




El proxy es para es para capturar paquetes

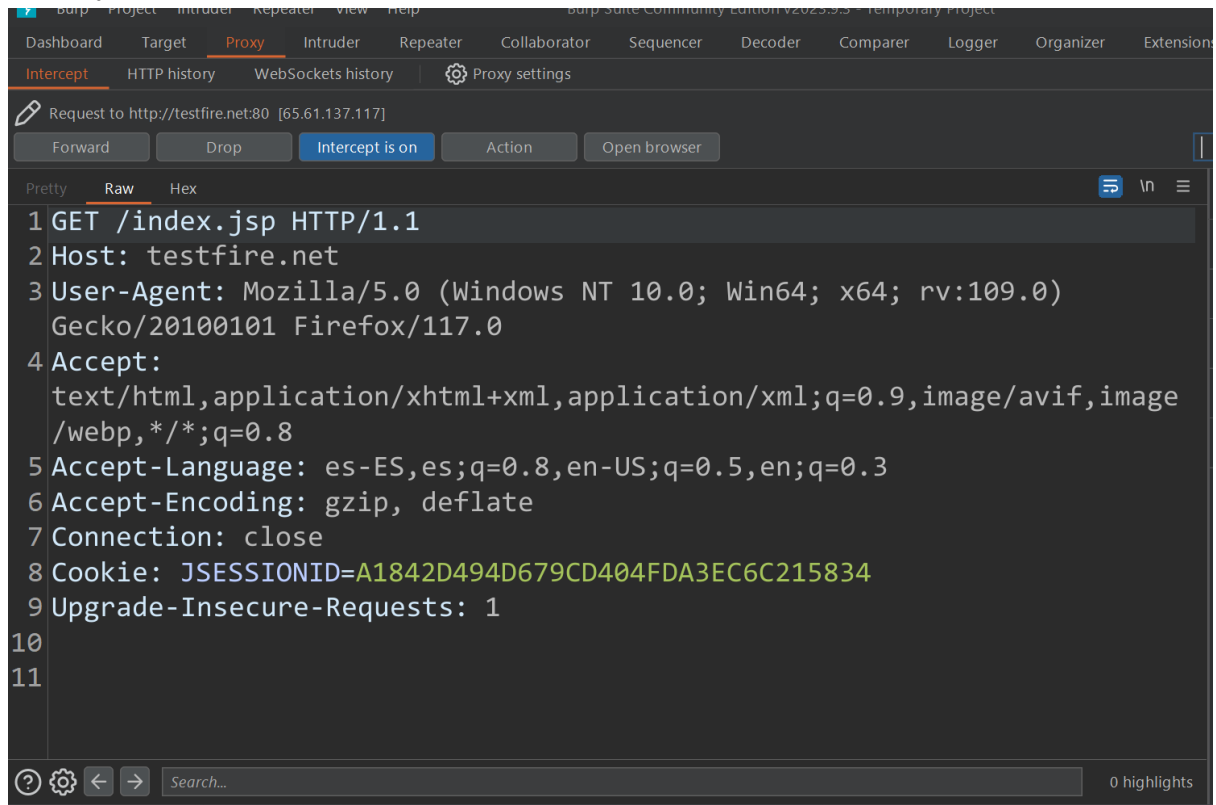


el intruder es para realizar ataques de fuerza bruta, que son automatizados, a apartir de modificar las peticiones

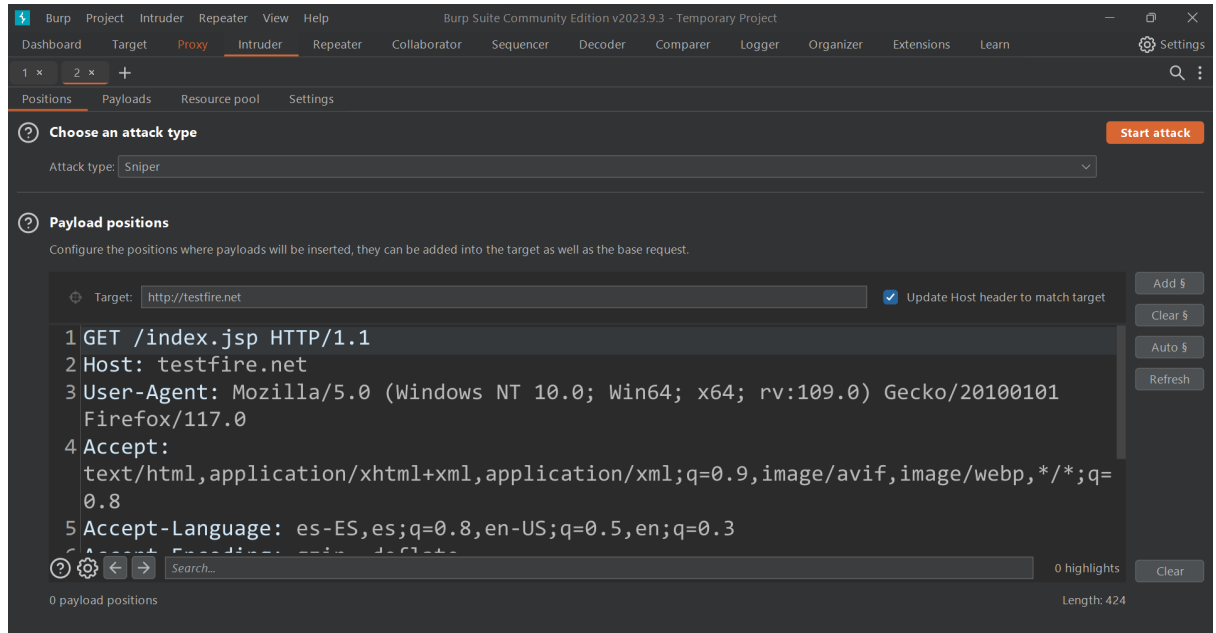

los ataques se pueden subir desde la seccion de payloads

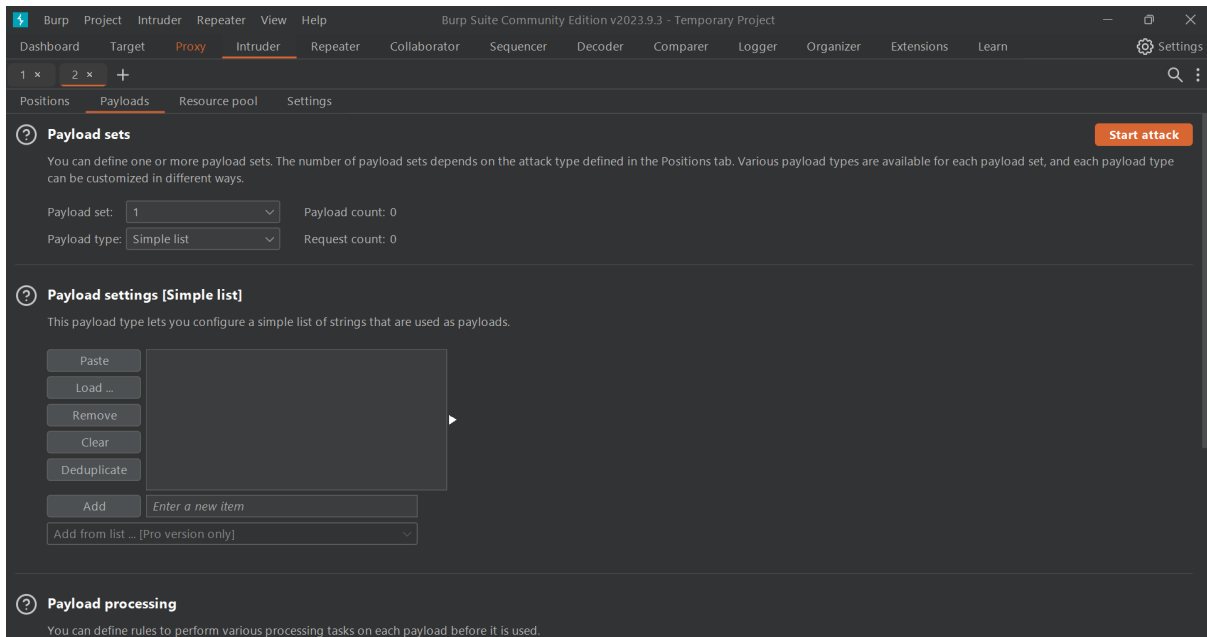

el repeater es para capturar las respuestas del servidor

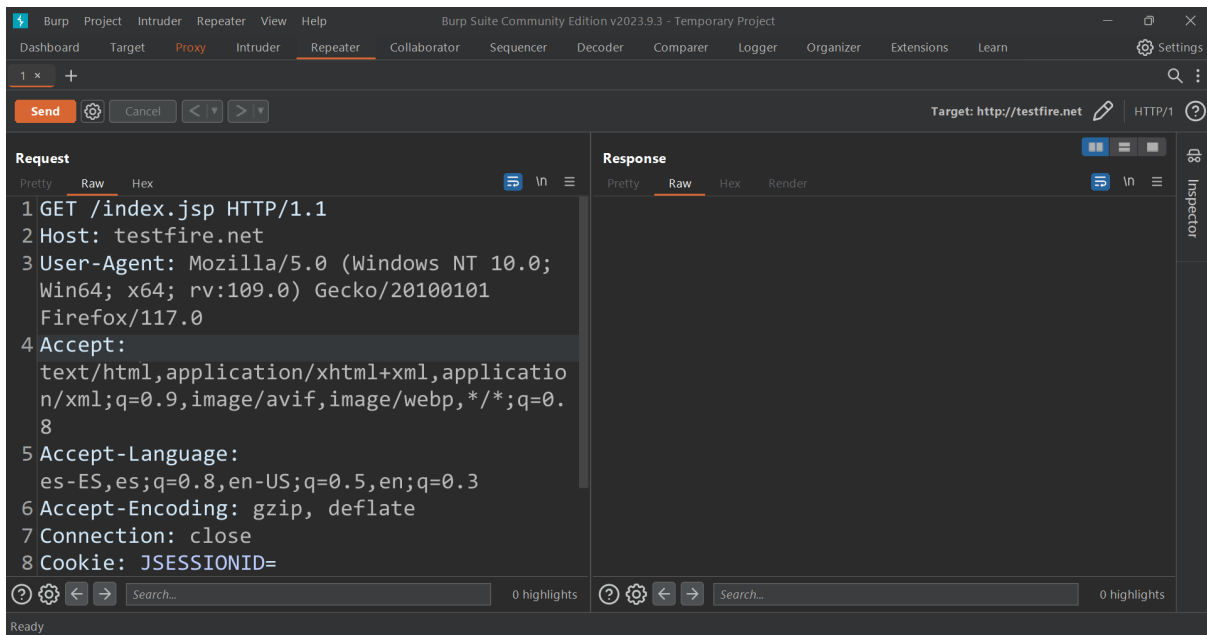

el target es para mapear las paginas apesar de no tener activada la captura de los paquetes en el proxy

⚙️

Project

Intruder

Repeater

View

Help

Dashboard

Target

Proxy

Intruder

Repeater

Collaborator

Sequencer

Decoder

Comparer

Logger

Organizer

Extensions

Learn

Site map

Issue definitions

⚙️ Scope settings

⚙️ Filter: Hiding not found items; hiding CSS, image and general binary content; hiding 4xx responses; hiding empty folders

> 📁 https://contile-images.services.mozilla.com

> 📁 http://detectportal.firefox.com

> 📁 https://firefox.settings.services.mozilla.com

> 📁 https://incoming.telemetry.mozilla.org

> 📁 https://push.services.mozilla.com

> 📁 http://testfire.net

Host	Method	URL	Params	Status code ^	Length	MIME type	Title	Com
http://detectportal.firefo...	GET	/success.txt?ipv4	✓	200	235	text		
http://detectportal.firefo...	GET	/success.txt?ipv6	✓	200	235	text		
http://detectportal.firefo...	GET	/success.txt						

Request

Response

Pretty

Raw

Hex

1 GET /success.txt HTTP/1.1

2 Host: detectportal.firefox.com

3 Accept-Encoding: gzip, deflate

4 Accept: */*

5 Accept-Language: en-US;q=0.9,en;q=0.8

6 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/116.0.5845.111 Safari/537.36

⚙️

⏪

⏩

Search...

0 highlights

Inspector

Request attributes

2

▼

Request headers

7

▼