

# Machine Learning's Slides

**Author:** Pannenets.F

**Date:** September 23, 2020

*Je reviendrai et je serai des millions. — «Spartacus»*

# Contents


<b>I part</b>	<b>1</b>
<b>1 Week1</b>	<b>2</b>
1.1 Introduction . . . . .	2
1.2 Gradient Descent . . . . .	42
1.3 Linear Algebra . . . . .	92
<b>2 Week2</b>	<b>118</b>
2.1 Multiple Features . . . . .	118
2.2 Octave . . . . .	150
<b>3 Week3</b>	<b>161</b>
3.1 Logistic Regression . . . . .	161
3.2 Overfitting . . . . .	193
<b>4 Neural Networks</b>	<b>218</b>
4.1 Non-linear Hypotheses . . . . .	218
4.2 Learning . . . . .	261
4.3 NN . . . . .	295

**Part I**

**part**

# **Chapter 1 Week1**

## **1.1 Introduction**

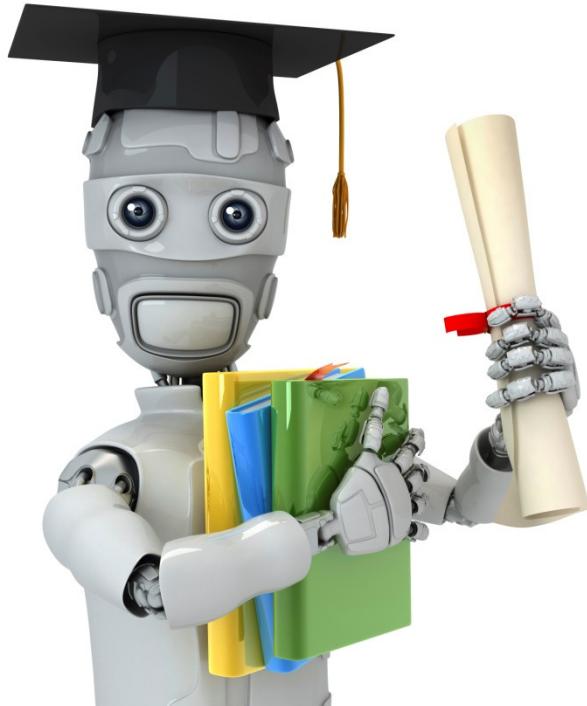

Machine Learning

# Introduction

---

## Welcome

Andrew Ng



Andrew Ng



# Machine Learning

- Grew out of work in AI
- New capability for computers

## Examples:

- Database mining
  - Large datasets from growth of automation/web.  
E.g., Web click data, medical records, biology, engineering
- Applications can't program by hand.
  - E.g., Autonomous helicopter, handwriting recognition, most of Natural Language Processing (NLP), Computer Vision.

# Machine Learning

- Grew out of work in AI

Exam

-

-



ig

host of

# Machine Learning

- Grew out of work in AI
- New capability for computers

## Examples:

- Database mining
  - Large datasets from growth of automation/web.  
E.g., Web click data, medical records, biology, engineering
- Applications can't program by hand.
  - E.g., Autonomous helicopter, handwriting recognition, most of Natural Language Processing (NLP), Computer Vision.

# Machine Learning

- Grew out of work in AI
- New capability for computers

## Examples:

- Database mining
  - Large datasets from growth of automation/web.  
E.g., Web click data, medical records, biology, engineering
- Applications can't program by hand.
  - E.g., Autonomous helicopter, handwriting recognition, most of Natural Language Processing (NLP), Computer Vision.
- Self-customizing programs
  - E.g., Amazon, Netflix product recommendations


# Machine Learning

- Grew out of work in AI
- New capability for computers

## Examples:

- Database mining
  - Large datasets from growth of automation/web.  
E.g., Web click data, medical records, biology, engineering
- Applications can't program by hand.
  - E.g., Autonomous helicopter, handwriting recognition, most of Natural Language Processing (NLP), Computer Vision.
- Self-customizing programs
  - E.g., Amazon, Netflix product recommendations
- Understanding human learning (brain, real AI).

Andrew Ng

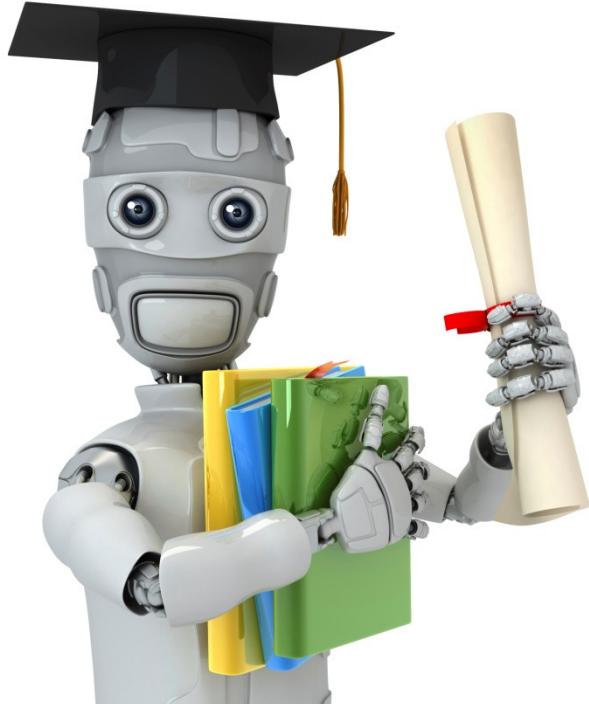

Machine Learning

# Introduction

---

## What is machine learning


# Machine Learning definition

# Machine Learning definition

- Arthur Samuel (1959). Machine Learning: Field of study that gives computers the ability to learn without being explicitly programmed.

# Machine Learning definition

- Arthur Samuel (1959). Machine Learning: Field of study that gives computers the ability to learn without being explicitly programmed.

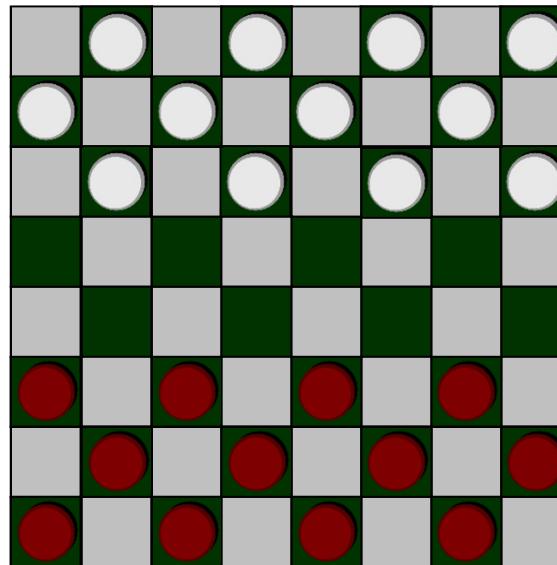

# Machine Learning definition

- Arthur Samuel (1959). Machine Learning: Field of study that gives computers the ability to learn without being explicitly programmed.
- Tom Mitchell (1998) Well-posed Learning Problem: A computer program is said to *learn* from experience E with respect to some task T and some performance measure P, if its performance on T, as measured by P, improves with experience E.

“A computer program is said to *learn* from experience E with respect to some task T and some performance measure P, if its performance on T, as measured by P, improves with experience E.”

Suppose your email program watches which emails you do or do not mark as spam, and based on that learns how to better filter spam. What is the task T in this setting?

- Classifying emails as spam or not spam.       $T \leftarrow$
- Watching you label emails as spam or not spam.       $E \leftarrow$
- The number (or fraction) of emails correctly classified as spam/not spam.
- None of the above—this is not a machine learning problem.       $P \leftarrow$


“A computer program is said to *learn* from experience E with respect to some class of tasks T if its performance improves with experience.”

Support  
not n  
spam

on T,

or do  
filter

spam.

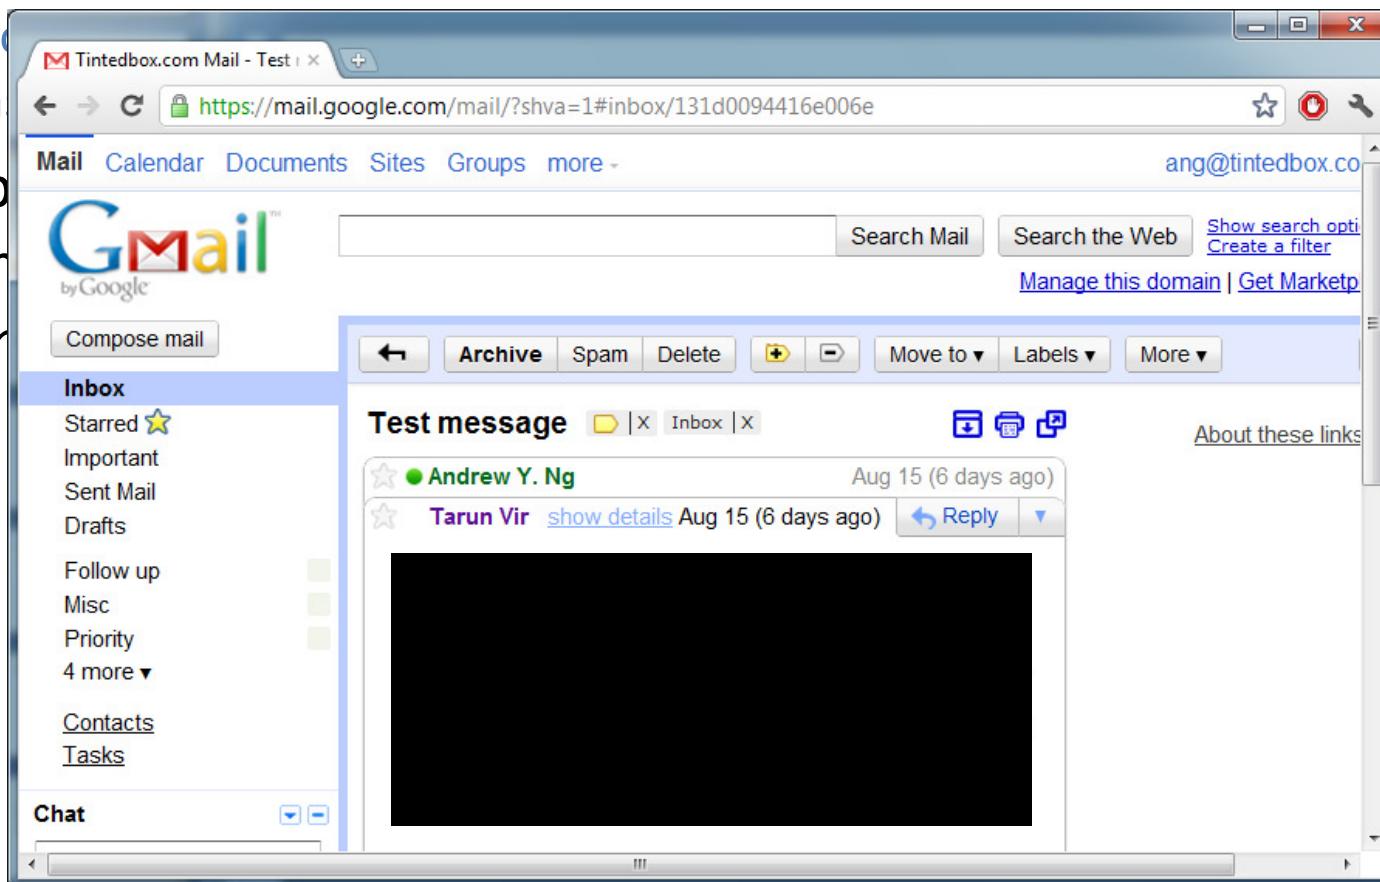

“A computer program is said to *learn* from experience E with respect to some task T and some performance measure P, if its performance on T, as measured by P, improves with experience E.”

Suppose your email program watches which emails you do or do not mark as spam, and based on that learns how to better filter spam. What is the task T in this setting?

- Classifying emails as spam or not spam.       $T \leftarrow$
- Watching you label emails as spam or not spam.       $E \leftarrow$
- The number (or fraction) of emails correctly classified as spam/not spam.
- None of the above—this is not a machine learning problem.       $P \leftarrow$

Machine learning algorithms:

- Supervised learning
- Unsupervised learning




Others: Reinforcement learning, recommender systems.

Also talk about: Practical advice for applying learning algorithms.



Andrew Ng

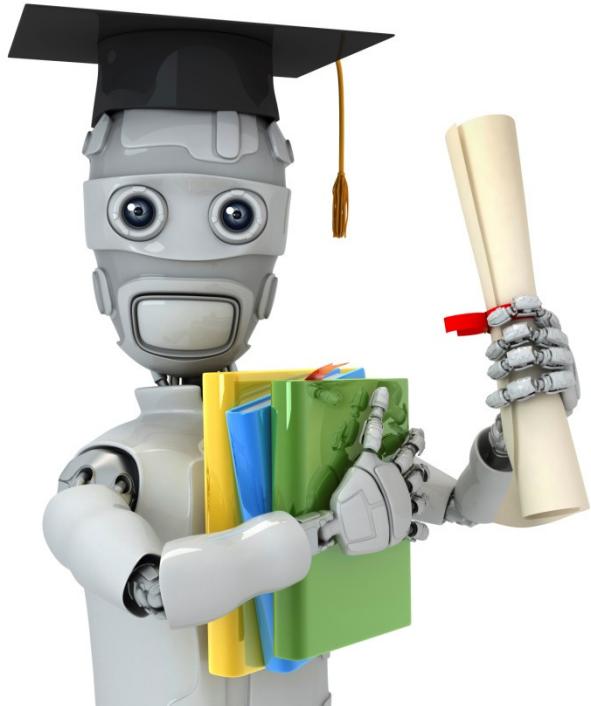


Machine Learning

# Introduction

---

# Supervised Learning


# Housing price prediction.

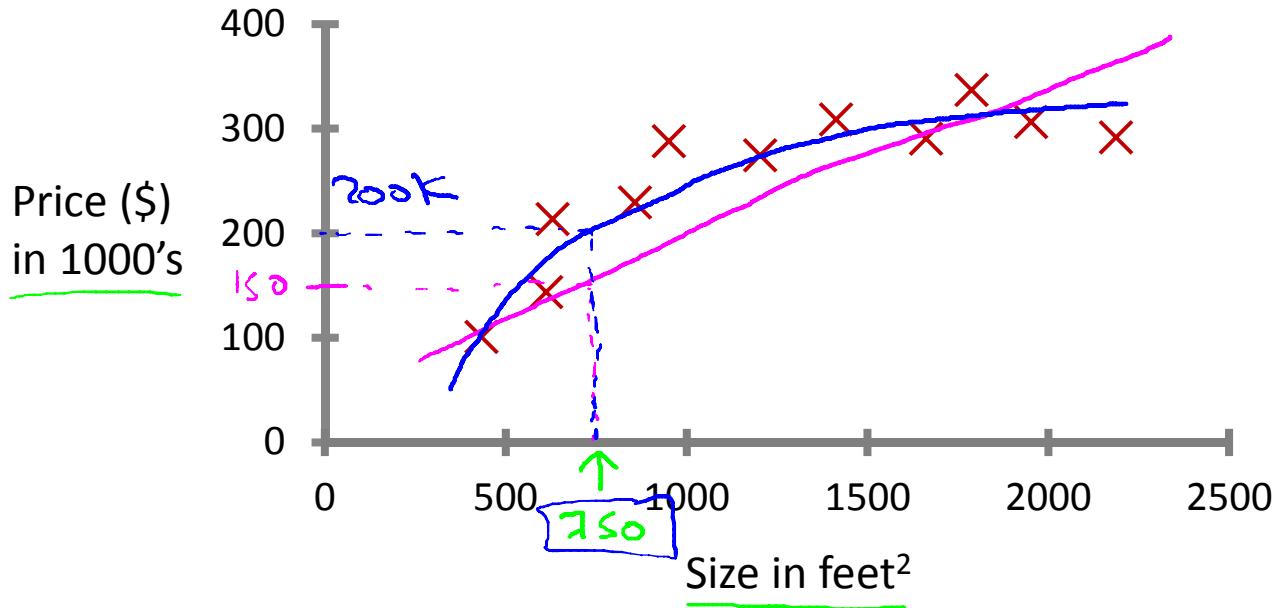

Supervised Learning  
‘right answers’ given


Regression: Predict continuous valued output (price)


# Breast cancer (malignant, benign)

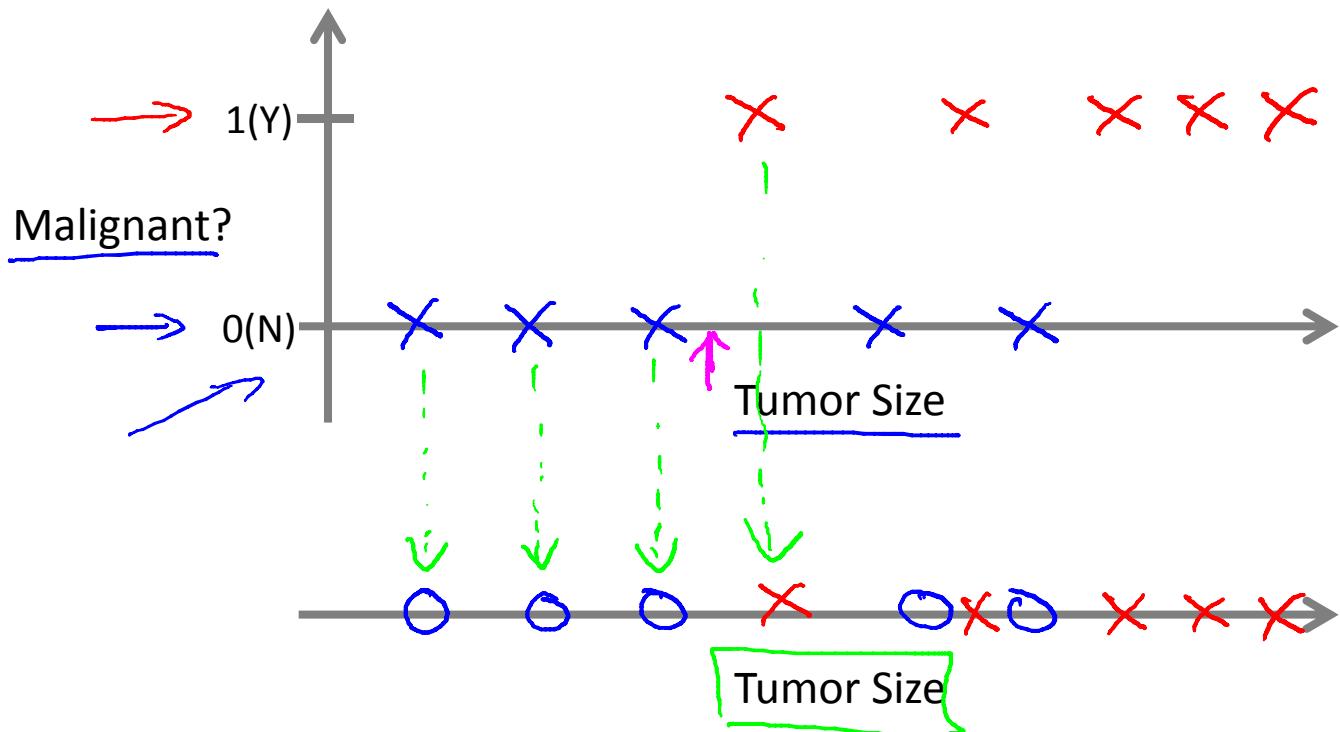

## Classification

Discrete valued output (0 or 1)

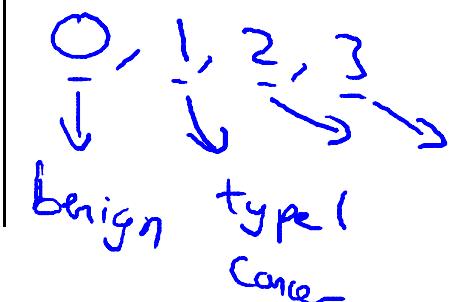

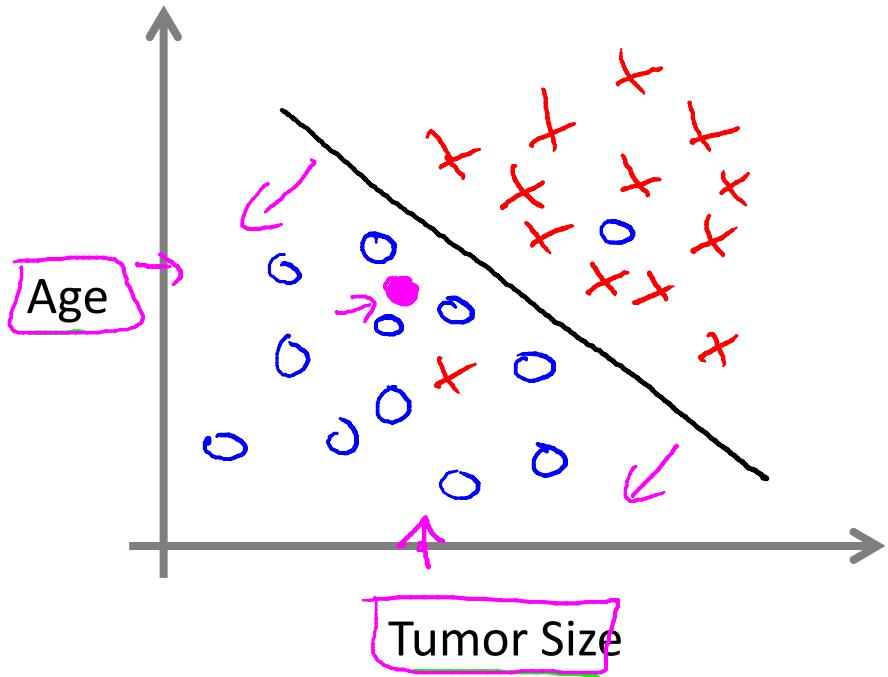

- Clump Thickness
- Uniformity of Cell Size
- Uniformity of Cell Shape

...

You're running a company, and you want to develop learning algorithms to address each of two problems.

1000's


- Problem 1: You have a large inventory of identical items. You want to predict how many of these items will sell over the next 3 months.
- Problem 2: You'd like software to examine individual customer accounts, and for each account decide if it has been hacked/compromised.

→ 0 - not hacked  
→ 1 - hacked

Should you treat these as classification or as regression problems?

- Treat both as classification problems.
- Treat problem 1 as a classification problem, problem 2 as a regression problem.
- Treat problem 1 as a regression problem, problem 2 as a classification problem.
- Treat both as regression problems.

Andrew Ng

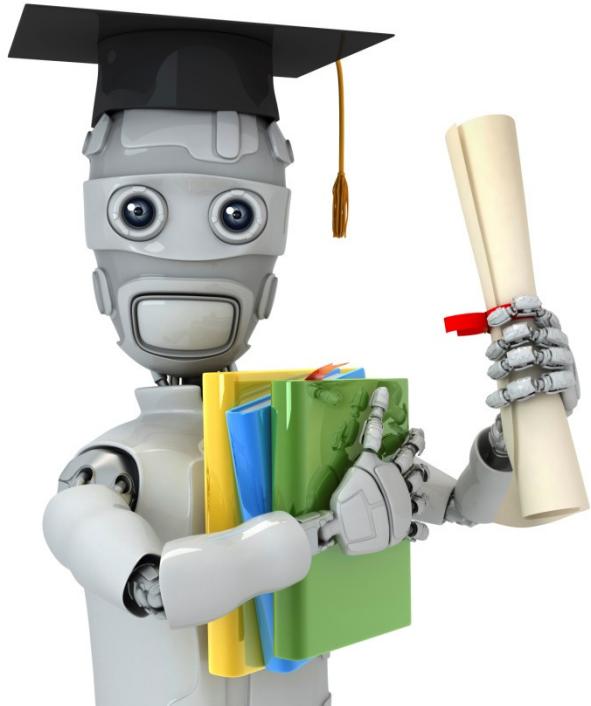


Machine Learning

# Introduction


---

# Unsupervised Learning

# Supervised Learning

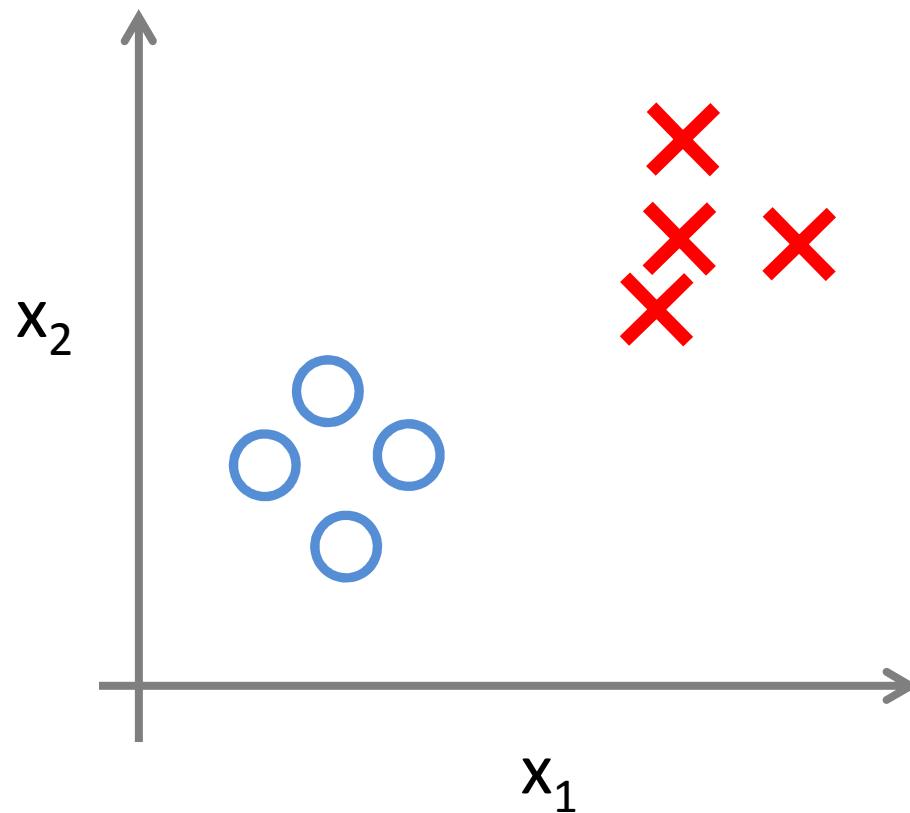

# Unsupervised Learning

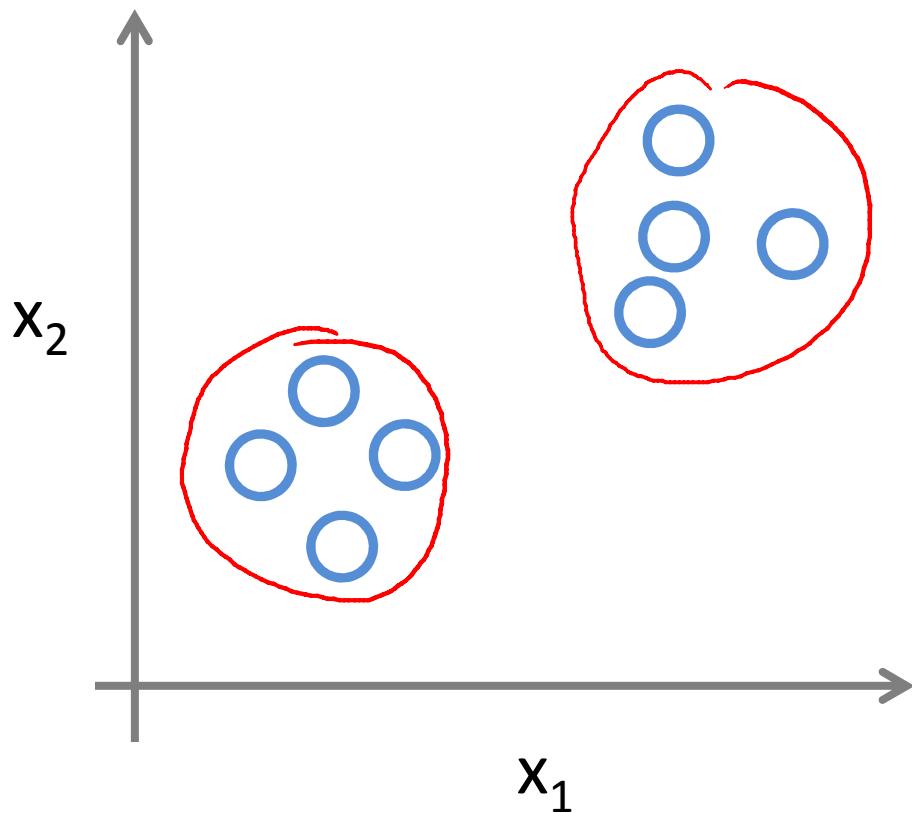

Google News news.google.com andrewyantakng@gmail.com | Web History | Settings ▾ | Sign out

Web Images Videos Maps News Shopping Gmail more ▾ Advanced news search Search News Search the Web U.S. edition ▾ Add a section »

## Top Stories

Deepwater Horizon  
Fed meeting  
Foreign exchange market  
Lindsay Lohan  
IBM  
Tom Brady  
Toronto International Film Festival  
Paris Hilton  
Iran  
Hurricane Igor

## Starred ☆

San Francisco Bay Area  
World  
U.S.  
Business  
Sci/Tech  
More Top Stories  
Spotlight  
Health  
Sports  
Entertainment

## All news Headlines Images

### Top Stories

Christine O'Donnell » [White House official denies Tea Party-focused ad campaign](#) CNN International - Ed Henry - 1 hour ago Democratic sources say the White House is not considering an ad campaign tying Republicans to the Tea Party. Washington (CNN) -- A top White House official sharply denied a report that claims President Obama's political advisers are weighing a national ...  
[Tea Party is misplaced the blame, former President Bill Clinton claims](#) New York Daily News  
[GOP tea party backer defends Christine O'Donnell](#) The Associated Press  
[Atlanta Journal Constitution - Politics Daily - MyFox Washington DC - Salon](#) all 726 news articles »

### US Stocks Climb After Recession Called Over, Homebuilders Gain

MarketWatch - Kristina Peterson - 16 minutes ago NEW YORK (MarketWatch) -- US stocks climbed Monday, gaining speed after a key nonprofit organization officially called the recession over, giving investors a boost of confidence in the gradual economic recovery. Longest recession since 1930s ended in June 2009, group says Los Angeles Times  
[Downturn Was Longest in Decades, Panel Confirms](#) New York Times  
[Wall Street Journal - AFP - CNN - USA Today](#) all 276 news articles »

### Deepwater Horizon » [BP Oil Well, Site of National Catastrophe, Dies at One](#)

Vanity Fair - Juli Weiner - 22 minutes ago The BP oil well, site of the Deepwater Horizon explosion that led to the worst oil spill in US history, died today at one year old.  
+ Video: Blown-out BP Well Finally Killed in Gulf  The Associated Press Weiss Doubts BP Would End Operations in Gulf of Mexico: Video Bloomberg CNN International - Wall Street Journal (blog) - The Guardian - New York Times all 2,292 news articles »

### Recent

[Recession officially ended in June 2009](#) CNNMoney - Chris Isidore - 39 minutes ago Hurricane Igor lashes Bermuda USA Today - Gerry Broome - 5 minutes ago 'Explain what you want from us,' reads front-page editorial msnbc.com - Olivia Torres - 10 minutes ago

### Crisis response: Pakistan floods

### San Francisco Bay Area - Edit

Clorox » Bay Biz Buzz: Clorox close to selling STP, Armor All San Jose Mercury News - 48 minutes ago - all 24 articles » Google's official beekeeper keeps the company buzzing with excitement San Jose Mercury News - Bruce Newman - 1 hour ago Jon Sylvia » Martinez man still unconscious as police investigate weekend shooting San Jose Mercury News - Robert Salonga - 48 minutes ago - all 6 articles »

### Spotlight

Sarkozy rages at EU 'humiliation' Financial Times - Peggy Hollinger - Sep 16, 2010



Google News news.google.com andrewyantakng@gmail.com | Web History | Settings | Sign out

## Top Stories

- Deepwater Horizon
- Fed meeting
- forex exchange market
- Lindsay Lohan
- IBM
- Tony Brady
- Toronto International Film Festival
- Paris Hilton
- India
- Hurricane Igor
- Starred
- San Francisco Bay Area
- World
- U.S.
- Business
- SciTech
- More Top Stories
- All news Headlines Images

**Top Stories**

Christine O'Donnell » **White House official denies Tea Party-focused ad campaign**  
 U.S. election - 1 hour ago  
 Democratic sources say the White House is not considering an ad campaign tying Republicans to the Tea Party. Washington (CNN) — A top White House official says the White House is not considering an ad campaign that claims President Obama's political advisers are weighing a national Tea Party is misplacing the blame, former President Bill Clinton claims.

GOP tea party backer defends Christine O'Donnell The Associated Press Atlanta Journal Constitution - Politics Daily - MyFox Washington DC - Salon all 726 news articles »

**US Stock Climb After Recession Called Over, Hurricane Irene Gain**  
 MarketWatch - Kristina Peterson - 16 minutes ago  
 NEW YORK (MarketWatch) — U.S. stocks climbed Monday, gaining speed after a sharp drop last week, as investors grew recession over, giving investors a boost of confidence in the gradual economic recovery. Longest recession since 1930s ended in June 2009, group says.

Low oil prices fuel rally Dowtwn Was Longest in Decades, Panel Confirms New York Times Wall Street Journal - AFP - CNN - USA Today all 2,292 news articles »

**Deepwater Horizon**

**BP Oil Well, Site of National Catastrophe, Dies at One**  
 Vanity Fair - Juli Weiner - 22 minutes ago  
 The BP oil well site of the Deepwater Horizon explosion is now at one year old. The US has been battling it at a year old. Video: Blown-out BP Well Finally Killed in Gulf The Associated Press Weiss Doubts BP Would End Operations in Gulf of Mexico. Video Bloomberg CNN - The Wall Street Journal (blog) - The Guardian - New York Times all 2,292 news articles »

**San Francisco Bay Area - Edit**

CNN Buzz - Cloe Weller - 39 minutes ago  
 San Jose Mercury News - 5 minutes ago  
 USA Today - Gerry Broome - 5 minutes ago  
 E-mail what you want from us... reads front-page edition msnbc.com - Olivia Torres - 10 minutes ago

**RECESSION**  
 MyFox Philadelphia - 1 hour ago

**San Francisco Bay Area - Edit**

Clothesline - 16 minutes ago  
 San Jose Mercury News - 48 minutes ago  
 all 23 articles »

George W. Bush's official biography keeps the company busy San Jose Mercury News - Bruce Newman - 1 hour ago

Joe Sylva - 48 minutes ago  
 Most women still unconscious as police investigate weekend shooting San Jose Mercury News - Robert Salonga - 48 minutes ago - all 6 articles »

**Spotlight**

Sarkozy rages at EU humiliation' Financial Times - Peggy Hollinger - September 2010

Allen: Well is dead, but much Gulf Coast work remains

By the CNN Wire Staff  
 September 20, 2010 - Updated 1317 GMT (2117 HKT)

**Click to play**

What next for Gulf oil spill?

(CNN) -- The ruptured Macondo well, a mile under the Gulf of Mexico off the Louisiana coast, has been pronounced dead.

**STORY HIGHLIGHTS**

BP Kills Macondo, But Its Legacy Lives On blogs.wsj.com/source/2010/09/20/bp-kills-macondo-but-its-legacy-lives-on/ THE WALL STREET JOURNAL Digital Network WSJ.com MarketWatch BARRON'S AllThings.Digital FIN'S SmartMoney More Log In Register For Free Subscribe Now, Get 2 Weeks Free SEARCH

## THE SOURCE

Financial Services Transport Leisure Insurance Oil & Gas Sport Caught on the Web Betting Technology

SEPTEMBER 20, 2010, 12:44 PM GMT

**BP Kills Macondo, But Its Legacy Lives On**

Article Comments (2)

E-mail Print Permissions Facebook Text + About The Source Follow Us

The Source is WSJ.com Europe's home for rapid-fire analysis of the day's big business and finance stories. It is edited by Lauren Mills, based in London.

**Most Recent**

1. Who Needs Plaza II Anyway

2. Will Banks Be Forced to Split Retail And Banking Arms?

3. Timing of Ratings Award Intriguing

4. BP Kills Macondo, But Its Legacy Lives On

5. We Already Need a Cannon to Basal III

**BP oil well** Site of National Catastrophe, Dies at One

Allen: Well is dead, but much Gulf Coast work remains

BP confirmed late Sunday that the Macondo well that leaked almost five million barrels of oil into the Gulf of Mexico has been permanently sealed, but the well will continue to affect BP and the wider oil industry for many years.

The most immediate worry for BP and its shareholders is how the authorities will apportion blame for the spill. BP's own investigation spread responsibility across

**BP oil spill cost hits nearly \$10bn**

BP has set up a \$20bn compensation fund after the Deepwater Horizon disaster, which has so far paid out 19,000 claims totaling more than \$240m

Julia Kollewe guardian.co.uk, Monday 20 September 2010 08:33 BST Article history

**BP oil spill cost hits nearly \$10bn**


BP oil spill cost hits nearly \$10bn

BP has set up a \$20bn compensation fund after the Deepwater Horizon disaster, which has so far paid out 19,000 claims totaling more than \$240m

BP's costs for the Deepwater Horizon disaster have hit \$10bn. Photograph: HoReuter


Andrew Ng

Genes

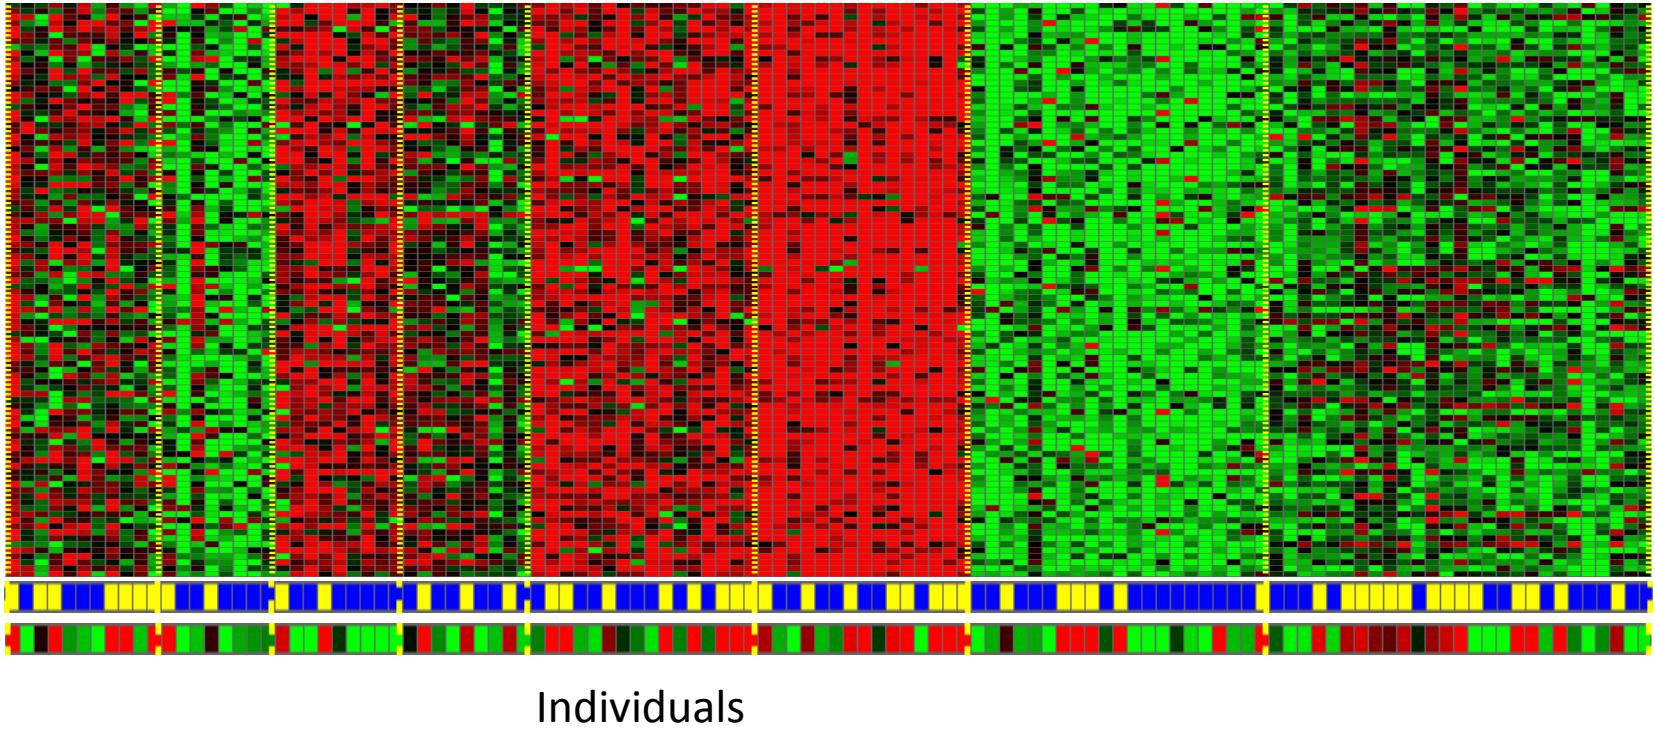


[Source: Daphne Koller]

Andrew Ng

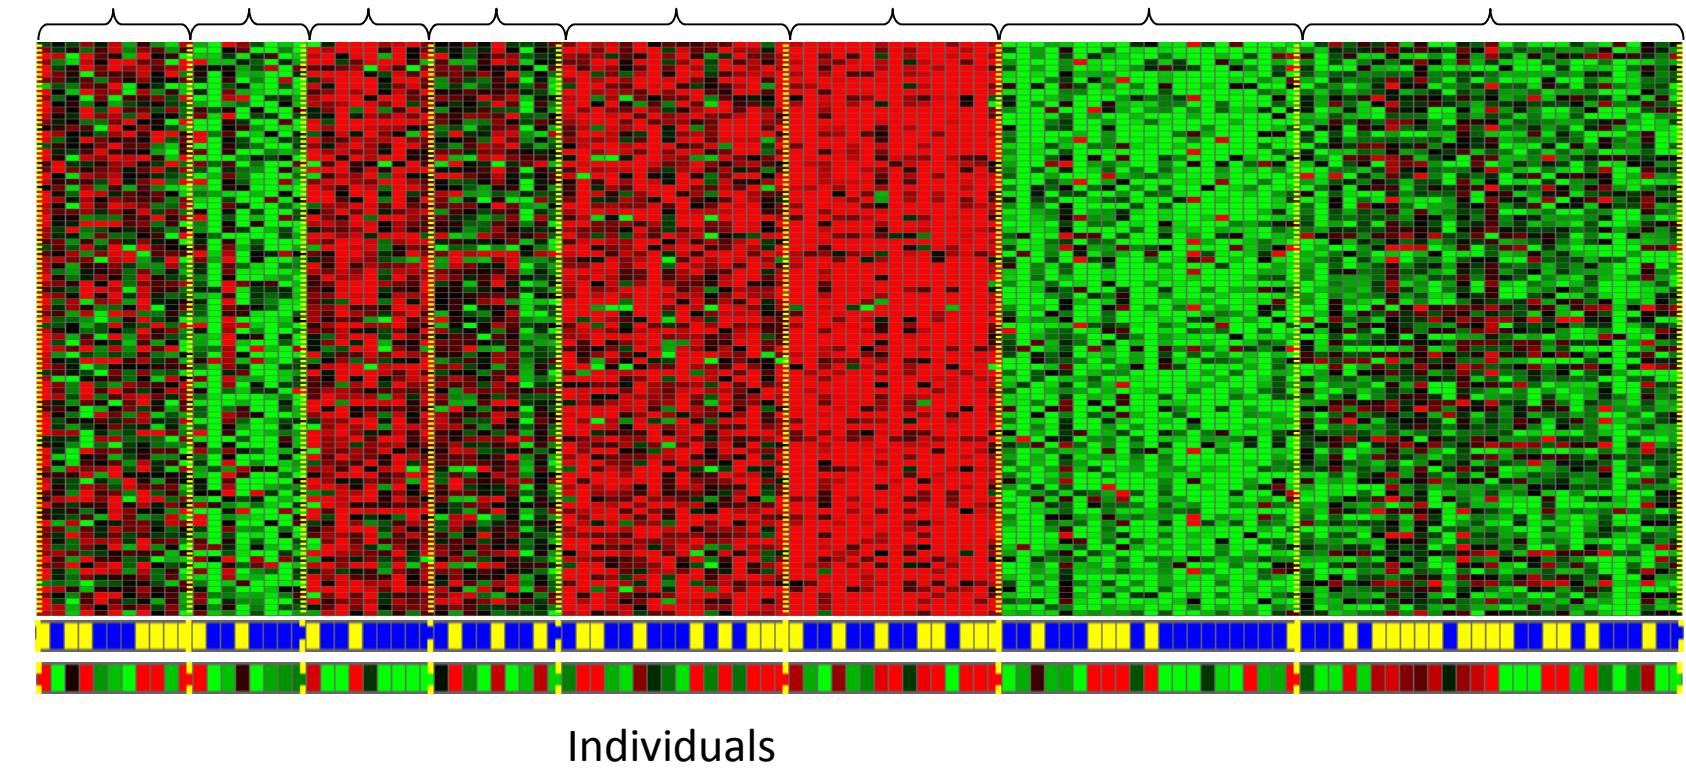


[Source: Daphne Koller]


Andrew Ng

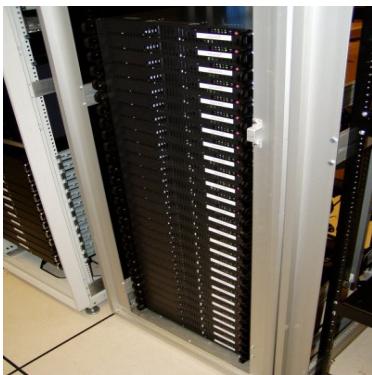


Organize computing clusters

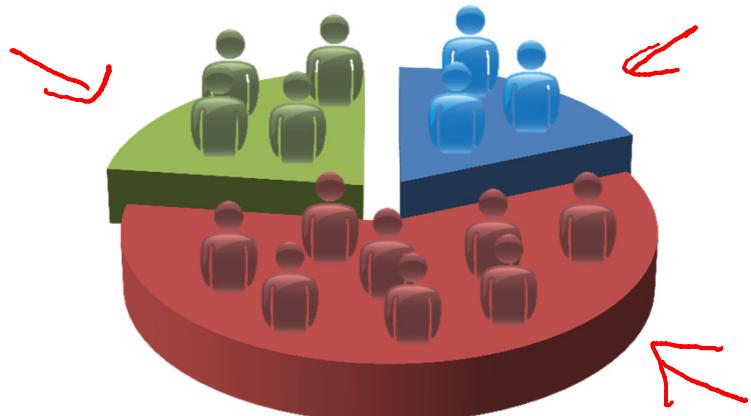

Market segmentation

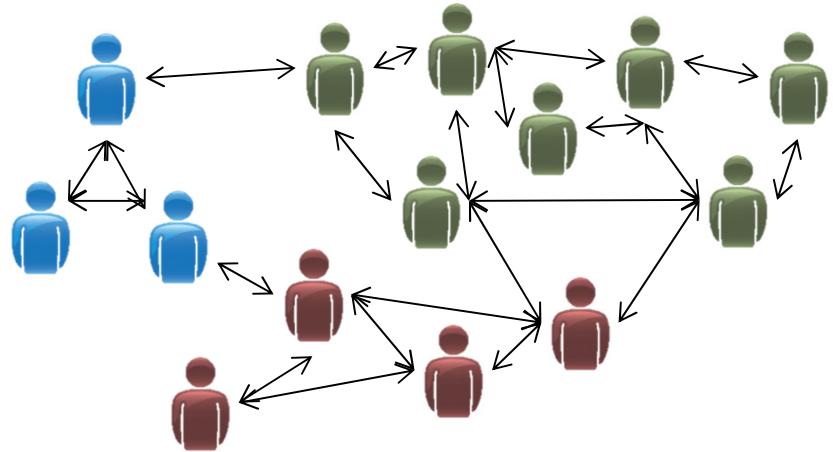


Social network analysis

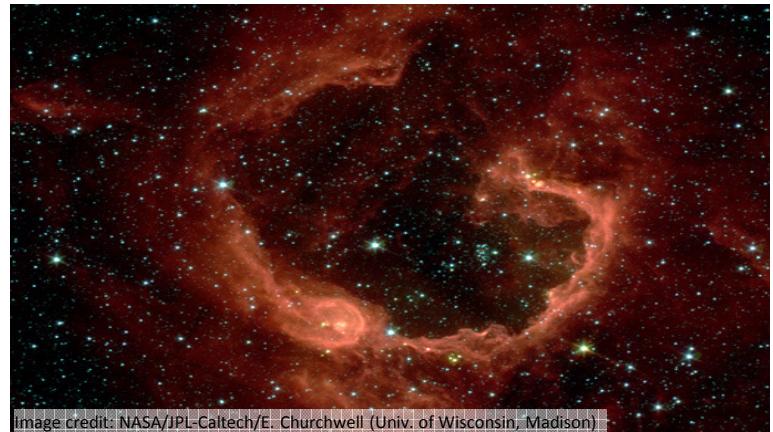

Astronomical data analysis

Andrew Ng

# Cocktail party problem

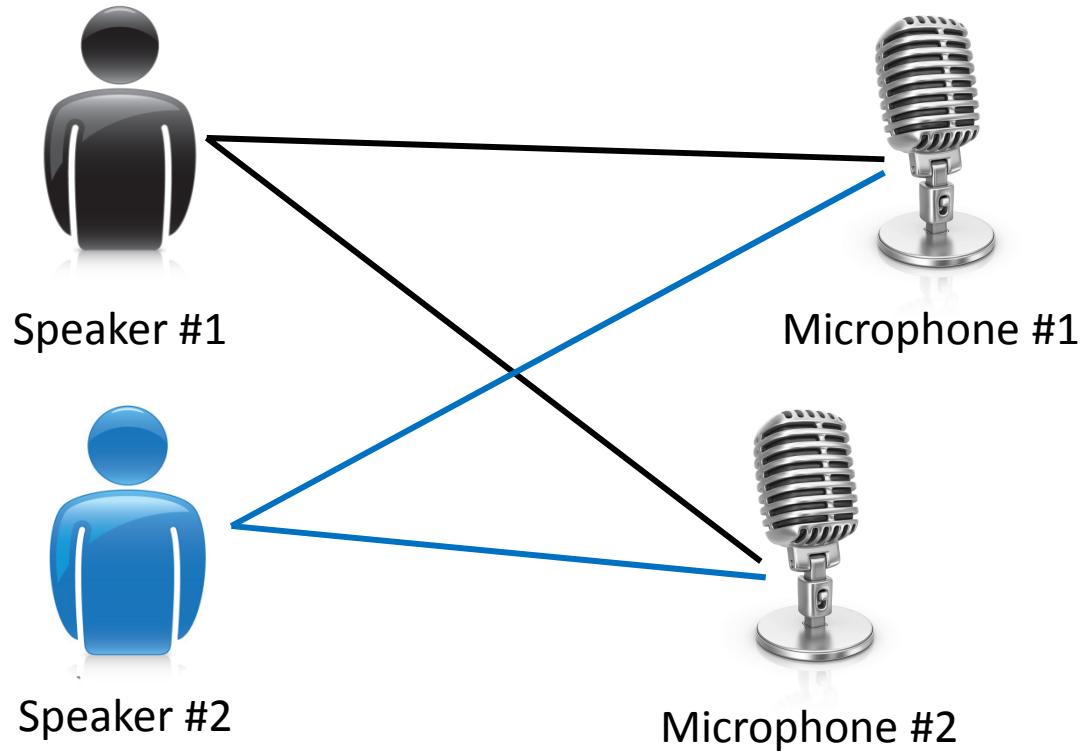

Microphone #1: 

Output #1: 

Microphone #2: 

Output #2: 

---

Microphone #1: 

Output #1: 

Microphone #2: 

Output #2: 

[Audio clips courtesy of Te-Won Lee.]

Andrew Ng

# Cocktail party problem algorithm

```
[W,s,v] = svd((repmat(sum(x.*x,1),size(x,1),1).*x)*x');
```

[Source: Sam Roweis, Yair Weiss & Eero Simoncelli]


Andrew Ng

Of the following examples, which would you address using an unsupervised learning algorithm? (Check all that apply.)

- Given email labeled as spam/not spam, learn a spam filter.
- Given a set of news articles found on the web, group them into set of articles about the same story.
- Given a database of customer data, automatically discover market segments and group customers into different market segments.
- Given a dataset of patients diagnosed as either having diabetes or not, learn to classify new patients as having diabetes or not.

Andrew Ng

## 1.2 Gradient Descent

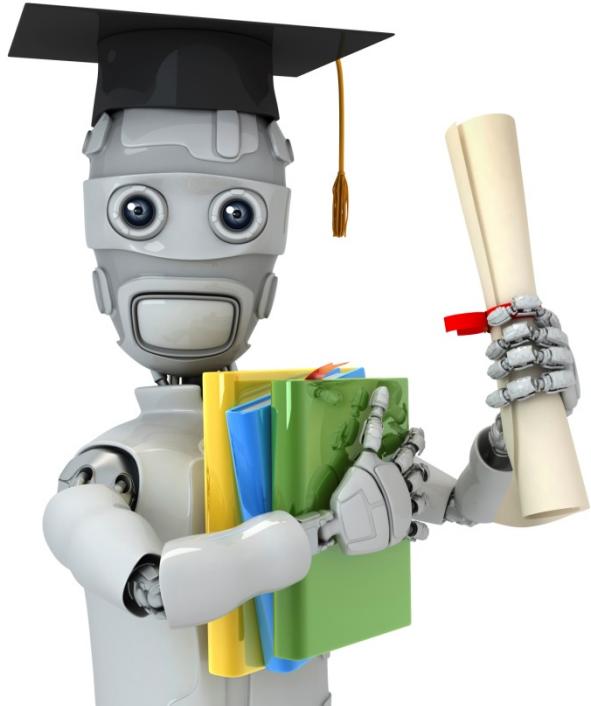

Machine Learning


## Linear regression with one variable

---

## Model representation

# Housing Prices (Portland, OR)

Price  
(in 1000s  
of dollars)

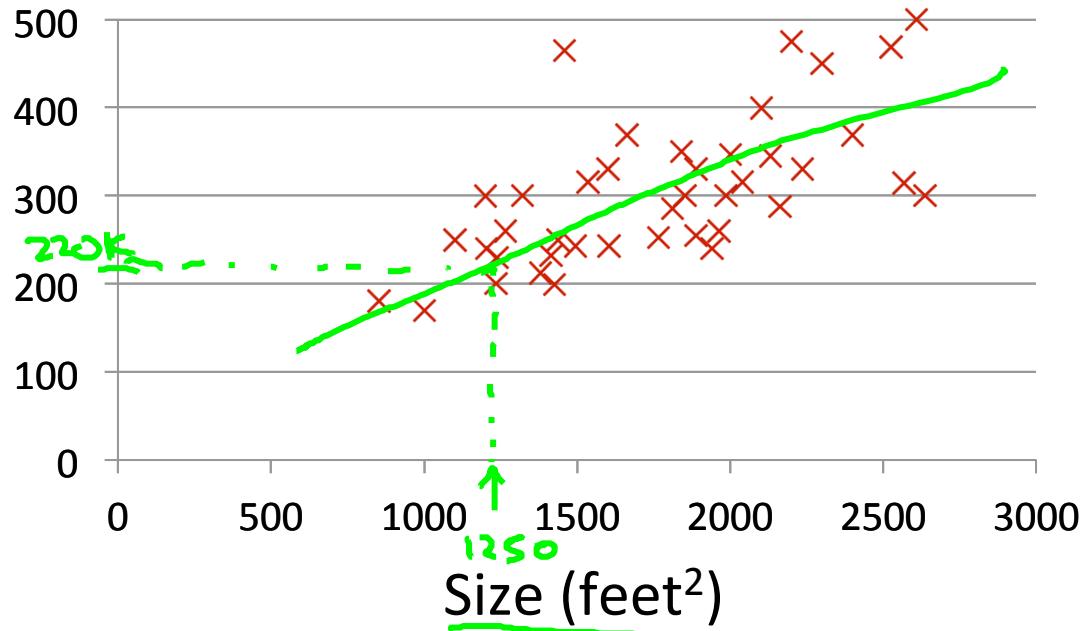

## Supervised Learning

Given the "right answer" for each example in the data.

## Regression Problem

Predict real-valued output

Classification: Discrete-valued output

## Training set of housing prices (Portland, OR)

Size in feet <sup>2</sup> (x)	Price (\$) in 1000's (y)
→ 2104	460
→ 1416	232
→ 1534	315
852	178
...	...
i	i


Notation:

- $m$  = Number of training examples
- $x$ 's = "input" variable / features
- $y$ 's = "output" variable / "target" variable

$(x, y)$  - one training example

$(x^{(i)}, y^{(i)})$  - i<sup>th</sup> training example


$$\begin{cases} x^{(1)} = 2104 \\ x^{(2)} = 1416 \\ \vdots \\ y^{(1)} = 460 \end{cases}$$

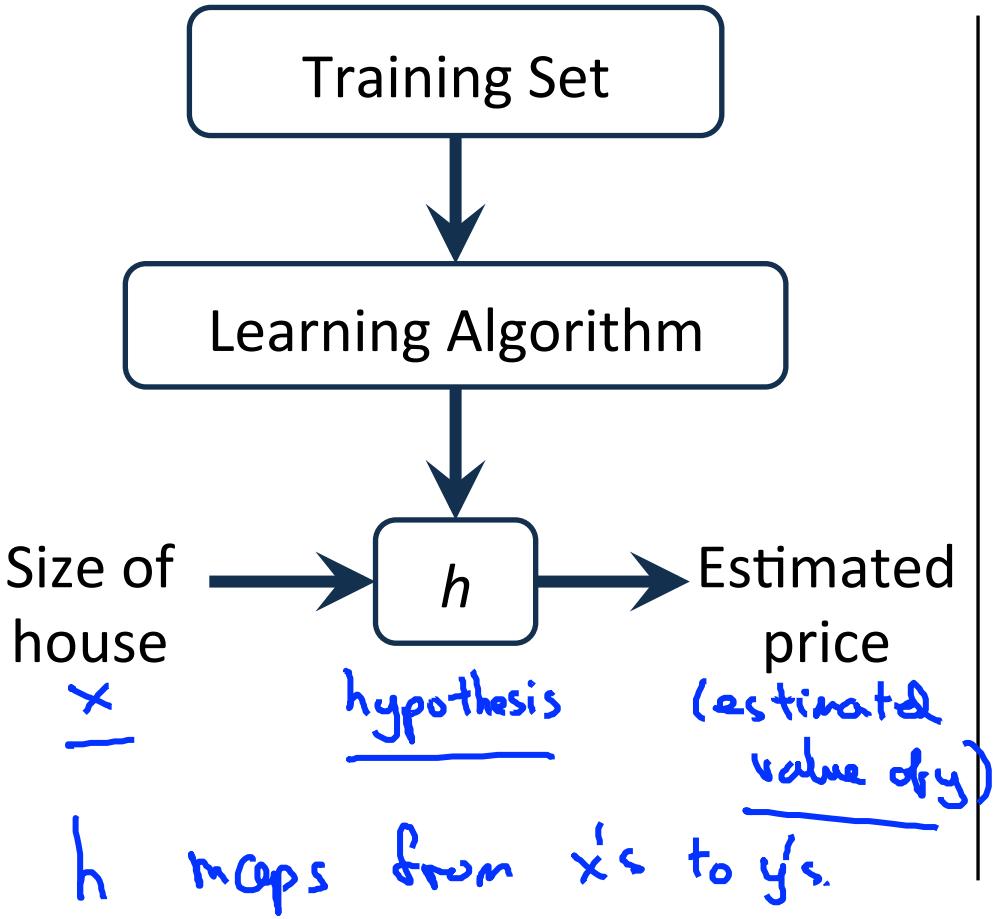

How do we represent  $h$  ?


$$h_{\theta}(x) = \underline{\theta_0 + \theta_1 x}$$

Shorthand:  $h(x)$

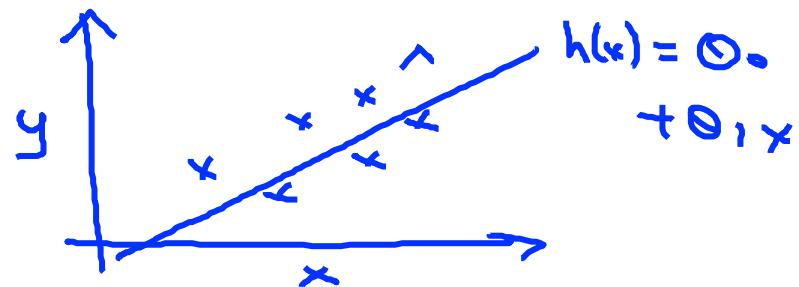

Linear regression with one variable.  
Univariate linear regression.

one variable

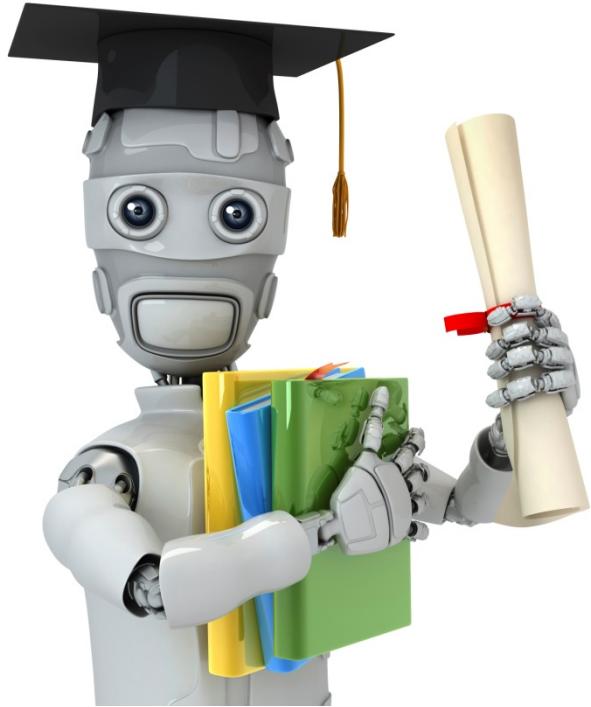

Machine Learning

# Linear regression with one variable

---

## Cost function

## Training Set

Size in feet <sup>2</sup> (x)	Price (\$) in 1000's (y)
2104	460
1416	232
1534	315
852	178
...	...


$$m = 47$$

Hypothesis: 
$$h_{\theta}(x) = \theta_0 + \theta_1 x$$


$\theta_i$ 's: Parameters

How to choose  $\theta_i$ 's ?


$$\underline{h_{\theta}(x) = \theta_0 + \theta_1 x}$$

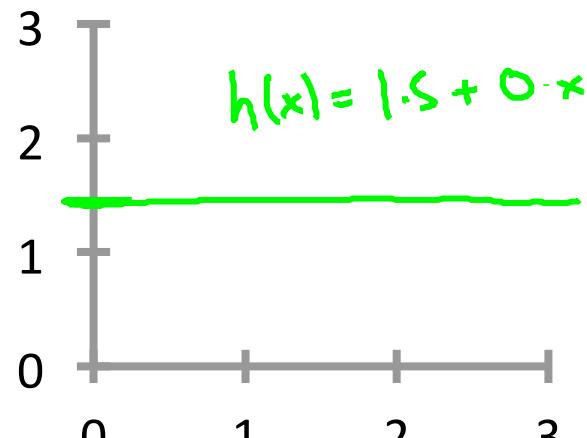


$$\rightarrow \theta_0 = 1.5$$
$$\rightarrow \theta_1 = 0$$

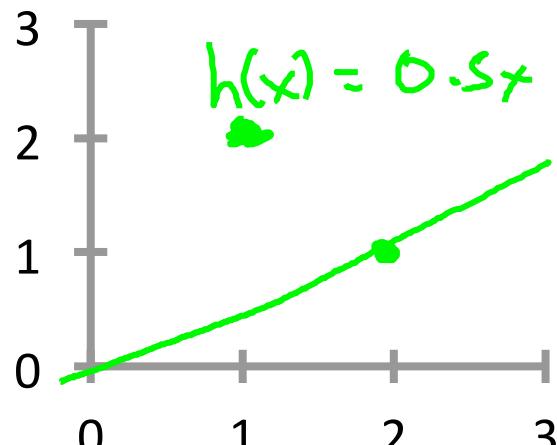

$$\rightarrow \theta_0 = 0$$
$$\rightarrow \theta_1 = 0.5$$

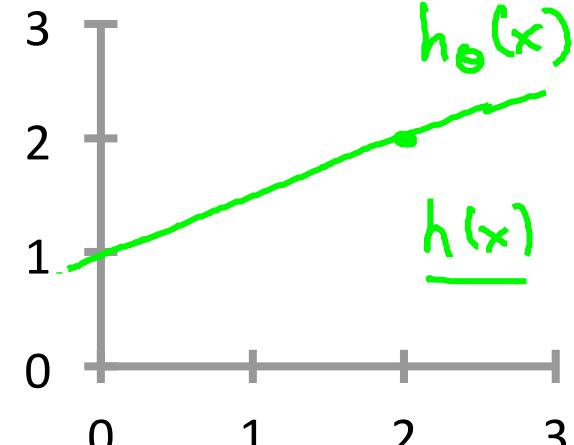

$$\rightarrow \theta_0 = 1$$
$$\rightarrow \theta_1 = 0.5$$

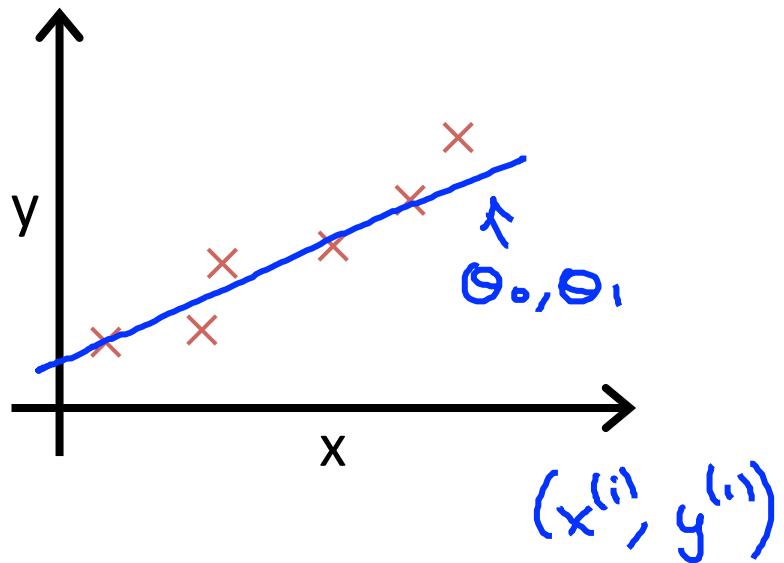

Idea: Choose  $\underline{\theta_0}, \underline{\theta_1}$  so that  
 $\underline{h_\theta(x)}$  is close to  $\underline{y}$  for our  
 training examples  $\underline{(x, y)}$

$x, y$

minimize  $\underline{\theta_0, \theta_1}$

$$\frac{1}{2m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2$$

#training examples


$h_\theta(x^{(i)}) = \underline{\theta_0} + \underline{\theta_1 x^{(i)}}$

$$J(\theta_0, \theta_1) = \frac{1}{2m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2$$

minimize  $\underline{\theta_0, \theta_1}$   $J(\theta_0, \theta_1)$

Cost function

Squared error function

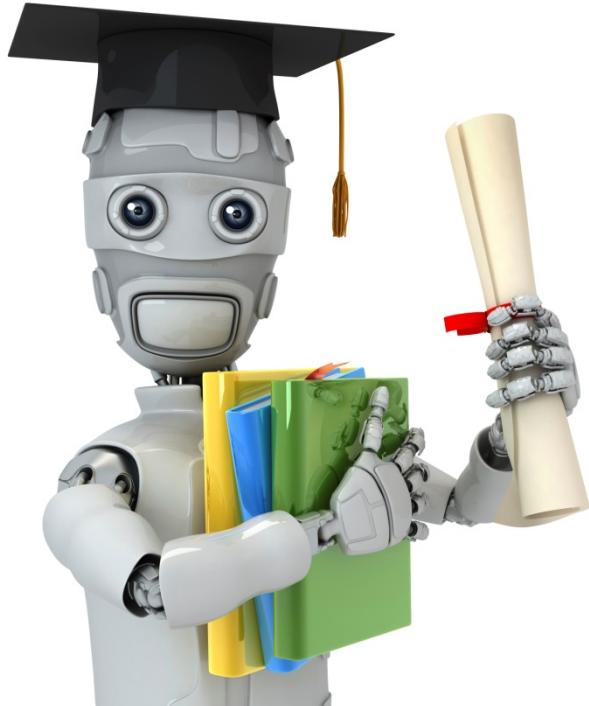

Machine Learning

# Linear regression with one variable

---

# Cost function intuition I


## Simplified

Hypothesis:

$$\underline{h_{\theta}(x) = \theta_0 + \theta_1 x}$$

Parameters:

$$\underline{\theta_0, \theta_1}$$

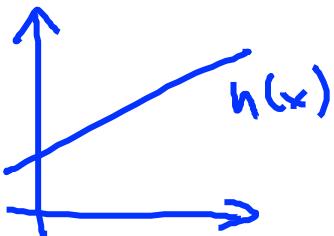

Cost Function:


$$\rightarrow J(\theta_0, \theta_1) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

Goal: minimize  $J(\theta_0, \theta_1)$

$$\nearrow \theta_0, \theta_1$$

$$h_{\theta}(x) = \underline{\theta_1 x}$$

$$\underline{\theta_0 = 0}$$

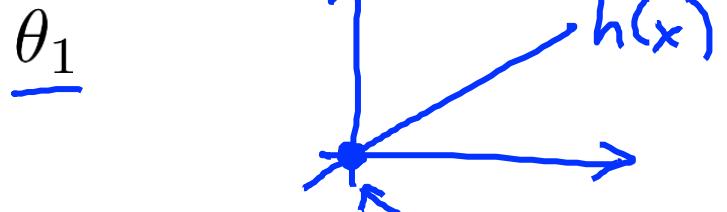


$$J(\theta_1) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

$$\text{minimize } \underline{\theta_1} \quad \nearrow \underline{\theta_0, x^{(i)}}$$

$\rightarrow h_{\theta}(x)$


(for fixed  $\theta_1$ , this is a function of  $x$ )

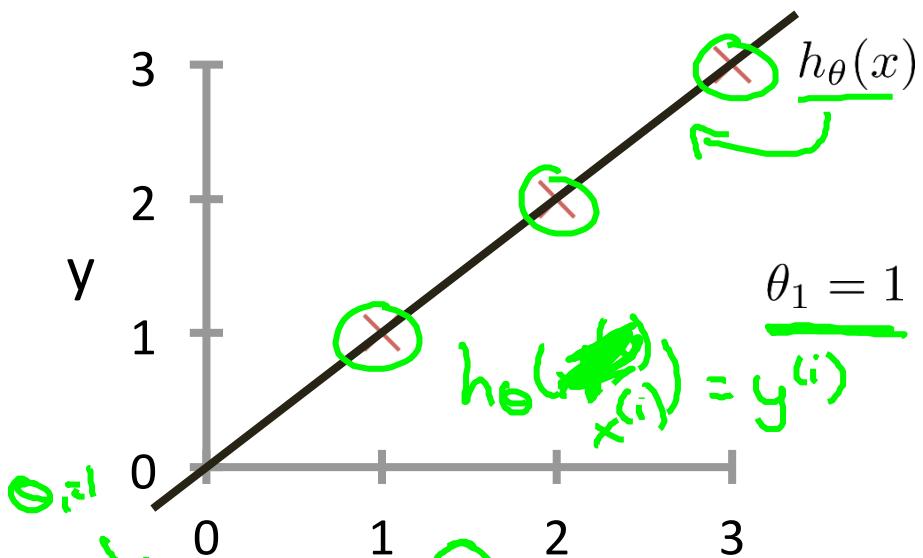

$$\begin{aligned} J(\theta_1) &= \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2 \\ &= \frac{1}{2m} \sum_{i=1}^m (\theta_0 x^{(i)} - y^{(i)})^2 = \frac{1}{2m} (0^2 + 0^2 + 0^2) = 0^2 \end{aligned}$$


$\rightarrow J(\theta_1)$

(function of the parameter  $\theta_1$ )

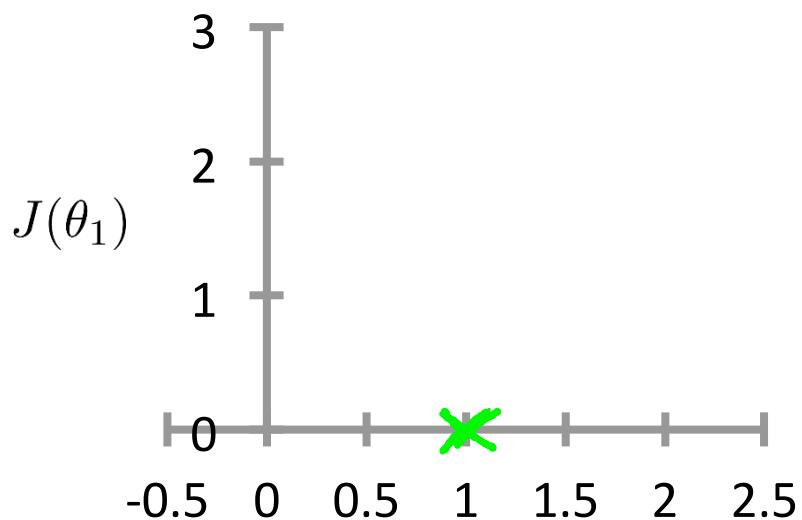


$$J(1) = 0$$

$h_\theta(x)$   
(for fixed  $\theta_1$ , this is a function of  $x$ )

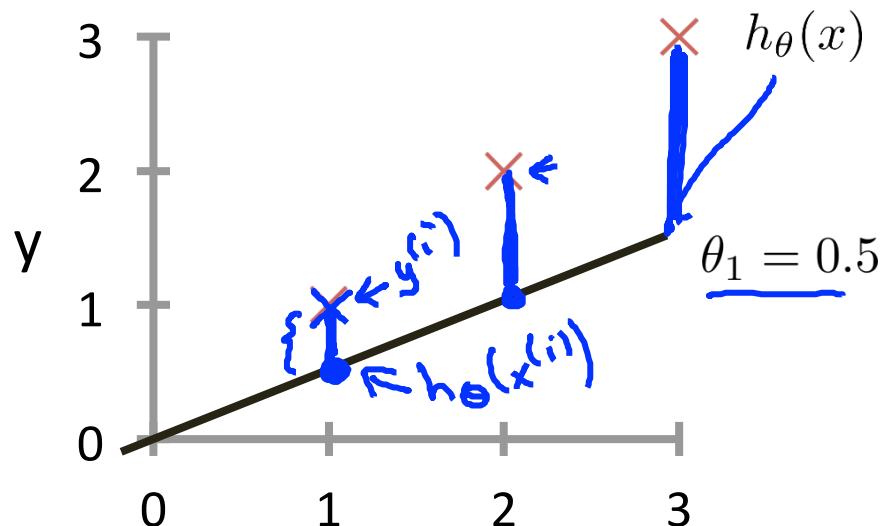


$$\begin{aligned} J(0.5) &= \frac{1}{2m} \sum_{i=1}^m [(0.5 - 1)^2 + (1 - 2)^2 + (1.5 - 3)^2] \\ &= \frac{1}{2 \times 3} (3.5) = \frac{3.5}{6} \approx \underline{0.58} \end{aligned}$$


$J(\theta_1)$   
(function of the parameter  $\theta_1$ )

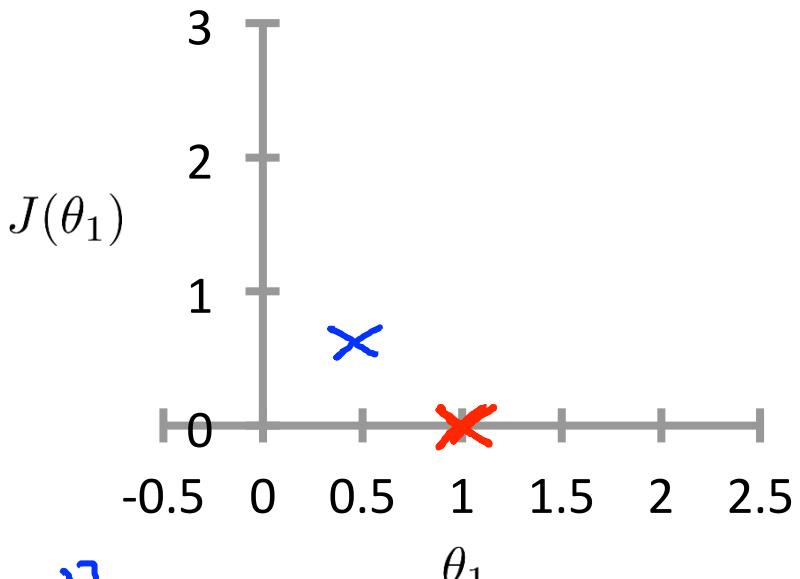


$$\begin{aligned} \theta_1 &=? \\ J(0) &=? \end{aligned}$$

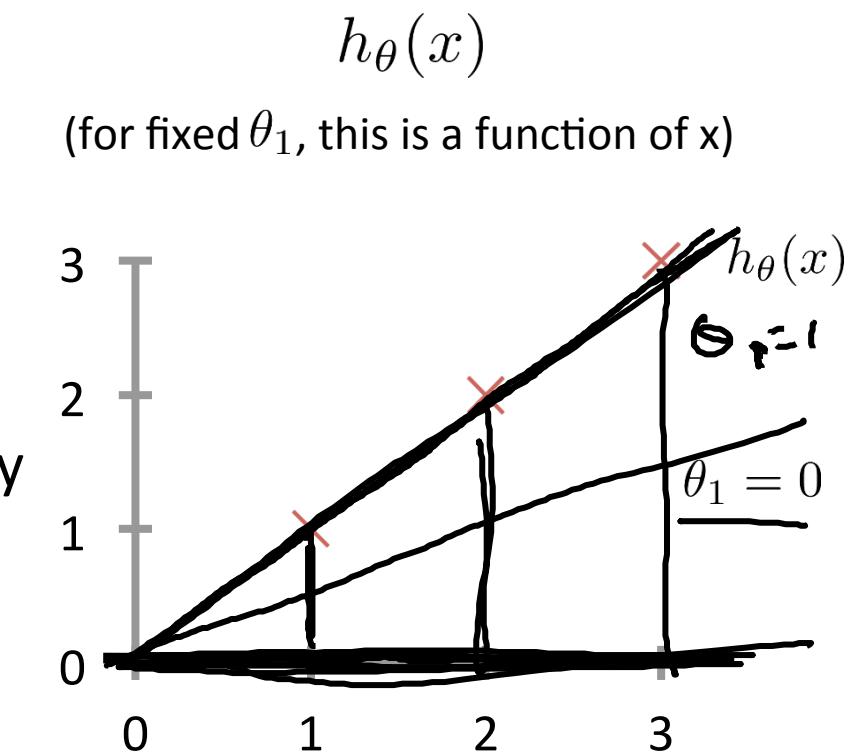

$$\begin{aligned}
 J(0) &= \frac{1}{2m} (1^2 + 2^2 + 3^2) \\
 &= \frac{1}{6} \cdot 14 \approx 2.3
 \end{aligned}$$

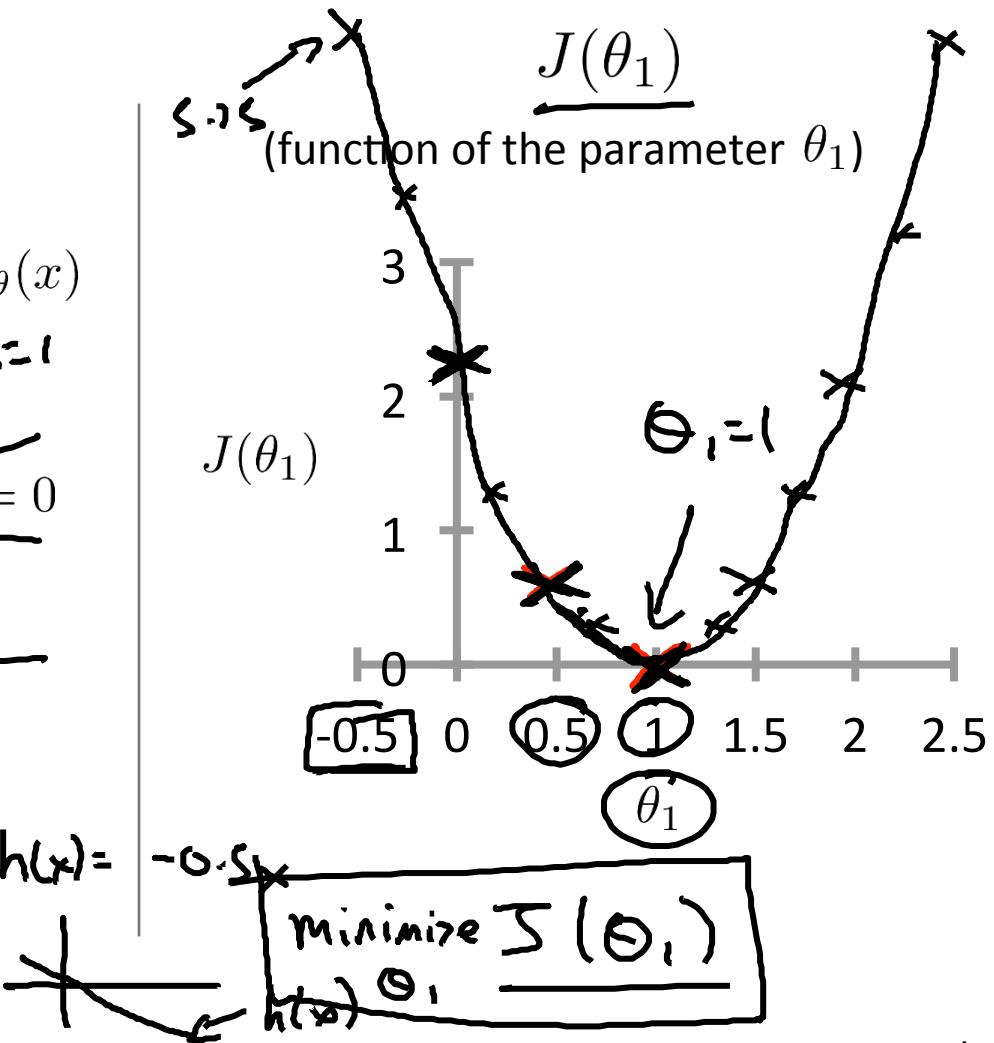

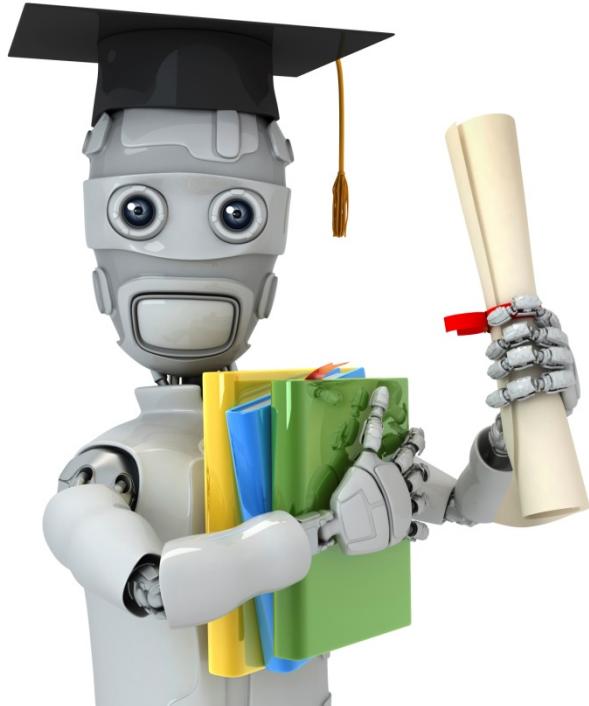

Machine Learning

# Linear regression with one variable

---

# Cost function intuition II

Hypothesis:  $h_{\theta}(x) = \theta_0 + \theta_1 x$


Parameters:  $\theta_0, \theta_1$

Cost Function:  $J(\theta_0, \theta_1) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$

Goal:  $\underset{\theta_0, \theta_1}{\text{minimize}} J(\theta_0, \theta_1)$


.

$h_{\theta}(x)$   
(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

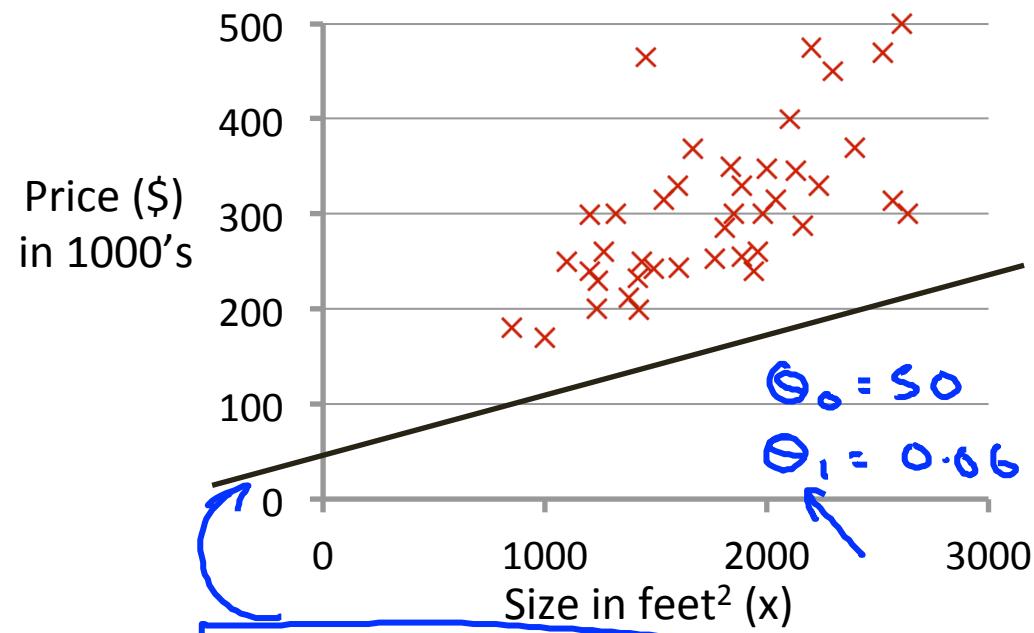


$$h_{\theta}(x) = 50 + 0.06x$$

$J(\theta_0, \theta_1)$   
(function of the parameters  $\theta_0, \theta_1$ )

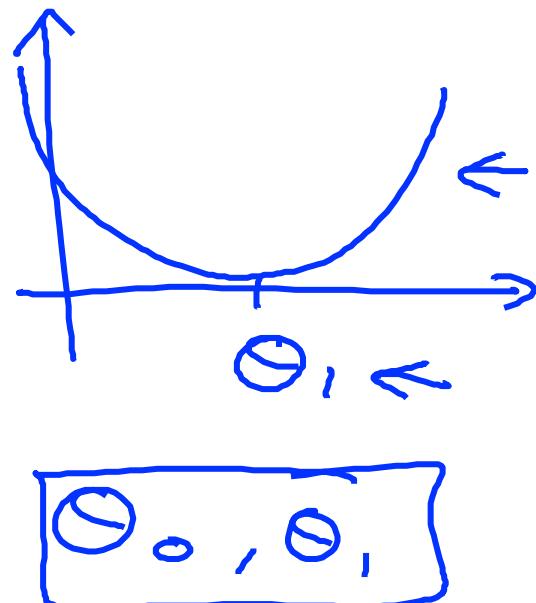


Contour plots  
Contour figures -

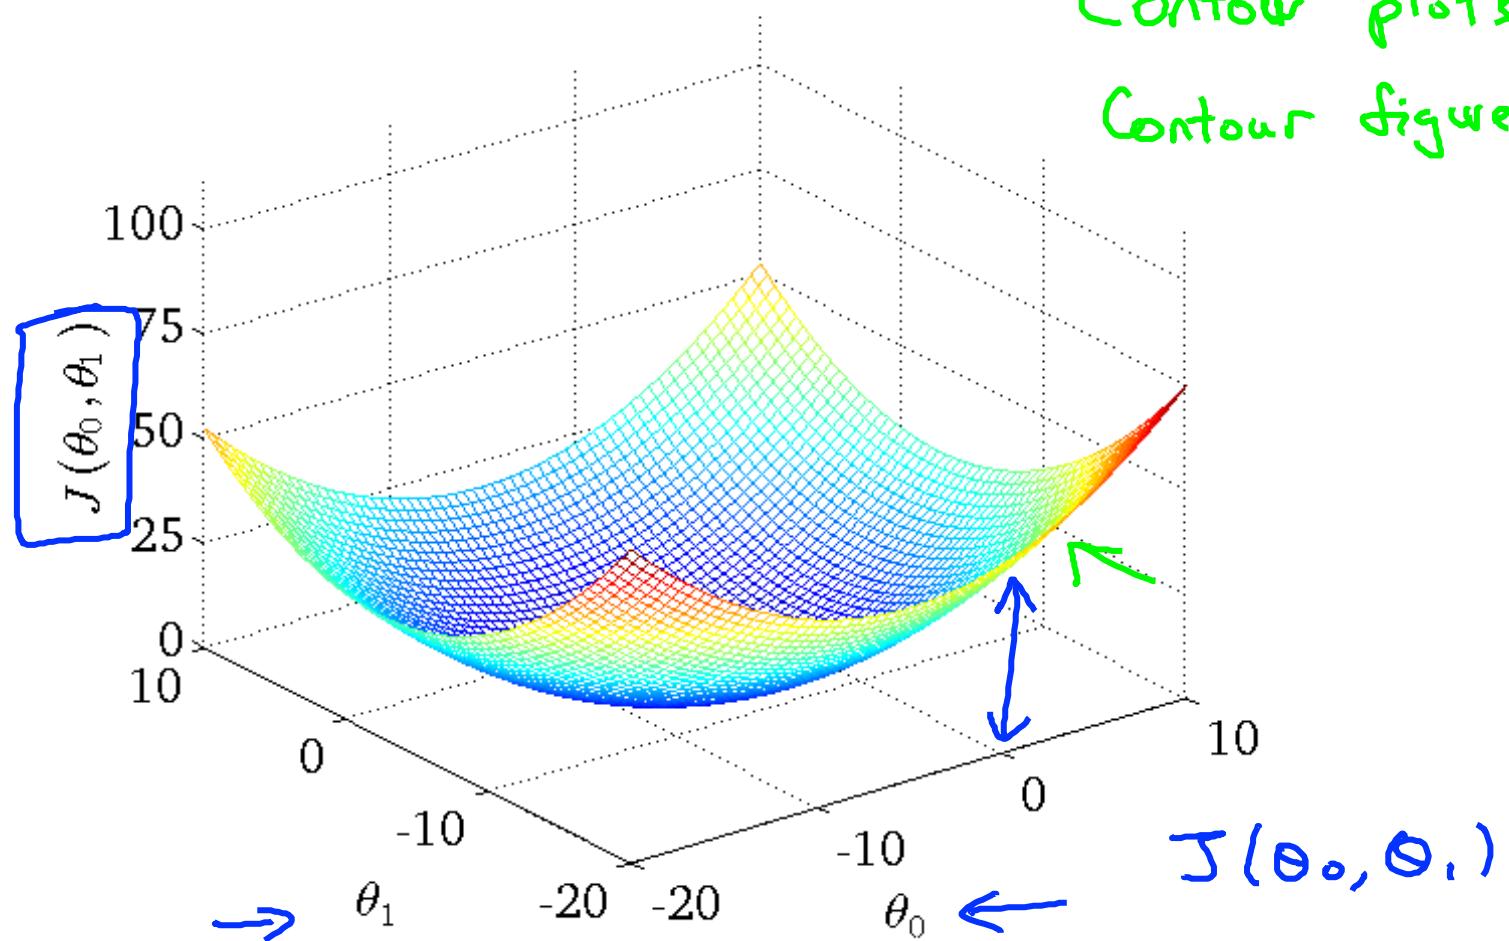


$$h_{\theta}(x)$$

$$J(\theta_0, \theta_1)$$

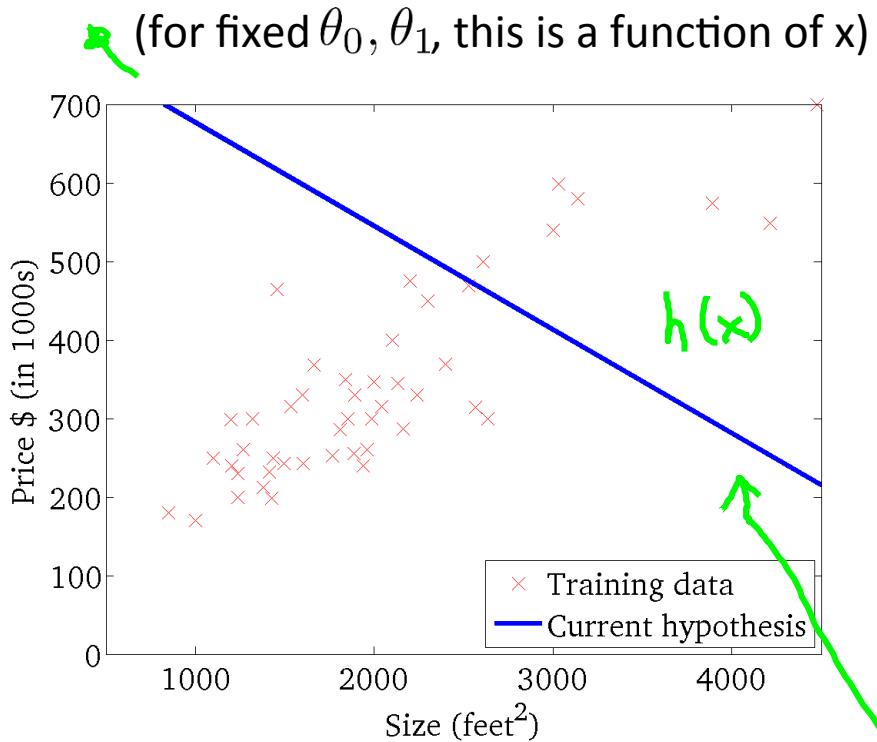


(function of the parameters  $\theta_0, \theta_1$ )

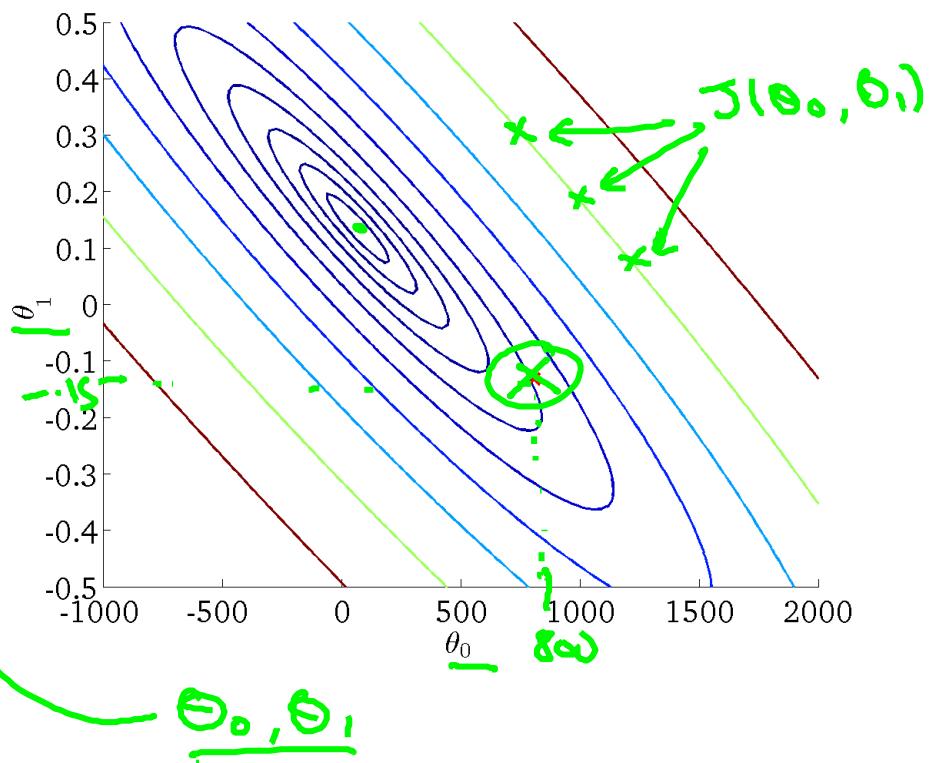


$$h_{\theta}(x)$$

(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

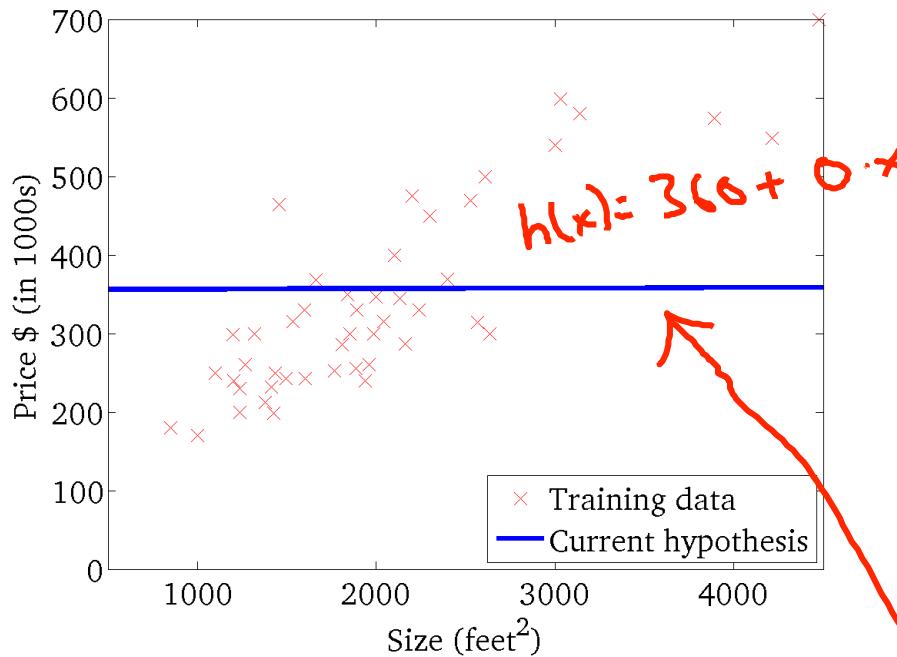


$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

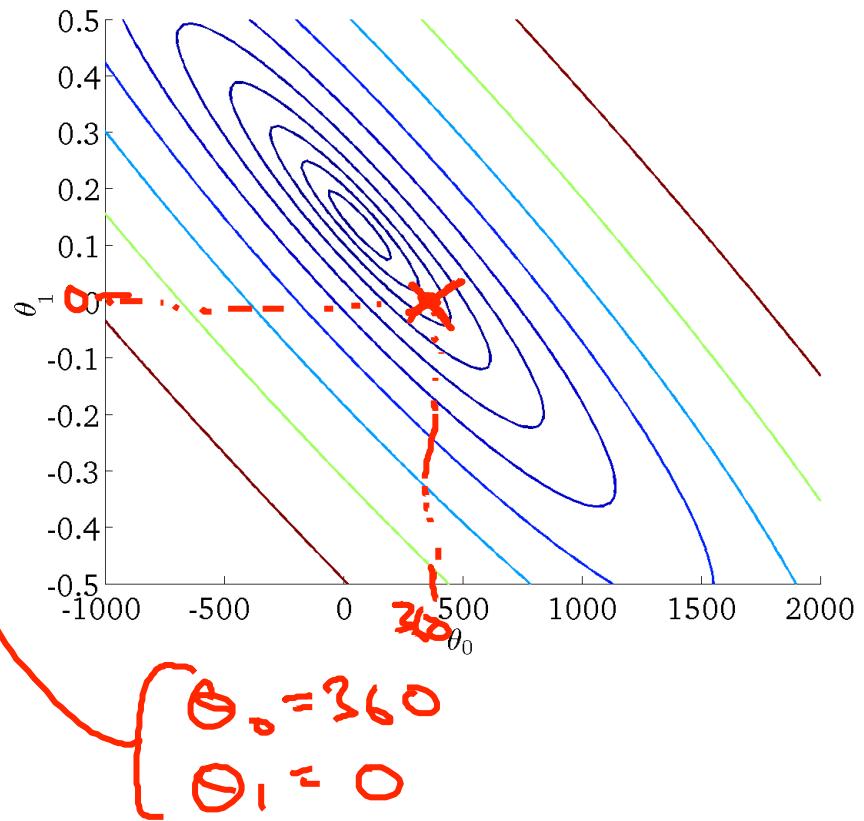


$$h_{\theta}(x)$$

(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

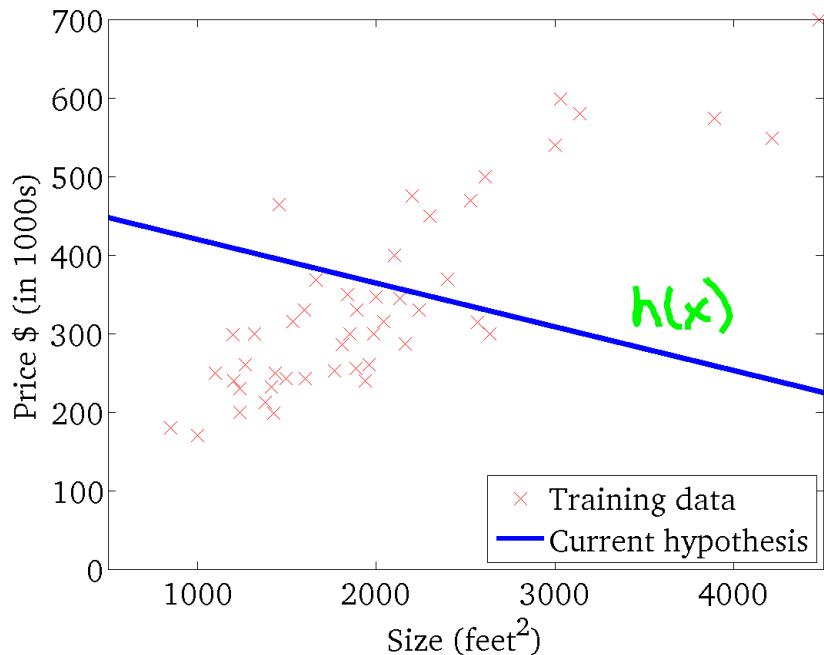


$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

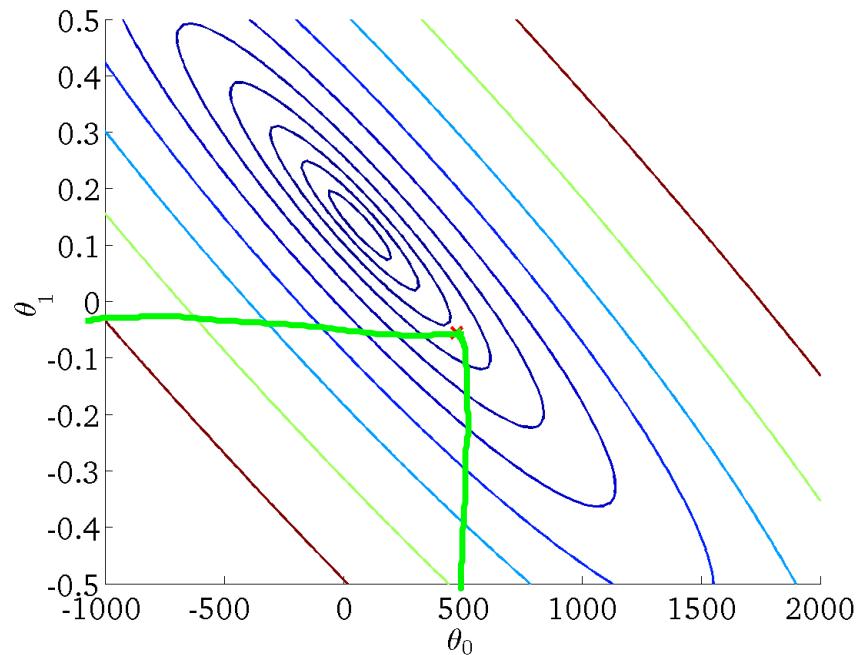


$$h_{\theta}(x)$$


(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

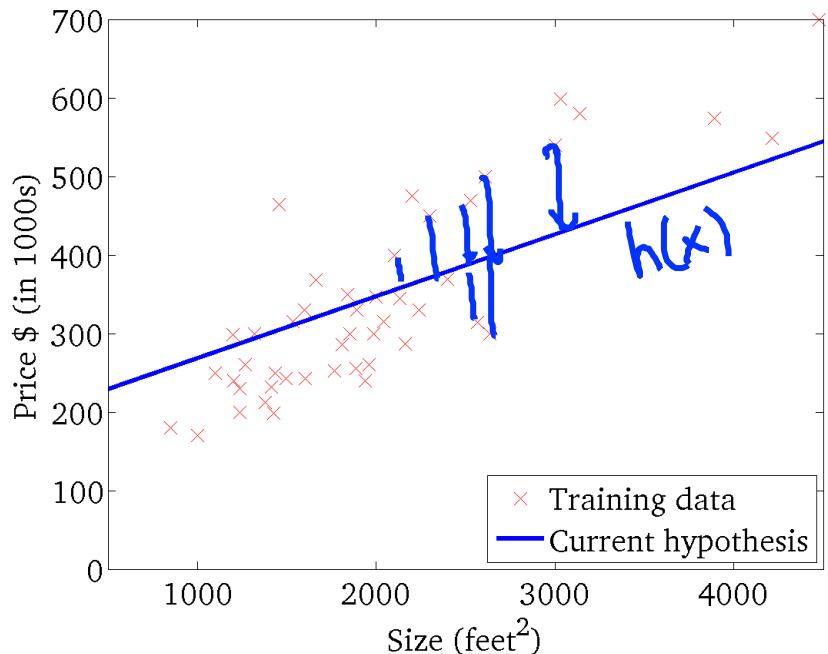

$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

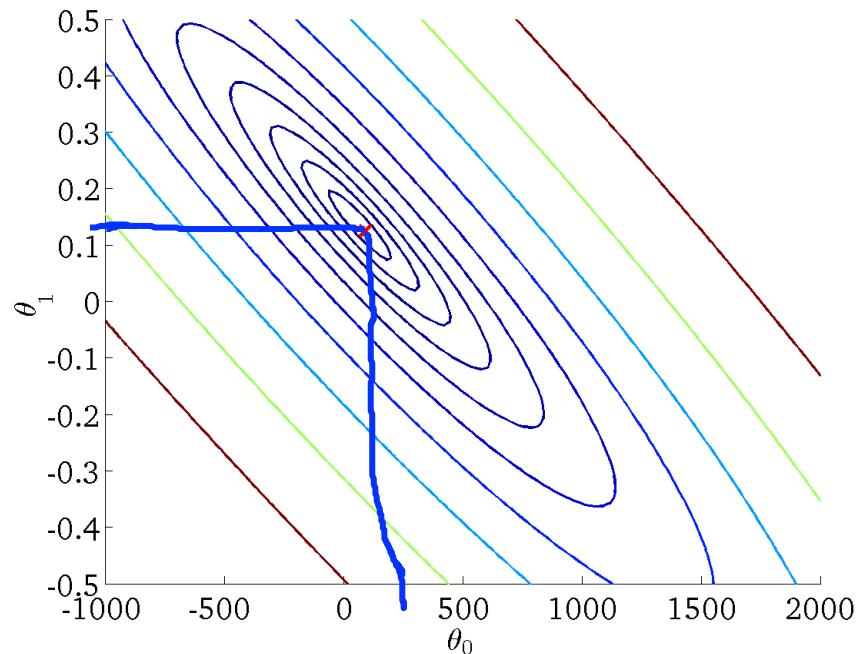

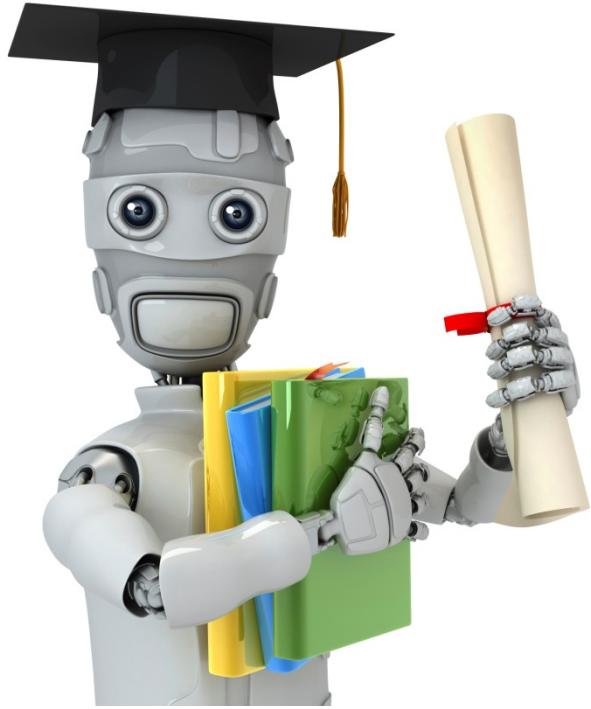

Machine Learning

Linear regression  
with one variable

---


Gradient  
descent


Have some function  $\underline{J(\theta_0, \theta_1)}$   $J(\theta_0, \theta_1, \theta_2, \dots, \theta_n)$

Want  $\min_{\theta_0, \theta_1} \underline{J(\theta_0, \theta_1)}$   $\min_{\theta_0, \dots, \theta_n} \underline{J(\theta_0, \dots, \theta_n)}$

## Outline:

- Start with some  $\underline{\theta_0, \theta_1}$  (say  $\theta_0 = 0, \theta_1 = 0$ )
- Keep changing  $\underline{\theta_0, \theta_1}$  to reduce  $\underline{J(\theta_0, \theta_1)}$   
until we hopefully end up at a minimum

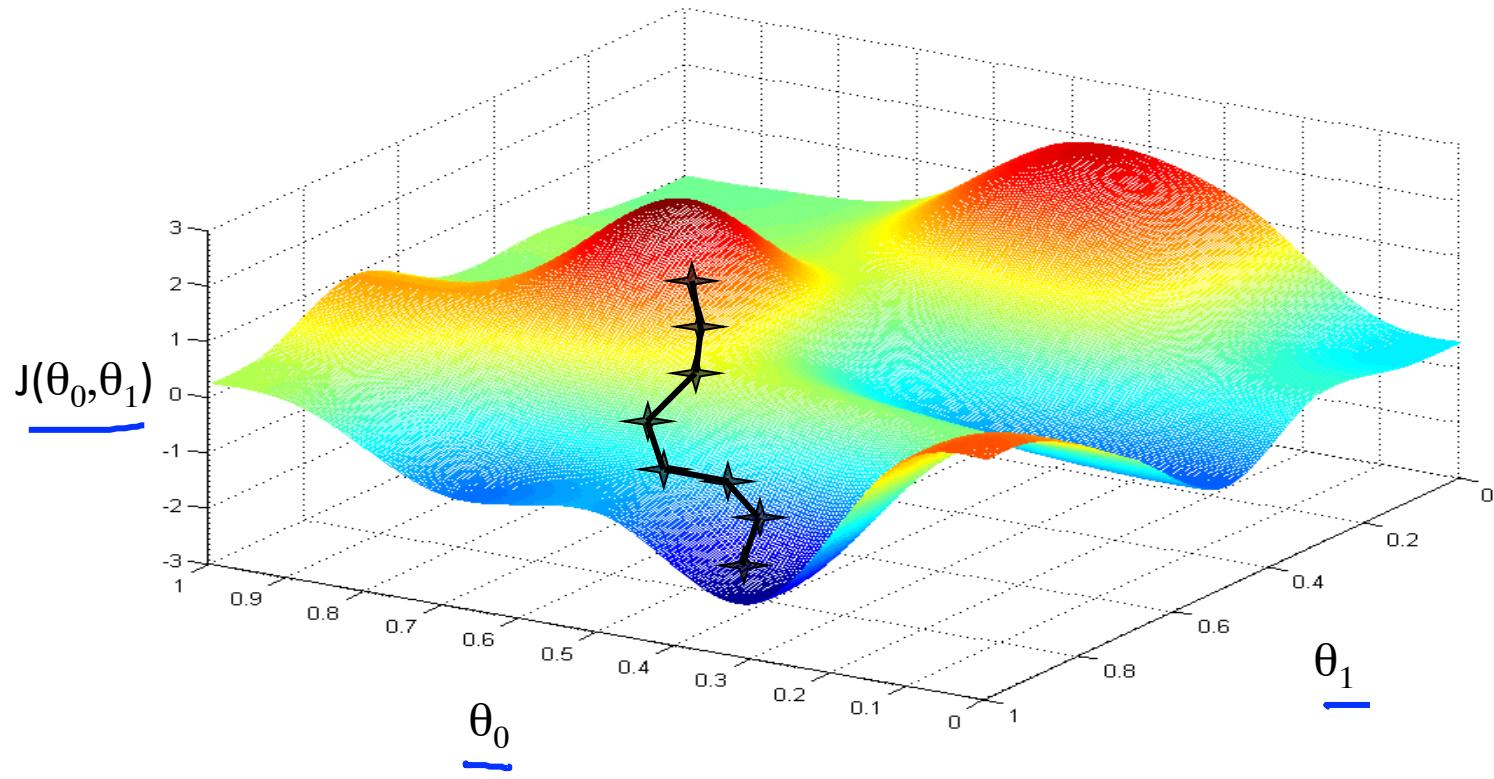

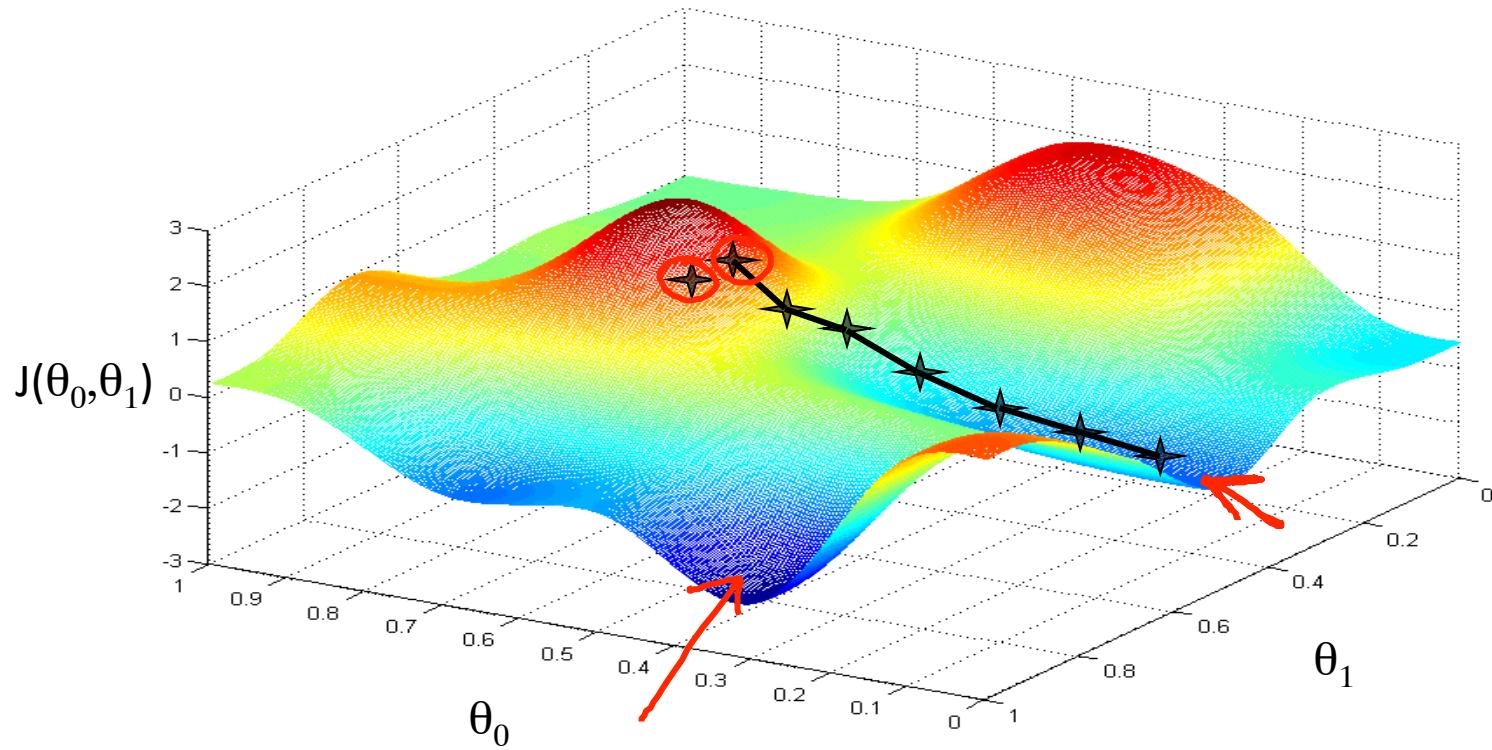

Andrew Ng

# Gradient descent algorithm

repeat until convergence {

$$\theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta_0, \theta_1)$$

learning rate

$\theta_0, \theta_1$

Assignment

$$\begin{array}{l} a := b \\ \quad \uparrow \\ a := a + 1 \end{array}$$

Truth assertion

$$a = b \leftarrow$$

$$a = a + 1 \times$$

(for  $j = 0$  and  $j = 1$ )


Simultaneously update  
 $\theta_0$  and  $\theta_1$

Correct: Simultaneous update

- $\text{temp0} := \theta_0 - \alpha \frac{\partial}{\partial \theta_0} J(\theta_0, \theta_1)$
- $\text{temp1} := \theta_1 - \alpha \frac{\partial}{\partial \theta_1} J(\theta_0, \theta_1)$
- $\theta_0 := \text{temp0}$
- $\theta_1 := \text{temp1}$

Incorrect:

- $\text{temp0} := \theta_0 - \alpha \frac{\partial}{\partial \theta_0} J(\theta_0, \theta_1)$
- $\theta_0 := \text{temp0}$
- $\text{temp1} := \theta_1 - \alpha \frac{\partial}{\partial \theta_1} J(\theta_0, \theta_1)$
- $\theta_1 := \text{temp1}$

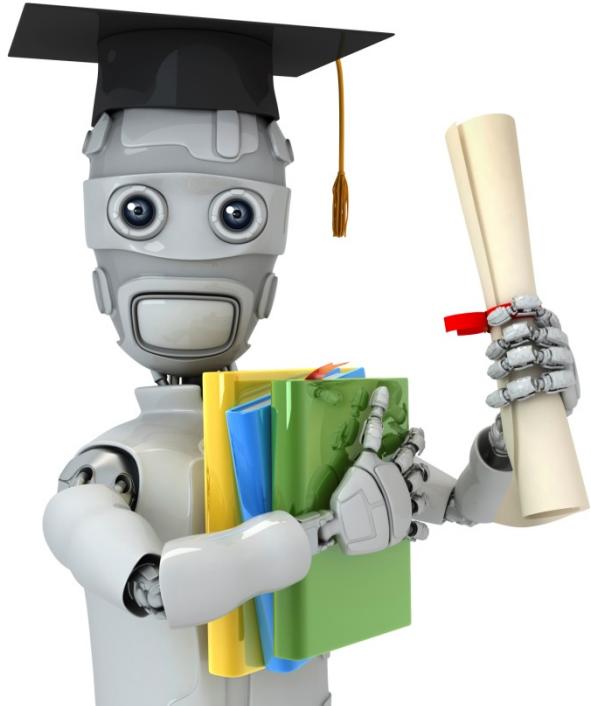

Machine Learning

## Linear regression with one variable

---


## Gradient descent intuition

# Gradient descent algorithm

repeat until convergence {  
→  $\theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta_0, \theta_1)$  (simultaneously update  
}  
}  $j = 0$  and  $j = 1$ )  

learning rate      derivative

$$\min_{\theta_1} J(\theta_1) \quad \theta_1 \in \mathbb{R}$$

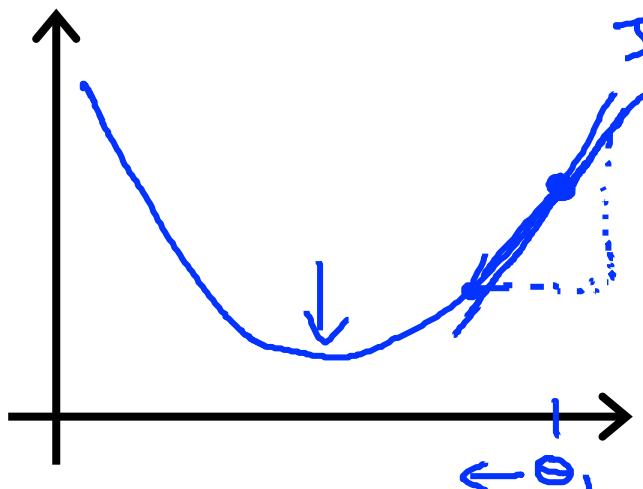


$J(\theta_1)$  ( $\theta_1 \in \mathbb{R}$ )

$$\theta_1 := \theta_1 - \frac{\alpha}{\frac{\partial}{\partial \theta_1} J(\theta_1)} \geq 0$$

Diagram illustrating the update rule for  $\theta_1$ . A blue box contains the formula  $\theta_1 := \theta_1 - \frac{\alpha}{\frac{\partial}{\partial \theta_1} J(\theta_1)}$ . Above the box, a small diagram shows a rectangle with width  $\Delta \theta_1$  and height  $\frac{\partial}{\partial \theta_1} J(\theta_1)$ , with a downward-pointing arrow indicating the negative slope of the function at that point.

$$\theta_1 := \theta_1 - \frac{\alpha}{\frac{\partial}{\partial \theta_1} J(\theta_1)} \cdot (\text{positive number})$$

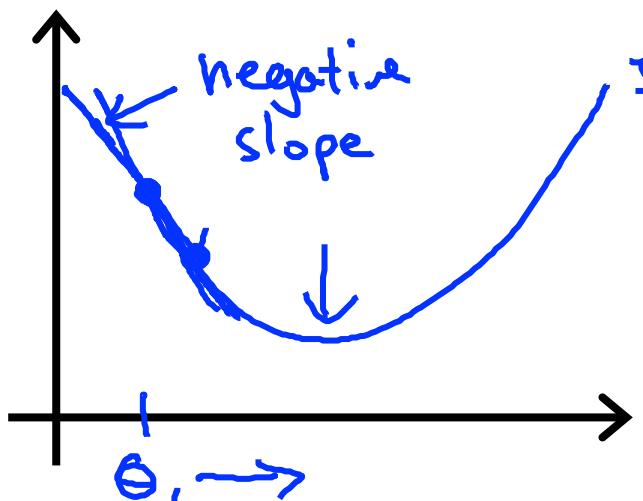


$$\frac{\frac{\partial}{\partial \theta_1} J(\theta_1)}{\leq 0}$$


$$\theta_1 := \theta_1 - \frac{\alpha}{\frac{\partial}{\partial \theta_1} J(\theta_1)} \cdot (\text{negative number})$$


$$\theta_1 := \theta_1 - \alpha \frac{\partial}{\partial \theta_1} J(\theta_1)$$

If  $\alpha$  is too small, gradient descent can be slow.

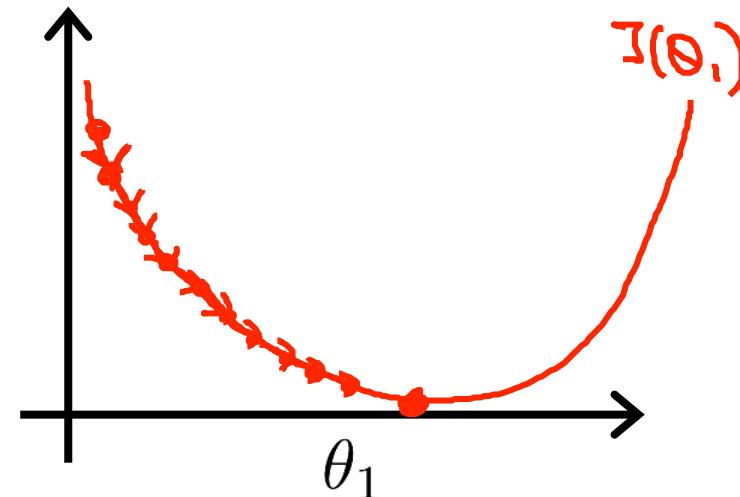

If  $\alpha$  is too large, gradient descent can overshoot the minimum. It may fail to converge, or even diverge.

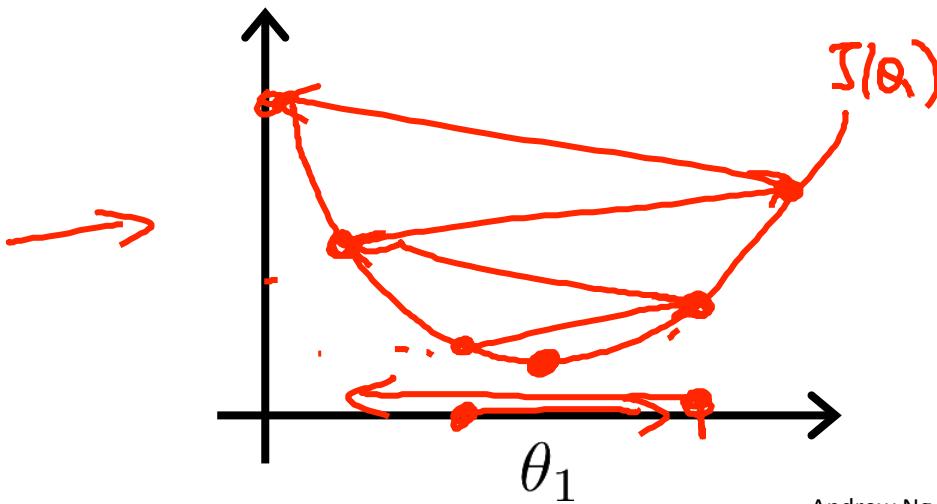

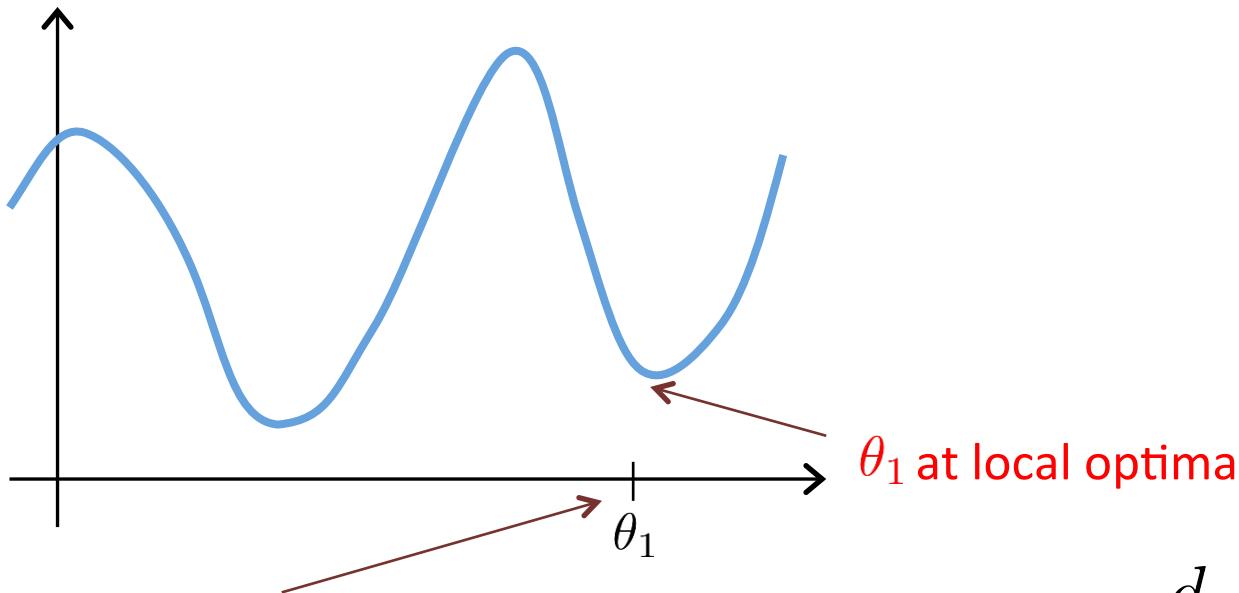



$$\theta_1 := \theta_1 - \alpha \frac{d}{d\theta_1} J(\theta_1)$$

Gradient descent can converge to a local minimum, even with the learning rate  $\alpha$  fixed.

$$\theta_1 := \theta_1 - \alpha \frac{d}{d\theta_1} J(\theta_1)$$

As we approach a local minimum, gradient descent will automatically take smaller steps. So, no need to decrease  $\alpha$  over time.

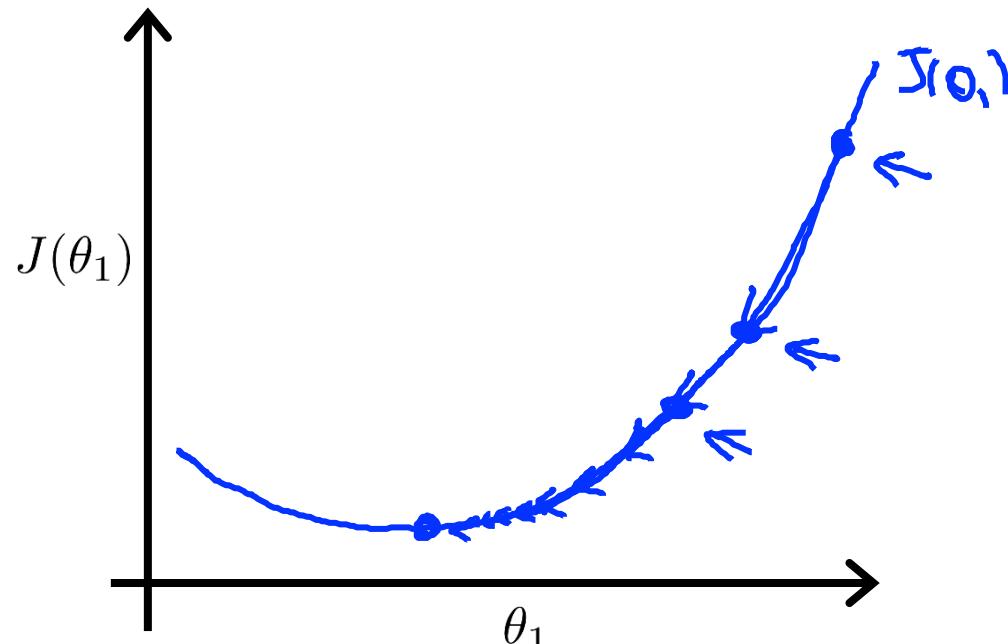

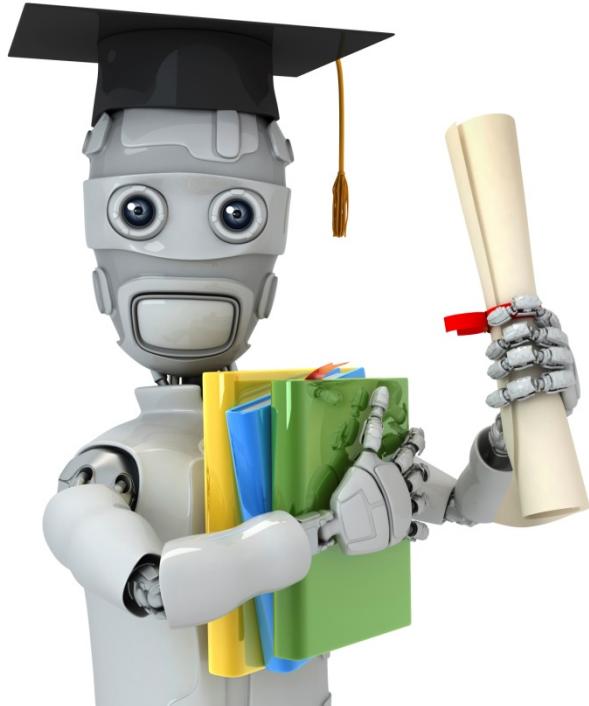

Machine Learning

## Linear regression with one variable

---

## Gradient descent for linear regression

## Gradient descent algorithm

```
repeat until convergence {  
     $\theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta_0, \theta_1)$   
    (for  $j = 1$  and  $j = 0$ )  
}
```

## Linear Regression Model

$$h_{\theta}(x) = \theta_0 + \theta_1 x$$

$$J(\theta_0, \theta_1) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

$$\frac{\partial}{\partial \theta_j} J(\theta_0, \theta_1) = \frac{2}{m} \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

$$= \frac{2}{m} \frac{1}{m} \sum_{i=1}^m (\underline{\theta_0 + \theta_1 x^{(i)}} - y^{(i)})^2$$

$$j = 0 : \frac{\partial}{\partial \theta_0} J(\theta_0, \theta_1) = \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})$$

$$j = 1 : \frac{\partial}{\partial \theta_1} J(\theta_0, \theta_1) = \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) \cdot x^{(i)}$$

## Gradient descent algorithm

repeat until convergence {

$$\theta_0 := \theta_0 - \alpha \left[ \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) \right]$$


$$\theta_1 := \theta_1 - \alpha \left[ \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) \cdot x^{(i)} \right]$$

}


$$\frac{\partial}{\partial \theta_0} J(\theta_0, \theta_1)$$

update  
 $\theta_0$  and  $\theta_1$   
simultaneously


$$\frac{\partial}{\partial \theta_1} J(\theta_0, \theta_1)$$

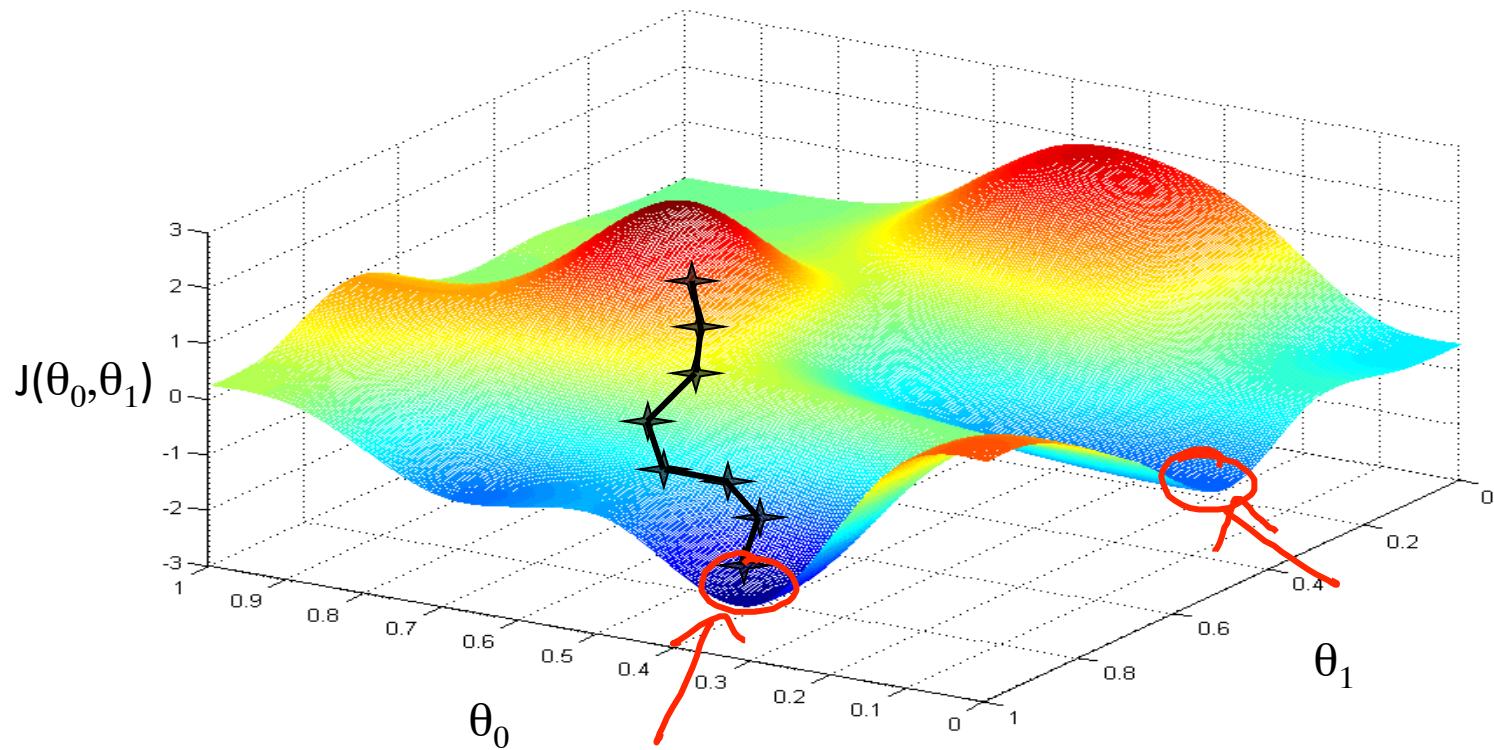


Andrew Ng

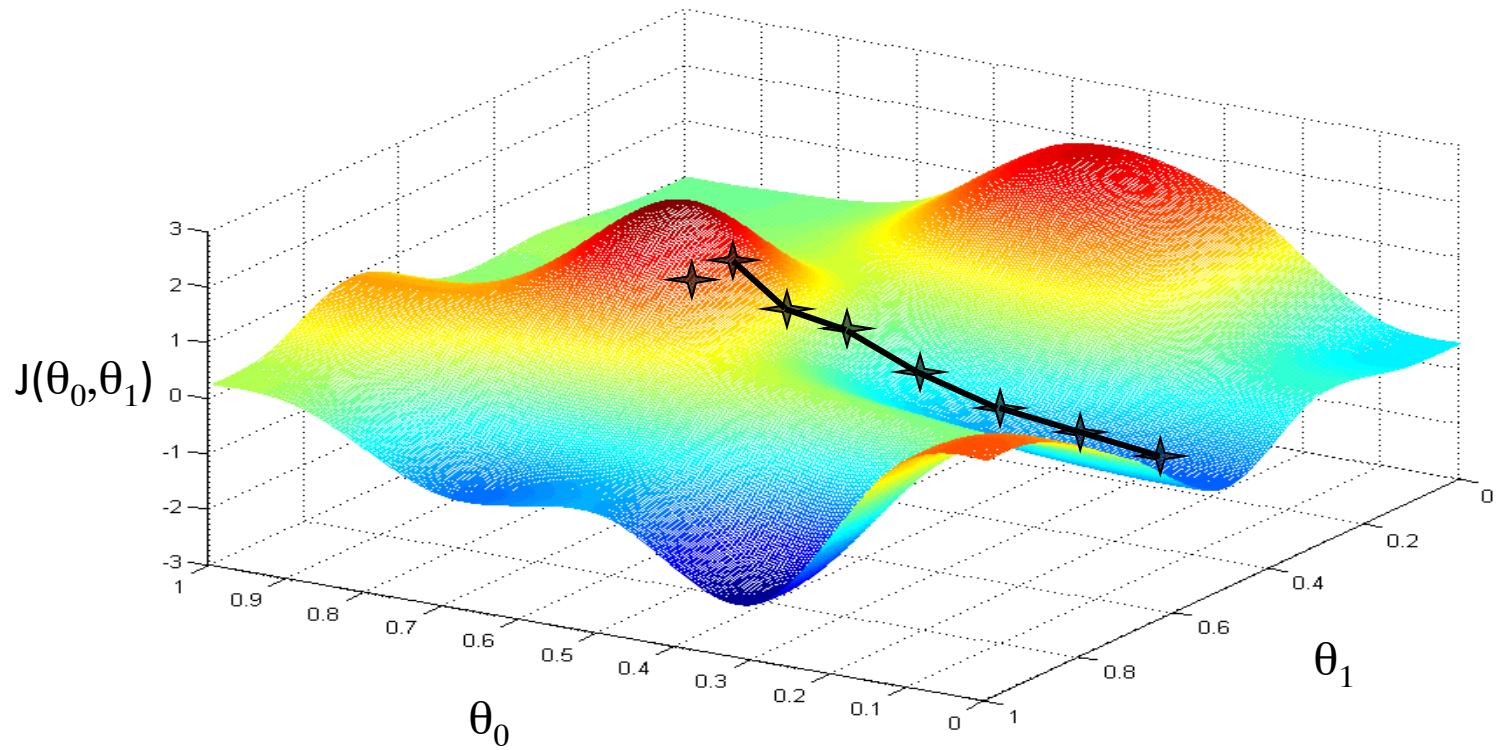


Andrew Ng

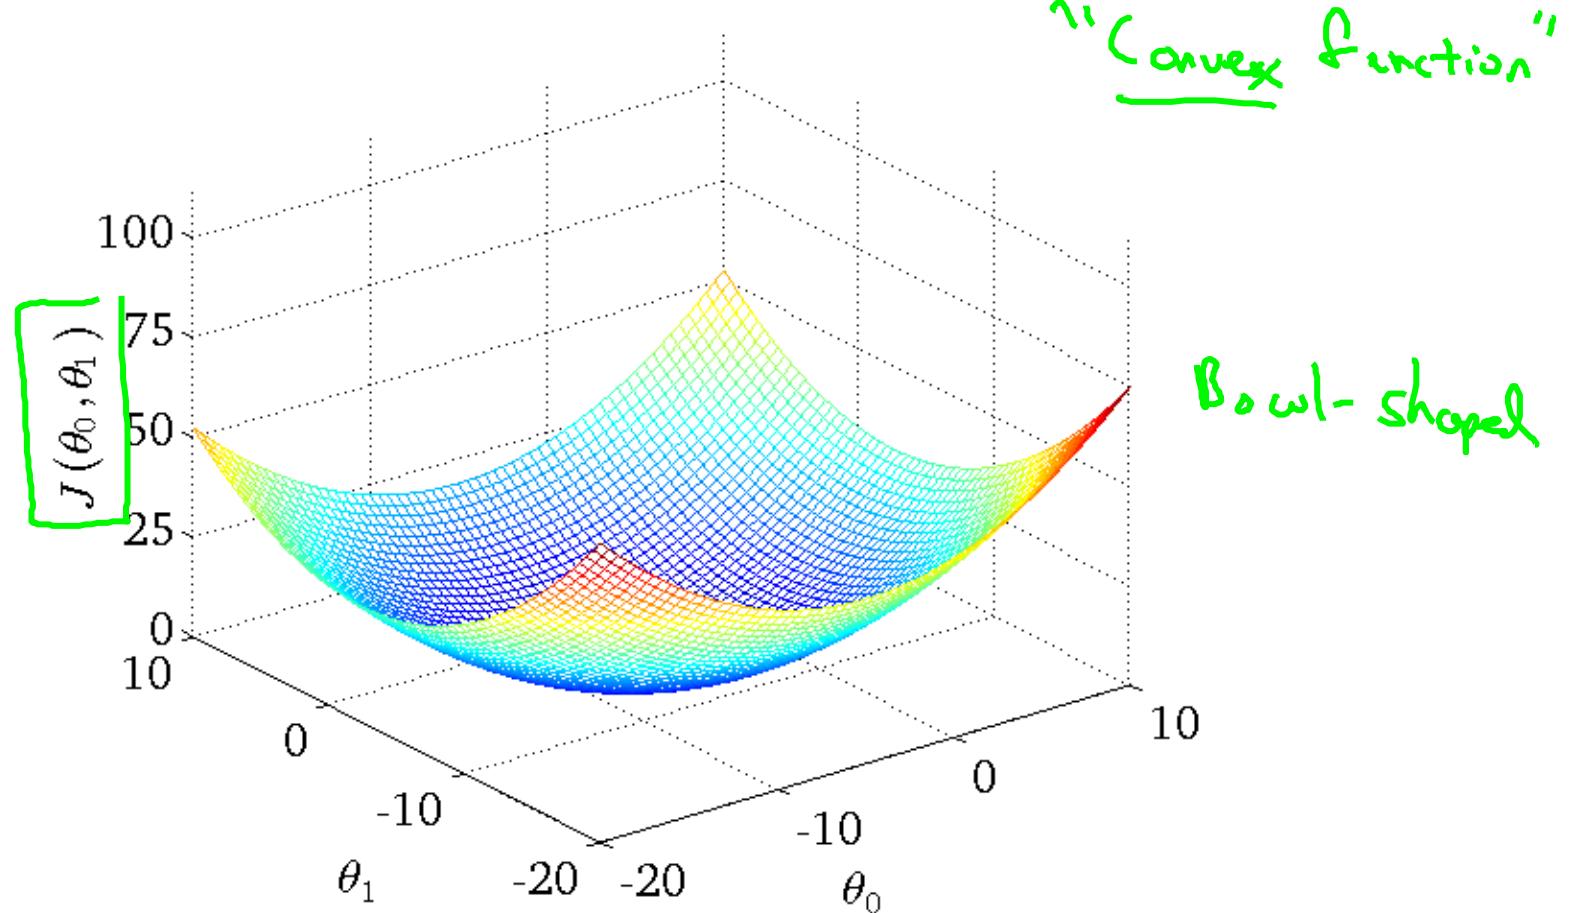


$\underline{h_{\theta}(x)}$   
 (for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

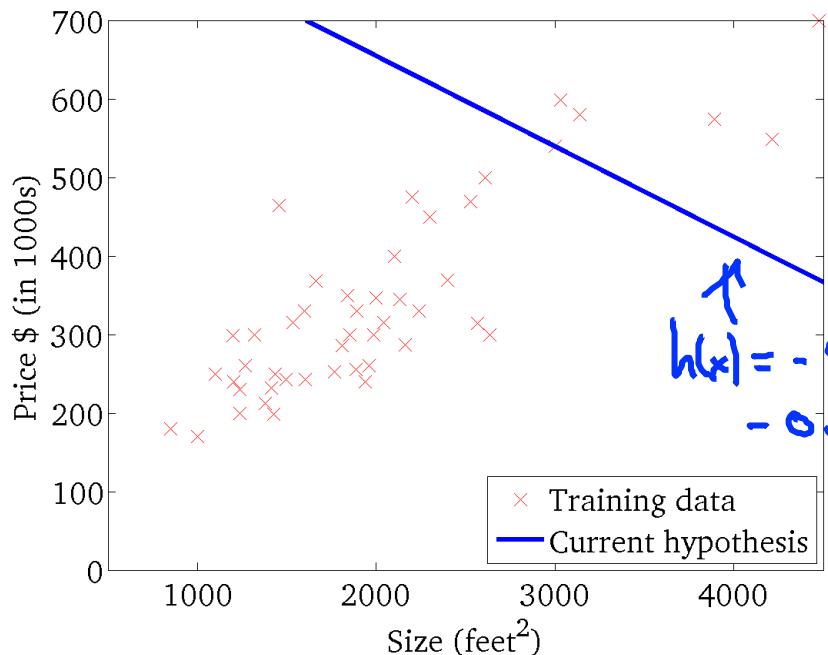


$\underline{J(\theta_0, \theta_1)}$   
 (function of the parameters  $\theta_0, \theta_1$ )

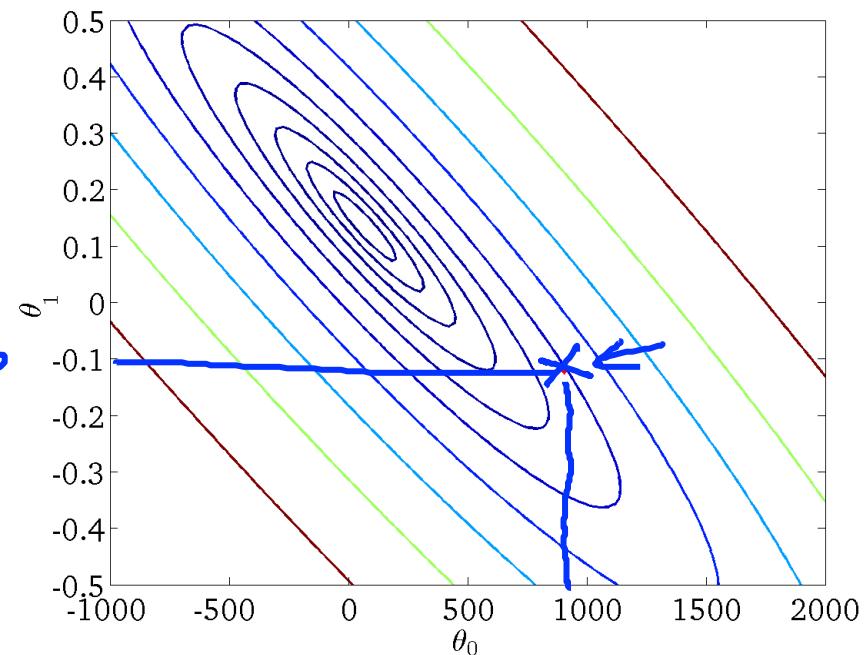

$h_{\theta}(x)$   
(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

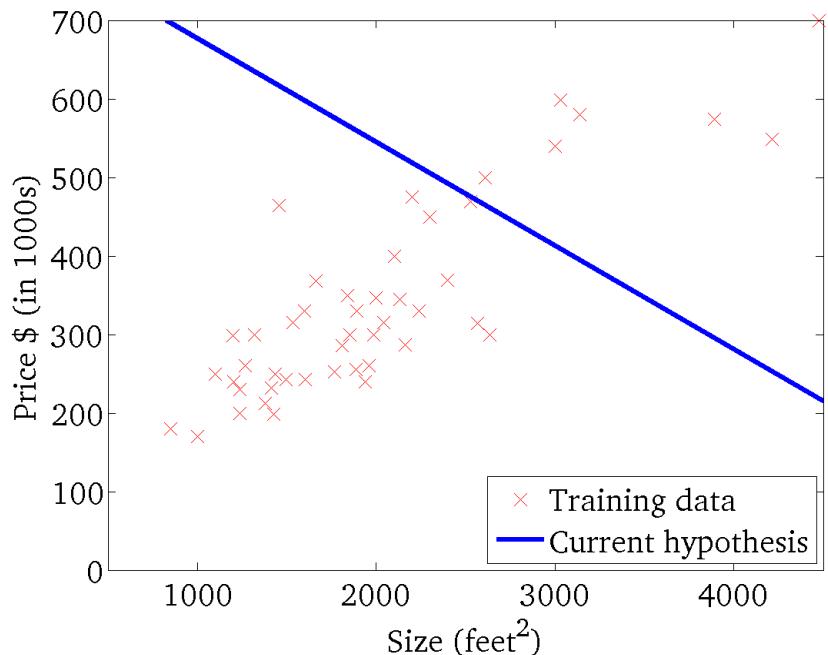


$J(\theta_0, \theta_1)$   
(function of the parameters  $\theta_0, \theta_1$ )

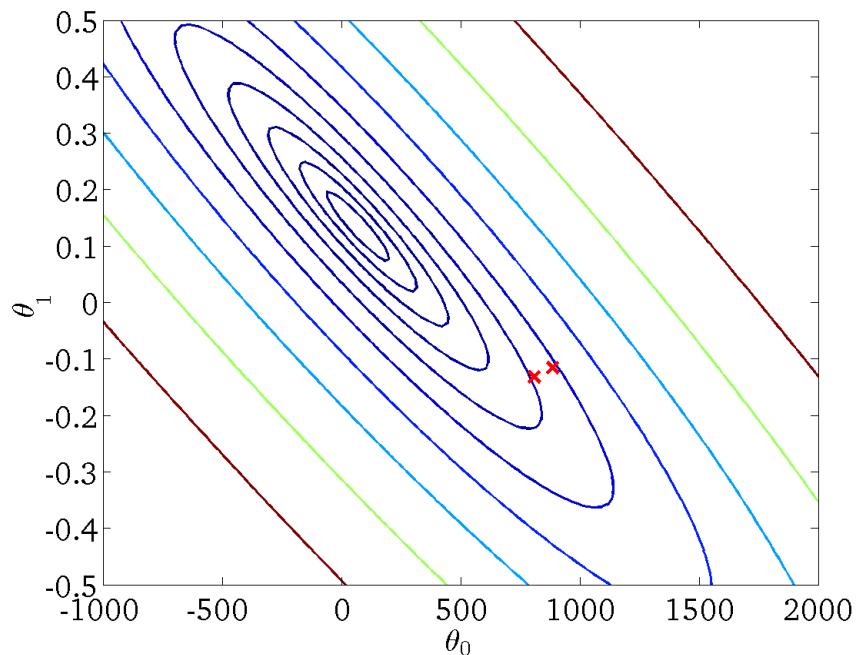


$$h_{\theta}(x)$$

(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

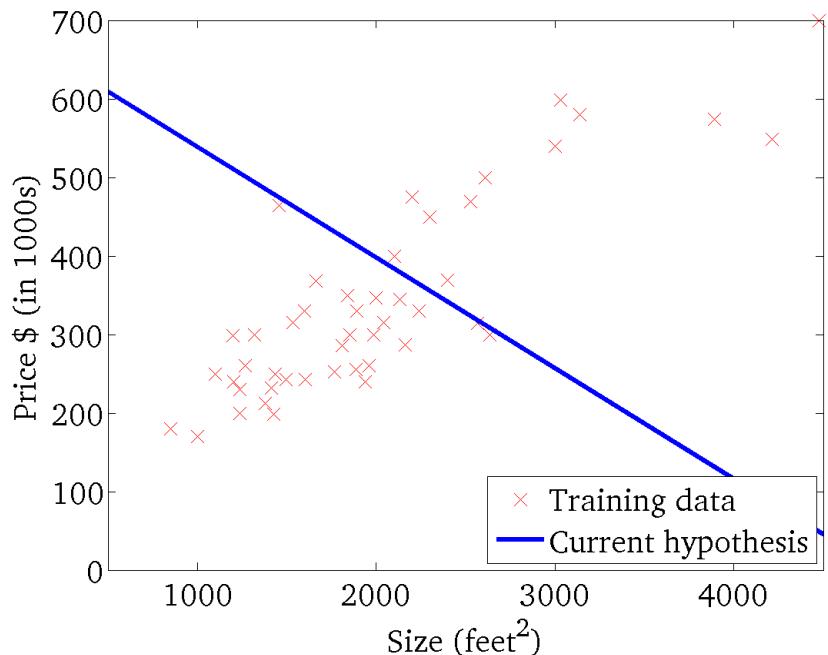


$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

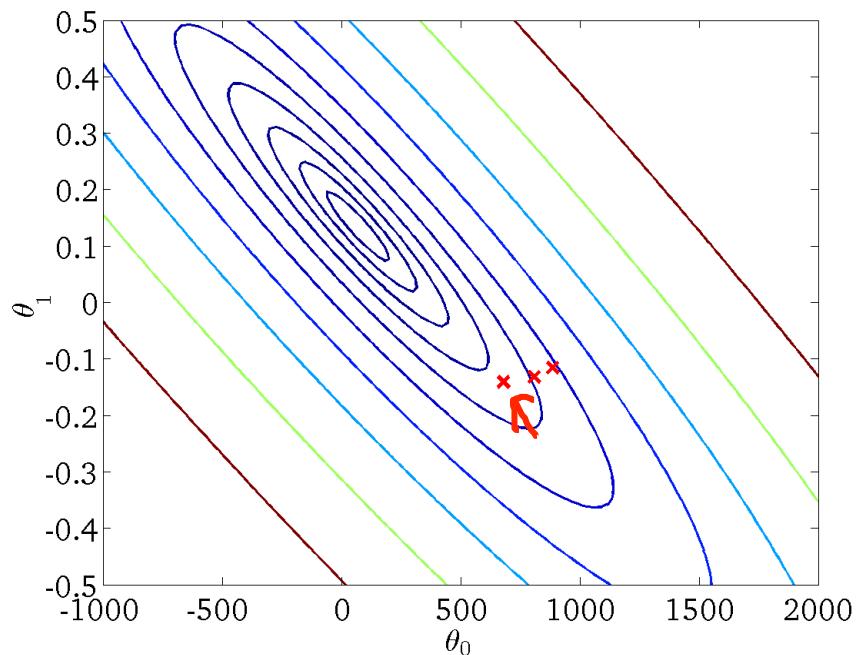


$$h_{\theta}(x)$$

(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

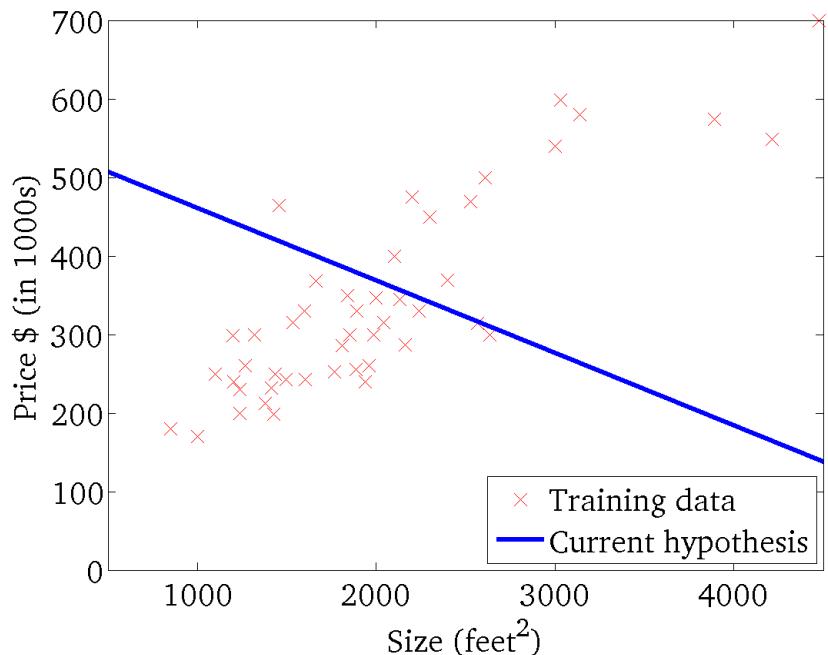


$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

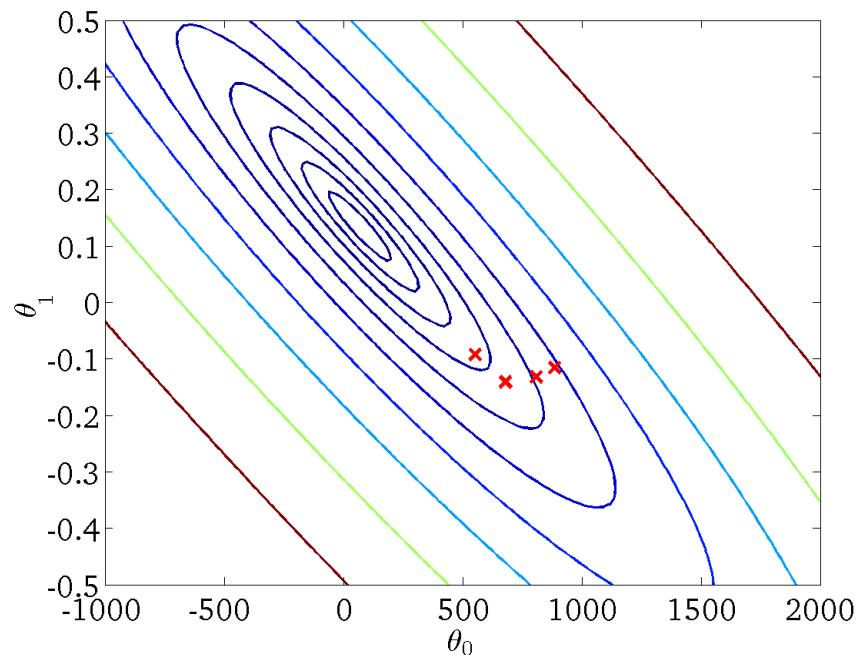


$$h_{\theta}(x)$$

(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

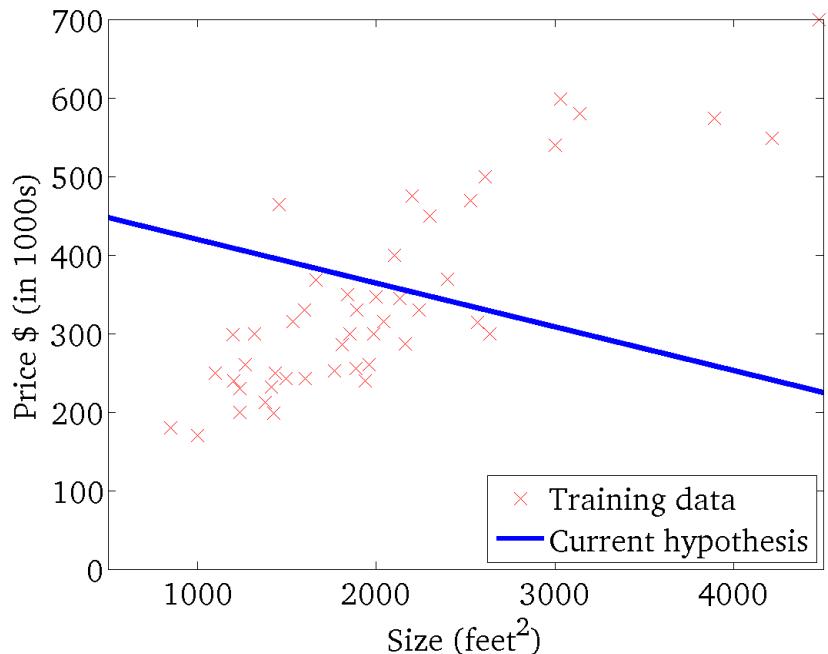


$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

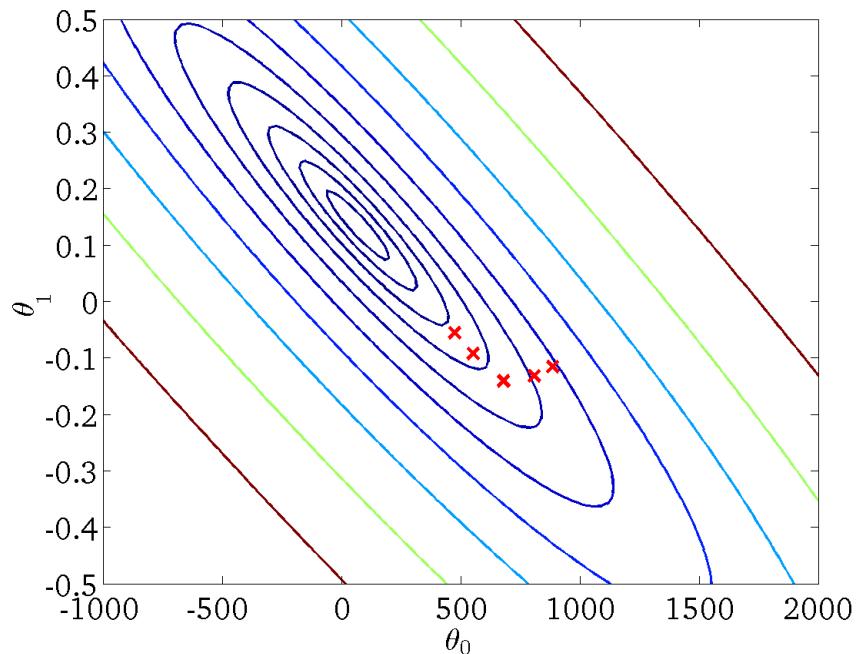


$$h_{\theta}(x)$$

(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

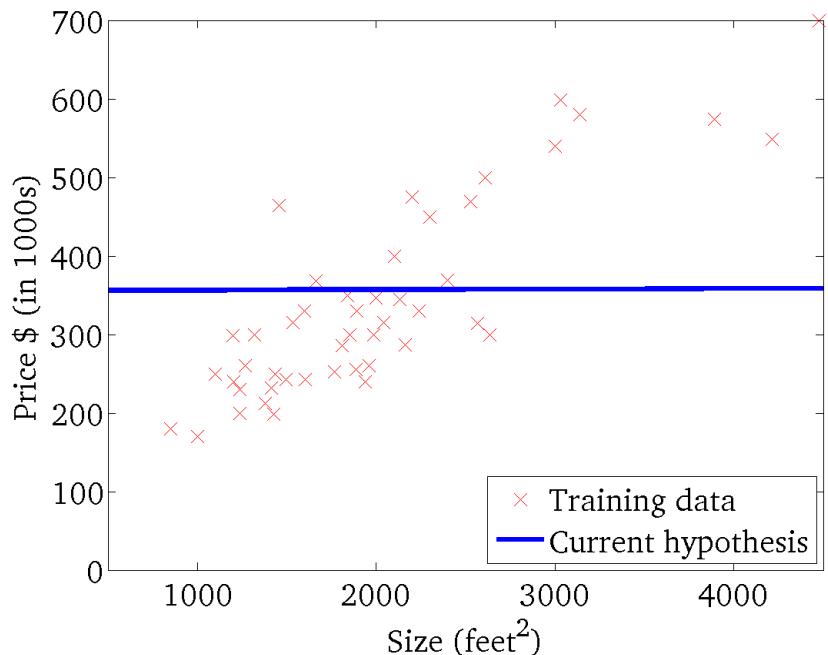


$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

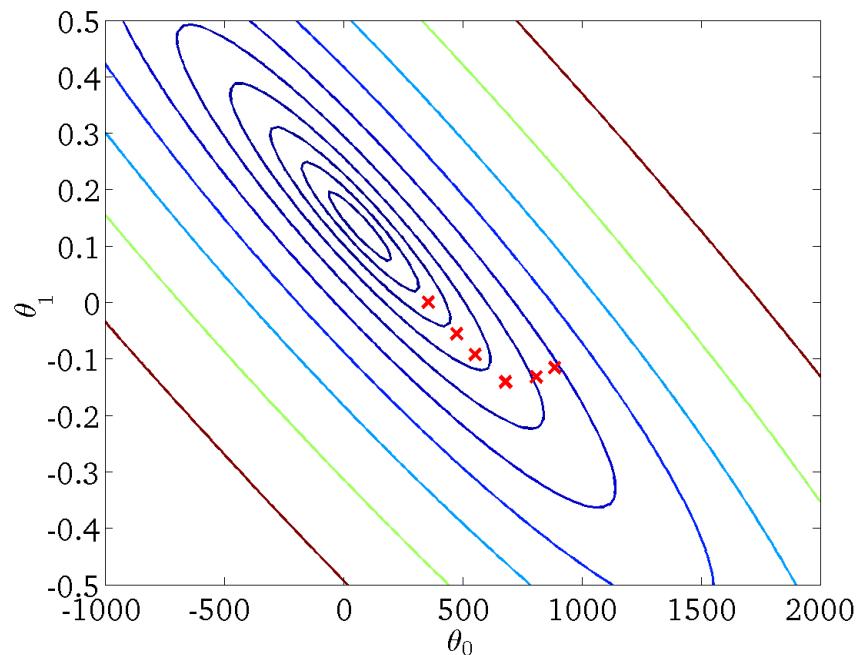


$$h_{\theta}(x)$$

(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

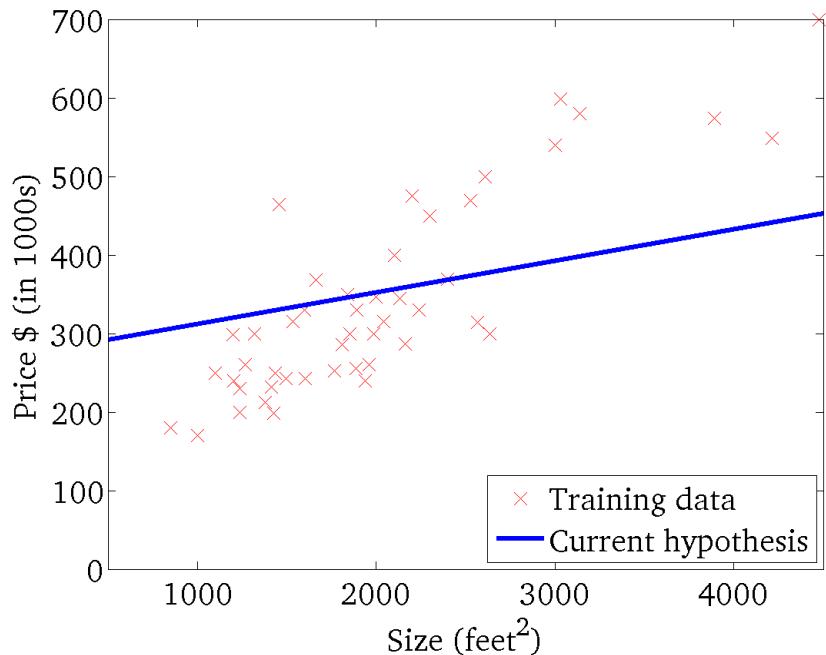


$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

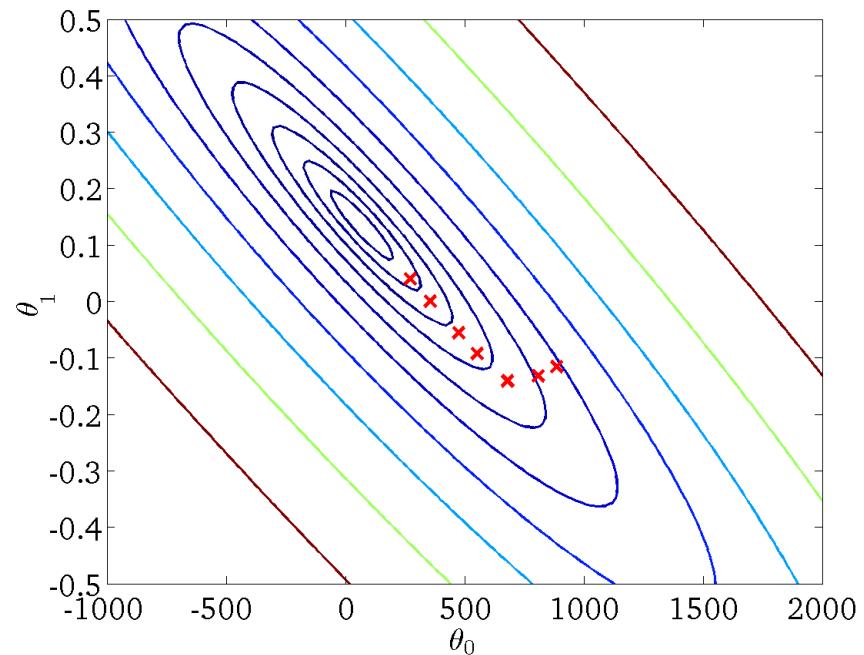


$$h_{\theta}(x)$$

(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

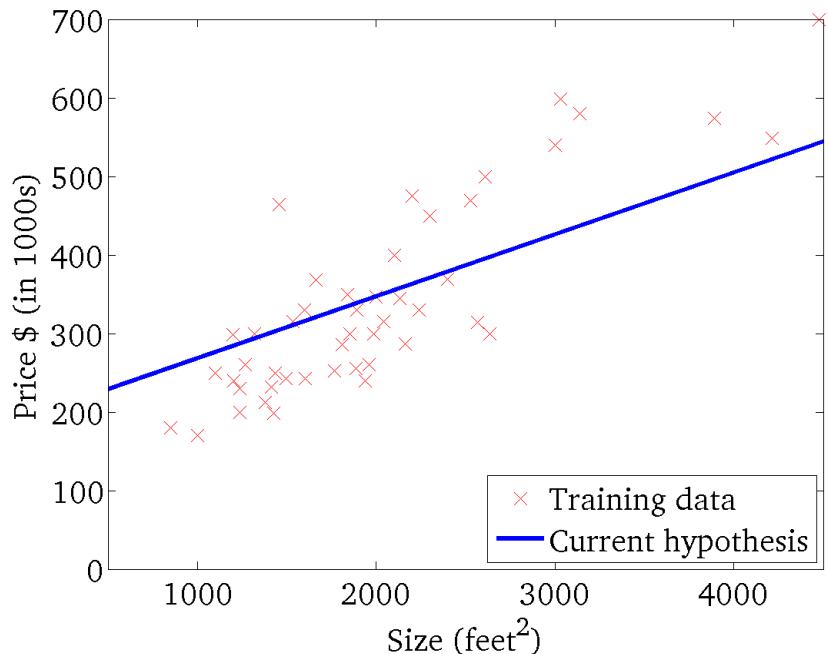


$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

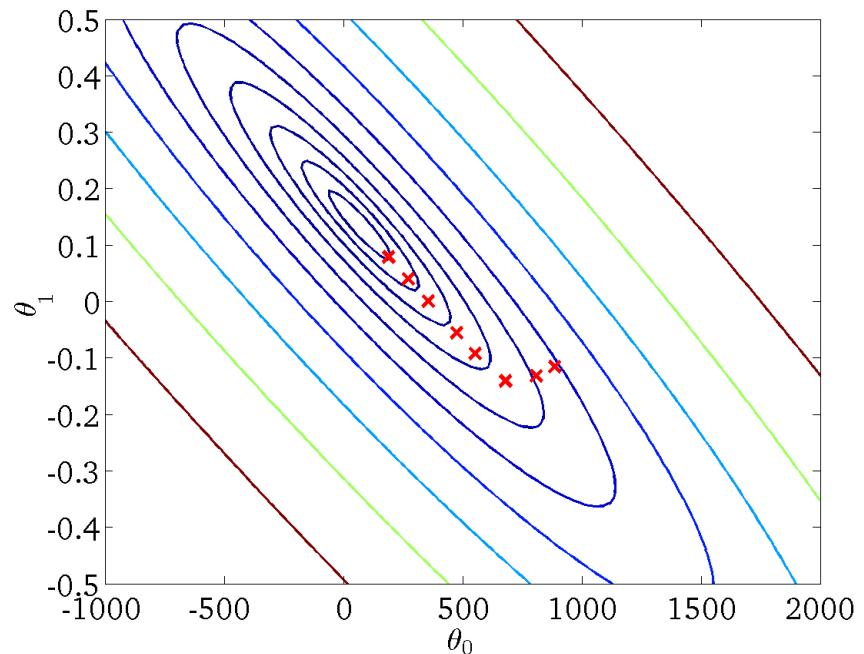


$$h_{\theta}(x)$$

(for fixed  $\theta_0, \theta_1$ , this is a function of  $x$ )

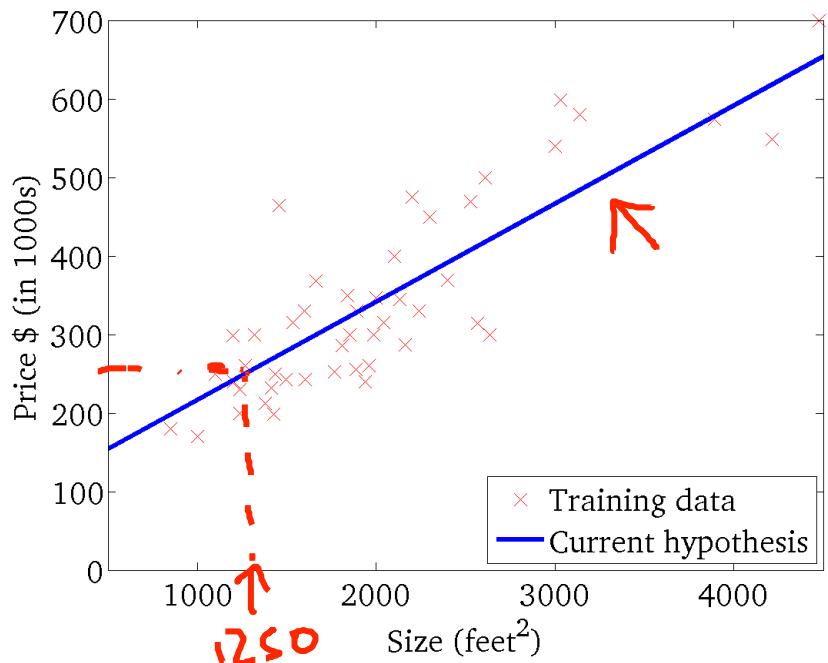

$$J(\theta_0, \theta_1)$$

(function of the parameters  $\theta_0, \theta_1$ )

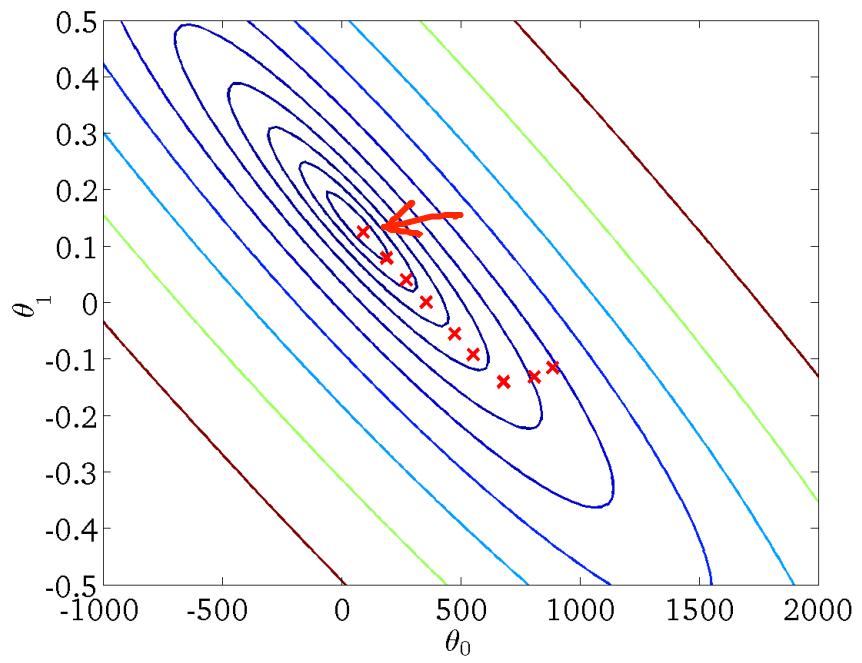


## “Batch” Gradient Descent

“Batch”: Each step of gradient descent uses all the training examples.

$$\xrightarrow{\text{all}} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})$$

## 1.3 Linear Algebra

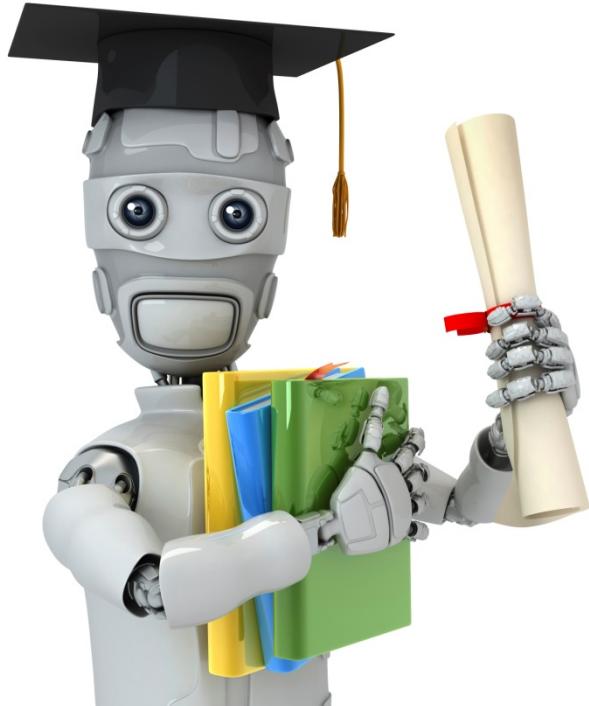

Machine Learning

## Linear Algebra review (optional)

---

## Matrices and vectors

**Matrix:** Rectangular array of numbers:

$$\begin{array}{c} \rightarrow \\ \rightarrow \\ \rightarrow \\ \rightarrow \\ \nearrow \quad \uparrow \quad \uparrow \end{array} \left[ \begin{array}{cc} 1402 & 191 \\ 1371 & 821 \\ 949 & 1437 \\ 147 & 1448 \end{array} \right]$$

$4 \times 2$  matrix

$$\rightarrow \boxed{\mathbb{R}^{4 \times 2}}$$

$$2 \rightarrow \left[ \begin{array}{ccc} 1 & 2 & 3 \\ 4 & 5 & 6 \end{array} \right] \quad \begin{matrix} \uparrow & \uparrow & \uparrow \\ 3 & & \end{matrix}$$

$2 \times 3$  matrix

$$\boxed{\mathbb{R}^{2 \times 3}}$$

Dimension of matrix: number of rows x number of columns

## Matrix Elements (entries of matrix)

$$A = \begin{bmatrix} 1402 & 191 \\ 1371 & 821 \\ 949 & 1437 \\ 147 & 1448 \end{bmatrix}$$

$A_{ij}$  = " $i, j$  entry" in the  $i^{th}$  row,  $j^{th}$  column.

$$A_{11} = 1402$$

$$A_{12} = 191$$

$$A_{\underline{3}\underline{2}} = 1437$$

$$A_{41} = 147$$

~~$A_{43}$~~  = Undefined (error)

Vector: An  $n \times 1$  matrix.

$$y = \begin{bmatrix} 460 \\ 232 \\ 315 \\ 178 \end{bmatrix} \quad \begin{matrix} \nearrow & \searrow \\ n=4 \end{matrix} \quad \leftarrow \text{4-dimensional vector}$$

~~$\mathbb{R}^{3 \times 2}$~~

$\mathbb{R}^4$

$y_i = i^{th}$  element

$$y_1 = 460$$

$$y_2 = 232$$

$$y_3 = 315$$


$\rightarrow [A, B, C, X]$

$a, b, x, y$

1-indexed vs 0-indexed:

$$y[1] \quad y = \begin{bmatrix} y_1 \\ y_2 \\ y_3 \\ y_4 \end{bmatrix} \quad \begin{matrix} \leftarrow \\ \leftarrow \\ \leftarrow \\ \leftarrow \end{matrix} \quad \boxed{\text{1-indexed}}$$

$$y[0] \quad y = \begin{bmatrix} y_0 \\ y_1 \\ y_2 \\ y_3 \end{bmatrix} \quad \begin{matrix} \leftarrow \\ \leftarrow \\ \leftarrow \\ \leftarrow \end{matrix} \quad \boxed{\text{0-indexed}}$$

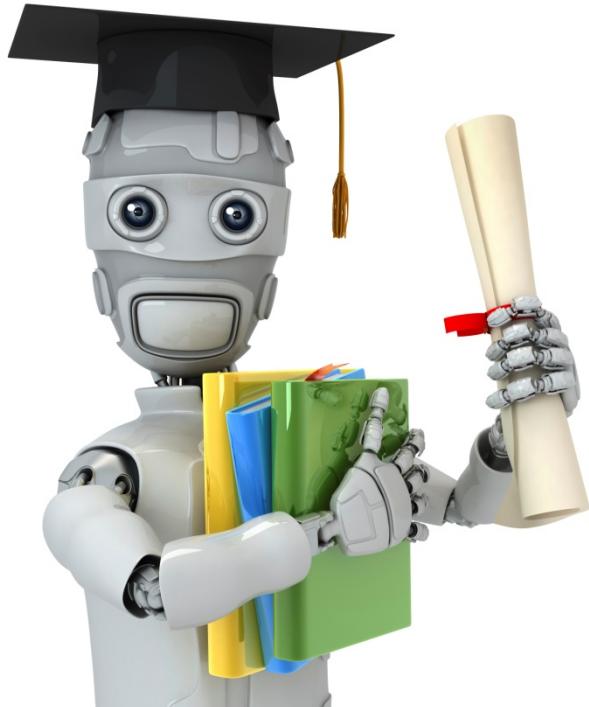

Machine Learning

## Linear Algebra review (optional)

---

Addition and scalar  
multiplication

# Matrix Addition

$$\begin{array}{c}
 \begin{array}{cc}
 \downarrow & \downarrow \\
 \left[ \begin{array}{cc} 1 & 0 \\ 2 & 5 \\ 3 & 1 \end{array} \right] & + \left[ \begin{array}{cc} 4 & 0.5 \\ 2 & 5 \\ 0 & 1 \end{array} \right] = \left[ \begin{array}{cc} 5 & 0.5 \\ 4 & 10 \\ 3 & 2 \end{array} \right]
 \end{array} \\
 \hline
 \begin{array}{c}
 3 \times 2 \\
 \text{matrix}
 \end{array}
 \end{array}$$

# Scalar Multiplication

↙ real number

$$3 \times \begin{bmatrix} 1 & 0 \\ 2 & 5 \\ 3 & 1 \end{bmatrix} = \boxed{\begin{bmatrix} 3 & 0 \\ 6 & 15 \\ 9 & 3 \end{bmatrix}} = \begin{bmatrix} 1 & 0 \\ 2 & 5 \\ 3 & 1 \end{bmatrix} \times 3$$
$$\frac{1}{4} \begin{bmatrix} 4 & 0 \\ 6 & 3 \end{bmatrix} / 4 = \frac{1}{4} \begin{bmatrix} 4 & 0 \\ 6 & 3 \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ \frac{3}{2} & \frac{3}{4} \end{bmatrix}$$

# Combination of Operands

$$3 \times \begin{bmatrix} 1 \\ 4 \\ 2 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 5 \end{bmatrix} - \begin{bmatrix} 3 \\ 0 \\ 2 \end{bmatrix} / 3$$

Scalar multiplication

Scalar division

$$= \begin{bmatrix} 3 \\ 12 \\ 6 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 5 \end{bmatrix} - \begin{bmatrix} 1 \\ 0 \\ \frac{2}{3} \end{bmatrix}$$


matrix subtraction / vector subtraction

matrix addition / vector addition

$$= \begin{bmatrix} 2 \\ 12 \\ 10 \frac{1}{3} \end{bmatrix}$$

3x1 matrix

3-dimensional vector

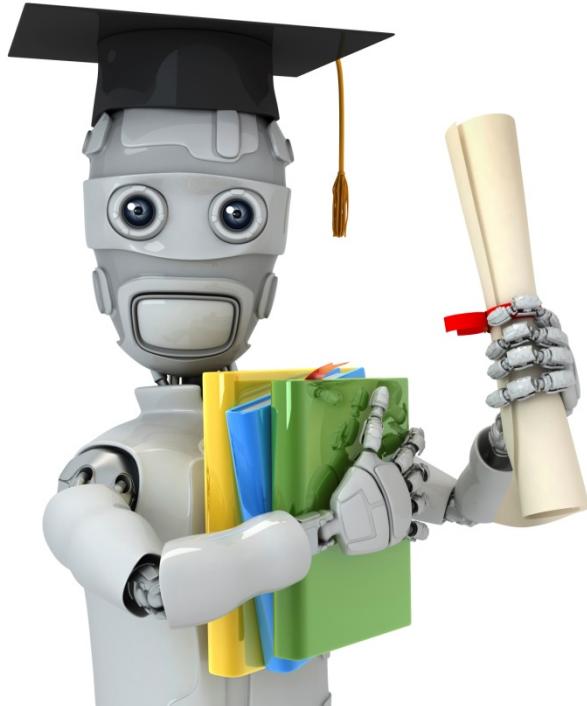

Machine Learning

## Linear Algebra review (optional)

---

## Matrix-vector multiplication

# Example

$$\begin{matrix} & \begin{matrix} 1 & 3 \\ 4 & 0 \\ 2 & 1 \end{matrix} \\ \underbrace{\quad\quad\quad}_{3 \times 2} & \times \begin{matrix} 1 \\ 5 \end{matrix} = \begin{bmatrix} 16 \\ 4 \\ 7 \end{bmatrix} \end{matrix}$$

*3x1 matrix*

$$1 \times 1 + 3 \times 5 = 16$$

$$4 \times 1 + 0 \times 5 = 4$$

$$2 \times 1 + 1 \times 5 = 7$$

## Details:

$$\underbrace{A}_{\substack{\text{m} \times \text{n} \text{ matrix} \\ (\text{m rows}, \\ \text{n columns})}} \times \underbrace{x}_{\substack{\text{n} \times 1 \text{ matrix} \\ (\text{n-dimensional} \\ \text{vector})}} = \underbrace{y}_{\substack{\text{m-dimensional} \\ \text{vector}}}$$

The diagram illustrates the multiplication of a matrix  $A$  by a vector  $x$  to produce a vector  $y$ . Matrix  $A$  is shown as a stack of  $n$  horizontal rows, each represented by a blue oval. Vector  $x$  is shown as a vertical column of  $n$  elements, also represented by blue ovals. The result  $y$  is a vector with  $m$  elements, represented by blue ovals. Blue arrows indicate the mapping from each row of  $A$  to its corresponding element in  $y$ , and from each element in  $x$  to its corresponding element in  $y$ .

To get  $y_i$ , multiply  $A$ 's  $i^{th}$  row with elements of vector  $x$ , and add them up.

## Example

$$\begin{bmatrix} 1 & 2 & 1 & 5 \\ 0 & 3 & 0 & 4 \\ -1 & -2 & 0 & 0 \end{bmatrix}$$

$3 \times 4$

$$\begin{bmatrix} 1 \\ 3 \\ 2 \\ 1 \end{bmatrix} = \begin{bmatrix} 14 \\ 13 \\ -7 \end{bmatrix} = \begin{bmatrix} 14 \\ 13 \\ -7 \end{bmatrix}$$

$$1 \times 1 + 2 \times 3 + 1 \times 2 + 5 \times 1 = 14$$
$$0 \times 1 + 3 \times 3 + 0 \times 2 + 4 \times 1 = 13$$
$$-1 \times 1 + (-2) \times 3 + 0 \times 2 + 0 \times 1 = -7$$

House sizes:

→ 2104

→ 1416

→ 1534

→ 852

Matrix  $x$

	4x2
1	2104
1	1416
1	1534
1	852

$$h_{\theta}(x) = -40 + 0.25x$$

$h_{\theta}(x)$

2x1

Vector

-40
0.25

$\times$

4x1 matrix

$-40 \times 1 + 0.25 \times 2104$
$-40 \times 1 + 0.25 \times 1416$

$h_{\theta}(2104)$


$h_{\theta}(1416)$

$\boxed{\text{prediction}} = \boxed{\text{Data Matrix}} \times \boxed{\text{Parameters}}$

4x1

$n$

for  $i = 1: 1000$ ,  
 $\text{prediction}(i) := \dots$

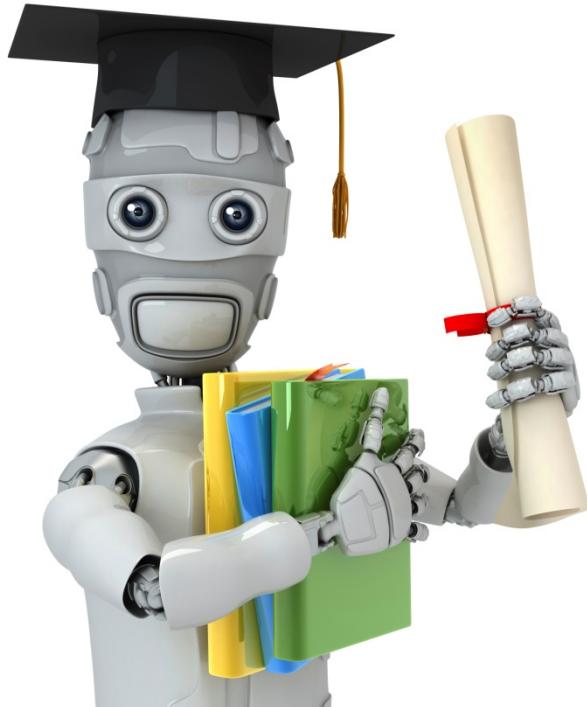

Machine Learning

## Linear Algebra review (optional)

---

## Matrix-matrix multiplication


## Example

$$\begin{bmatrix} 1 & 3 & 2 \\ 4 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \\ 5 \end{bmatrix} = \begin{bmatrix} 11 & 10 \\ 9 & 14 \end{bmatrix}$$

$$\begin{bmatrix} 1 & 3 & 2 \\ 4 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} 1 \\ 0 \\ 5 \end{bmatrix} = \begin{bmatrix} 11 \\ 9 \end{bmatrix}$$

$$\begin{bmatrix} 1 & 3 & 2 \\ 4 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} 3 \\ 1 \\ 2 \end{bmatrix} = \begin{bmatrix} 10 \\ 14 \end{bmatrix}$$

## Details:

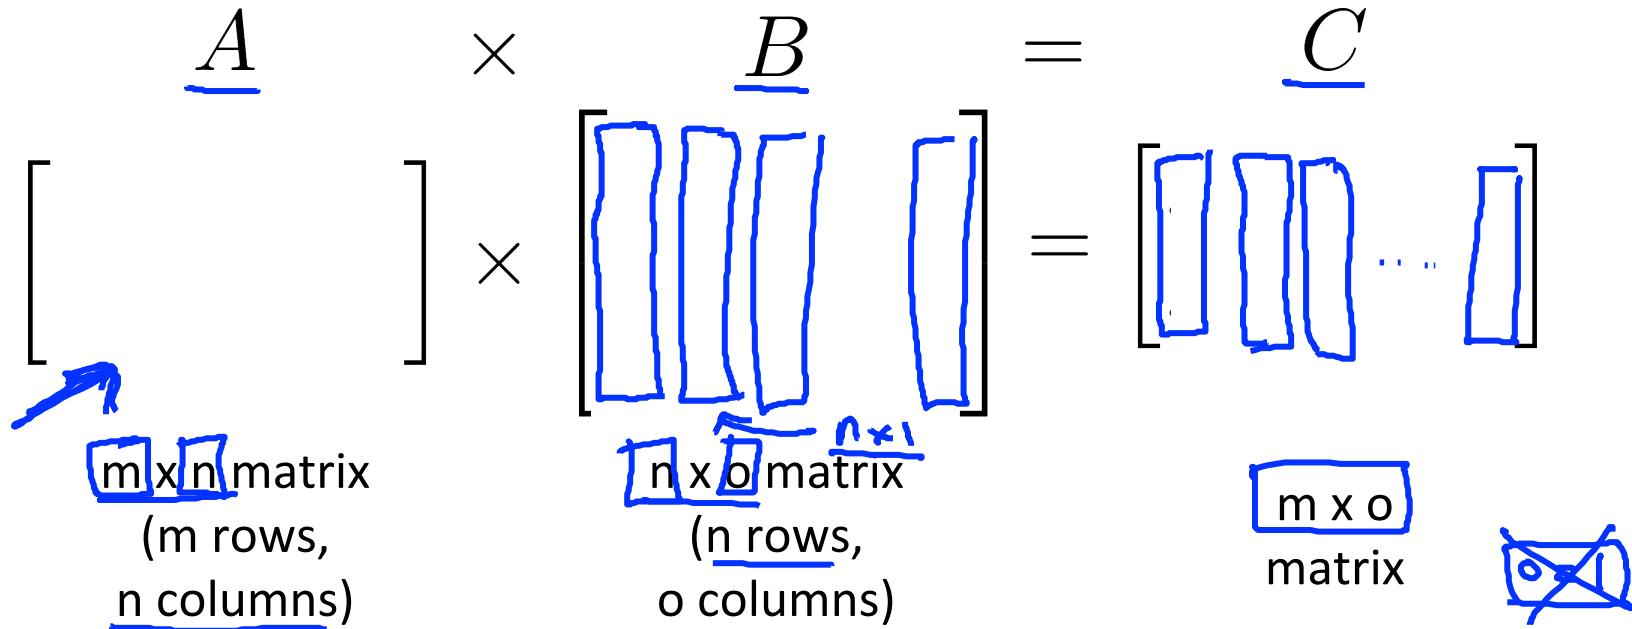

The  $i^{th}$  column of the matrix  $C$  is obtained by multiplying  $A$  with the  $i^{th}$  column of  $B$ . (for  $i = 1, 2, \dots, o$ )

## Example

$$\begin{bmatrix} 1 & 3 \\ 2 & 5 \end{bmatrix} \begin{bmatrix} 0 & 1 \\ 3 & 2 \end{bmatrix} = \begin{bmatrix} 9 & 7 \\ 15 & 12 \end{bmatrix}$$

$$\begin{bmatrix} 1 & 3 \\ 2 & 5 \end{bmatrix} \begin{bmatrix} 0 \\ 3 \end{bmatrix} = \begin{bmatrix} 1 \times 0 + 3 \times 3 \\ 2 \times 0 + 5 \times 3 \end{bmatrix} = \begin{bmatrix} 9 \\ 15 \end{bmatrix}$$

$$\begin{bmatrix} 1 & 3 \\ 2 & 5 \end{bmatrix} \begin{bmatrix} 1 \\ 2 \end{bmatrix} = \begin{bmatrix} 1 \times 1 + 3 \times 2 \\ 2 \times 1 + 5 \times 2 \end{bmatrix} = \begin{bmatrix} 7 \\ 12 \end{bmatrix}$$

House sizes:

$$\left\{ \begin{array}{r} 2104 \\ 1416 \\ 1534 \\ \hline 852 \end{array} \right.$$

Have 3 competing hypotheses:

$$1. h_{\theta}(x) = -40 + 0.25x$$

$$2. h_{\theta}(x) = 200 + 0.1x$$

$$3. h_{\theta}(x) = -150 + 0.4x$$

Matrix

$$\begin{bmatrix} 1 & 2104 \\ 1 & 1416 \\ 1 & 1534 \\ 1 & 852 \end{bmatrix}$$

Matrix


$$\begin{bmatrix} -40 \\ 200 \\ -150 \\ 0.25 \\ 0.1 \\ 0.4 \end{bmatrix}$$

=

$$\begin{bmatrix} 486 \\ 314 \\ 344 \\ 173 \\ 410 \\ 342 \\ 353 \\ 285 \\ 692 \\ 416 \\ 464 \\ 191 \end{bmatrix}$$

↑  
Prediction  
of 1<sup>st</sup>  
 $h_{\theta}$

↑  
Predictions  
of 2<sup>nd</sup>  
 $h_{\theta}$

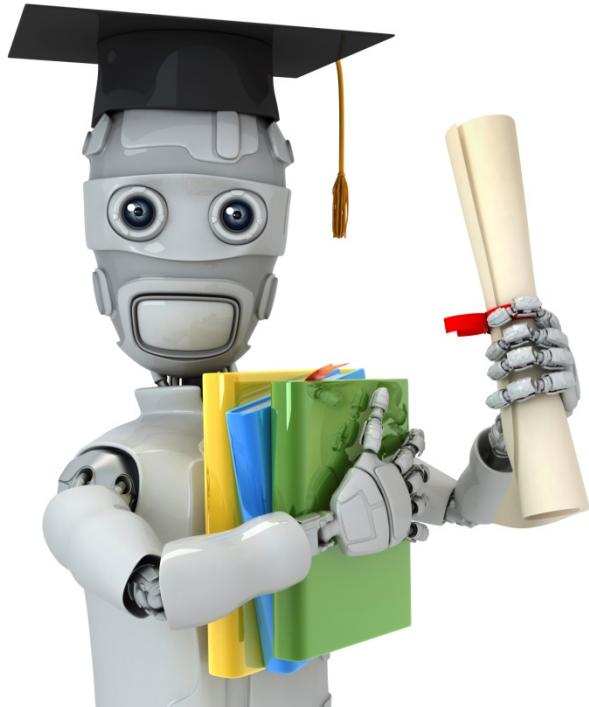

Machine Learning

## Linear Algebra review (optional)

---

## Matrix multiplication properties

$$\begin{matrix} 3 \times 5 \\ \curvearrowleft \end{matrix} = 5 \times 3$$

"Commutative"

Let  $A$  and  $B$  be matrices. Then in general,  
 $A \times B \neq B \times A$ . (not commutative.)

E.g.

$$\begin{bmatrix} 1 & 1 \\ 0 & 0 \end{bmatrix} \begin{bmatrix} 0 & 0 \\ 2 & 0 \end{bmatrix} = \begin{bmatrix} 2 & 0 \\ 0 & 0 \end{bmatrix}$$

$$\begin{matrix} A \times B \\ m \times n \end{matrix}$$

$$\begin{bmatrix} 0 & 0 \\ 2 & 0 \end{bmatrix} \begin{bmatrix} 1 & 1 \\ 0 & 0 \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 2 & 2 \end{bmatrix}$$

$$\begin{matrix} \frac{A \times B}{\text{is}} & m \times m \\ \frac{B \times A}{\text{is}} & n \times n \end{matrix}$$



$$\underline{3 \times 5 \times 2}$$

$$3 \times 10 = 30 = 15 \times 2$$

$$3 \times (5+2) = (3 \times 5) + 2$$

"Associative"

$$A \times B \times C.$$

Let  $D = B \times C$ .

Compute  $A \times D$ .

Let  $E = A \times B$ .

Compute  $E \times C$ .

$$\begin{array}{c} A \times (B \times C) \\ (A \times B) \times C \end{array}$$

$\begin{array}{c} A \times (B \times C) \\ (A \times B) \times C \end{array}$   
Some answer.

## Identity Matrix

1 is identity

Denoted  $I$  (or  $I_{n \times n}$ ).

Examples of identity matrices:

$$\begin{bmatrix} 1 \\ 1 \end{bmatrix}_{1 \times 1}$$

$$\begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}_{3 \times 3}$$

~~$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}_{4 \times 4}$$~~

For any matrix  $A$ ,

$$A \cdot I = I \cdot A = A$$

$\begin{matrix} \nearrow mxn & \nearrow nxn & \nearrow mxm & \nearrow mxn & \nearrow mxn \\ A & \cdot & I & = & I & \cdot & A & = & A \end{matrix}$

$$I_{n \times n}$$

$$1 \times z = z \times 1 = z$$

for any  $z$


Informally:

$$\begin{bmatrix} 1 & & & \\ & 1 & & \\ & & 1 & \\ & & & \dots \end{bmatrix} \leftarrow$$

Note:

$$AB \neq BA \text{ in general}$$

$$AI = IA \quad \checkmark$$

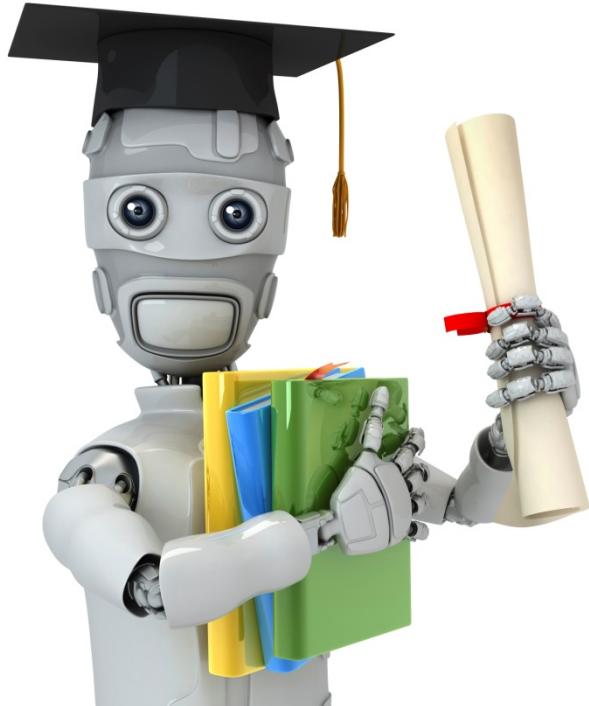

Machine Learning

## Linear Algebra review (optional)

---

## Inverse and transpose

I = "identity."

$$3 \begin{pmatrix} 3^{-1} \\ \frac{1}{3} \end{pmatrix} = 1$$

$$\frac{12 \times (12^{-1})}{\frac{1}{12}} = 1$$

$$0 \begin{pmatrix} 0^{-1} \\ \underline{\quad} \end{pmatrix}$$

undefined

Not all numbers have an inverse.

**Matrix inverse:**

If A is an  $m \times m$  matrix, and if it has an inverse,

$$\rightarrow A(A^{-1}) = A^{-1}A = I.$$

Square matrix  
(#rows = #columns)

$A^{-1}$

$$A = \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix}$$

E.g.

$$\begin{bmatrix} 3 & 4 \\ 2 & 16 \end{bmatrix} \underbrace{\qquad}_{2 \times 2} \qquad A$$

$$\begin{bmatrix} 0.4 & -0.1 \\ -0.05 & 0.075 \end{bmatrix} \underbrace{\qquad}_{A^{-1}}$$

$$= \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} = I_{2 \times 2}$$

$A^{-1}A$

Matrices that don't have an inverse are "singular" or "degenerate"

## Matrix Transpose

Example:

$$\underline{A} = \begin{bmatrix} 1 & 2 & 0 \\ 3 & 5 & 9 \end{bmatrix}_{2 \times 3}$$

$$\underline{B} = \underline{A^T} = \begin{bmatrix} 1 & 3 \\ 2 & 5 \\ 0 & 9 \end{bmatrix}_{3 \times 2}$$

Let  $A$  be an  $\underline{m \times n}$  matrix, and let  $B = A^T$ .

Then  $B$  is an  $\underline{n \times m}$  matrix, and


$$B_{ij} = A_{ji}.$$

$$B_{12} = A_{21} = 2$$

$$B_{32} = 9 \quad A_{23} = 9.$$

## **Chapter 2 Week2**

### **2.1 Multiple Features**

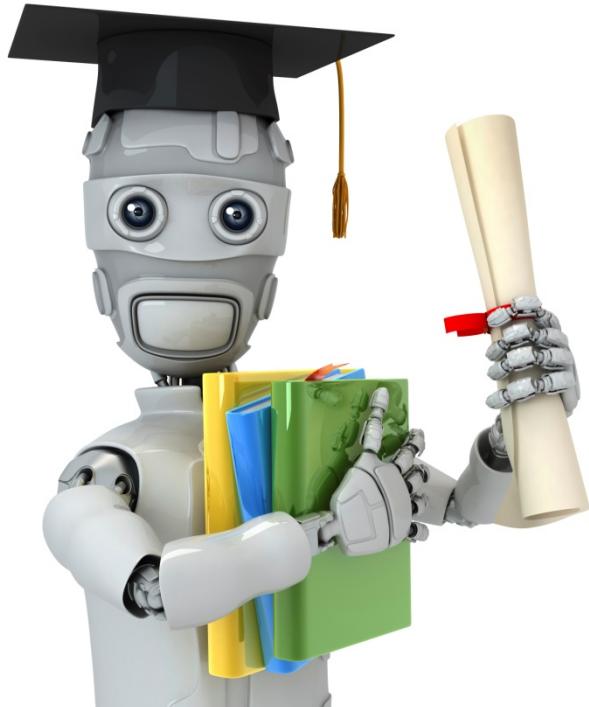

Machine Learning

## Linear Regression with multiple variables

---

## Multiple features

## Multiple features (variables).

Size (feet <sup>2</sup> )	Price (\$1000)
$\xrightarrow{x}$	$y \xleftarrow{ }$
2104	460
1416	232
1534	315
852	178
...	...

$$h_{\theta}(x) = \theta_0 + \theta_1 x$$

---

## Multiple features (variables).

<u>Size (feet<sup>2</sup>)</u>	<u>Number of bedrooms</u>	<u>Number of floors</u>	<u>Age of home (years)</u>	Price (\$1000)
$x_1$	$x_2$	$x_3$	$x_4$	$y$
2104	5	1	45	460
1416	3	2	40	232
1534	3	2	30	315
852	2	1	36	178
...	...	...	...	...

Notation:

- $n$  = number of features  $n=4$
- $x^{(i)}$  = input (features) of  $i^{th}$  training example.
- $x_j^{(i)}$  = value of feature  $j$  in  $i^{th}$  training example.

$\underline{x}^{(2)} = \begin{bmatrix} 1416 \\ 3 \\ 2 \\ 40 \end{bmatrix}$

$x_3^{(2)} = 2$

Hypothesis:

Previously:  $h_{\theta}(x) = \theta_0 + \theta_1 x$

$$h_{\theta}(x) = \theta_0 + \theta_1 x_1 + \theta_2 x_2 + \theta_3 x_3 + \theta_4 x_4$$

E.g.  $\underline{h_{\theta}(x)} = \underline{\underline{\theta_0}} + \underline{\underline{\theta_1 x_1}} + \underline{\underline{\theta_2 x_2}} + \underline{\underline{\theta_3 x_3}} - \underline{\underline{\theta_4 x_4}}$

$$\rightarrow h_{\theta}(x) = \underline{\theta_0} + \underline{\theta_1}x_1 + \underline{\theta_2}x_2 + \cdots + \underline{\theta_n}x_n$$

For convenience of notation, define  $x_0 = 1.$  ( $x_0^{(i)} = 1$ )

$$x = \begin{bmatrix} x_0 \\ x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix} \in \mathbb{R}^{n+1}$$


$$\Theta = \begin{bmatrix} \theta_0 \\ \theta_1 \\ \theta_2 \\ \vdots \\ \theta_n \end{bmatrix} \in \mathbb{R}^{n+1}$$

$$\begin{aligned} h_{\theta}(x) &= \underline{\theta_0x_0 + \theta_1x_1 + \cdots + \theta_nx_n} \\ &= \boxed{\Theta^T x} \end{aligned}$$

$$\begin{bmatrix} \theta_0 & \theta_1 & \cdots & \theta_n \end{bmatrix} \stackrel{\Theta^T}{\overbrace{\quad}} \begin{bmatrix} x_0 \\ x_1 \\ \vdots \\ x_n \end{bmatrix} \stackrel{x}{\overbrace{\quad}}$$

$\Theta^T$   
 $(n+1) \times 1$  matrix  
 $\Theta^T x$

Multivariate linear regression.  $\leftarrow$

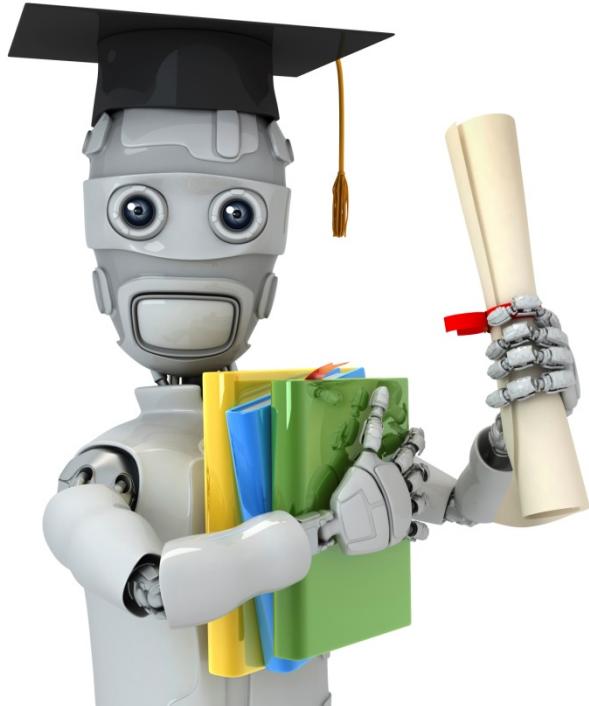

Machine Learning

## Linear Regression with multiple variables

---

## Gradient descent for multiple variables

Hypothesis:  $h_{\theta}(x) = \theta^T x = \theta_0 x_0 + \theta_1 x_1 + \theta_2 x_2 + \cdots + \theta_n x_n$

$\xrightarrow{x_0 = 1}$

Parameters:  $\theta_0, \theta_1, \dots, \theta_n$   $\Theta$   $n+1$ -dimensional vector

Cost function:

$$J(\theta_0, \theta_1, \dots, \theta_n) = J(\Theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

Gradient descent:

Repeat {

$$\theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta_0, \dots, \theta_n) \quad J(\Theta)$$

(simultaneously update for every  $j = 0, \dots, n$ )

# Gradient Descent

Previously (n=1):

Repeat {

$$\theta_0 := \theta_0 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) \underbrace{\frac{\partial}{\partial \theta_0} J(\theta)}$$

$$\theta_1 := \theta_1 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_1^{(i)}$$

(simultaneously update  $\theta_0, \theta_1$ )

}

New algorithm ( $n \geq 1$ ):

Repeat {

$$\theta_j := \theta_j - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_j^{(i)}$$

(simultaneously update  $\theta_j$  for  $j = 0, \dots, n$ )

}


$$\theta_0 := \theta_0 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_0^{(i)}$$

$$\theta_1 := \theta_1 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_1^{(i)}$$

$$\theta_2 := \theta_2 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_2^{(i)}$$

...

Andrew Ng

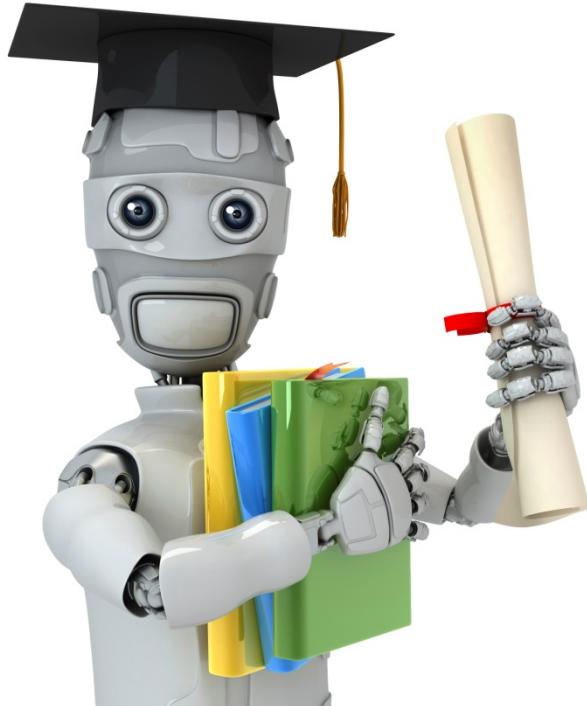

Machine Learning

# Linear Regression with multiple variables

---


## Gradient descent in practice I: Feature Scaling

## Feature Scaling

Idea: Make sure features are on a similar scale.

E.g.  $x_1 = \text{size } (\underline{0-2000} \text{ feet}^2)$  ←


$x_2 = \text{number of bedrooms } (\underline{1-5})$  ←

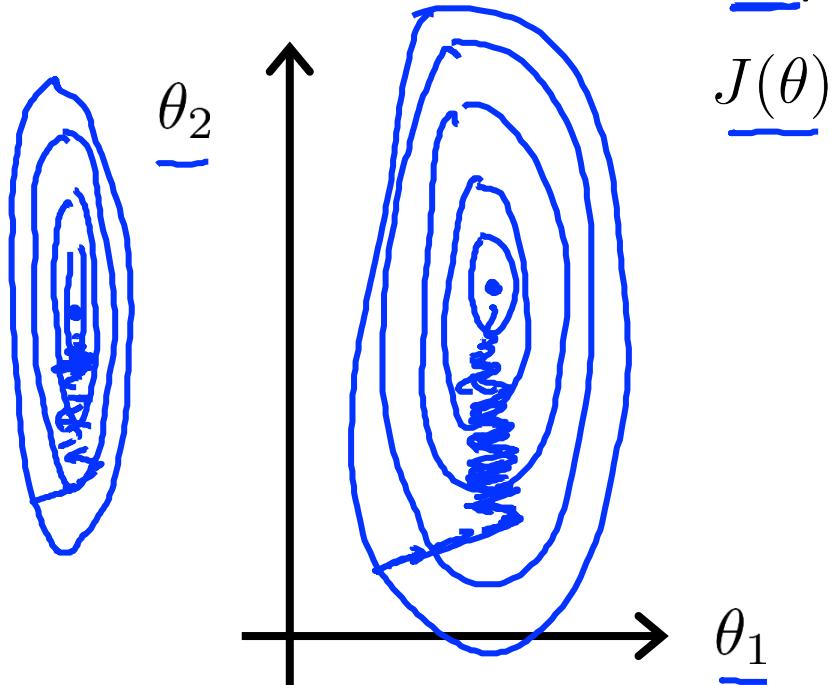

$$\rightarrow x_1 = \frac{\text{size (feet}^2)}{2000} \quad \leftarrow$$

$$\rightarrow x_2 = \frac{\text{number of bedrooms}}{5}$$

$$0 \leq x_1 \leq 1 \quad 0 \leq x_2 \leq 1$$

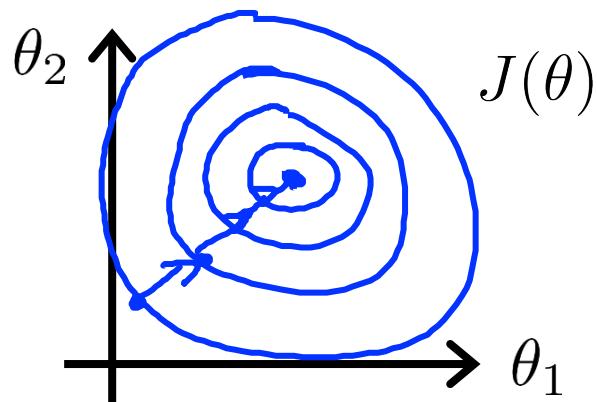

## Feature Scaling

Get every feature into approximately a  $-1 \leq x_i \leq 1$  range.

$$x_0 = 1$$

$$6 \leq x_1 \leq 3 \quad \checkmark$$

$$-2 \leq x_2 \leq 0.5 \quad \checkmark$$

$$-100 \leq x_3 \leq 100 \quad \times$$

$$-0.0001 \leq x_4 \leq 0.0001 \quad \times$$

$$\boxed{-1 \leq x_i \leq 1}$$

$$-3 \text{ to } 3 \quad \checkmark$$

$$-\frac{1}{3} \text{ to } \frac{1}{3} \quad \checkmark$$

## Mean normalization

Replace  $x_i$  with  $\frac{x_i - \mu_i}{\sigma_i}$  to make features have approximately zero mean  
(Do not apply to  $x_0 = 1$ ).

E.g.  $x_1 = \frac{\text{size} - 1000}{2000}$

Average size = 100

$$x_2 = \frac{\#\text{bedrooms} - 2}{5 - 4}$$

1 - 5 bedrooms


$$\rightarrow [-0.5 \leq x_1 \leq 0.5, -0.5 \leq x_2 \leq 0.5]$$

$$x_1 \leftarrow \frac{x_1 - \mu_1}{\sigma_1}$$

avg value of  $x_1$  in training set

range ( $\frac{\max - \min}{\sigma_1}$ )  
(or standard deviation)

$$x_2 \leftarrow \frac{x_2 - \mu_2}{\sigma_2}$$

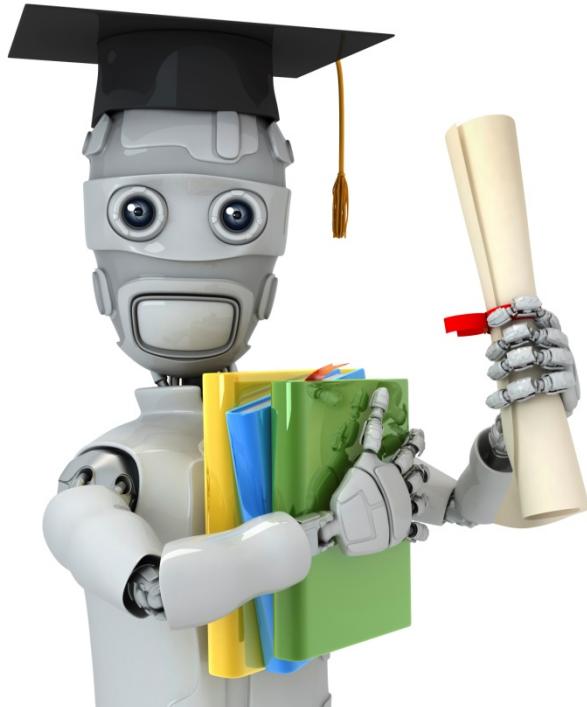

Machine Learning

# Linear Regression with multiple variables

---


Gradient descent in  
practice II: Learning rate

## Gradient descent

$$\rightarrow \theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta)$$

- “Debugging”: How to make sure gradient descent is working correctly.
- How to choose learning rate  $\alpha$ .

## Making sure gradient descent is working correctly.

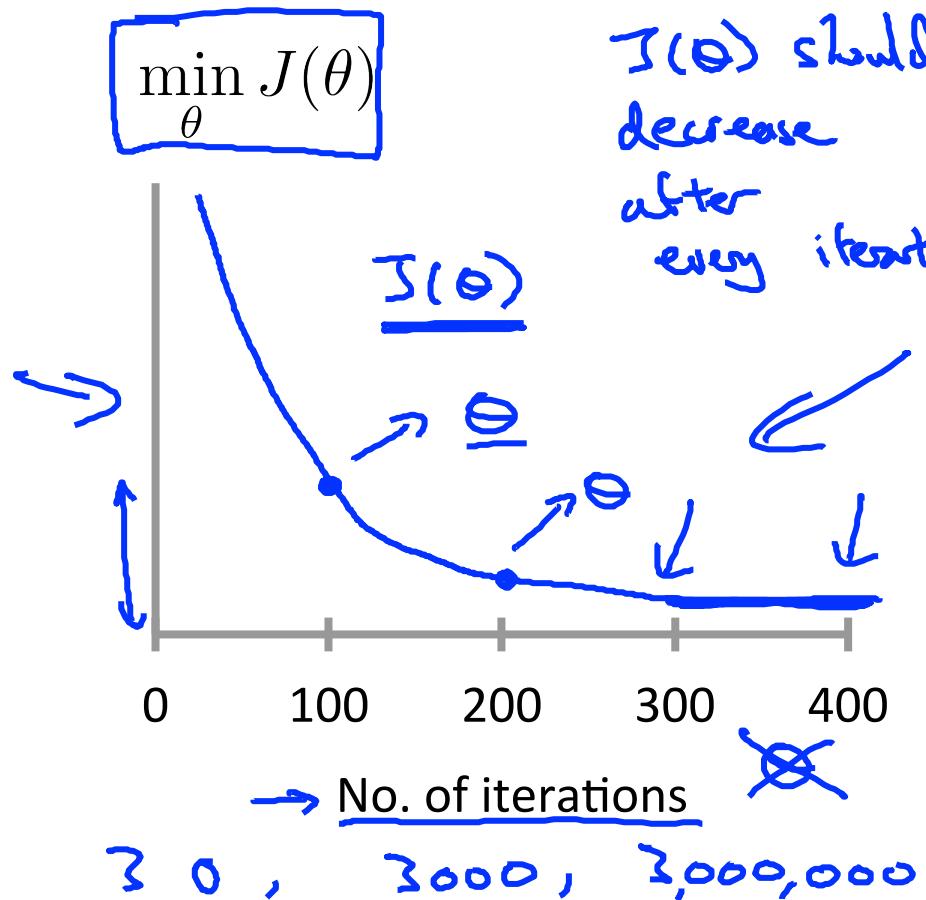


$J(\theta)$  should decrease after every iteration.

→ Example automatic convergence test:

→ Declare convergence if  $J(\theta)$  decreases by less than  $10^{-3}$  in one iteration.


## Making sure gradient descent is working correctly.

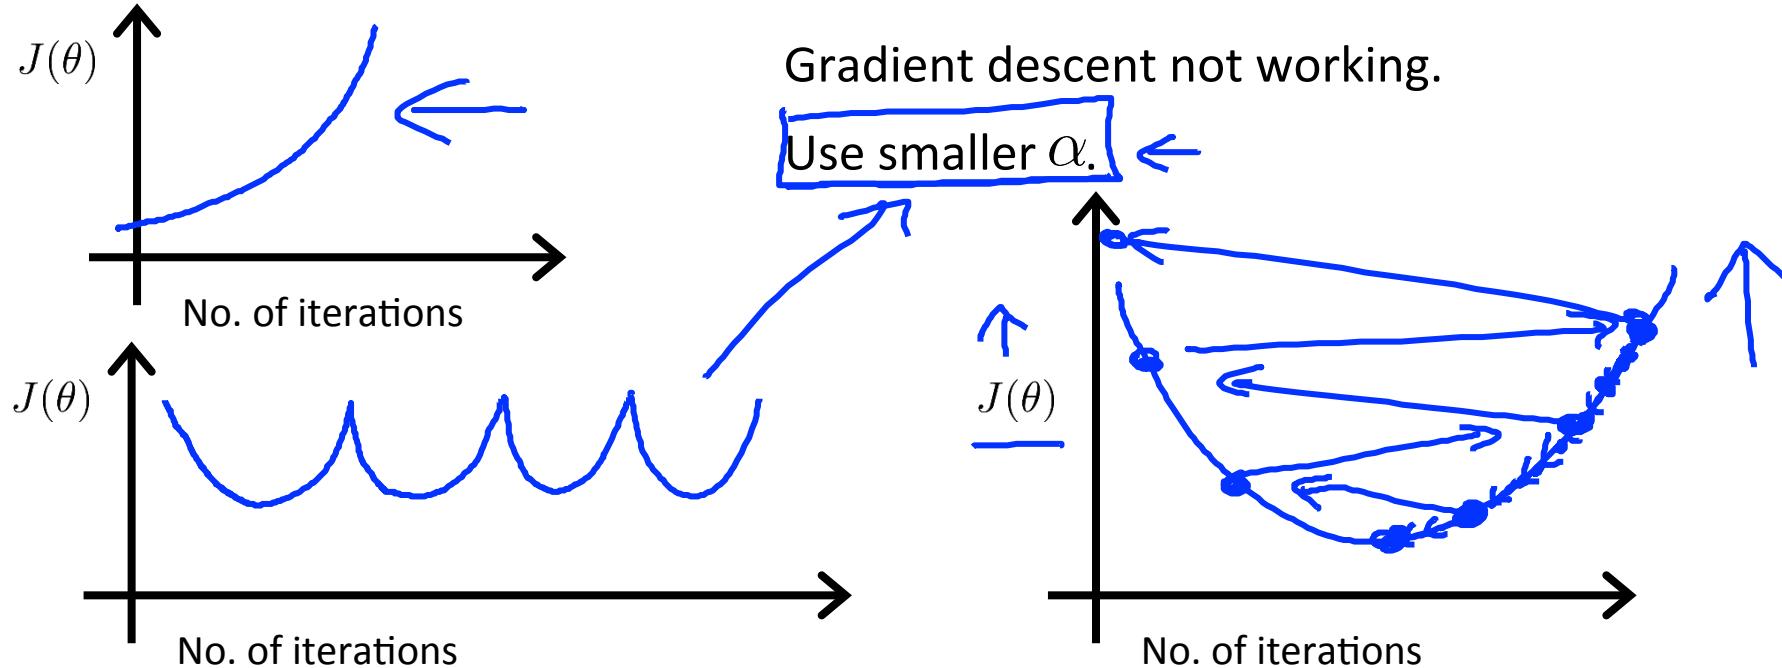

- For sufficiently small  $\alpha$ ,  $J(\theta)$  should decrease on every iteration.
- But if  $\alpha$  is too small, gradient descent can be slow to converge.

## Summary:


- If  $\alpha$  is too small: slow convergence.
- If  $\alpha$  is too large:  $J(\theta)$  may not decrease on every iteration; may not converge. (Slow converge also possible)

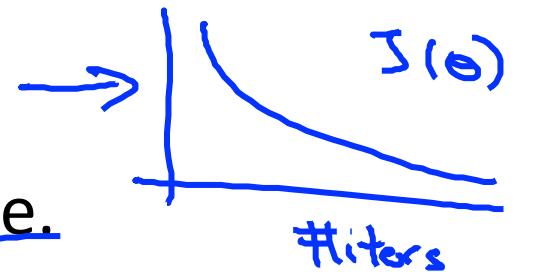

To choose  $\alpha$ , try

$$\dots, \underline{0.001}, \underline{0.003}, \underline{0.01}, \underline{0.03}, \underline{0.1}, \underline{0.3}, \underline{1}, \dots$$

$\nearrow 2x$      $\nwarrow 2x$      $\nearrow 3x$      $\nwarrow 3x$      $\nearrow$

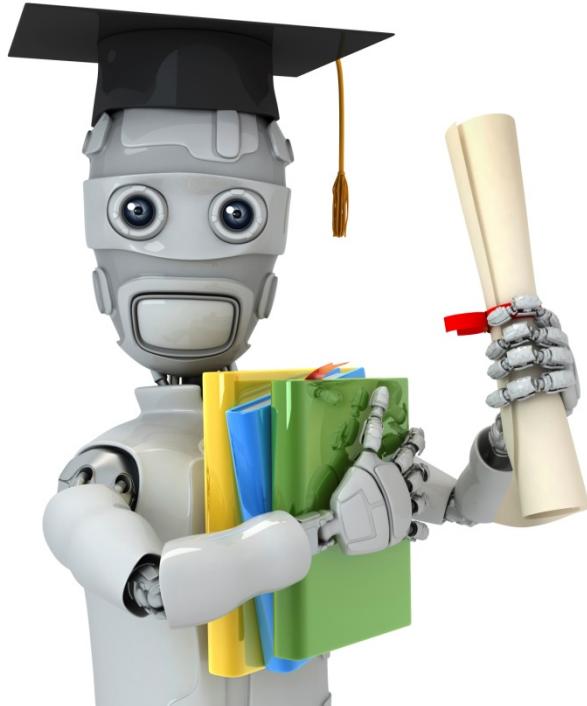

Machine Learning

# Linear Regression with multiple variables

---

Features and  
polynomial regression

## Housing prices prediction

$$h_{\theta}(x) = \theta_0 + \theta_1 \times \boxed{\text{frontage}} + \theta_2 \times \boxed{\text{depth}}$$

$x_1$        $x_2$




Area

$$x = \underline{\text{frontage} \times \text{depth}}$$


$$h_{\theta}(x) = \theta_0 + \theta_1 x$$

↑ land area

## Polynomial regression

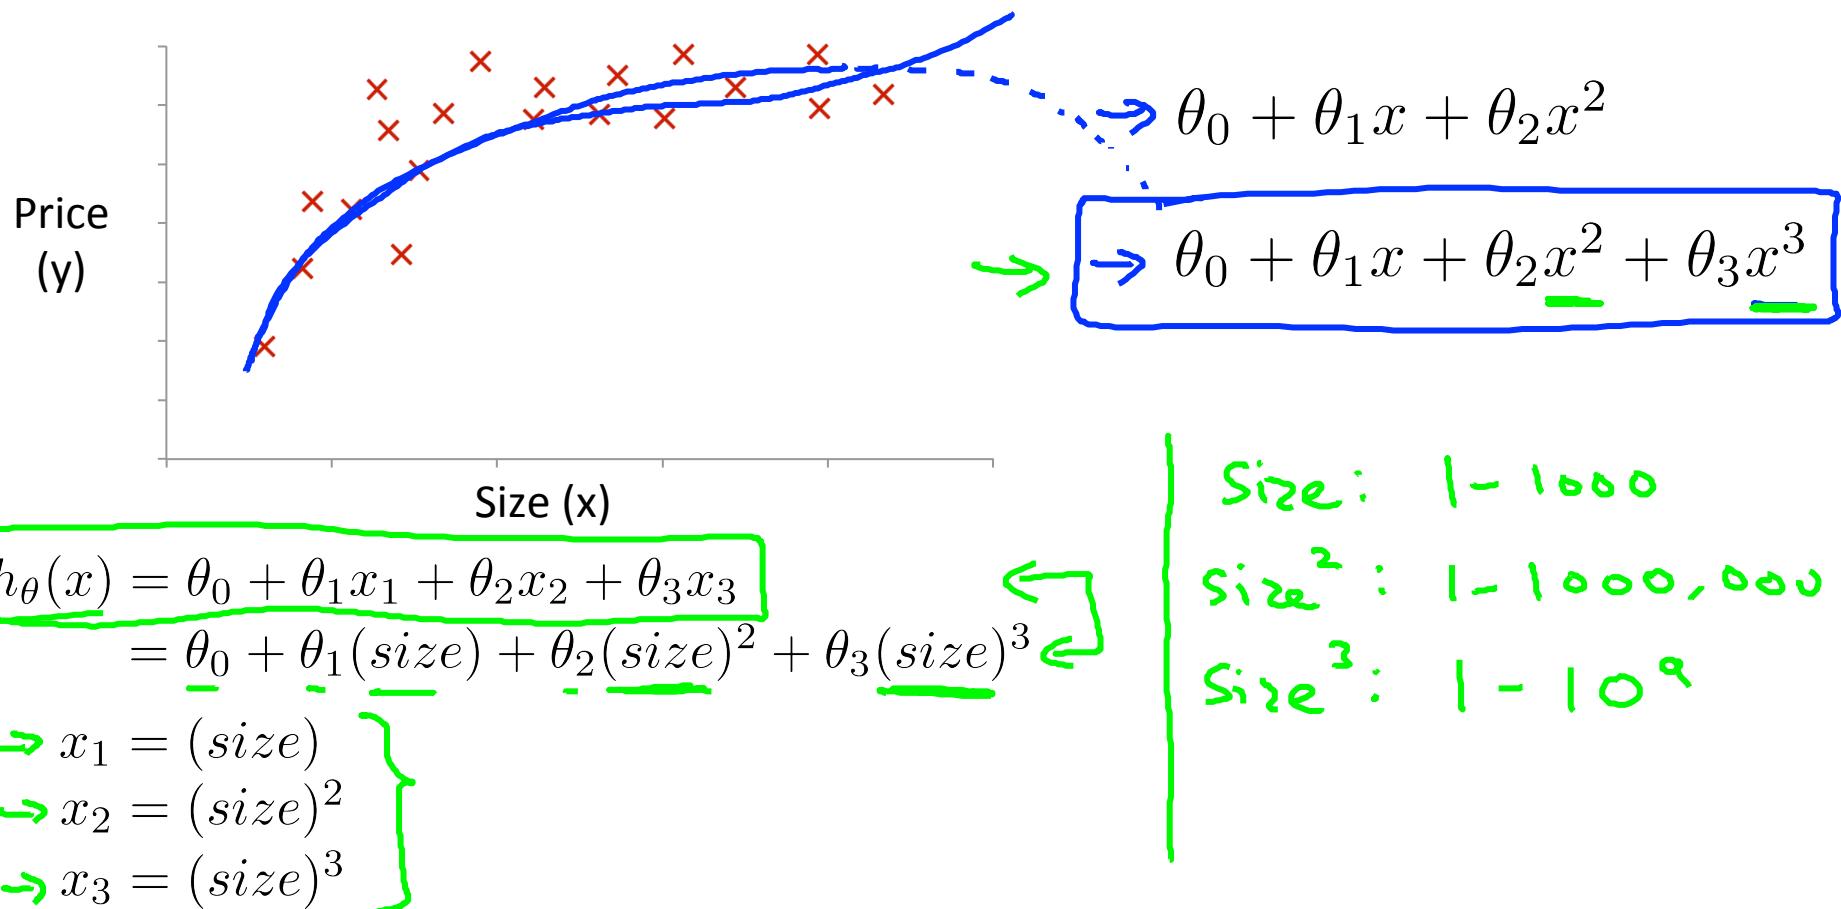



## Choice of features

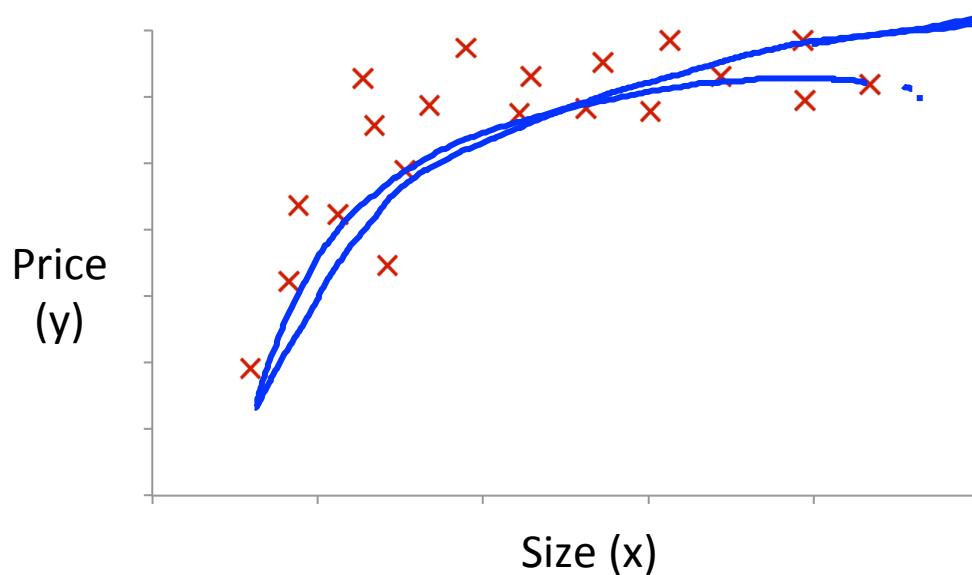

$$\rightarrow h_{\theta}(x) = \theta_0 + \theta_1(\text{size}) + \theta_2(\text{size})^2$$

$$\rightarrow h_{\theta}(x) = \theta_0 + \theta_1(\text{size}) + \theta_2 \sqrt{(\text{size})}$$

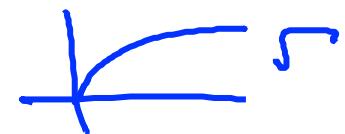

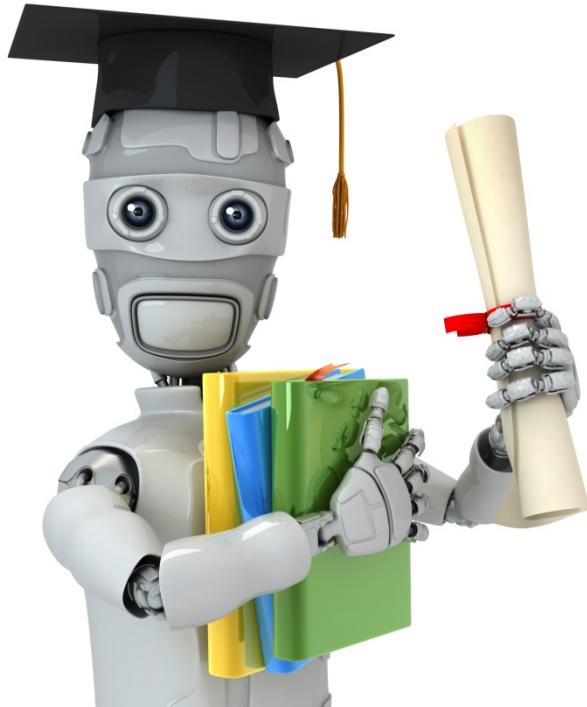


Machine Learning

# Linear Regression with multiple variables

---

## Normal equation

## Gradient Descent

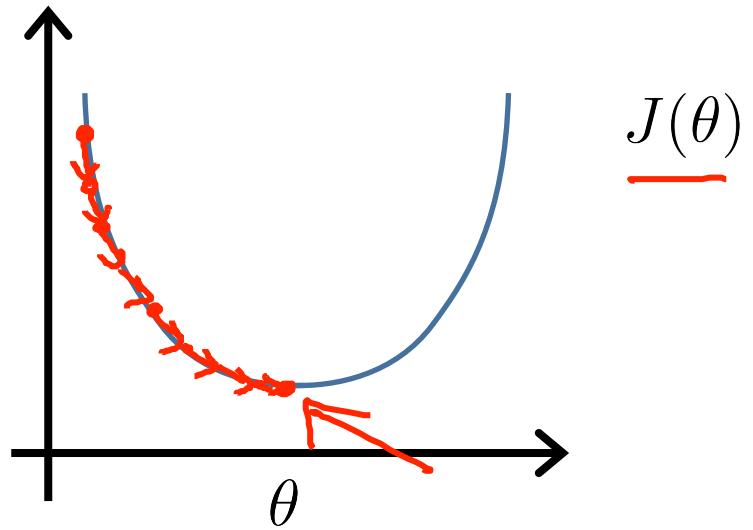


Normal equation: Method to solve for  $\theta$   
analytically.

Intuition: If 1D ( $\theta \in \mathbb{R}$ )

$$\rightarrow J(\theta) = a\theta^2 + b\theta + c$$

$$\frac{\partial}{\partial \theta} J(\theta) = \dots \stackrel{\text{set}}{=} 0$$

Solve for  $\theta$

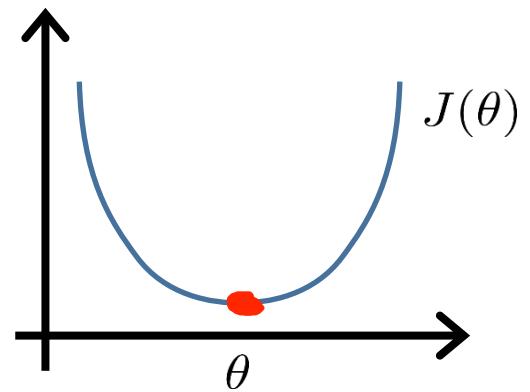

$$\underline{\theta \in \mathbb{R}^{n+1}}$$

$$\underline{J(\theta_0, \theta_1, \dots, \theta_m)} = \frac{1}{2m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2$$

$$\underline{\frac{\partial}{\partial \theta_j} J(\theta) = \dots = 0} \quad (\text{for every } j)$$

Solve for  $\underline{\theta_0, \theta_1, \dots, \theta_n}$

Examples:  $m = 4$ .

	Size (feet <sup>2</sup> )	Number of bedrooms	Number of floors	Age of home (years)	Price (\$1000)
$x_0$	$x_1$	$x_2$	$x_3$	$x_4$	$y$
1	2104	5	1	45	460
1	1416	3	2	40	232
1	1534	3	2	30	315
1	852	2	1	36	178

$X = \begin{bmatrix} 1 & 2104 & 5 & 1 & 45 \\ 1 & 1416 & 3 & 2 & 40 \\ 1 & 1534 & 3 & 2 & 30 \\ 1 & 852 & 2 & 1 & 36 \end{bmatrix}$ 
 $y = \begin{bmatrix} 460 \\ 232 \\ 315 \\ 178 \end{bmatrix}$

$m \times (n+1)$

$\theta = (X^T X)^{-1} X^T y$

$m$  examples  $(x^{(1)}, y^{(1)}), \dots, (x^{(m)}, y^{(m)})$ ;  $n$  features.

$$x^{(i)} = \begin{bmatrix} x_0^{(i)} \\ x_1^{(i)} \\ x_2^{(i)} \\ \vdots \\ x_n^{(i)} \end{bmatrix} \in \mathbb{R}^{n+1}$$

$\times$       (design matrix)

$$X = \begin{bmatrix} \cdots & (x^{(1)})^\top & \cdots \\ \cdots & (x^{(1)})^\top & \cdots \\ \vdots & \vdots & \vdots \\ \cdots & (x^{(m)})^\top & \cdots \end{bmatrix}$$

E.g. If  $x^{(i)} = \begin{bmatrix} 1 \\ x_1^{(i)} \end{bmatrix}$

$$\mathcal{O} = (X^\top X)^{-1} X^\top y$$

$$X = \begin{bmatrix} 1 & x_1^{(1)} \\ 1 & x_1^{(2)} \\ \vdots & \vdots \\ 1 & x_1^{(m)} \end{bmatrix}_{m \times 2}$$

$$y = \begin{bmatrix} y^{(1)} \\ y^{(2)} \\ \vdots \\ y^{(m)} \end{bmatrix}_{m \times 1}$$

$$\theta = \boxed{(X^T X)^{-1} X^T y}$$

$(X^T X)^{-1}$  is inverse of matrix  $X^T X$ .

Set A =  $X^T X$

$$\boxed{(X^T X)^{-1}} = A^{-1}$$

Octave:  $\text{pinv}(X' * X) * X' * y$

$$\boxed{\text{pinv}(X^T * X) * X^T * y}$$

$$\Theta = \boxed{(X^T X)^{-1} X^T y}$$

$$\min_{\Theta} J(\Theta)$$

$$\left| \begin{array}{l} X' \quad X^T \\ \cancel{\text{Feature Scaling}} \\ 0 \leq x_1 \leq 1 \\ 0 \leq x_2 \leq 1000 \\ 0 \leq x_3 \leq 10^{-5} \end{array} \right| \checkmark$$

$m$  training examples,  $n$  features.

### Gradient Descent

- • Need to choose  $\alpha$ .
- • Needs many iterations.
- Works well even when  $n$  is large.

$$\overbrace{n = 10^6}^{}$$


### Normal Equation

- • No need to choose  $\alpha$ .
- • Don't need to iterate.
- Need to compute  $(X^T X)^{-1}$   $n \times n$   $O(n^3)$
- Slow if  $n$  is very large.

$$n = 100$$

$$n = 1000$$

$$\dots - n = 10000$$

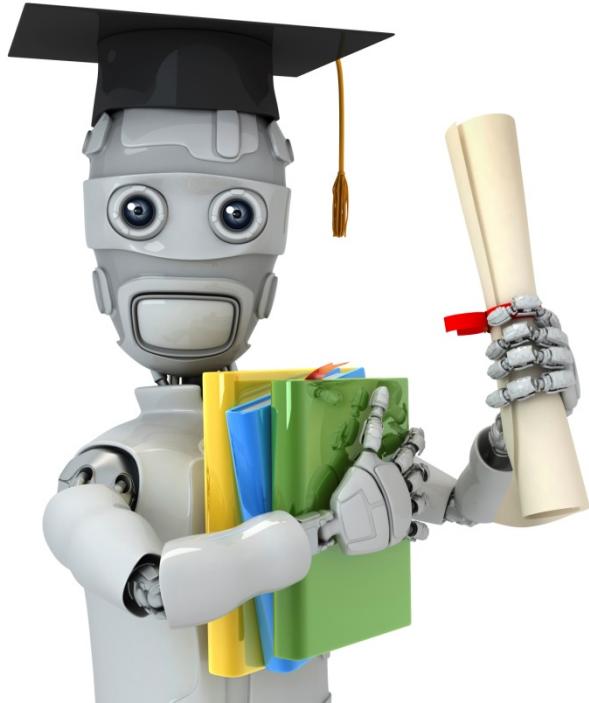

Machine Learning

# Linear Regression with multiple variables

---


Normal equation  
and non-invertibility  
(optional)

## Normal equation

$$\theta = \underline{(X^T X)^{-1} X^T y}$$

$$\underline{X^T X}$$

- What if  $X^T X$  is non-invertible? (singular/  
degenerate)
- Octave:  $\text{pinv}(X' * X) * X' * y$

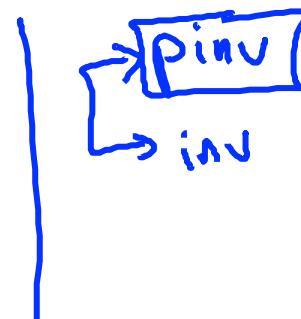

What if  $\boxed{X^T X}$  is non-invertible?



- Redundant features (linearly dependent).

E.g. 
$$\begin{bmatrix} \underline{x_1} = \text{size in feet}^2 \\ \underline{x_2} = \text{size in m}^2 \\ \underline{x_1} = (3.28)^2 \underline{x_2} \end{bmatrix}$$

$$l_m = 3.28 \text{ feet}$$

$$\rightarrow \underline{m = 10} \leftarrow$$

$$\rightarrow \underline{n = 100} \leftarrow$$


$$\mathbf{O} \in \mathbb{R}^{101}$$

- Too many features (e.g.  $m \leq n$ ).

- Delete some features, or use regularization.

↓  
later

## 2.2 Octave

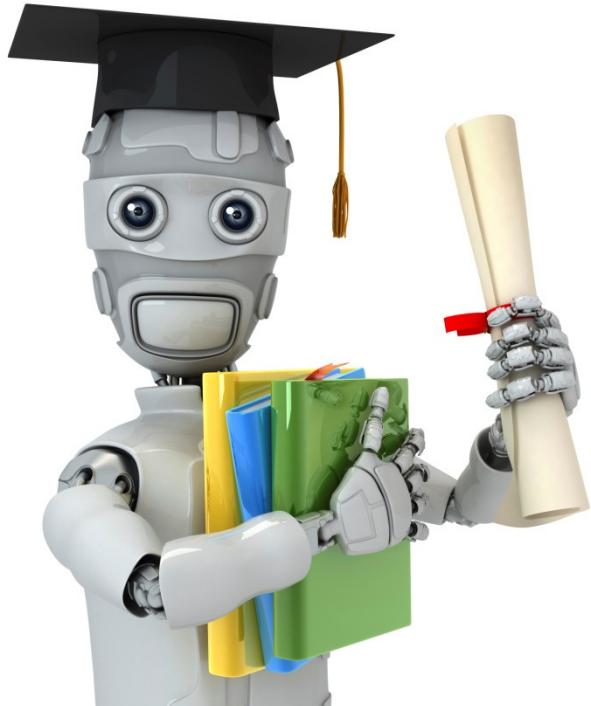


Machine Learning

# Octave Tutorial

---

## Basic operations

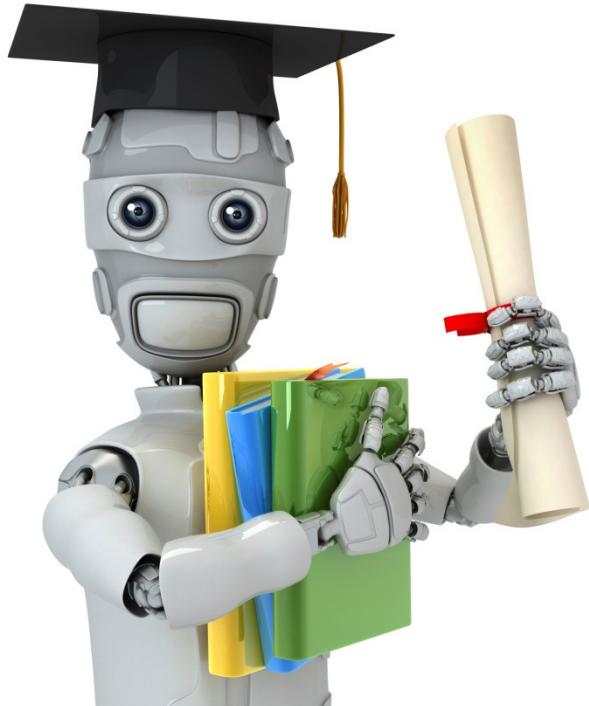


Machine Learning

# Octave Tutorial

---

## Moving data around

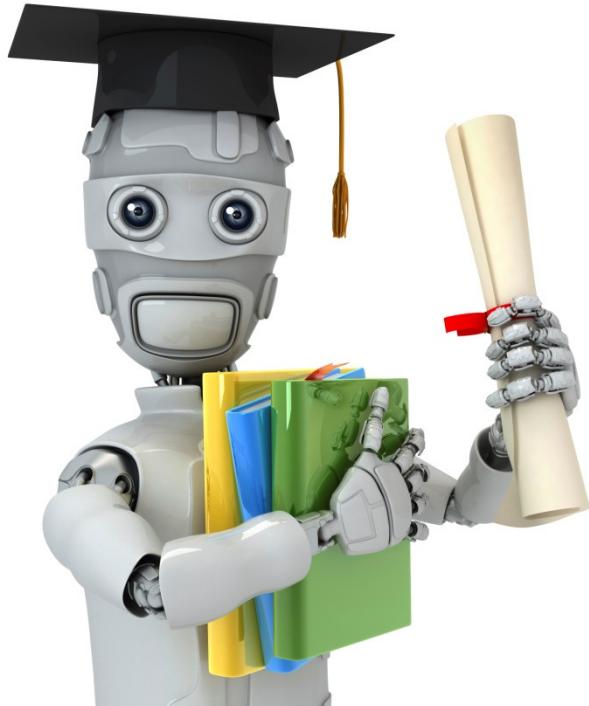


Machine Learning

# Octave Tutorial

---

## Computing on data

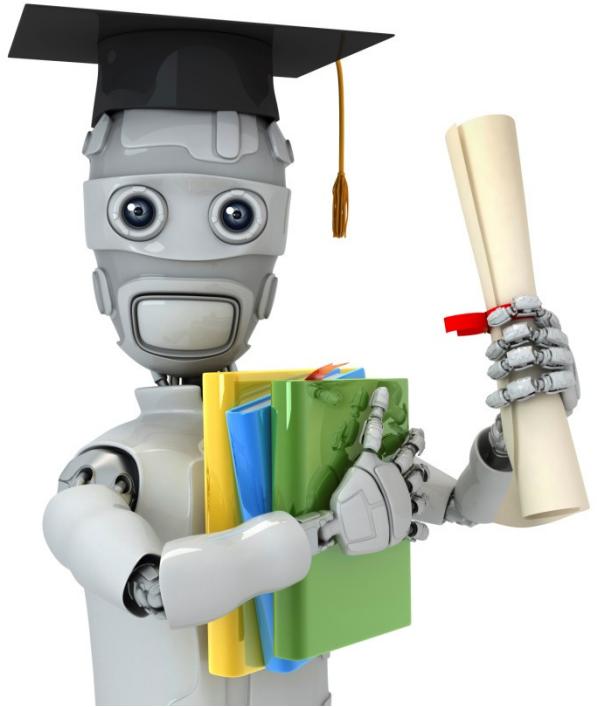


Machine Learning

# Octave Tutorial

---

## Plotting data

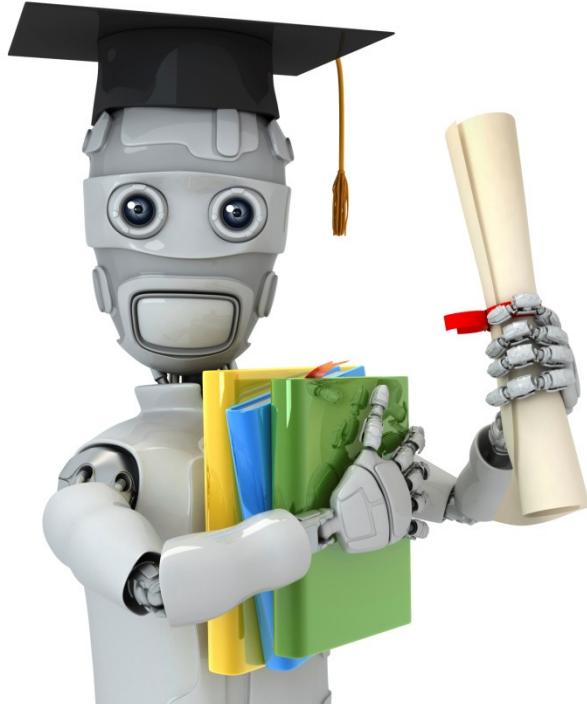


Machine Learning

# Octave Tutorial

---

Control statements: for,  
while, if statements

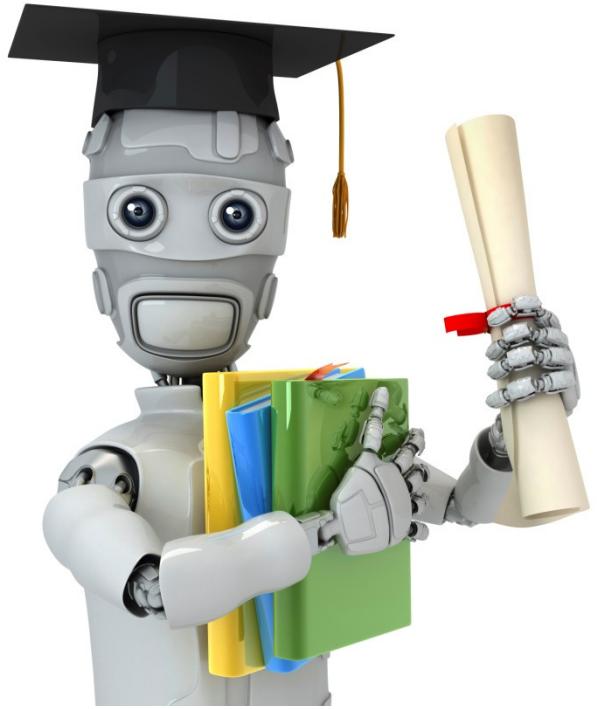

Machine Learning

# Octave Tutorial

---

## Vectorial implementation

## Vectorization example.

$$h_{\theta}(x) = \sum_{j=0}^n \theta_j x_j \\ = \theta^T x$$

### Unvectorized implementation

```
prediction = 0.0;  
for j = 1:n+1,  
    prediction = prediction +  
        theta(j) * x(y)  
end;
```

### Vectorized implementation

```
prediction = theta' * x;
```

## Vectorization example.

$$h_{\theta}(x) = \sum_{j=0}^n \theta_j x_j \\ = \theta^T x$$

### Unvectorized implementation

```
double prediction = 0.0;  
for (int j = 0; j < n; j++)  
    prediction += theta[j] * x[y];
```

### Vectorized implementation

```
double prediction  
= theta.transpose() * x;
```

## Gradient descent

$$\theta_j := \theta_j - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_j^{(i)} \quad (\text{for all } j)$$

---

$$\theta_0 := \theta_0 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_0^{(i)}$$

$$\theta_1 := \theta_1 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_1^{(i)}$$


$$\theta_2 := \theta_2 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_2^{(i)}$$

$$\begin{aligned}
\theta_0 &:= \theta_0 - \alpha \frac{1}{m} \sum_{\substack{i=1 \\ i \neq m}}^m (h_\theta(x^{(i)}) - y^{(i)}) x_0^{(i)} \\
\theta_1 &:= \theta_1 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_1^{(i)} \\
\theta_2 &:= \theta_2 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_2^{(i)} \\
(n = 2)
\end{aligned}$$

$$\left| \begin{array}{l} u(j) = 2v(j) + 5w(j) \quad (\text{for all } j) \\ u = 2v + 5w \end{array} \right.$$

# **Chapter 3 Week3**

## **3.1 Logistic Reggression**

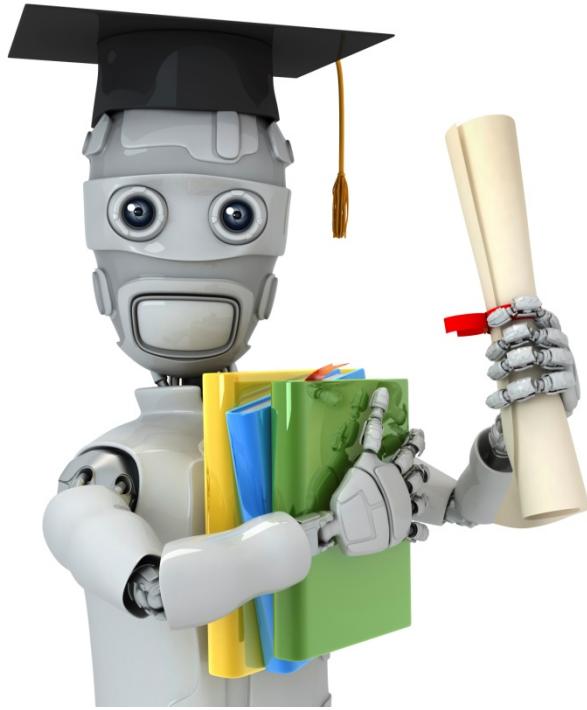

Machine Learning


# Logistic Regression

---

# Classification

## Classification

- Email: Spam / Not Spam?
  - Online Transactions: Fraudulent (Yes / No)?
  - Tumor: Malignant / Benign ?
- $y \in \{0, 1\}$
- 0: “Negative Class” (e.g., benign tumor)
  - 1: “Positive Class” (e.g., malignant tumor)
- $y \in \{0, 1, 2, 3\}$

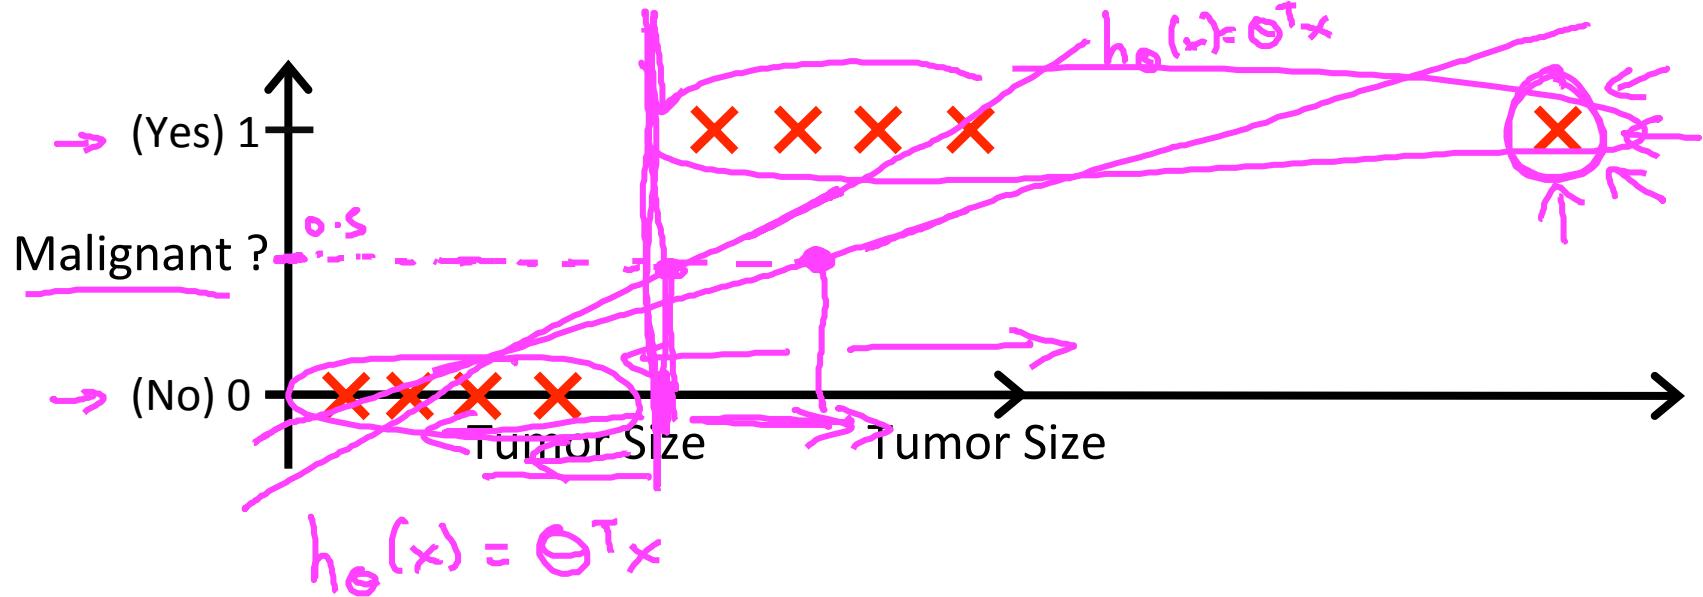

→ Threshold classifier output  $h_\theta(x)$  at 0.5:

→ If  $h_\theta(x) \geq 0.5$ , predict "y = 1"


If  $h_\theta(x) < 0.5$ , predict "y = 0"

Classification:  $y = 0 \text{ or } 1$

$h_\theta(x)$  can be  $\underline{\quad}$  or  $\underline{\quad}$

Logistic Regression:  $0 \leq h_\theta(x) \leq 1$

Classification

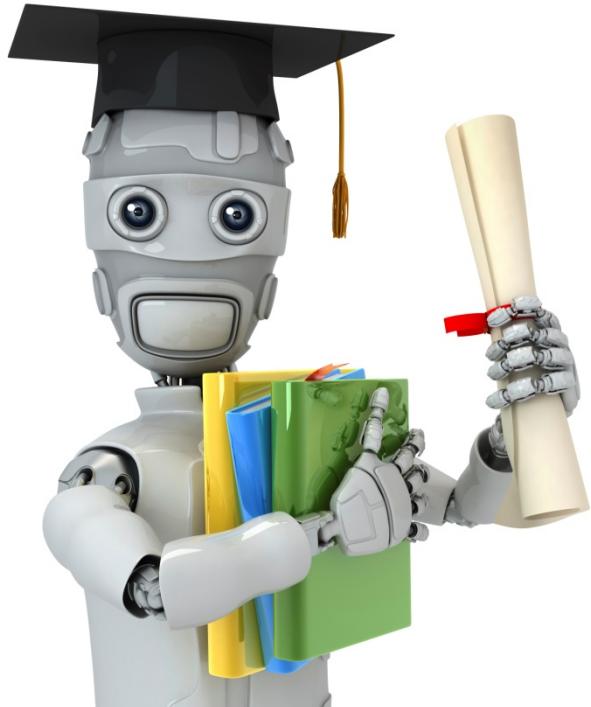

Machine Learning

# Logistic Regression

---

## Hypothesis Representation

## Logistic Regression Model


Want  $0 \leq h_\theta(x) \leq 1$

$$h_\theta(x) = g(\theta^T x)$$

$$\rightarrow g(z) = \frac{1}{1 + e^{-z}}$$

$\theta^T x$

$$h_\theta(x) = \frac{1}{1 + e^{-\theta^T x}}$$

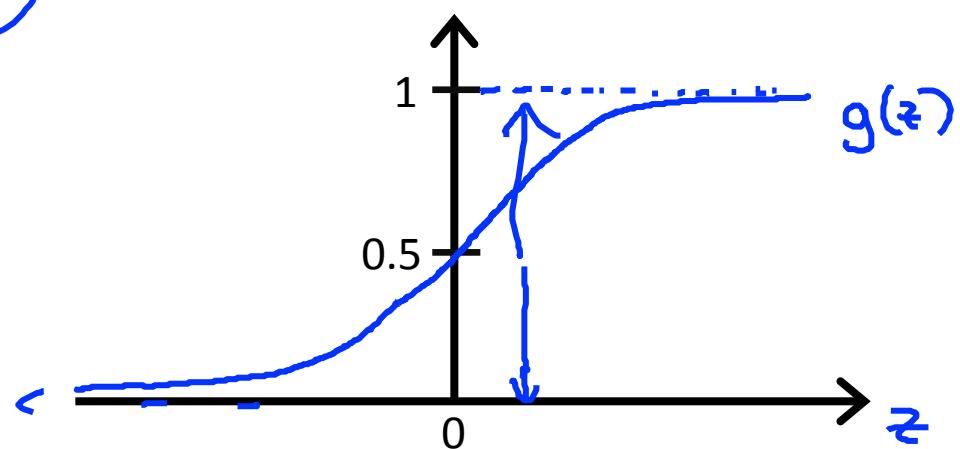

- Sigmoid function
- Logistic function

Parameters  $\underline{\theta}$ .

## Interpretation of Hypothesis Output

$$h_{\theta}(x)$$

$h_{\theta}(x)$  = estimated probability that  $y = 1$  on input  $x$

Example: If  $\underline{x} = \begin{bmatrix} x_0 \\ x_1 \end{bmatrix} = \begin{bmatrix} 1 & \leftarrow \\ \text{tumorSize} & \leftarrow \end{bmatrix}$

$$\underline{h_{\theta}(x) = 0.7} \quad y=1$$


Tell patient that 70% chance of tumor being malignant

$$\underline{h_{\theta}(x) = P(y=1|x; \theta)}$$

“probability that  $y = 1$ , given  $x$ , parameterized by  $\theta$ ”

$$\underline{y = 0 \text{ or } 1}$$

$$\begin{aligned} \rightarrow P(y = 0|x; \theta) + P(y = 1|x; \theta) &= 1 \\ \rightarrow P(y = 0|x; \theta) &= 1 - P(y = 1|x; \theta) \end{aligned}$$

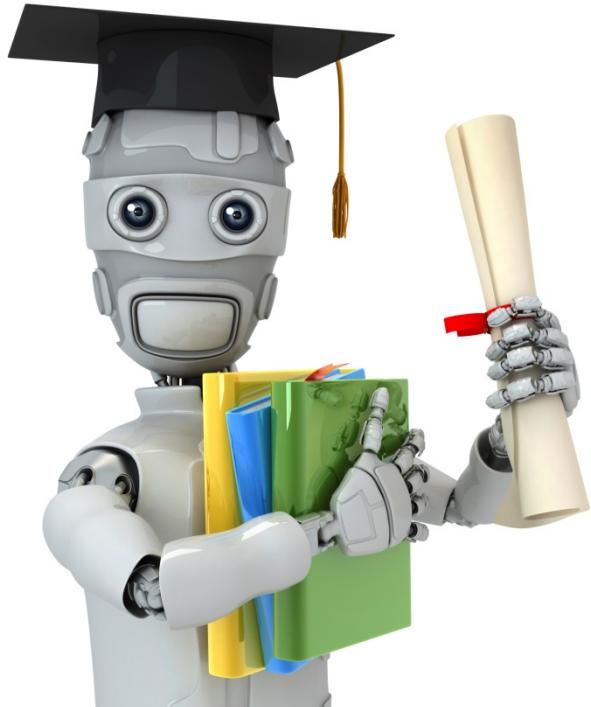

Machine Learning

# Logistic Regression

---

## Decision boundary

## Logistic regression

$$h_{\theta}(x) = g(\theta^T x)$$


$$g(z) = \frac{1}{1+e^{-z}}$$

Suppose predict " $y = 1$ " if  $h_{\theta}(x) \geq 0.5$

$$\theta^T x \geq 0$$

predict " $y = 0$ " if  $h_{\theta}(x) < 0.5$

$$\theta^T x < 0$$

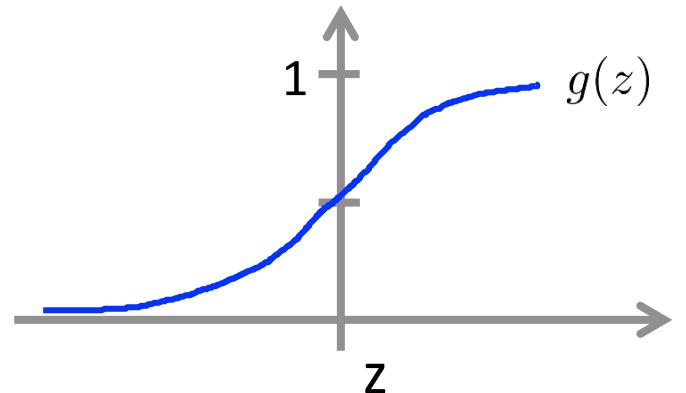

$$g(z) \geq 0.5$$


when  $z \geq 0$

$$h_{\theta}(x) = g(\theta^T x)$$

$$g(z) < 0.5$$

when  $z < 0$

## Decision Boundary

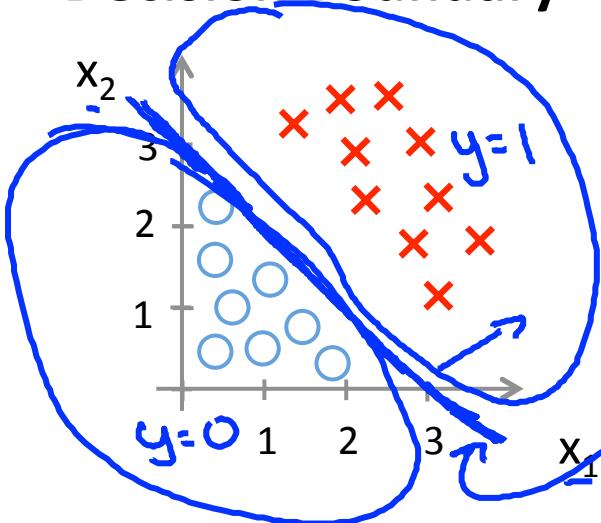

$$\Theta = \begin{bmatrix} -3 \\ 1 \\ 1 \end{bmatrix}$$

$$h_{\theta}(x) = g(\theta_0 + \theta_1 x_1 + \theta_2 x_2)$$

Decision boundary

Predict " $y = 1$ " if  $\underline{-3 + x_1 + x_2 \geq 0}$

$$\underline{\Theta^T x}$$

$$\underline{x_1 + x_2 \geq 3}$$

$$x_1, x_2$$


$$h_{\theta}(x) = 0.5$$

$$x_1 + x_2 = 3$$

$$x_1 + x_2 < 3$$

$$y = 0$$

## Non-linear decision boundaries

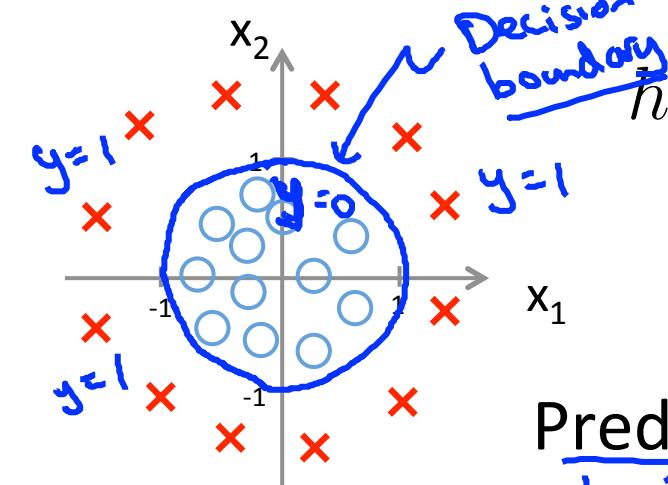


$$h_{\theta}(x) = g(\theta_0 + \theta_1 x_1 + \theta_2 x_2 + \theta_3 x_1^2 + \theta_4 x_2^2)$$


" " " "

$$\theta = \begin{bmatrix} -1 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

Predict " $y = 1$ " if  $\frac{-1 + x_1^2 + x_2^2 \geq 0}{x_1^2 + x_2^2 \geq 1}$

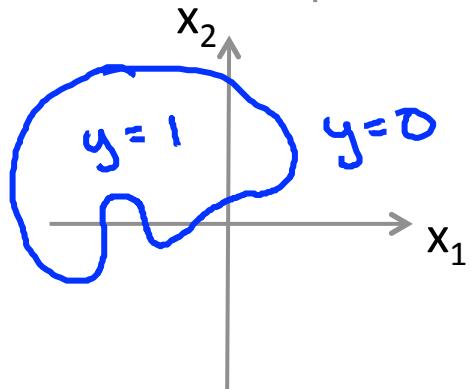

$$h_{\theta}(x) = g(\theta_0 + \theta_1 x_1 + \theta_2 x_2 + \theta_3 \underline{x_1^2} + \theta_4 \underline{x_1^2 x_2} + \theta_5 \underline{x_1^2 x_2^2} + \theta_6 \underline{x_1^3 x_2} + \dots)$$

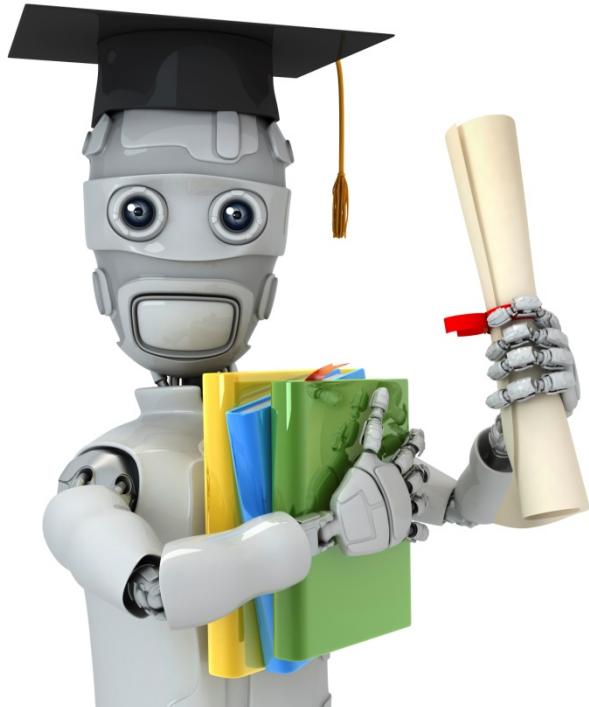

Machine Learning

# Logistic Regression

---

## Cost function

Training  
set:

m examples

$$x \in \begin{bmatrix} x_0 \\ x_1 \\ \dots \\ x_n \end{bmatrix} \quad \mathbb{R}^{n+1}$$

$$x_0 = 1, y \in \{0, 1\}$$

$$h_{\theta}(x) = \frac{1}{1 + e^{-\underline{\theta^T x}}}$$

How to choose parameters  $\theta$  ?

## Cost function

→ Linear regression:  $J(\theta)$



logistic

$$J(\theta) = \frac{1}{m} \sum_{i=1}^m \frac{1}{2} (h_\theta(x^{(i)}) - y^{(i)})^2$$

cost( $h_\theta(x^{(i)})$ ,  $y^{(i)}$ )


$\rightarrow$  Cost( $h_\theta(x^{(i)})$ ,  $y^{(i)}$ ) =  $\frac{1}{2} (h_\theta(x^{(i)}) - y^{(i)})^2$

$\frac{1}{2} e^{-\theta^T y}$

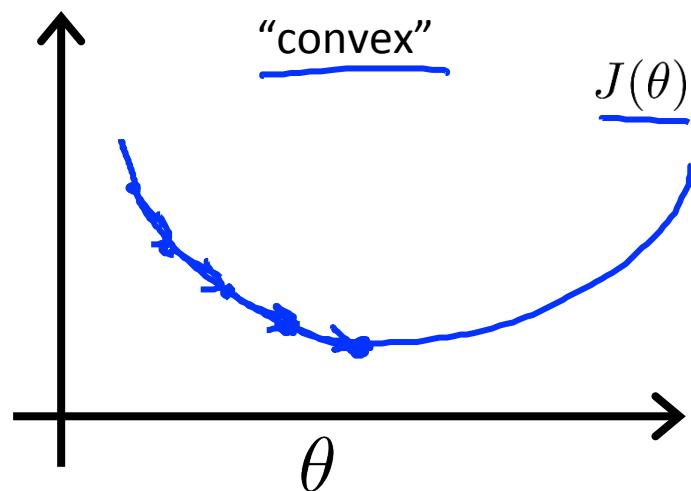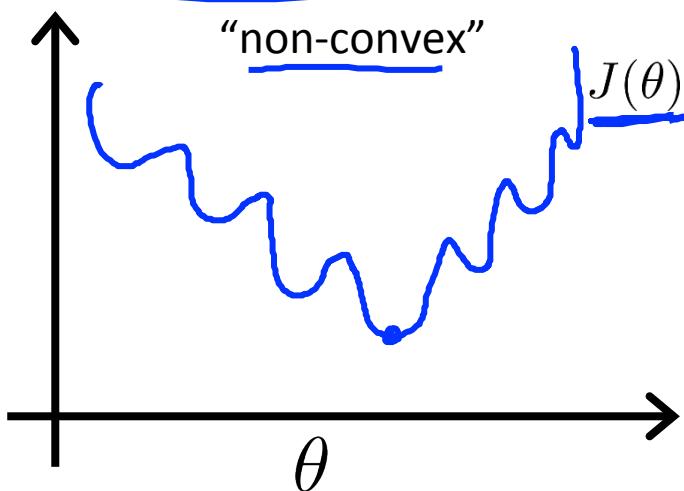

## Logistic regression cost function



$$\text{Cost}(h_{\theta}(x), y) = \begin{cases} -\log(h_{\theta}(x)) & \text{if } y = 1 \\ -\log(1 - h_{\theta}(x)) & \text{if } y = 0 \end{cases}$$

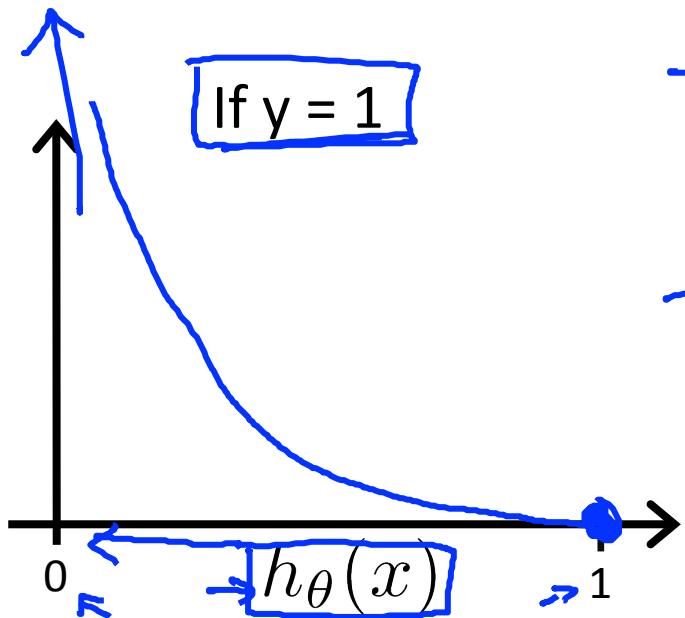


- Cost = 0 if  $y = 1, h_{\theta}(x) = 1$ 
  - But as  $h_{\theta}(x) \rightarrow 0$
  - $\underline{\text{Cost} \rightarrow \infty}$
- Captures intuition that if  $h_{\theta}(x) = 0$ ,  
(predict  $P(y = 1|x; \theta) = 0$ ), but  $y = 1$ ,  
we'll penalize learning algorithm by a very  
large cost.

## Logistic regression cost function

$$\text{Cost}(h_\theta(x), y) = \begin{cases} -\log(h_\theta(x)) & \text{if } y = 1 \\ -\log(1 - h_\theta(x)) & \text{if } y = 0 \end{cases}$$

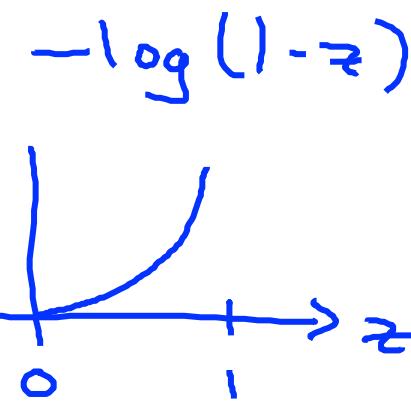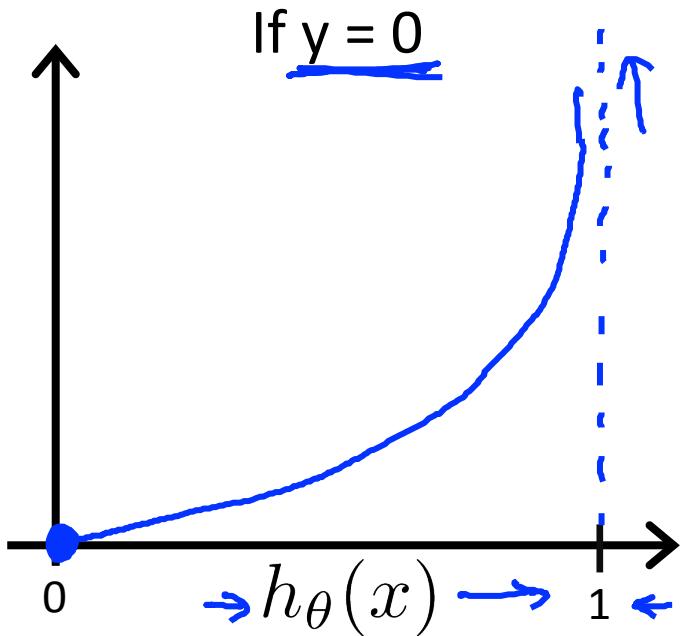

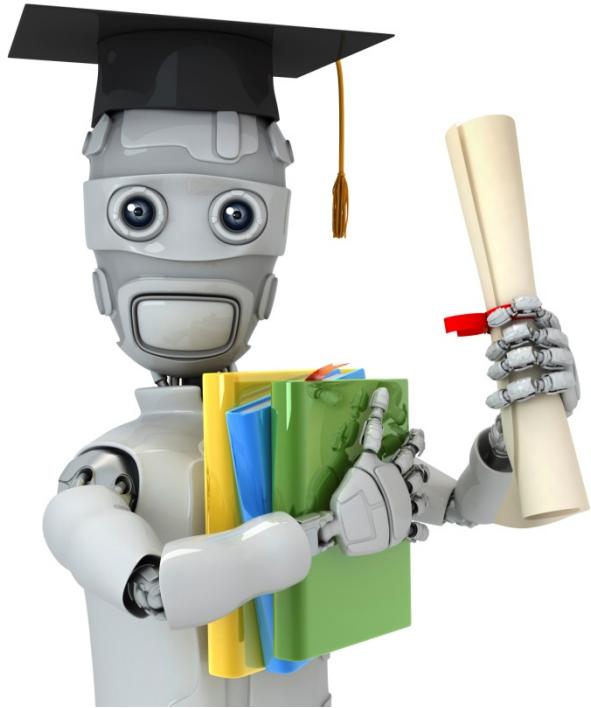

Machine Learning

# Logistic Regression

---

Simplified cost function  
and gradient descent

## Logistic regression cost function

$$\rightarrow J(\theta) = \frac{1}{m} \sum_{i=1}^m \text{Cost}(h_\theta(x^{(i)}), y^{(i)})$$

$$\rightarrow \text{Cost}(h_\theta(x), y) = \begin{cases} -\log(h_\theta(x)) & \text{if } y = 1 \\ -\log(1 - h_\theta(x)) & \text{if } y = 0 \end{cases}$$

Note:  $y = 0$  or  $1$  always

$$\rightarrow \text{Cost}(h_\theta(x), y) = -y \log(h_\theta(x)) - (1-y) \log(1 - h_\theta(x))$$

If  $y=1$ :  $\text{Cost}(h_\theta(x), y) = -\log h_\theta(x)$

If  $y=0$ :  $\text{Cost}(h_\theta(x), y) = -\log(1 - h_\theta(x))$

## Logistic regression cost function

$$\begin{aligned} J(\theta) &= \frac{1}{m} \sum_{i=1}^m \text{Cost}(h_\theta(x^{(i)}), y^{(i)}) \\ &= -\frac{1}{m} \left[ \sum_{i=1}^m y^{(i)} \log h_\theta(x^{(i)}) + (1 - y^{(i)}) \log (1 - h_\theta(x^{(i)})) \right] \end{aligned}$$

To fit parameters  $\theta$ :

$$\min_{\theta} J(\theta)$$

Get  $\underline{\theta}$

To make a prediction given new  $\underline{x}$ :

$$\text{Output } \underline{h_\theta(x)} = \frac{1}{1+e^{-\theta^T x}}$$

$$\underline{p(y=1 | x; \theta)}$$

## Gradient Descent

$$\rightarrow J(\theta) = -\frac{1}{m} \left[ \sum_{i=1}^m y^{(i)} \log h_\theta(x^{(i)}) + (1 - y^{(i)}) \log (1 - h_\theta(x^{(i)})) \right]$$

Want  $\min_{\theta} J(\theta)$ :

Repeat {

$$\theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta)$$

}

(simultaneously update all  $\theta_j$ )

$$\frac{\partial}{\partial \theta_j} J(\theta) = \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_j^{(i)}$$

## Gradient Descent

$$J(\theta) = -\frac{1}{m} \left[ \sum_{i=1}^m y^{(i)} \log h_\theta(x^{(i)}) + (1 - y^{(i)}) \log (1 - h_\theta(x^{(i)})) \right]$$

Want  $\min_{\theta} J(\theta)$ :

Repeat {

$$\theta_j := \theta_j - \alpha \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_j^{(i)}$$


(simultaneously update all  $\theta_j$ )

$$\Theta = \begin{bmatrix} \theta_0 \\ \theta_1 \\ \theta_2 \\ \vdots \\ \theta_n \end{bmatrix} \quad \text{for } i = 0 \dots n$$

$$h_\theta(x) = \theta^T x$$

$$h_\theta(x) = \frac{1}{1 + e^{-\theta^T x}}$$

Algorithm looks identical to linear regression!

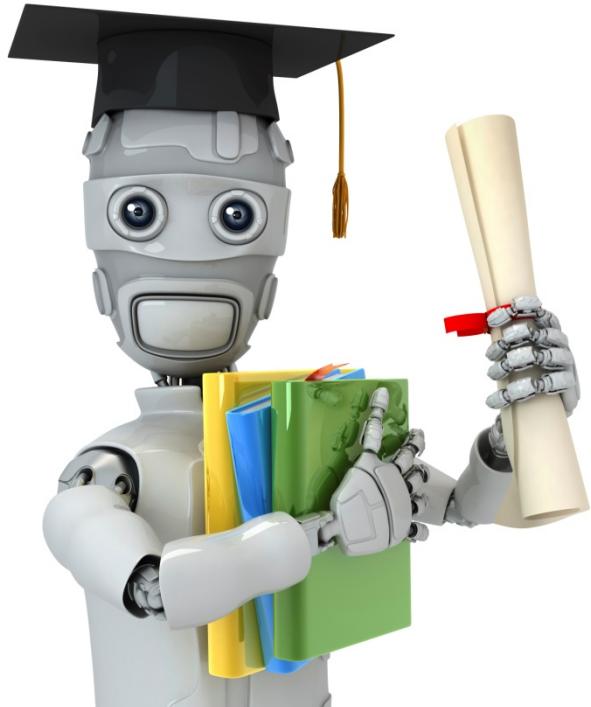

Machine Learning

# Logistic Regression

---

# Advanced optimization

## Optimization algorithm

Cost function  $\underline{J(\theta)}$ . Want  $\min_{\theta} \underline{J(\theta)}$ .

Given  $\theta$ , we have code that can compute

- -  $J(\theta)$
- -  $\frac{\partial}{\partial \theta_j} J(\theta)$  (for  $j = 0, 1, \dots, n$ )

Gradient descent:

Repeat {

$$\rightarrow \theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta)$$

}

## Optimization algorithm

Given  $\theta$ , we have code that can compute

- $J(\theta)$
- $\frac{\partial}{\partial \theta_j} J(\theta)$  (for  $j = 0, 1, \dots, n$ )

Optimization algorithms:

- - Gradient descent
- Conjugate gradient
- BFGS
- L-BFGS

Advantages:

- No need to manually pick  $\alpha$
- Often faster than gradient descent.

Disadvantages:

- More complex

Example:

$$\min_{\theta} J(\theta)$$

$$\rightarrow \theta = \begin{bmatrix} \theta_1 \\ \theta_2 \end{bmatrix} \quad \theta_1 = 5, \theta_2 = 5.$$

$$\rightarrow J(\theta) = (\theta_1 - 5)^2 + (\theta_2 - 5)^2$$

$$\rightarrow \frac{\partial}{\partial \theta_1} J(\theta) = 2(\theta_1 - 5)$$

$$\rightarrow \frac{\partial}{\partial \theta_2} J(\theta) = 2(\theta_2 - 5)$$

$\rightarrow$  options = optimset('GradObj', 'on', 'MaxIter', '100');

$\rightarrow$  initialTheta = zeros(2,1);

[optTheta, functionVal, exitFlag] ...

= fminunc(@costFunction, initialTheta, options);

↑      ↑

$\theta \in \mathbb{R}^d \quad d \geq 2$ .

```
function [jVal, gradient]
    = costFunction(theta)
jVal = (theta(1)-5)^2 + ...
      (theta(2)-5)^2;
gradient = zeros(2,1);
gradient(1) = 2*(theta(1)-5);
gradient(2) = 2*(theta(2)-5);
```

$$\underline{\text{theta}} = \begin{bmatrix} \theta_0 \\ \theta_1 \\ \vdots \\ \theta_n \end{bmatrix} \quad \begin{array}{l} \xrightarrow{\text{theta}(1)} \\ \xrightarrow{\text{theta}(2)} \\ \vdots \\ \xrightarrow{\text{theta}(n+1)} \end{array}$$

**function** [jVal, gradient] = costFunction(theta)


jVal = [code to compute  $J(\theta)$ ];

gradient(1) = [code to compute  $\frac{\partial}{\partial \theta_0} J(\theta)$ ];

gradient(2) = [code to compute  $\frac{\partial}{\partial \theta_1} J(\theta)$ ];

⋮

gradient(n+1) = [code to compute  $\frac{\partial}{\partial \theta_n} J(\theta)$ ];

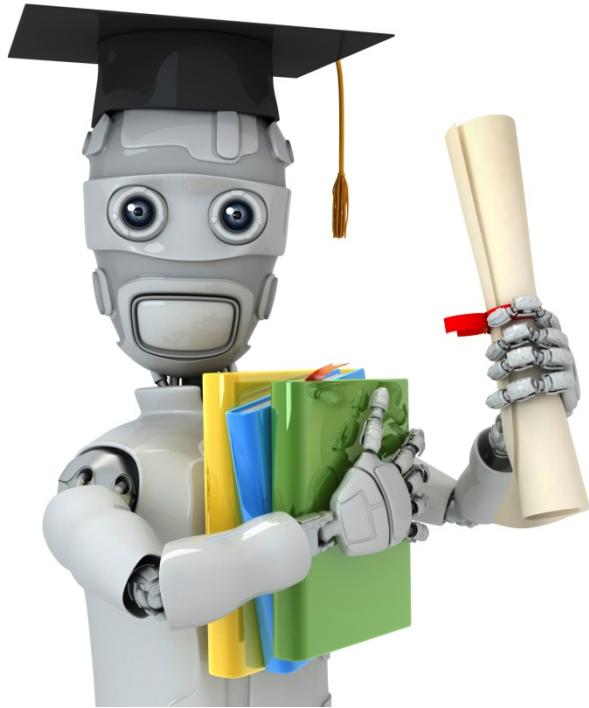

Machine Learning

# Logistic Regression

---

Multi-class classification:  
One-vs-all

## Multiclass classification

Email foldering/tagging: Work, Friends, Family, Hobby

$$y=1 \quad \uparrow \quad y=2 \quad \uparrow \quad y=3 \quad \uparrow \quad y=4$$


Medical diagrams: Not ill, Cold, Flu

$$y=1 \quad 2 \quad 3$$


Weather: Sunny, Cloudy, Rain, Snow

$$y=1 \quad 2 \quad 3 \quad 4 \quad \leftarrow$$



Binary classification:

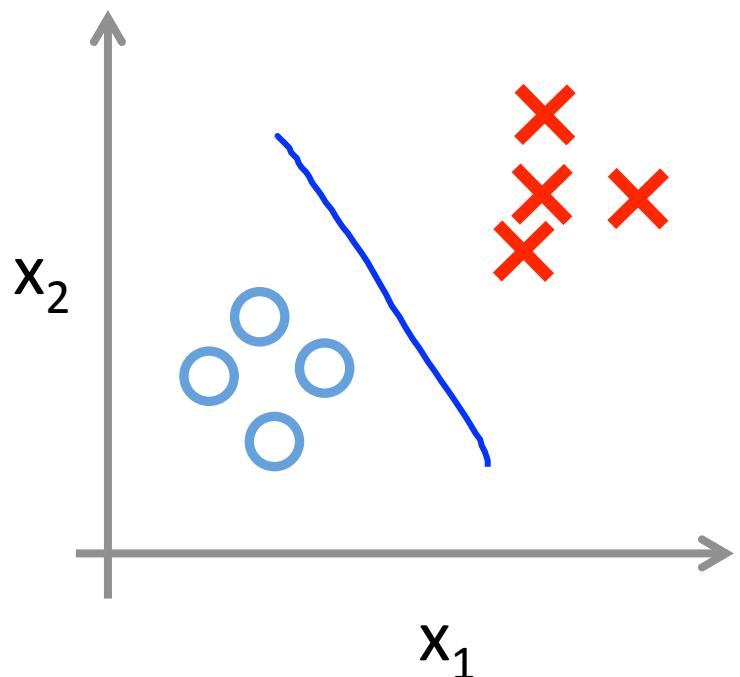

Multi-class classification:

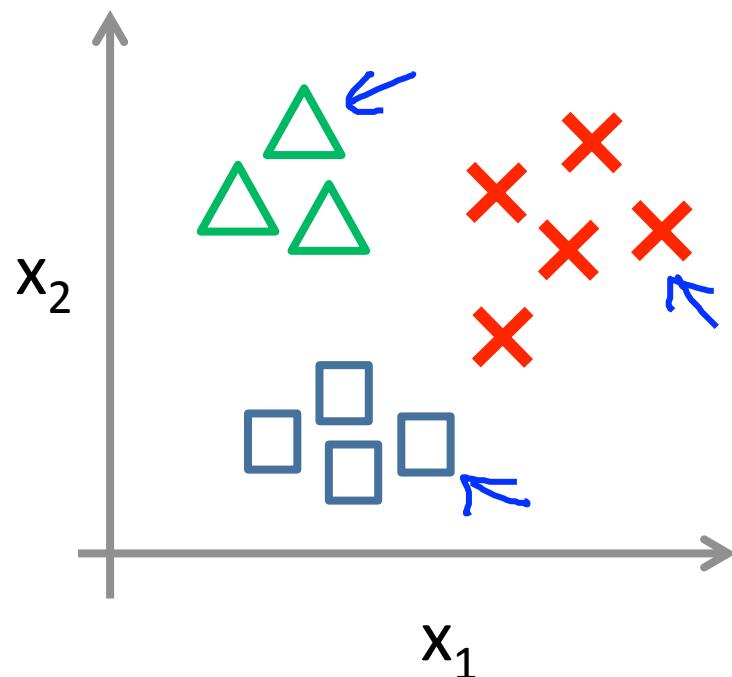


## One-vs-all (one-vs-rest):

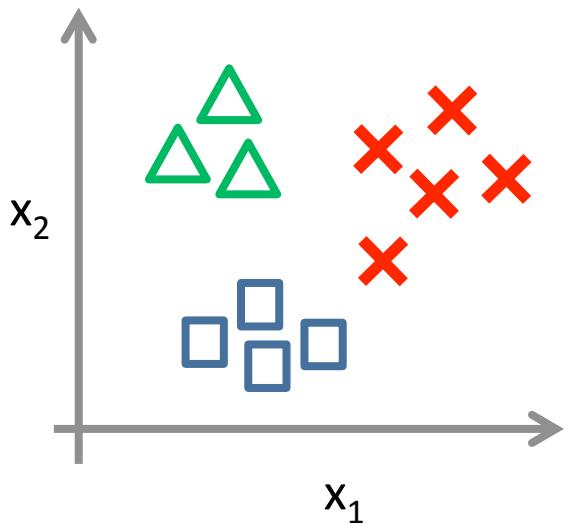

- Class 1:  $\leftarrow$
- Class 2:  $\leftarrow$
- Class 3:  $\leftarrow$

$$h_{\theta}^{(i)}(x) = P(y = i|x; \theta) \quad (i = 1, 2, 3)$$

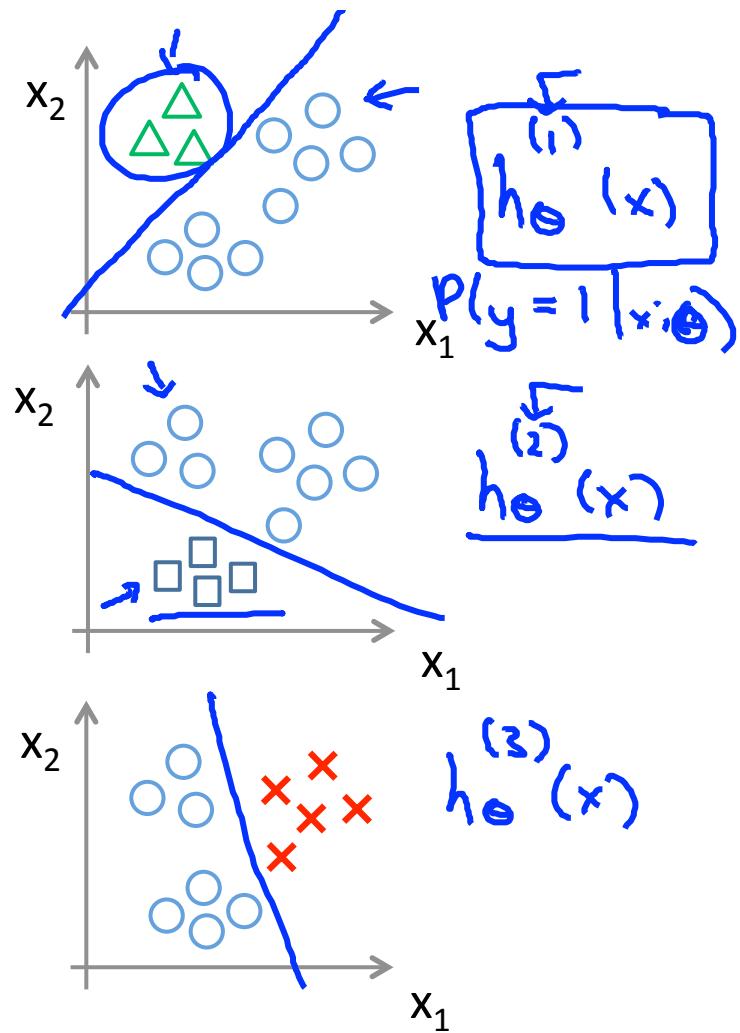


## One-vs-all

Train a logistic regression classifier  $\underline{h_{\theta}^{(i)}(x)}$  for each class  $\underline{i}$  to predict the probability that  $\underline{y = i}$ .

On a new input  $\underline{x}$ , to make a prediction, pick the class  $i$  that maximizes

$$\max_i \underline{\underline{h_{\theta}^{(i)}(x)}}$$

## 3.2 Overfitting

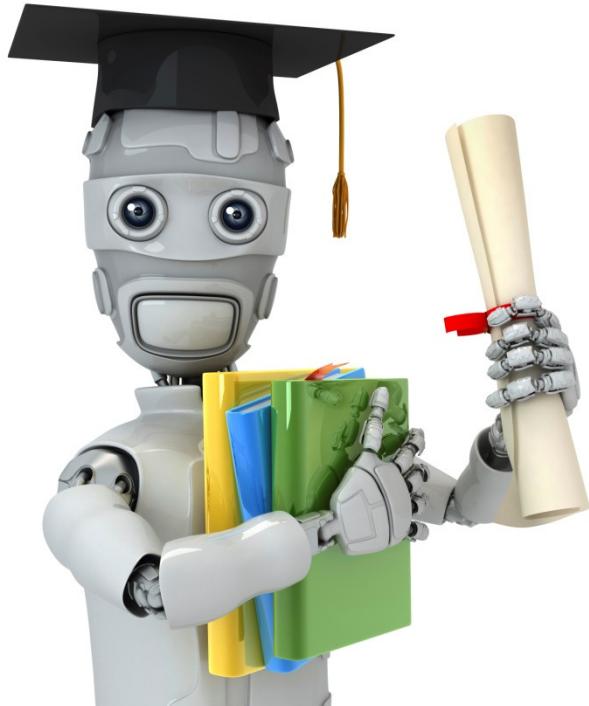


Machine Learning

# Regularization


---

## The problem of overfitting


## Example: Linear regression (housing prices)

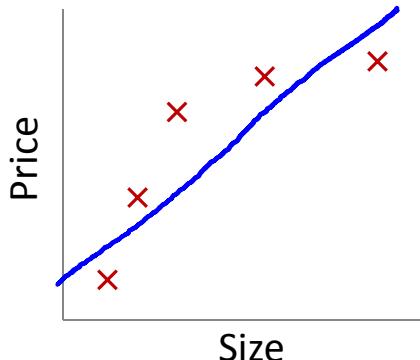

$\rightarrow \theta_0 + \theta_1 x$   
"Underfit" "High bias"

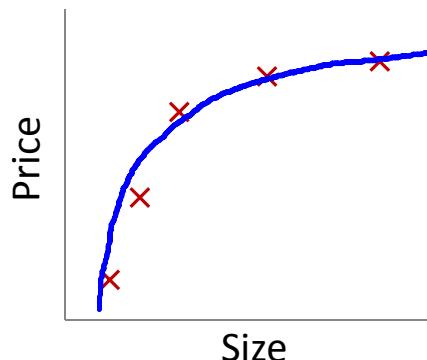


$\rightarrow \theta_0 + \theta_1 x + \theta_2 x^2$   
"Just right"

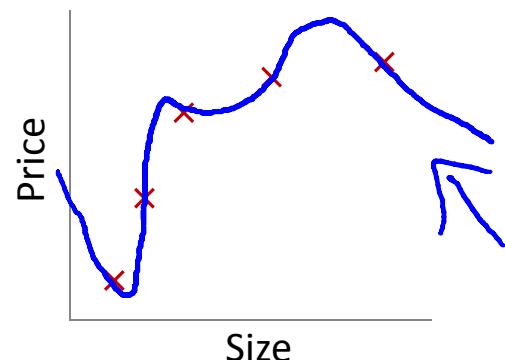

$\rightarrow \theta_0 + \theta_1 x + \theta_2 x^2 + \theta_3 x^3 + \theta_4 x^4$   
"Overfit" "High variance"

**Overfitting:** If we have too many features, the learned hypothesis may fit the training set very well ( $J(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2 \approx 0$ ), but fail to generalize to new examples (predict prices on new examples).


## Example: Logistic regression

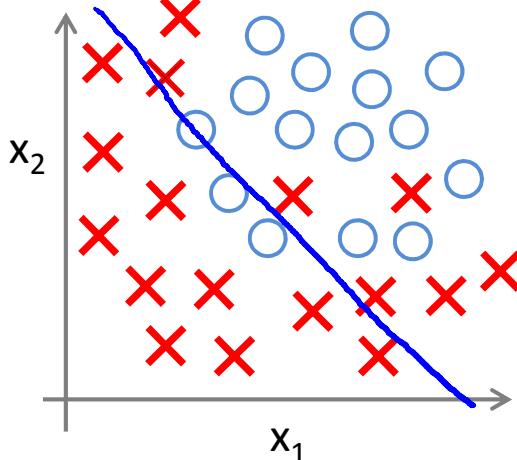


$$\rightarrow h_{\theta}(x) = g(\underline{\theta_0 + \theta_1 x_1 + \theta_2 x_2})$$

( $g$  = sigmoid function)

$\nwarrow$   
"Underfit"

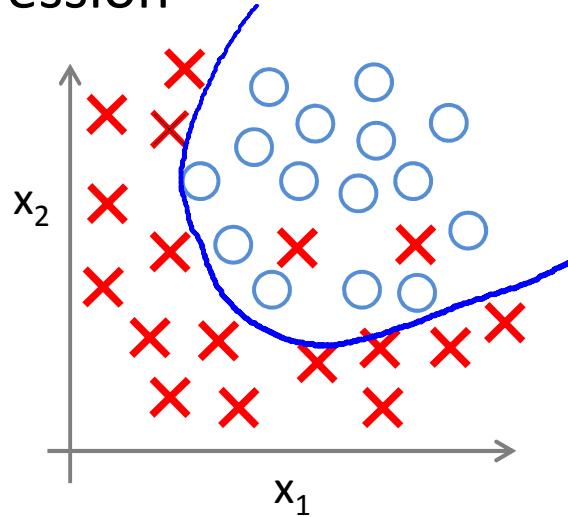

$$g(\underline{\theta_0 + \theta_1 x_1 + \theta_2 x_2} \\ + \underline{\theta_3 x_1^2} + \underline{\theta_4 x_2^2} \\ + \underline{\theta_5 x_1 x_2}})$$

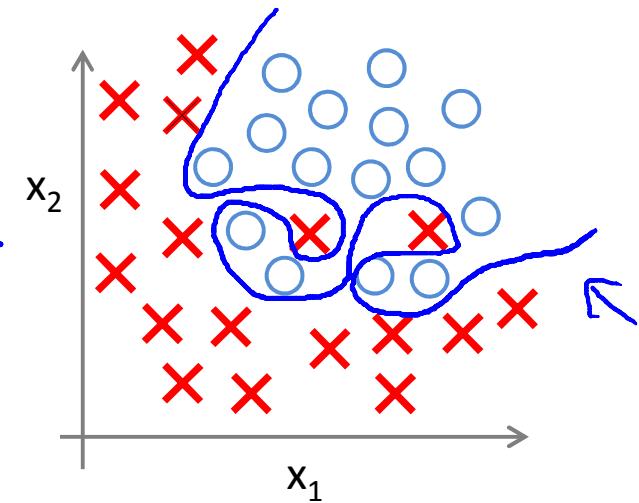


$$g(\underline{\theta_0 + \theta_1 x_1 + \theta_2 x_1^2} \\ + \underline{\theta_3 x_1^2 x_2} + \underline{\theta_4 x_1^2 x_2^2} \\ + \underline{\theta_5 x_1^2 x_2^3} + \underline{\theta_6 x_1^3 x_2} + \dots)$$

$\nwarrow$   
"Overfit"

## Addressing overfitting:

- $x_1$  = size of house
- $x_2$  = no. of bedrooms
- $x_3$  = no. of floors
- $x_4$  = age of house
- $x_5$  = average income in neighborhood
- $x_6$  = kitchen size
- :
- $x_{100}$

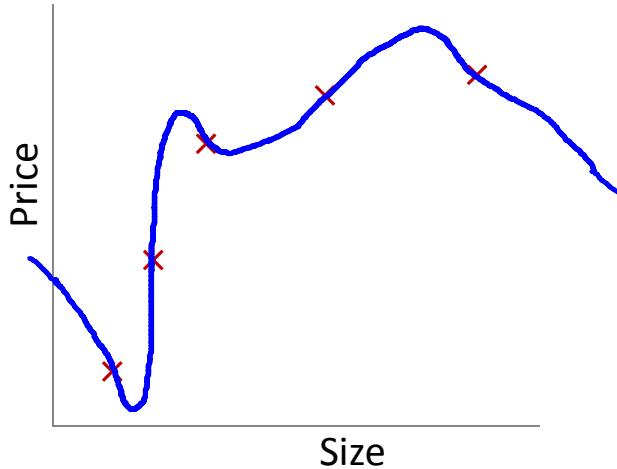


## Addressing overfitting:

### Options:

1. Reduce number of features.
  - — Manually select which features to keep.
  - — Model selection algorithm (later in course).
2. Regularization.
  - — Keep all the features, but reduce magnitude/values of parameters  $\theta_j$
  - Works well when we have a lot of features, each of which contributes a bit to predicting  $y$ .



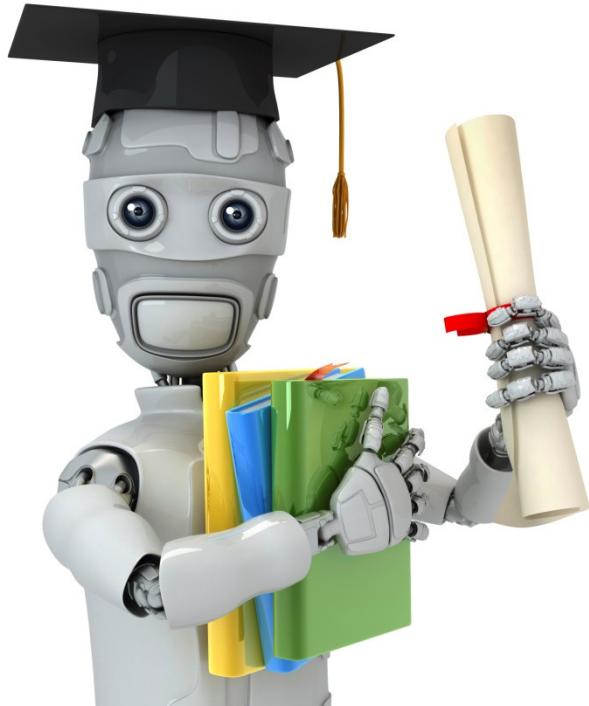


Machine Learning

# Regularization


---

## Cost function

## Intuition

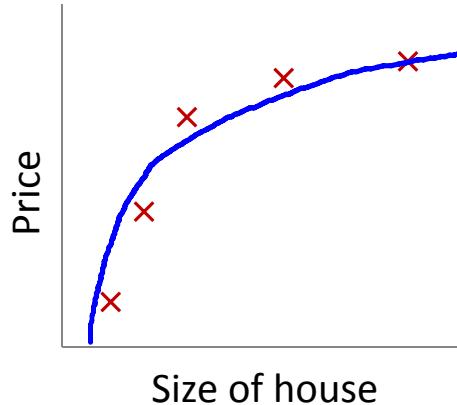

$$\theta_0 + \theta_1 x + \theta_2 x^2$$

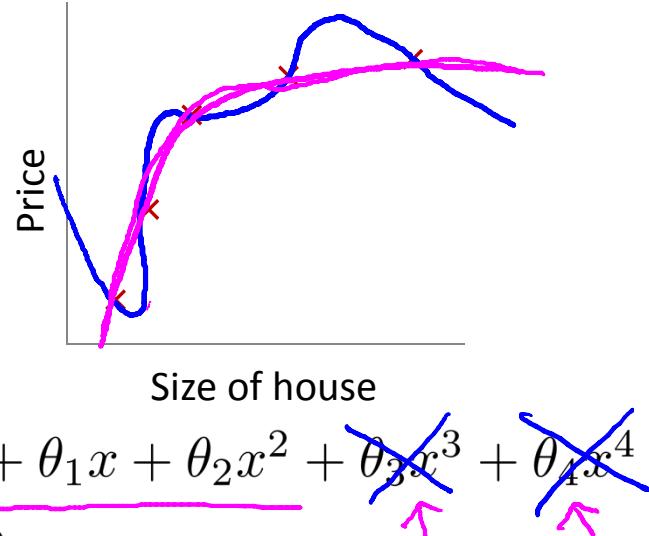

$$\theta_0 + \theta_1 x + \theta_2 x^2 + \underline{\theta_3 x^3} + \underline{\theta_4 x^4}$$

Suppose we penalize and make  $\theta_3, \theta_4$  really small.

$$\min_{\theta} \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2 + 1000 \underline{\theta_3^2} + 1000 \underline{\theta_4^2}$$

$\underline{\theta_3 \approx 0}$        $\underline{\theta_4 \approx 0}$

## Regularization.

Small values for parameters  $\theta_0, \theta_1, \dots, \theta_n$

- “Simpler” hypothesis
- Less prone to overfitting

$$\theta_3, \theta_4 \approx 0$$

Housing:

- Features:  $x_1, x_2, \dots, x_{100}$
- Parameters:  $\theta_0, \theta_1, \theta_2, \dots, \theta_{100}$

$$J(\theta) = \frac{1}{2m} \left[ \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2 + \lambda \sum_{j=1}^n \theta_j^2 \right]$$


~~$\theta_1, \theta_2, \theta_3, \dots, \theta_{100}$~~

## Regularization.

$$\rightarrow J(\theta) = \frac{1}{2m} \left[ \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2 + \lambda \sum_{j=1}^n \theta_j^2 \right]$$

$\min_{\theta} J(\theta)$

regularization parameter

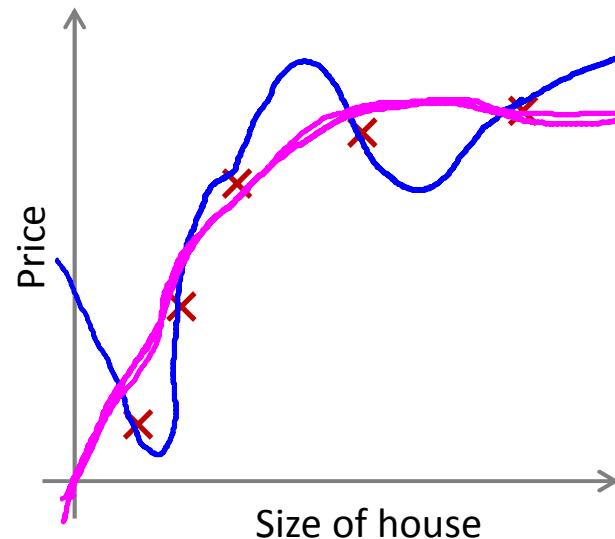

In regularized linear regression, we choose  $\theta$  to minimize

$$J(\theta) = \frac{1}{2m} \left[ \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2 + \lambda \sum_{j=1}^n \theta_j^2 \right]$$


What if  $\lambda$  is set to an extremely large value (perhaps for too large for our problem, say  $\lambda = 10^{10}$ )?

- Algorithm works fine; setting  $\lambda$  to be very large can't hurt it
- Algorithm fails to eliminate overfitting.
- Algorithm results in underfitting. (Fails to fit even training data well).
- Gradient descent will fail to converge.

In regularized linear regression, we choose  $\theta$  to minimize

$$J(\theta) = \frac{1}{2m} \left[ \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2 + \lambda \sum_{j=1}^n \theta_j^2 \right]$$

What if  $\lambda$  is set to an extremely large value (perhaps for too large for our problem, say  $\lambda = 10^{10}$ )?

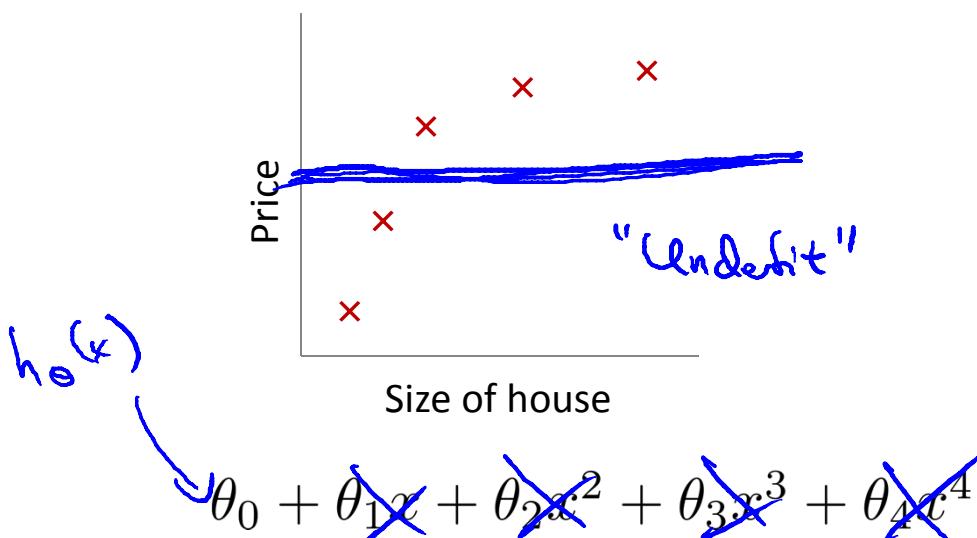


$$\underline{\theta}_1, \underline{\theta}_2, \underline{\theta}_3, \underline{\theta}_4$$

$$\theta_1 \approx 0, \theta_2 \approx 0$$

$$\theta_3 \approx 0, \theta_4 \approx 0$$

$$h_\theta(x) = \underline{\theta}_0$$



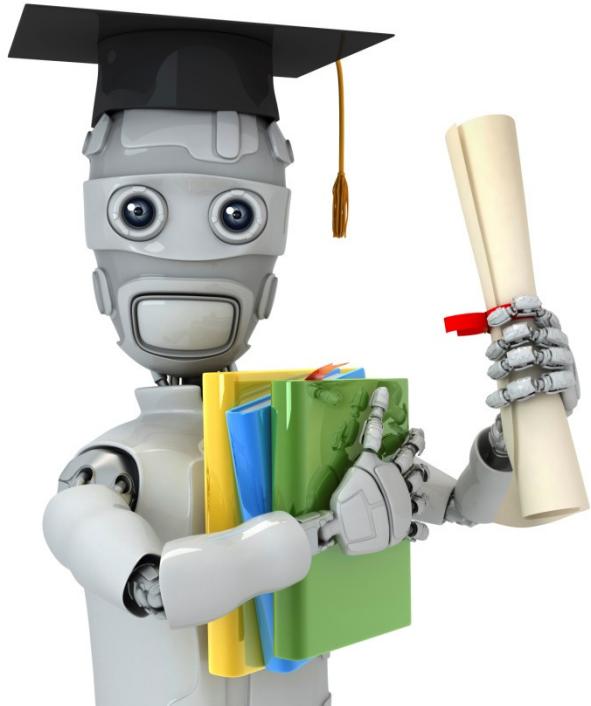

Machine Learning

# Regularization

---

## Regularized linear regression

## Regularized linear regression

$$J(\theta) = \frac{1}{2m} \left[ \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2 + \lambda \sum_{j=1}^n \theta_j^2 \right]$$

$$\min_{\theta} J(\theta)$$



## Gradient descent

Repeat {

$$\rightarrow \theta_0 := \theta_0 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_0^{(i)}$$

$$\frac{\partial}{\partial \theta_0}$$

$$\theta_1, \theta_2, \dots, \theta_n$$

$$\frac{\partial}{\partial \theta_0} J(\theta)$$

$$\begin{aligned} \theta_j &:= \theta_j - \boxed{\alpha} \left[ \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_j^{(i)} - \frac{\lambda}{m} \theta_j \right] \\ &\quad (j = \cancel{0}, 1, 2, 3, \dots, n) \\ \theta_j &:= \boxed{\theta_j (1 - \alpha \frac{\lambda}{m})} - \boxed{\alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_j^{(i)}} \rightarrow J(\theta) \end{aligned}$$

$$\boxed{\theta_j}$$

$$1 - \alpha \frac{\lambda}{m} < 1$$

$$\underline{0.99}$$

$$\theta_j \times 0.99$$

## Normal equation

$$\underline{X} = \begin{bmatrix} (x^{(1)})^T \\ \vdots \\ (x^{(m)})^T \end{bmatrix} \leftarrow \text{m} \times (n+1)$$

$$y = \begin{bmatrix} y^{(1)} \\ \vdots \\ y^{(m)} \end{bmatrix} \uparrow \mathbb{R}^m$$

$$\rightarrow \min_{\theta} J(\theta)$$

$$\frac{\partial}{\partial \theta_j} J(\theta) \stackrel{\text{set}}{=} 0 \quad \rightsquigarrow$$

$$\Rightarrow \theta = (X^T X + \lambda \underbrace{\begin{bmatrix} 0 & 1 & 0 & \dots & 0 \\ 1 & 0 & 1 & \dots & 0 \\ 0 & 1 & 0 & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \dots & 1 \end{bmatrix}}_{(n+1) \times (n+1)})^{-1} X^T y$$

E.g. n=2

$$\begin{bmatrix} 0 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

(n+1) × (n+1)

## Non-invertibility (optional/advanced).

Suppose  $m \leq n$ ,  $\leftarrow$   
(#examples) (#features)

$$\theta = \underbrace{(X^T X)^{-1}}_{\text{non-invertible / singular}} X^T y$$


pinv       $\frac{\text{inv}}{\kappa}$

If  $\lambda > 0$ ,

$$\theta = \left( X^T X + \lambda \begin{bmatrix} 0 & & & \\ & 1 & & \\ & & 1 & \\ & & & \ddots \\ & & & & 1 \end{bmatrix} \right)^{-1} X^T y$$

invertible .



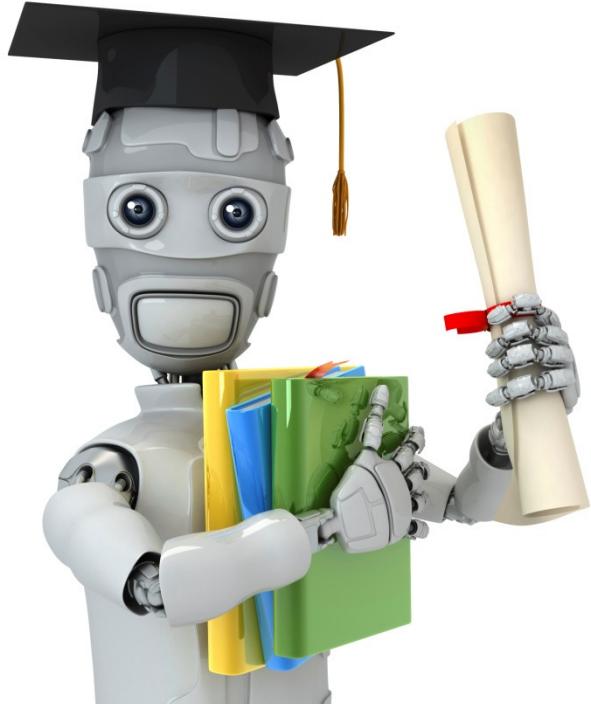


Machine Learning

# Regularization

---

## Regularized logistic regression

## Regularized logistic regression.

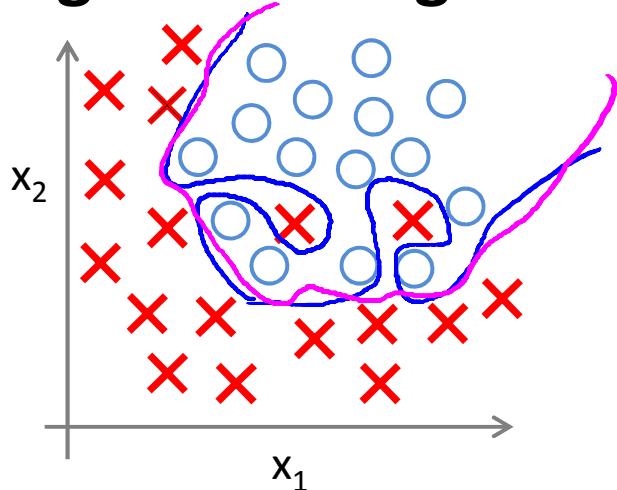

$$h_{\theta}(x) = g(\theta_0 + \theta_1 x_1 + \theta_2 x_1^2 + \theta_3 x_1^2 x_2 + \theta_4 x_1^2 x_2^2 + \theta_5 x_1^2 x_2^3 + \dots)$$

Cost function:

$$\rightarrow J(\theta) = - \left[ \frac{1}{m} \sum_{i=1}^m y^{(i)} \log h_{\theta}(x^{(i)}) + (1 - y^{(i)}) \log(1 - h_{\theta}(x^{(i)})) \right] + \frac{\lambda}{2m} \sum_{j=1}^n \theta_j^2$$

$\boxed{\theta_0, \theta_1, \dots, \theta_n}$

## Gradient descent

Repeat {

$$\rightarrow \theta_0 := \theta_0 - \alpha \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_0^{(i)}$$

$$\rightarrow \theta_j := \theta_j - \alpha \left[ \underbrace{\frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_j^{(i)}}_{(j = \cancel{x}, 1, 2, 3, \dots, n)} - \frac{1}{m} \theta_j \right] \leftarrow$$

$\theta_1, \dots, \theta_n$

}

$$\frac{\partial}{\partial \theta_j} \underline{J(\theta)}$$

$$h_\theta(x) = \frac{1}{1 + e^{-\theta^\top x}}$$

## Advanced optimization

f<sub>minimise</sub> (a cost function)  $\theta = \begin{bmatrix} \theta_0 \\ \theta_1 \\ \vdots \\ \theta_n \end{bmatrix}$   $\theta_0 \leftarrow \text{theta}(1)$   
 $\theta_1 \leftarrow \text{theta}(2)$   
 $\theta_n \leftarrow \text{theta}(n+1)$

→ function [jVal, gradient] = costFunction(theta)

jVal = [ code to compute  $J(\theta)$  ];

→  $J(\theta) = \left[ -\frac{1}{m} \sum_{i=1}^m y^{(i)} \log(h_\theta(x^{(i)})) + (1 - y^{(i)}) \log 1 - h_\theta(x^{(i)}) \right] + \left[ \frac{\lambda}{2m} \sum_{j=1}^n \theta_j^2 \right]$

→ gradient (1) = [ code to compute  $\frac{\partial}{\partial \theta_0} J(\theta)$  ];  
 $\frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_0^{(i)}$

→ gradient (2) = [ code to compute  $\frac{\partial}{\partial \theta_1} J(\theta)$  ];  
 $\left( \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_1^{(i)} \right) - \frac{\lambda}{m} \theta_1$   $J(\theta)$


→ gradient (3) = [ code to compute  $\frac{\partial}{\partial \theta_2} J(\theta)$  ];  
 $\vdots \quad \left( \frac{1}{m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)}) x_2^{(i)} \right) - \frac{\lambda}{m} \theta_2$

gradient (n+1) = [ code to compute  $\frac{\partial}{\partial \theta_n} J(\theta)$  ];



## **Chapter 4 Neural Networks**


### **4.1 Non-lineay Hypotheses**

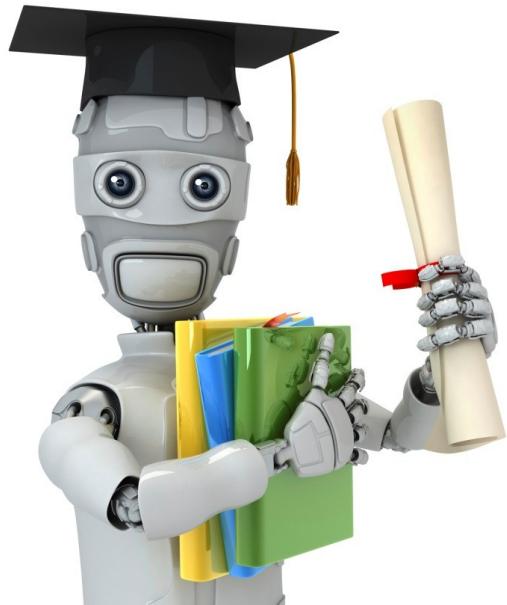

Machine Learning

# Neural Networks: Representation Non-linear hypotheses

## Non-linear Classification

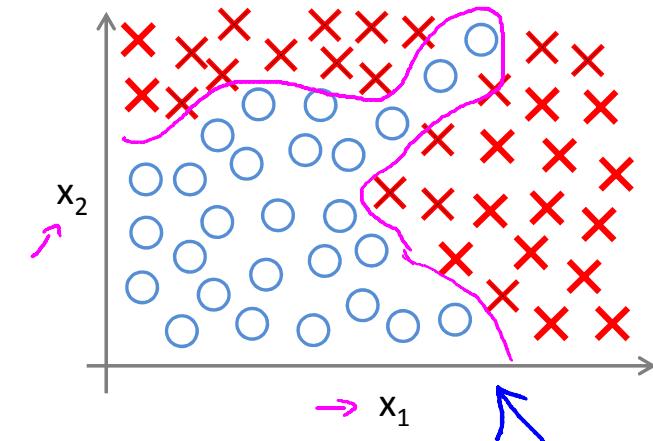

$\rightarrow \underline{x_1} = \text{size}$   
 $\underline{x_2} = \# \text{bedrooms}$   
 $\underline{x_3} = \# \text{floors}$   
 $x_4 = \text{age}$   
 $\dots$   
 $x_{100} -$

$\left\{ \begin{array}{c} \\ \\ h=100 \end{array} \right.$

$$g(\theta_0 + \theta_1 x_1 + \theta_2 x_2 + \theta_3 x_1 x_2 + \theta_4 x_1^2 x_2 + \theta_5 x_1^3 x_2 + \theta_6 x_1 x_2^2 + \dots)$$

$$\rightarrow \underline{x_1^2, x_1 x_2, x_1 x_3, x_1 x_4 \dots x_1 x_{100}}$$

$$\underline{x_2^2, x_2 x_3 \dots}$$

$\approx 5000 \text{ feature}$

$$\rightarrow \underline{x_1^2, x_2^2, x_3^2, \dots, x_{100}^2}$$

$$\rightarrow \underline{x_1 x_2 x_3, x_1^2 x_2, x_{10} x_{11} x_{12}, \dots}$$


$\frac{n^2}{2} + 10$

$O(n^3)$

170,000

# What is this?

You see this:

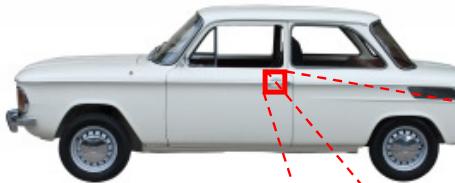

But the camera sees this:

194	210	201	212	199	213	215	195	178	158	182	209
180	189	190	221	209	205	191	167	147	115	129	163
114	126	140	188	176	165	152	140	170	106	78	88
87	103	115	154	143	142	149	153	173	101	57	57
102	112	106	131	122	138	152	147	128	84	58	66
94	95	79	104	105	124	129	113	107	87	69	67
68	71	69	98	89	92	98	95	89	88	76	67
41	56	68	99	63	45	60	82	58	76	75	65
20	43	69	75	56	41	51	73	55	70	63	44
50	50	57	69	75	75	73	74	53	68	59	37
72	59	53	66	84	92	84	74	57	72	63	42
67	61	58	65	75	78	76	73	59	75	69	50



Andrew Ng

# Computer Vision: Car detection



Cars





Not a car

Testing:





What is this?

Andrew Ng

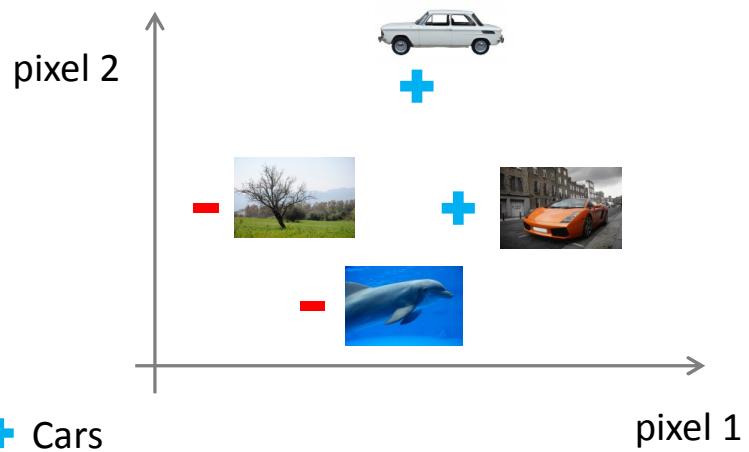
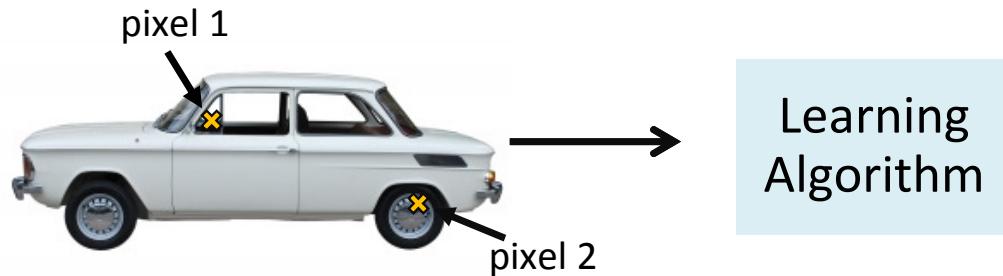


Andrew Ng

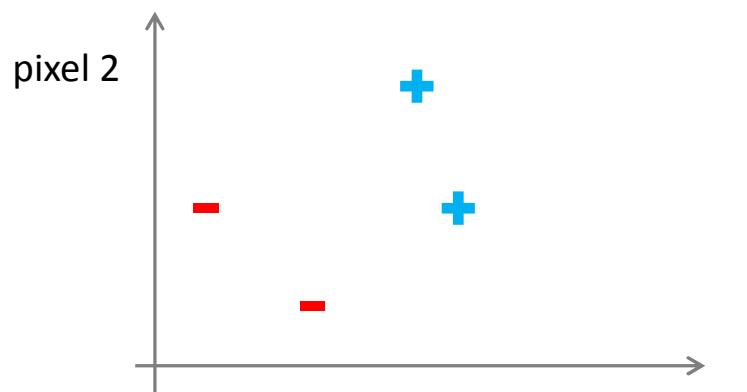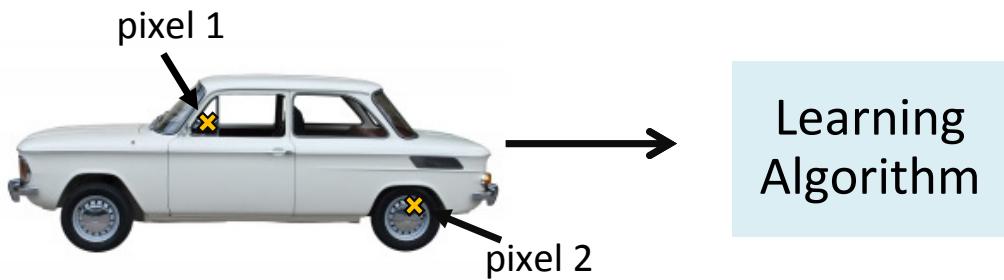

- ✚ Cars
- ⊖ “Non”-Cars

Andrew Ng

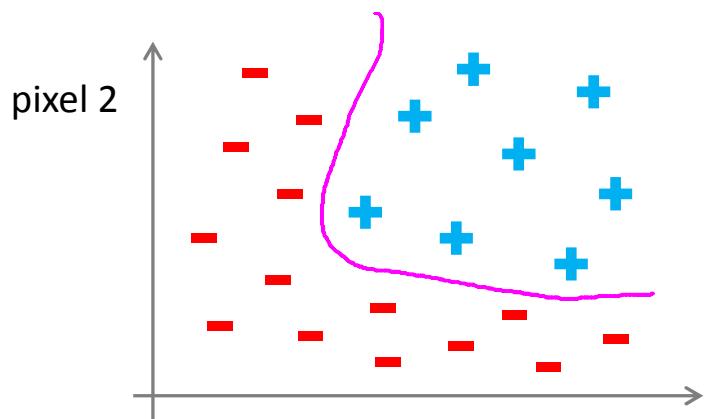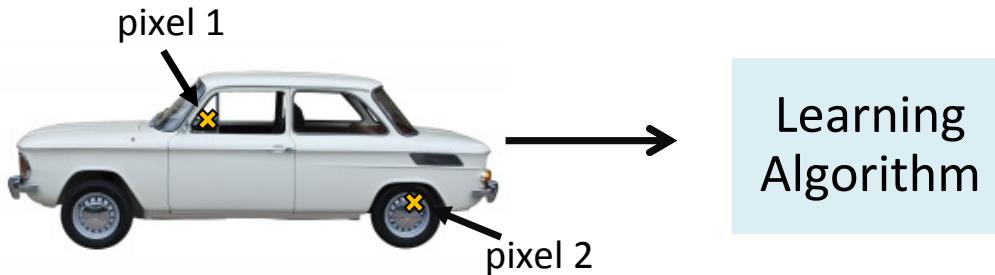

50 x 50 pixel images  $\rightarrow$  2500 pixels


$n = 2500$  (7500 if RGB)

$$x = \begin{bmatrix} \text{pixel 1 intensity} & 0-255 \\ \text{pixel 2 intensity} & \\ \vdots & \\ \text{pixel 2500 intensity} & \end{bmatrix}$$

Quadratic features ( $x_i \times x_j$ ):  $\approx 3$  million features

Andrew Ng



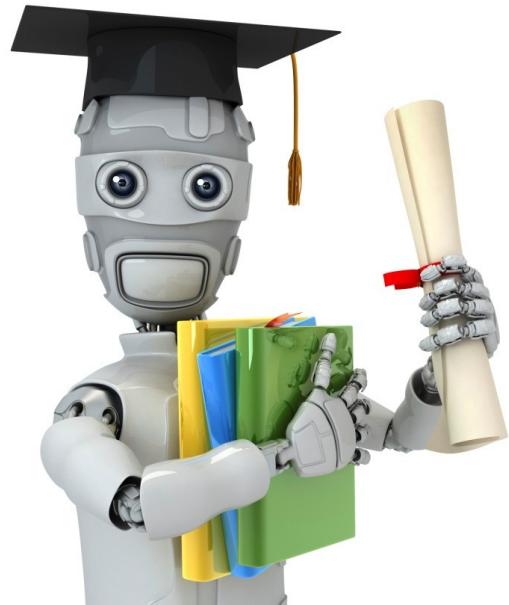

Machine Learning

## Neural Networks: Representation


---

## Neurons and the brain

## Neural Networks

- Origins: Algorithms that try to mimic the brain.
- Was very widely used in 80s and early 90s; popularity diminished in late 90s.
- Recent resurgence: State-of-the-art technique for many applications


## The “one learning algorithm” hypothesis

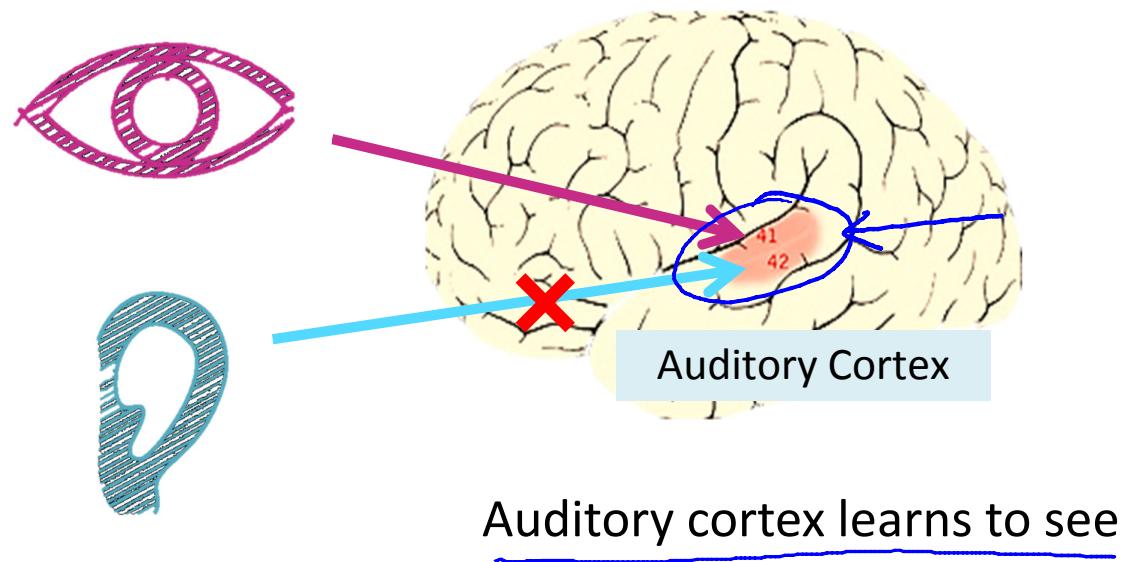

[Roe et al., 1992]

Andrew Ng


## The “one learning algorithm” hypothesis

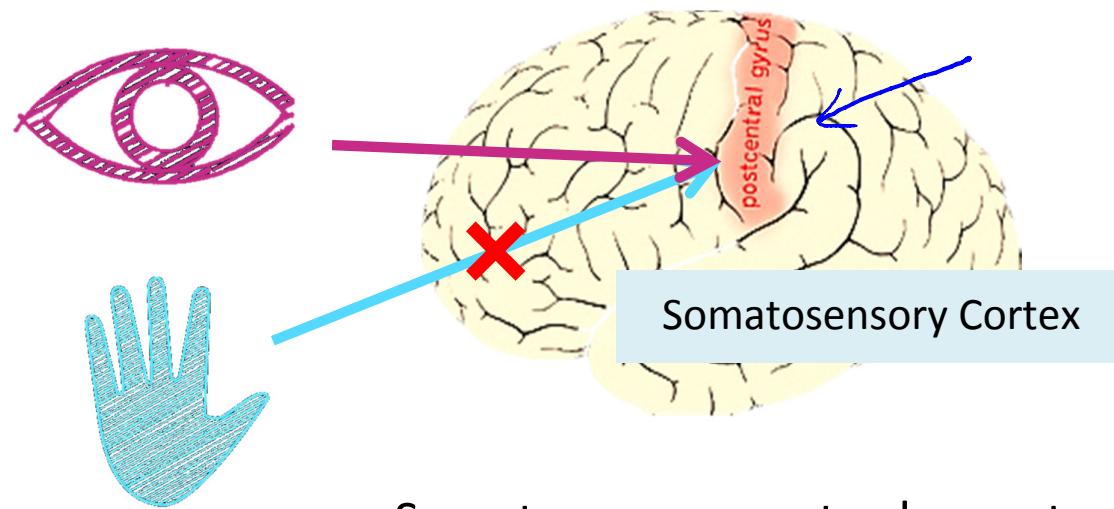

[Metin & Frost, 1989]

Andrew Ng


## Sensor representations in the brain

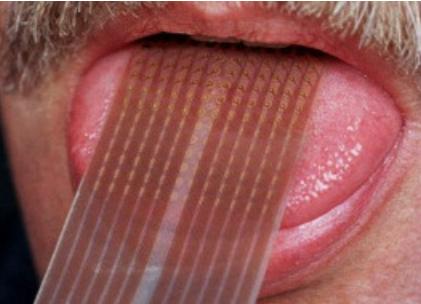


Seeing with your tongue



Human echolocation (sonar)

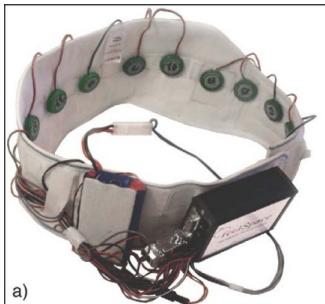

Haptic belt: Direction sense

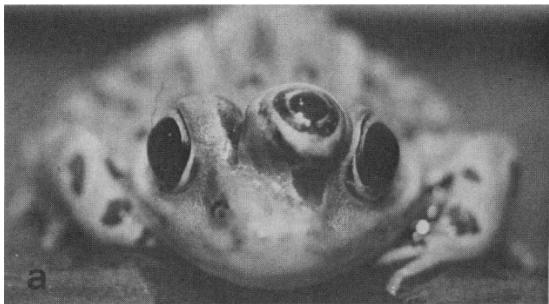


Implanting a 3<sup>rd</sup> eye

[BrainPort; Welsh & Blasch, 1997; Nagel et al., 2005; Constantine-Paton & Law, 2009]

Andrew Ng



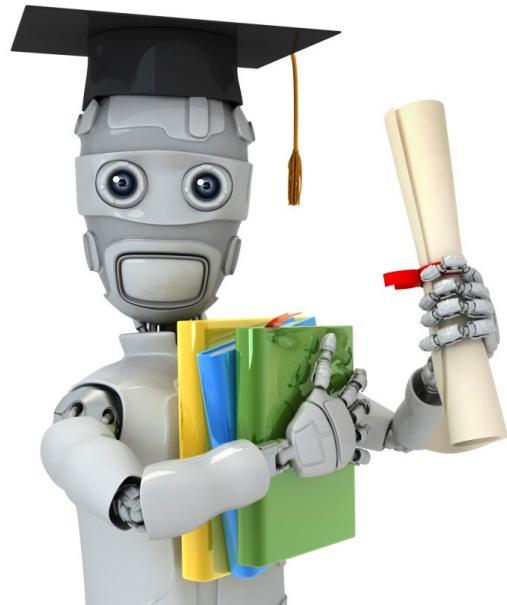


Machine Learning


## Neural Networks: Representation

### Model representation I

## Neuron in the brain

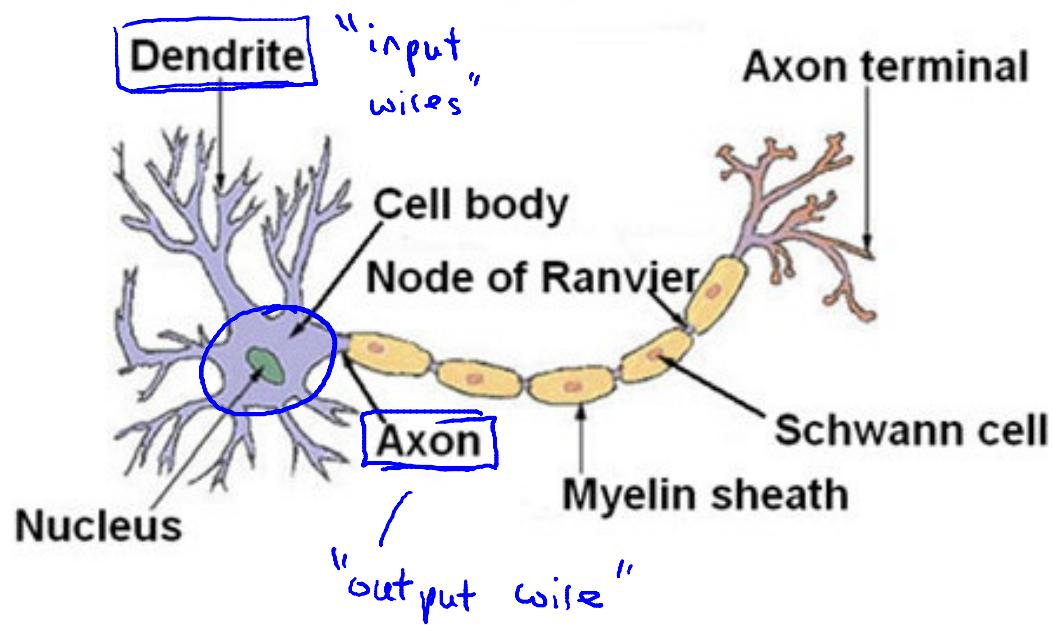


## Neurons in the brain

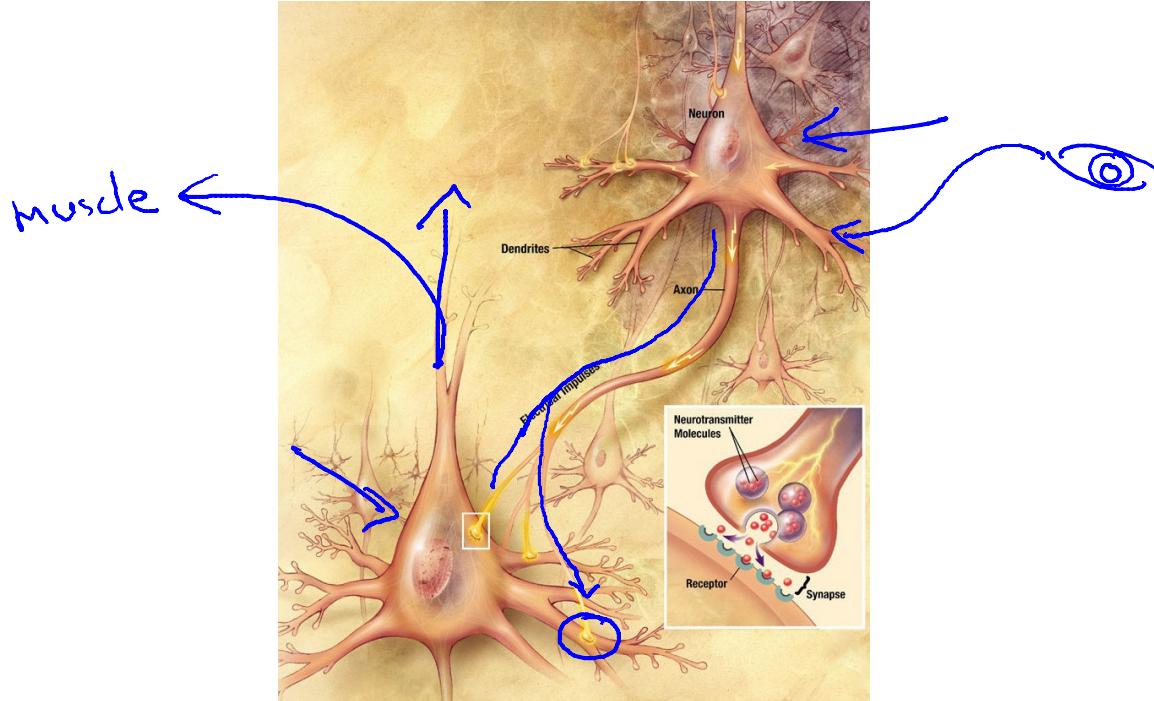

[Credit: US National Institutes of Health, National Institute on Aging]

Andrew Ng

## Neuron model: Logistic unit

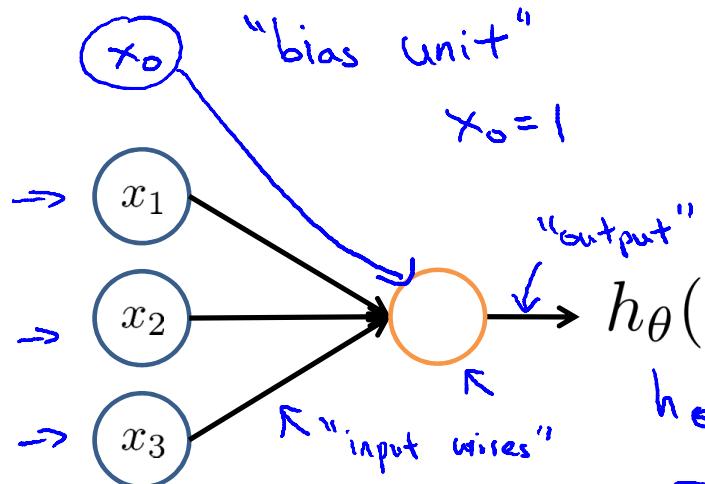


$$x = \begin{bmatrix} x_0 \\ x_1 \\ x_2 \\ x_3 \end{bmatrix} \quad \theta = \begin{bmatrix} \theta_0 \\ \theta_1 \\ \theta_2 \\ \theta_3 \end{bmatrix}$$

$\uparrow$   
"weights"  $\leftarrow$   
(parameters  $\leftarrow$ )

Sigmoid (logistic) activation function.


$$g(z) = \frac{1}{1 + e^{-z}}$$

## Neural Network

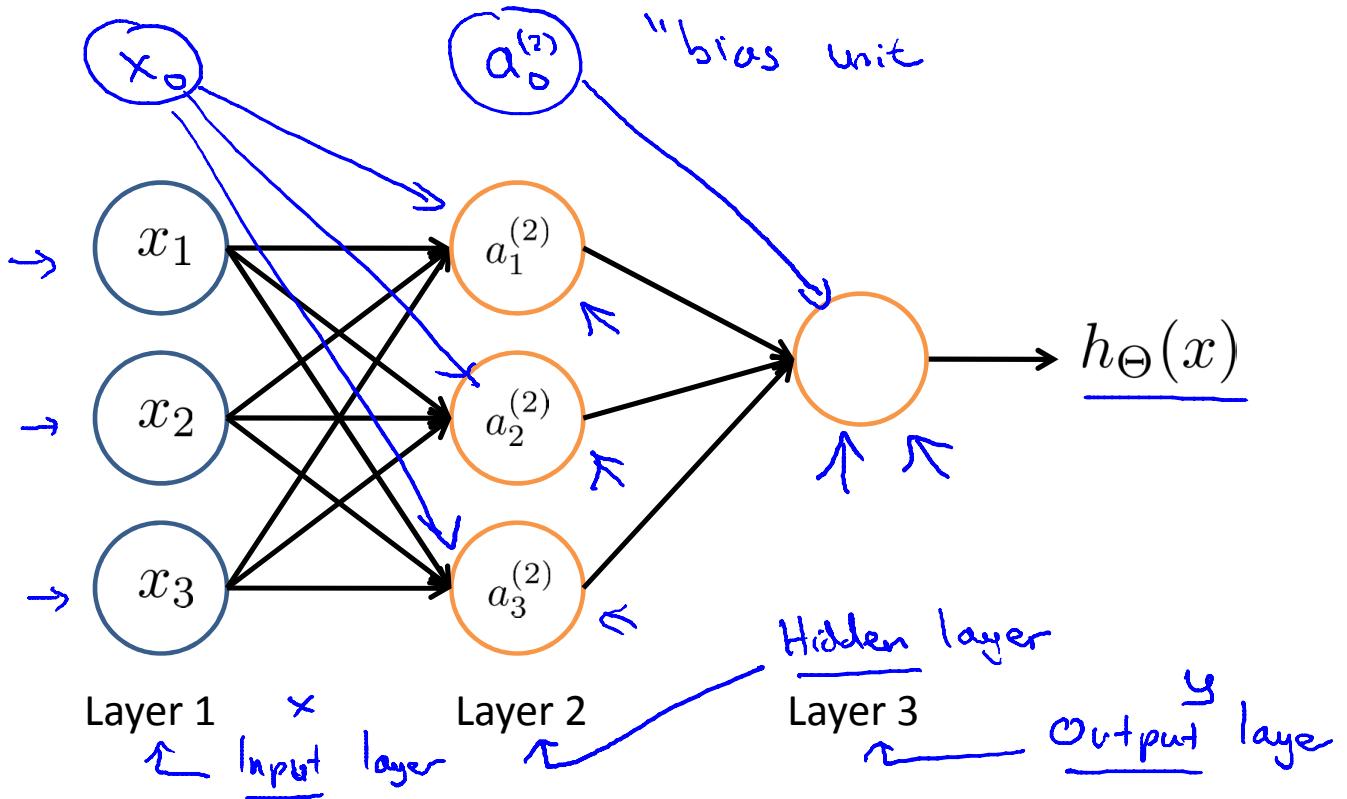

Andrew Ng

## Neural Network

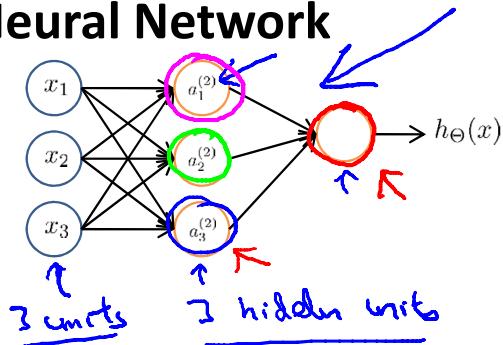

$\rightarrow a_i^{(j)}$  = “activation” of unit  $i$  in layer  $j$

$\rightarrow \Theta^{(j)}$  = matrix of weights controlling function mapping from layer  $j$  to

$$\Theta^{(j)} \in \mathbb{R}^{3 \times 4}$$

layer  $j + 1$

$$h_{\Theta}(x)$$

$$\rightarrow a_1^{(2)} = g(\Theta_{10}^{(1)} x_0 + \Theta_{11}^{(1)} x_1 + \Theta_{12}^{(1)} x_2 + \Theta_{13}^{(1)} x_3)$$

$$\rightarrow a_2^{(2)} = g(\Theta_{20}^{(1)} x_0 + \Theta_{21}^{(1)} x_1 + \Theta_{22}^{(1)} x_2 + \Theta_{23}^{(1)} x_3)$$


$$\rightarrow a_3^{(2)} = g(\Theta_{30}^{(1)} x_0 + \Theta_{31}^{(1)} x_1 + \Theta_{32}^{(1)} x_2 + \Theta_{33}^{(1)} x_3)$$

$$\rightarrow h_{\Theta}(x) = a_1^{(3)} = g(\Theta_{10}^{(2)} a_0^{(2)} + \Theta_{11}^{(2)} a_1^{(2)} + \Theta_{12}^{(2)} a_2^{(2)} + \Theta_{13}^{(2)} a_3^{(2)})$$

$\rightarrow$  If network has  $s_j$  units in layer  $j$ ,  $s_{j+1}$  units in layer  $j + 1$ , then  $\Theta^{(j)}$  will be of dimension  $s_{j+1} \times (s_j + 1)$ .

$$s_{j+1} \times (s_j + 1)$$




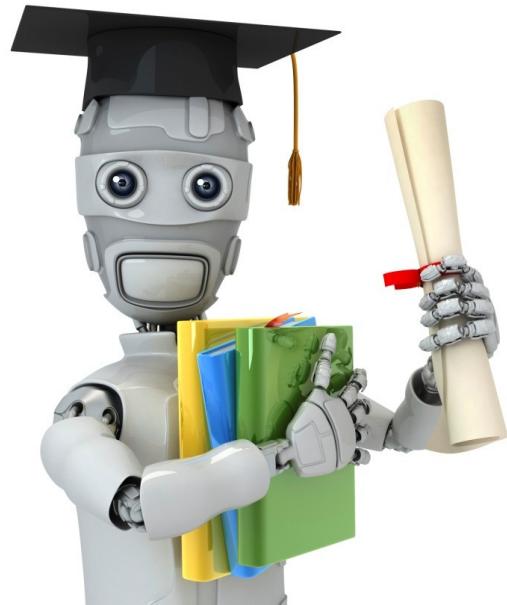

Machine Learning


# Neural Networks: Representation Model representation II

## Forward propagation: Vectorized implementation

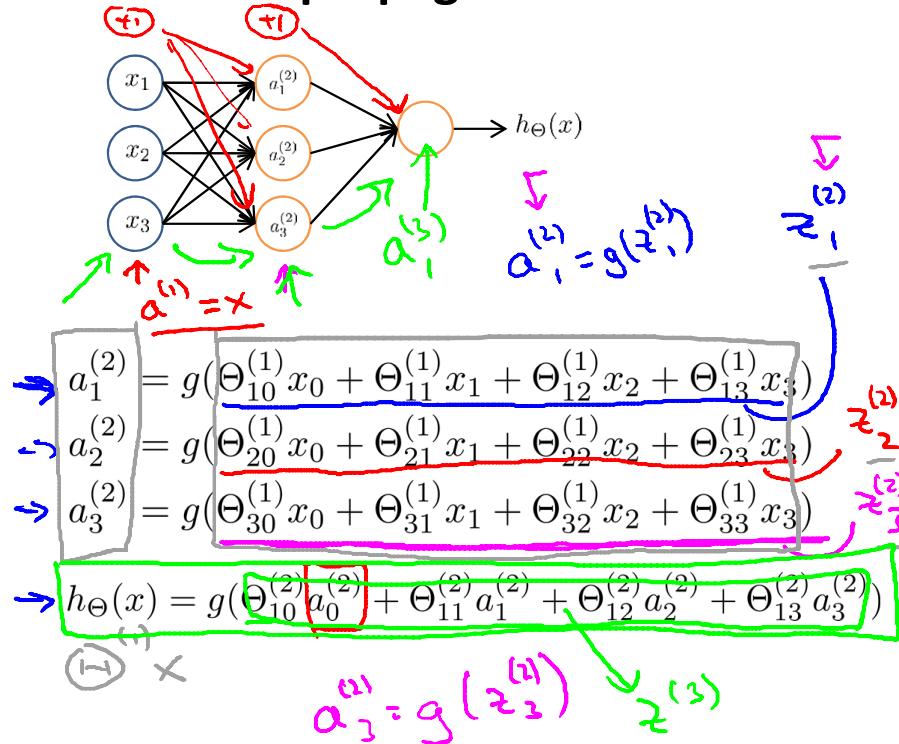


$$\boxed{\begin{aligned} z^{(2)} &= \Theta^{(1)} \cancel{x} a^{(1)} \\ a^{(2)} &= g(z^{(2)}) \\ \cancel{IR^4} &\quad \cancel{IR^3} \\ \text{Add } a_0^{(2)} &= 1. \rightarrow a^{(2)} \in IR^4 \\ z^{(3)} &= \Theta^{(2)}a^{(2)} \\ h_{\Theta}(x) &= a^{(3)} = g(z^{(3)}) \end{aligned}}$$

## Neural Network learning its own features

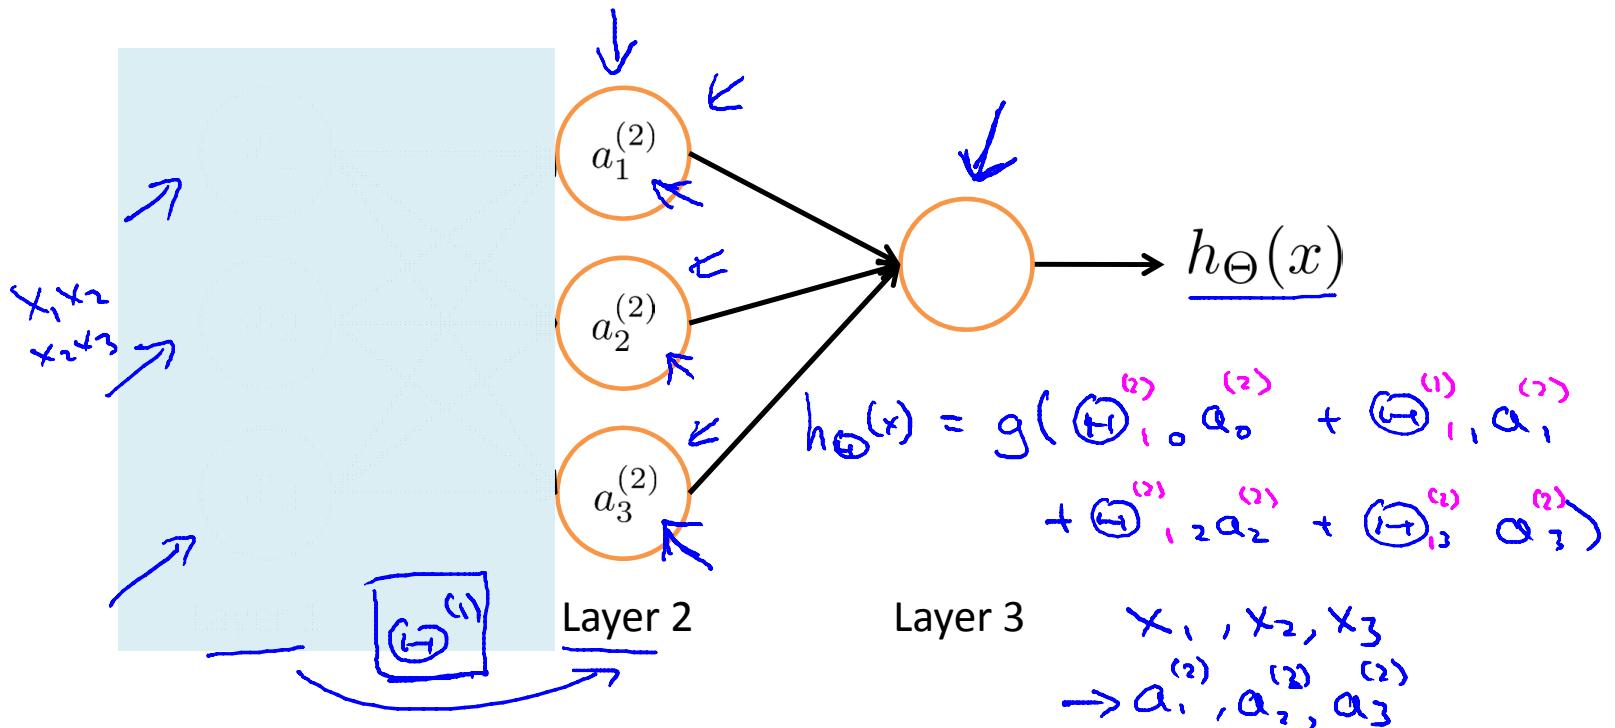


Andrew Ng

## Other network architectures

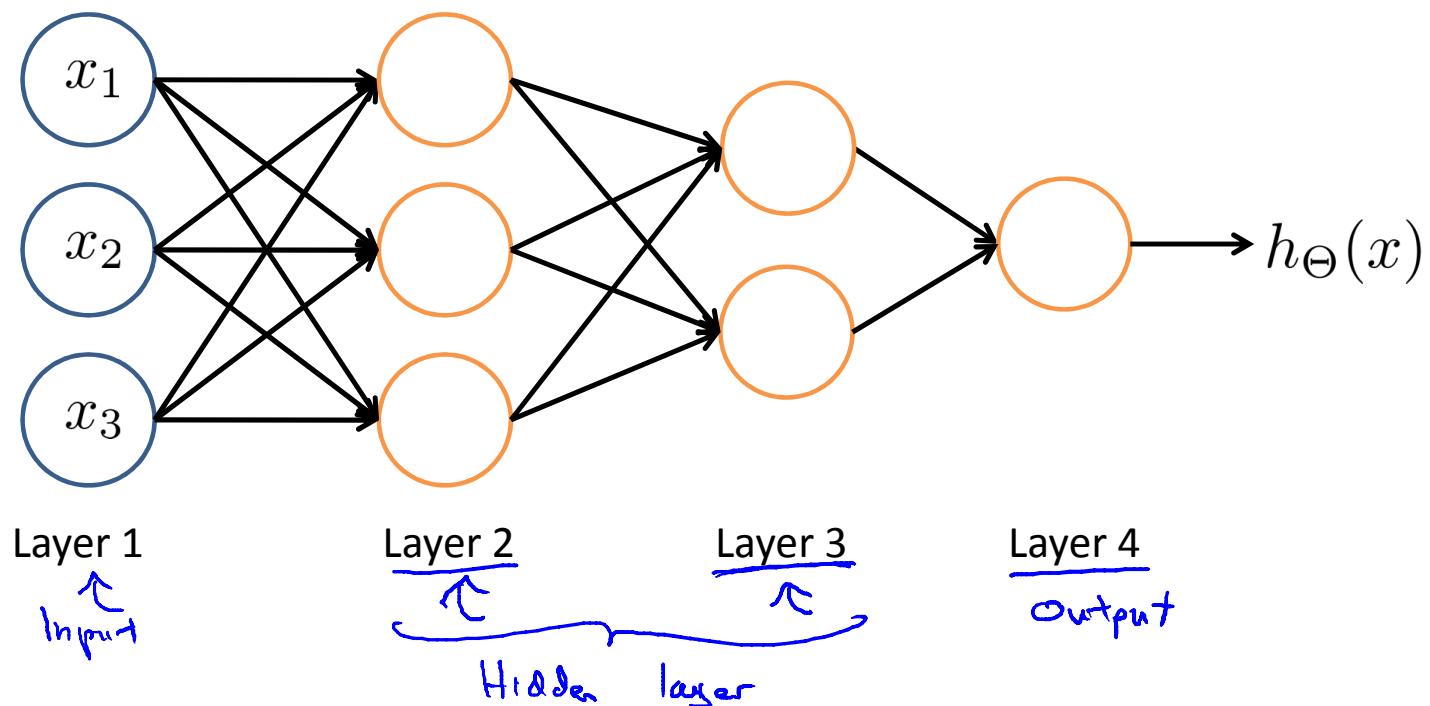

Andrew Ng



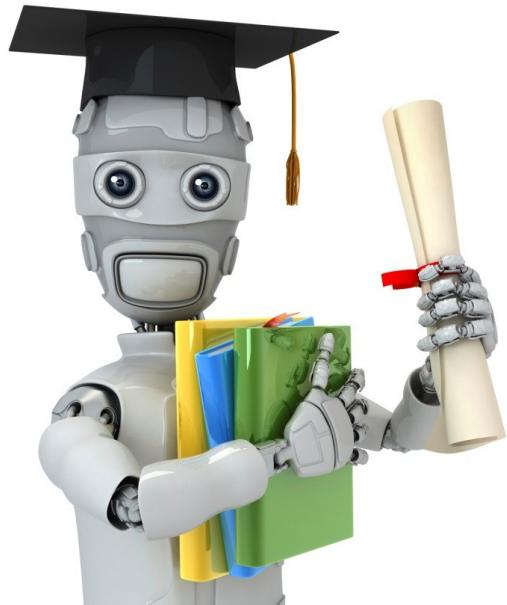

Machine Learning


# Neural Networks: Representation

---

## Examples and intuitions I


## Non-linear classification example: XOR/XNOR

→  $x_1, x_2$  are binary (0 or 1).

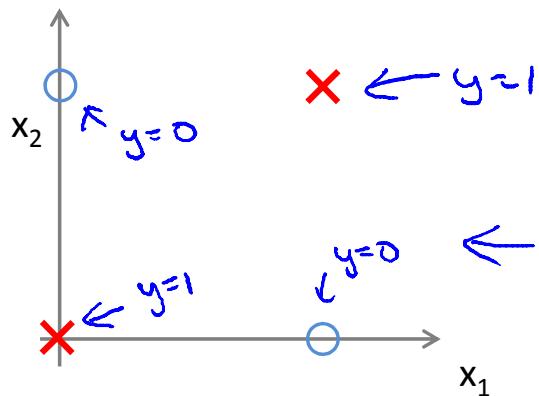

$$y = \underline{x_1 \text{ XOR } x_2}$$



→  $\underline{x_1 \text{ XNOR } x_2}$  ←  
→ NOT (x<sub>1</sub> XOR x<sub>2</sub>)

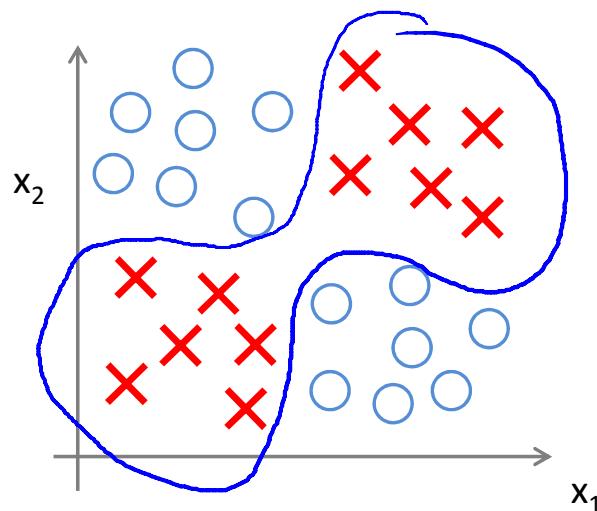

## Simple example: AND


$$\rightarrow x_1, x_2 \in \{0, 1\}$$

$$\rightarrow y = x_1 \text{ AND } x_2$$

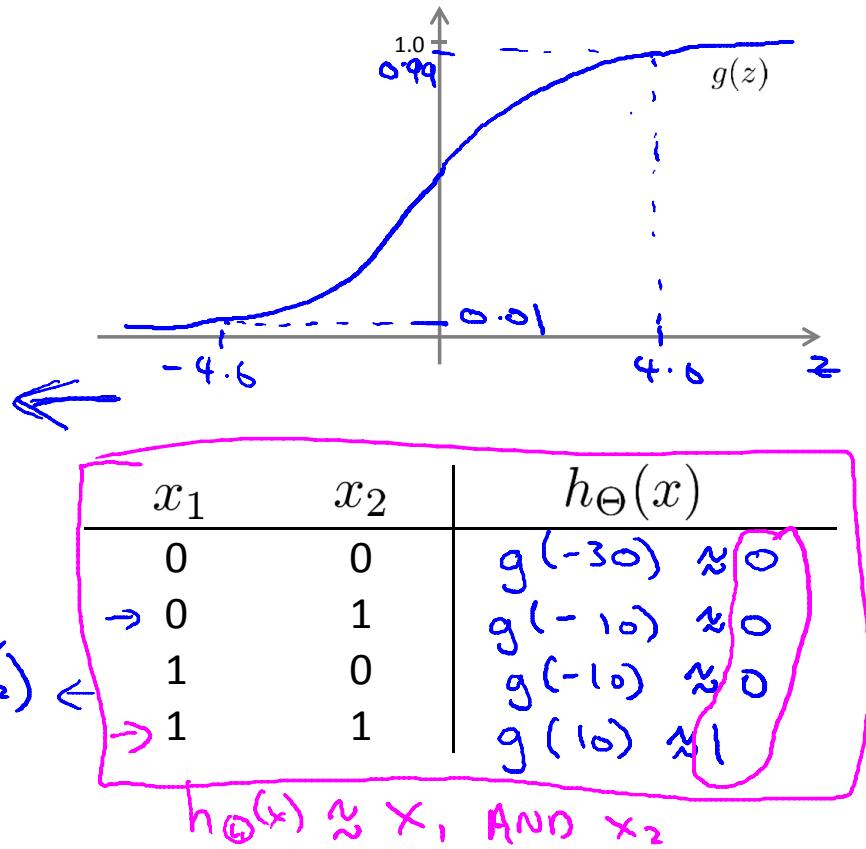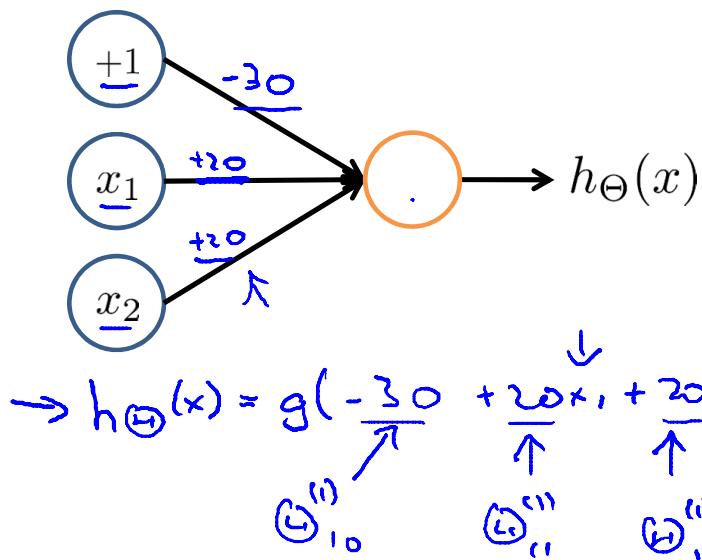


Andrew Ng

## Example: OR function

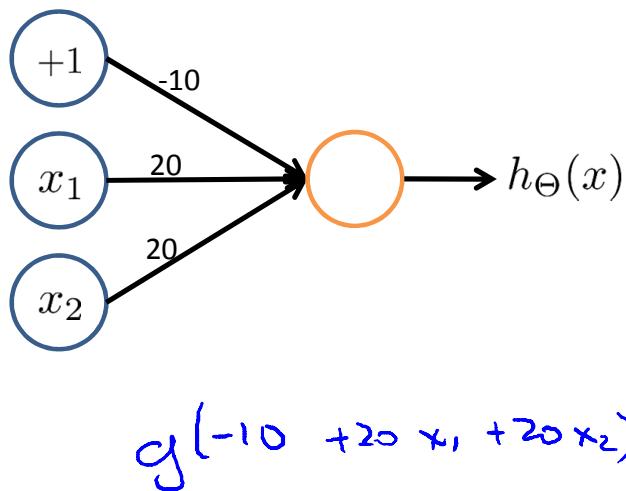

$x_1$	$x_2$	$h_{\Theta}(x)$
0	0	$g(-10) \approx 0$
0	1	$g(10) \approx 1$
1	0	$\approx 1$
1	1	$\approx 1$



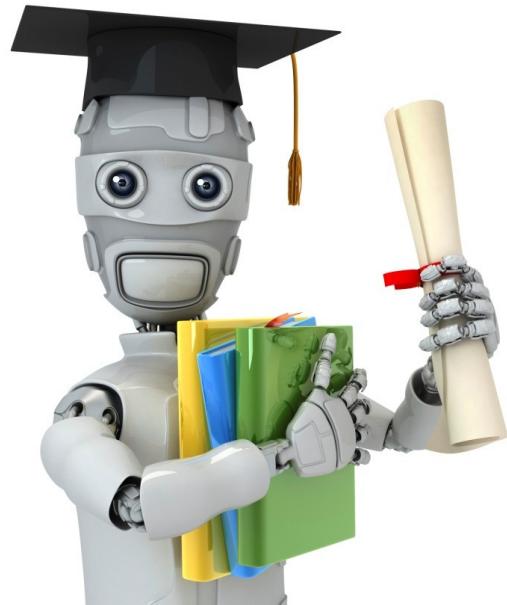

Machine Learning

# Neural Networks: Representation

---

## Examples and intuitions II


$\rightarrow x_1 \text{ AND } x_2$

$\rightarrow x_1 \text{ OR } x_2$

{0,1}.

**Negation:**

NOT  $x_1$

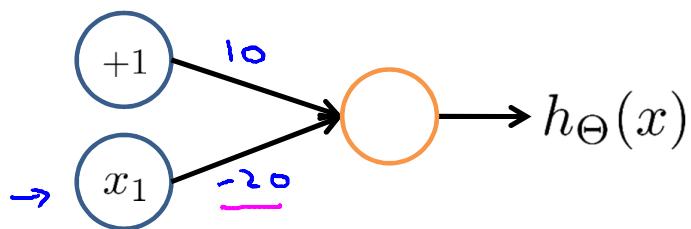

$x_1$	$h_\Theta(x)$
0	$g(10) \approx 1$
1	$g(-10) \approx 0$


$$h_\Theta(x) = g(10 - 20x_1)$$

$\rightarrow (\text{NOT } x_1) \text{ AND } (\text{NOT } x_2)$


$=1$  if and only if  
 $\rightarrow x_1 = x_2 = 0$

Andrew Ng


**Putting it together:**  $x_1 \text{ XNOR } x_2$

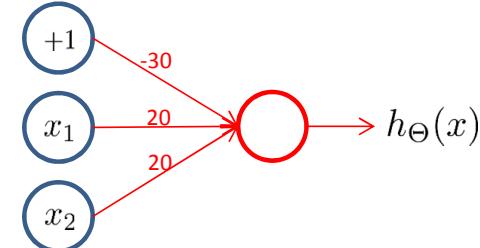


$\rightarrow x_1 \text{ AND } x_2$

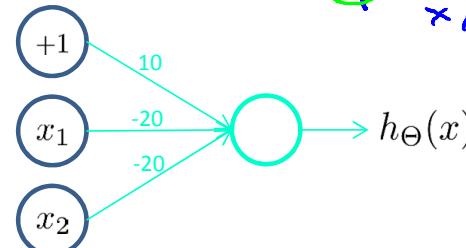

$\rightarrow (\text{NOT } x_1) \text{ AND } (\text{NOT } x_2)$

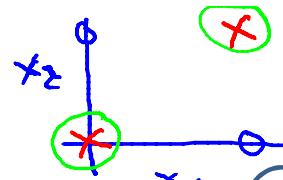


$\rightarrow x_1 \text{ OR } x_2$

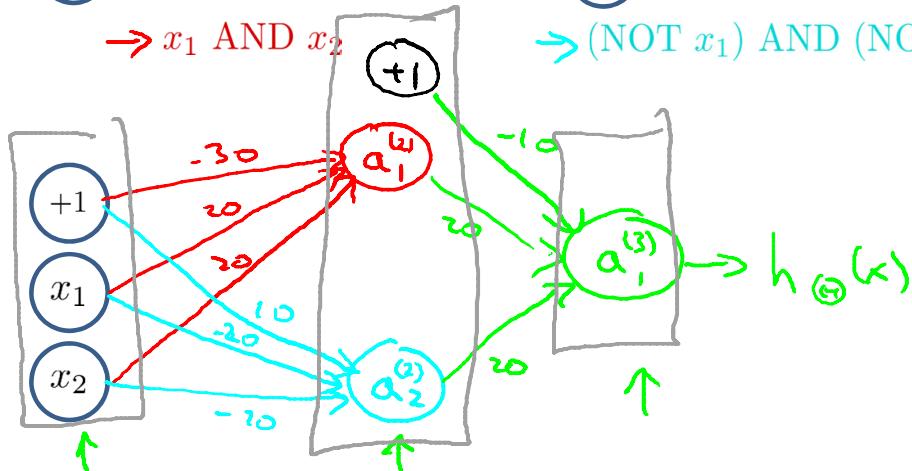

$x_1$	$x_2$	$a_1^{(2)}$	$a_2^{(2)}$	$h_{\Theta}(x)$
$\rightarrow 0$	$0$	0	1	1 ←
$0$	$1$	0	0	0
$1$	$0$	0	0	0
$\rightarrow 1$	$1$	1	0	1 ←


Andrew Ng

## Neural Network intuition

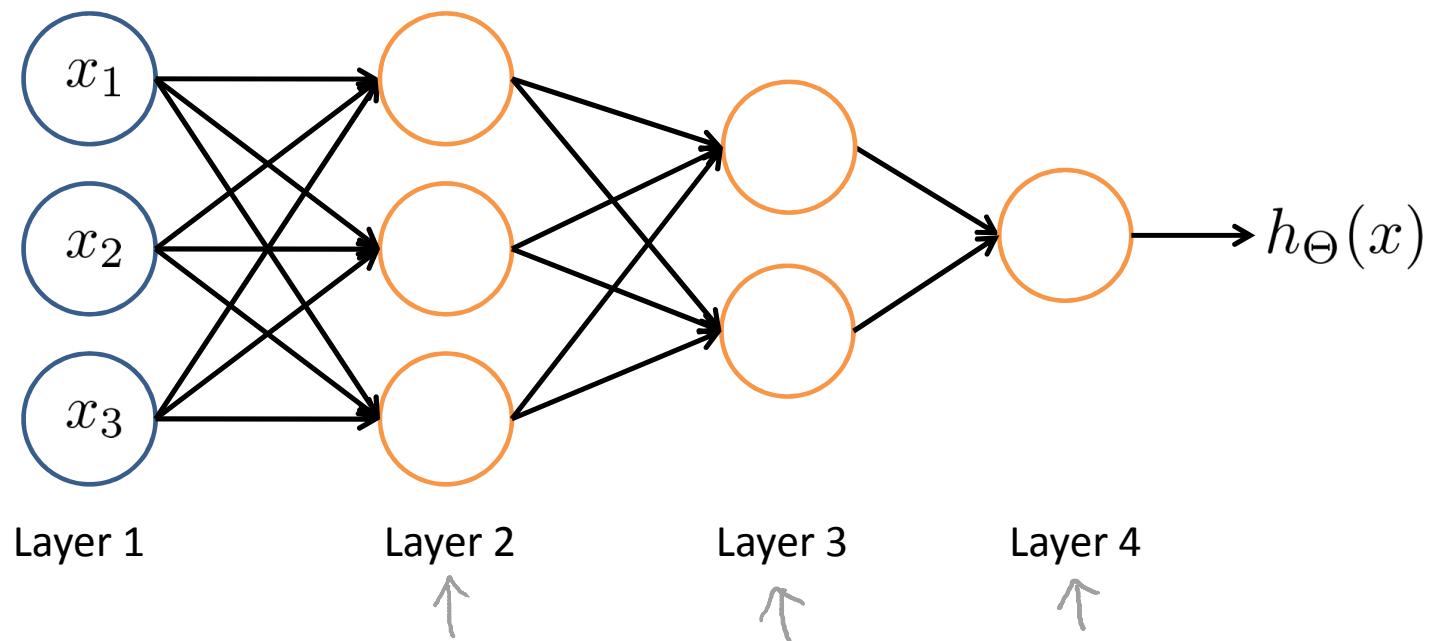

Andrew Ng


## Handwritten digit classification

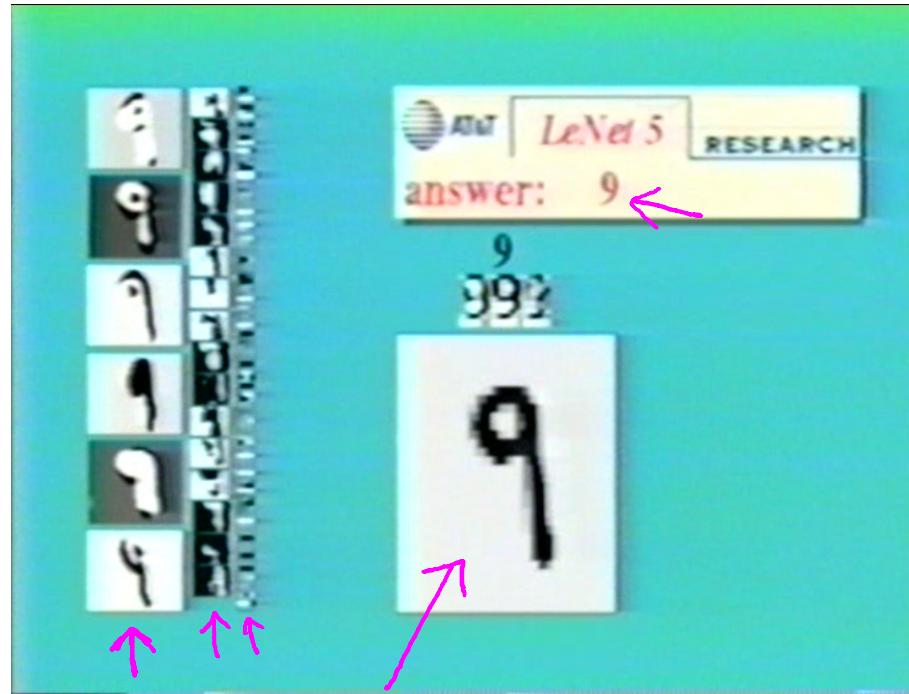

[Courtesy of Yann LeCun] ↵

Andrew Ng


## Handwritten digit classification

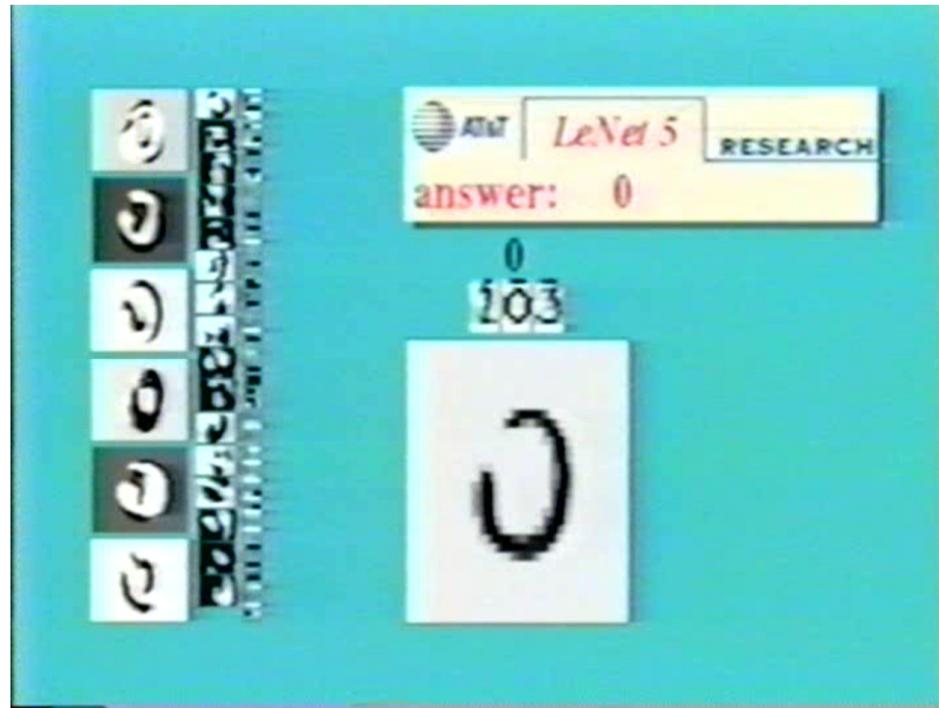

[Courtesy of Yann LeCun]

Andrew Ng

Andrew Ng

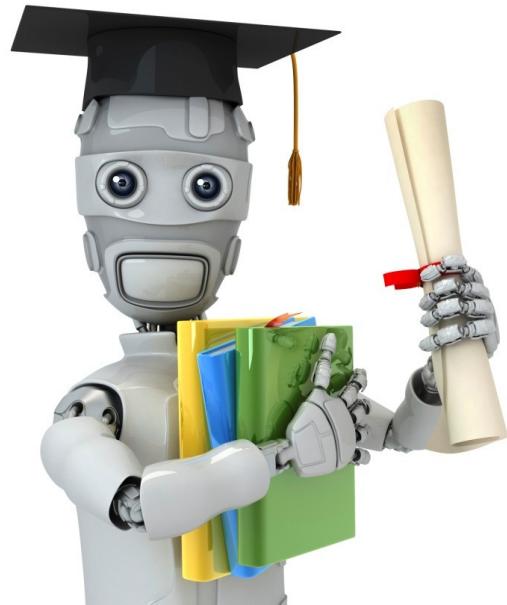

Machine Learning


# Neural Networks: Representation

---


## Multi-class classification

Andrew Ng

## Multiple output units: One-vs-all.

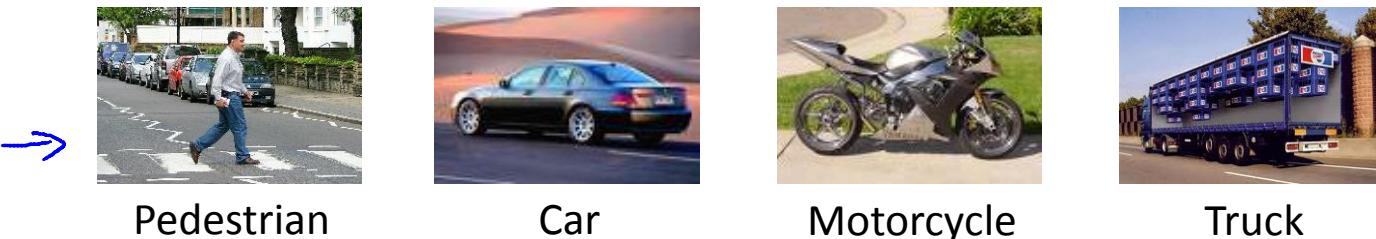


Pedestrian      Car      Motorcycle      Truck

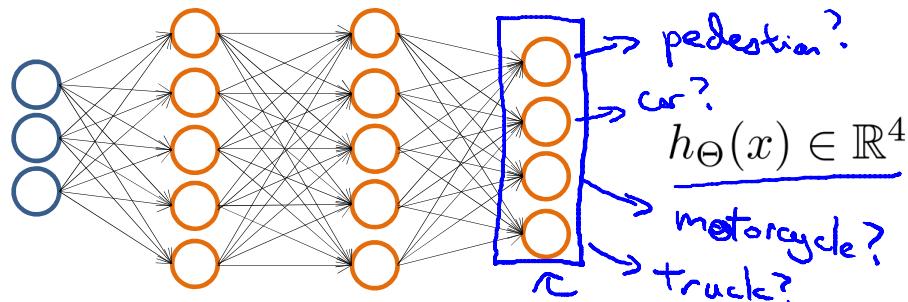

Want  $h_{\Theta}(x) \approx \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}$ ,  
when pedestrian       $h_{\Theta}(x) \approx \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}$ ,  
when car       $h_{\Theta}(x) \approx \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}$ , etc.  
when motorcycle

## Multiple output units: One-vs-all.

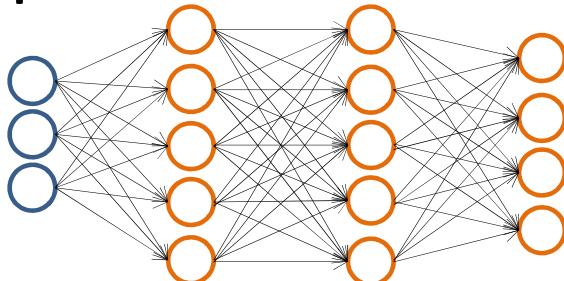

$$h_{\Theta}(x) \in \mathbb{R}^4$$

Want  $h_{\Theta}(x) \approx \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}$ ,  $h_{\Theta}(x) \approx \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}$ ,  $h_{\Theta}(x) \approx \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}$ , etc.  
 when pedestrian      when car      when motorcycle

Training set:  $(x^{(1)}, y^{(1)}), (x^{(2)}, y^{(2)}), \dots, (x^{(m)}, y^{(m)})$


$\Rightarrow y^{(i)}$  one of  $\begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}$ ,  $\begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}$ ,  $\begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}$ ,  $\begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$   
 pedestrian      car      motorcycle      truck

~~Previously  
 $y \in \{1, 2, 3, 4\}$~~   
 $(x^{(i)}, y^{(i)})$   
 $\uparrow$        $\uparrow$   
 $\underline{h_{\Theta}(x^{(i)}) \approx y^{(i)}} \in \mathbb{R}^4$

Andrew Ng

Andrew Ng

## 4.2 Learning

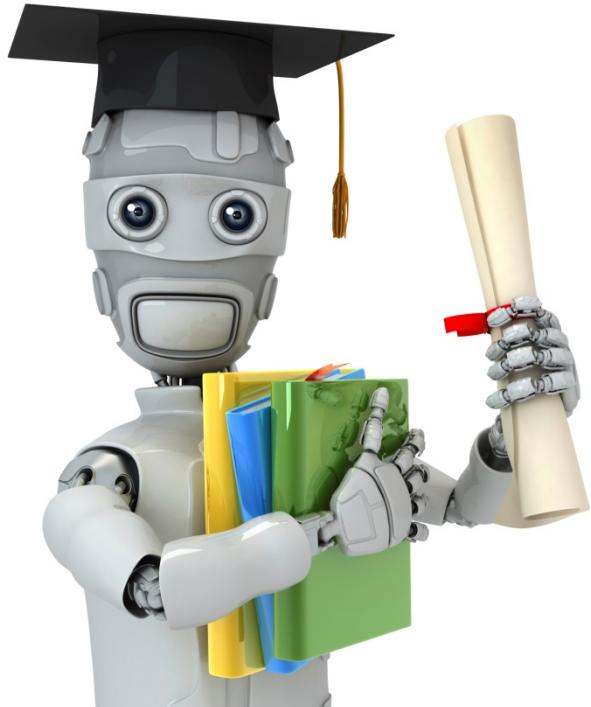


Machine Learning

# Neural Networks: Learning

## Cost function

## Neural Network (Classification)

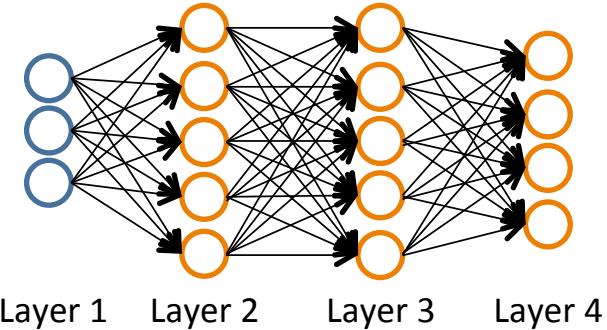

$$\{(x^{(1)}, y^{(1)}), (x^{(2)}, y^{(2)}), \dots, (x^{(m)}, y^{(m)})\}$$

$L$  = total no. of layers in network

$s_l$  = no. of units (not counting bias unit) in layer  $l$

### Binary classification

$$y = 0 \text{ or } 1$$

1 output unit

### Multi-class classification (K classes)

$$y \in \mathbb{R}^K \quad \text{E.g. } \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

pedestrian car motorcycle truck

K output units

## Cost function


Logistic regression:

$$J(\theta) = -\frac{1}{m} \left[ \sum_{i=1}^m y^{(i)} \log h_\theta(x^{(i)}) + (1 - y^{(i)}) \log(1 - h_\theta(x^{(i)})) \right] + \frac{\lambda}{2m} \sum_{j=1}^n \theta_j^2$$

Neural network:

$$h_\Theta(x) \in \mathbb{R}^K \quad (h_\Theta(x))_i = i^{th} \text{ output}$$

$$\begin{aligned} J(\Theta) &= -\frac{1}{m} \left[ \sum_{i=1}^m \sum_{k=1}^K y_k^{(i)} \log(h_\Theta(x^{(i)}))_k + (1 - y_k^{(i)}) \log(1 - (h_\Theta(x^{(i)}))_k) \right] \\ &\quad + \frac{\lambda}{2m} \sum_{l=1}^{L-1} \sum_{i=1}^{s_l} \sum_{j=1}^{s_{l+1}} (\Theta_{ji}^{(l)})^2 \end{aligned}$$

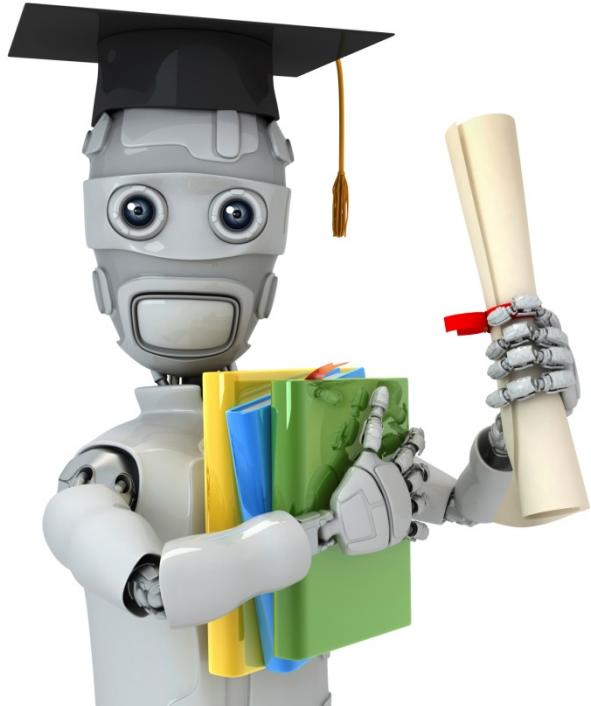

Machine Learning

# Neural Networks: Learning

## Backpropagation algorithm

## Gradient computation

$$\Rightarrow \underline{J(\Theta)} = -\frac{1}{m} \left[ \sum_{i=1}^m \sum_{k=1}^K y_k^{(i)} \log h_\theta(x^{(i)})_k + (1 - y_k^{(i)}) \log(1 - h_\theta(x^{(i)})_k) \right] \\ + \frac{\lambda}{2m} \sum_{l=1}^{L-1} \sum_{i=1}^{s_l} \sum_{j=1}^{s_{l+1}} (\Theta_j^{(l)})^2$$

$$\Rightarrow \min_{\Theta} J(\Theta)$$

Need code to compute:

$$\rightarrow - \underline{J(\Theta)}$$
$$\rightarrow - \underline{\frac{\partial}{\partial \Theta_{ij}^{(l)}} J(\Theta)} \leftarrow$$

$$\Theta_{ij}^{(l)} \in \mathbb{R}$$

## Gradient computation

Given one training example  $\underline{(x, y)}$ :

Forward propagation:

$$a^{(1)} = \underline{x}$$

$$\rightarrow z^{(2)} = \Theta^{(1)} a^{(1)}$$


$$\rightarrow a^{(2)} = g(z^{(2)}) \quad (\text{add } \underline{a_0^{(2)}})$$

$$\rightarrow z^{(3)} = \Theta^{(2)} a^{(2)}$$

$$\rightarrow a^{(3)} = g(z^{(3)}) \quad (\text{add } \underline{a_0^{(3)}})$$

$$\rightarrow z^{(4)} = \Theta^{(3)} a^{(3)}$$

$$\rightarrow a^{(4)} = \underline{h_{\Theta}(x) = g(z^{(4)})}$$

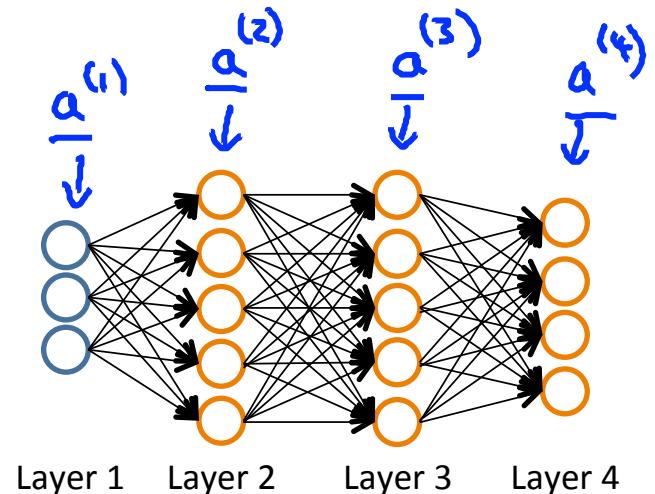


## Gradient computation: Backpropagation algorithm

Intuition:  $\underline{\delta_j^{(l)}}$  = “error” of node  $j$  in layer  $l$ .

For each output unit (layer  $L = 4$ )

$$\underline{\delta_j^{(4)}} = \underline{a_j^{(4)}} - \underline{y_j} \quad (\underline{h_{\Theta(x)}})_j \quad \underline{\delta^{(4)}} = \underline{a^{(4)}} - \underline{y}$$

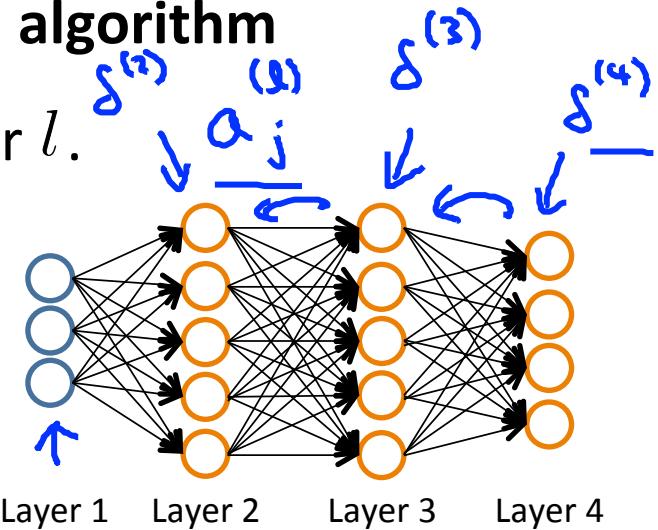

$$\rightarrow \delta^{(3)} = (\underline{\Theta^{(3)}})^T \underline{\delta^{(4)}} * g'(z^{(3)})$$

$$\rightarrow \delta^{(2)} = (\underline{\Theta^{(2)}})^T \underline{\delta^{(3)}} * g'(z^{(2)})$$

$$\frac{a^{(3)}}{a^{(2)}} * \frac{(1-a^{(3)})}{(1-a^{(2)})}$$

$$\frac{\partial}{\partial \Theta_{ij}} J(\Theta) = a_j^{(l)} \delta_i^{(l+1)} \quad (\text{ignoring } \lambda; \text{ if } \lambda = 0)$$

# Backpropagation algorithm

→ Training set  $\{(x^{(1)}, y^{(1)}), \dots, (x^{(m)}, y^{(m)})\}$

Set  $\underline{\Delta}_{ij}^{(l)} = 0$  (for all  $l, i, j$ ).

For  $i = 1$  to  $m$   $\leftarrow$   $(x^{(i)}, y^{(i)})$

Set  $a^{(1)} = x^{(i)}$

- Perform forward propagation to compute  $a^{(l)}$  for  $l = 2, 3, \dots, L$

→ Using  $y^{(i)}$ , compute  $\delta^{(L)} = a^{(L)} - y^{(i)}$

Compute  $\delta^{(L-1)}, \delta^{(L-2)}, \dots, \delta^{(2)}$


$$\Delta_{ii}^{(l)} := \Delta_{ij}^{(l)} + a_j^{(l)} \delta_i^{(l+1)}$$

$$\hat{\alpha}^{(k)} := \Delta^{(k)} + g^{(k+1)} (\alpha^{(k)})^T.$$

$$\rightarrow D_{ij}^{(l)} := \frac{1}{m} \Delta_{ij}^{(l)} + \lambda \Theta_{ij}^{(l)} \text{ if } j \neq 0$$

$$\rightarrow D_{ij}^{(l)} := \frac{1}{m} \triangle_{ij}^{(l)} \quad \text{if } j = 0$$

$$\frac{\partial}{\partial \Theta_{ij}^{(l)}} J(\Theta) = D_{ij}^{(l)}$$

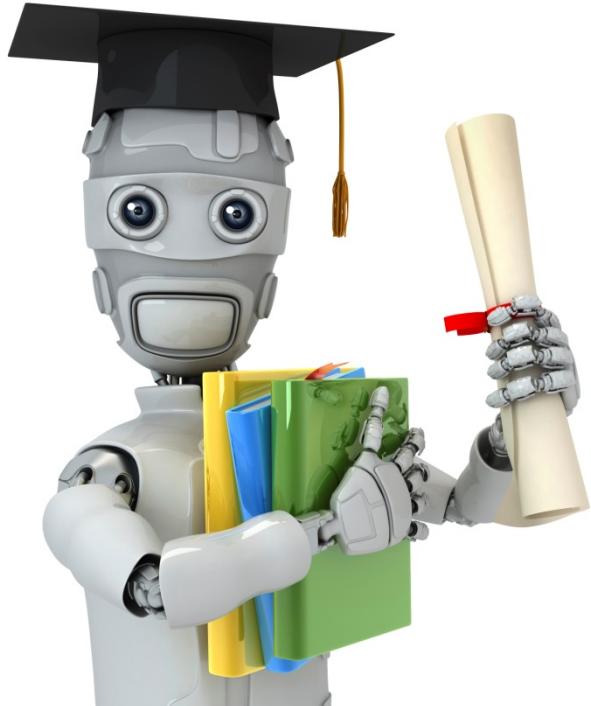


Machine Learning


# Neural Networks: Learning

## Backpropagation intuition

## Forward Propagation

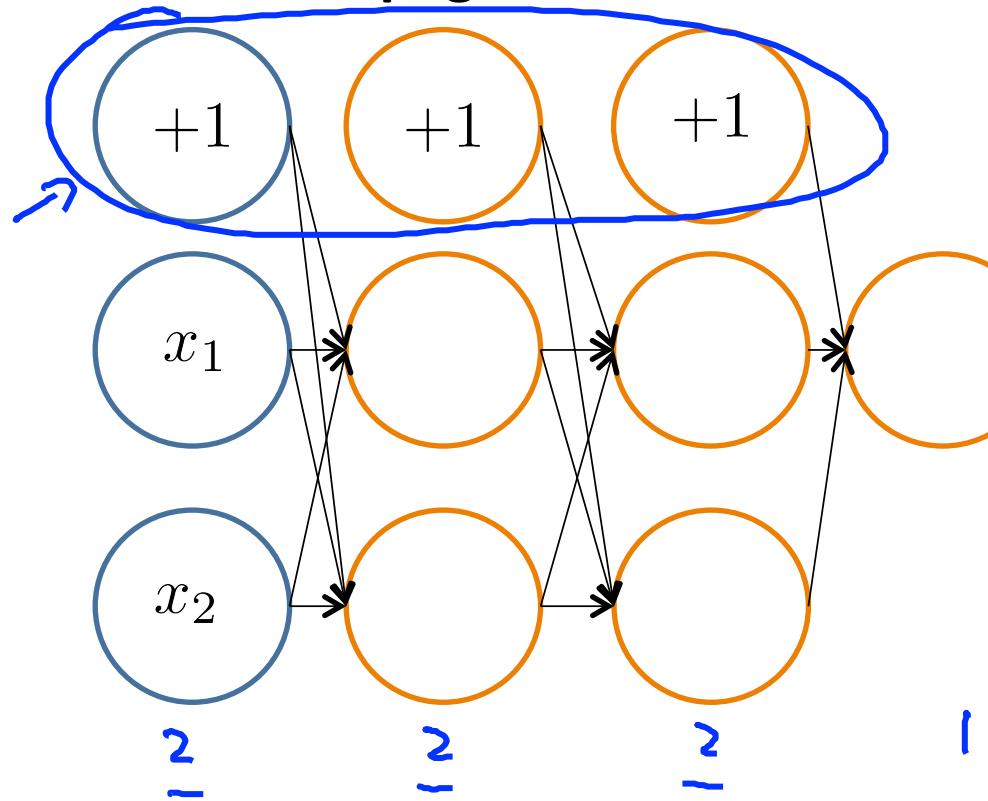

## Forward Propagation

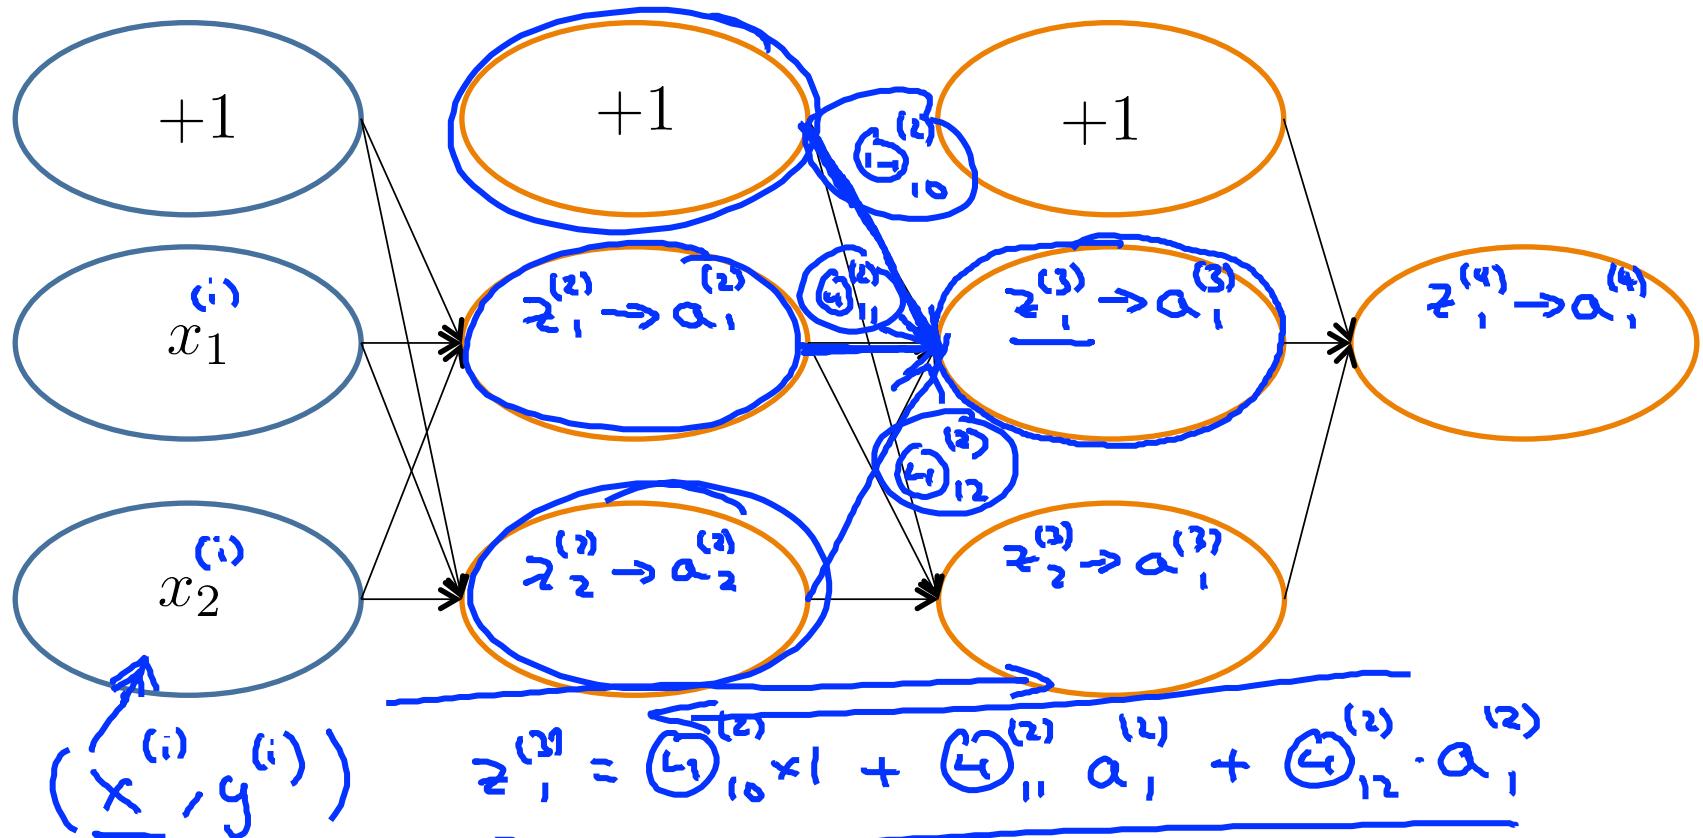

## What is backpropagation doing?

$$J(\Theta) = -\frac{1}{m} \left[ \sum_{i=1}^m y^{(i)} \log(h_\Theta(x^{(i)})) + (1 - y^{(i)}) \log(1 - h_\Theta(x^{(i)})) \right] \\ + \frac{\lambda}{2m} \sum_{l=1}^{L-1} \sum_{i=1}^{s_l} \sum_{j=1}^{s_{l+1}} (\Theta_{ji}^{(l)})^2$$

$(x^{(i)}, y^{(i)})$

Focusing on a single example  $x^{(i)}$ ,  $y^{(i)}$ , the case of 1 output unit, and ignoring regularization ( $\lambda = 0$ ),


$$\text{cost}(i) = y^{(i)} \log h_\Theta(x^{(i)}) + (1 - y^{(i)}) \log h_\Theta(x^{(i)})$$

$$(\text{Think of } \text{cost}(i) \approx (h_\Theta(x^{(i)}) - y^{(i)})^2)$$

I.e. how well is the network doing on example i?

$y^{(i)}$

## Forward Propagation

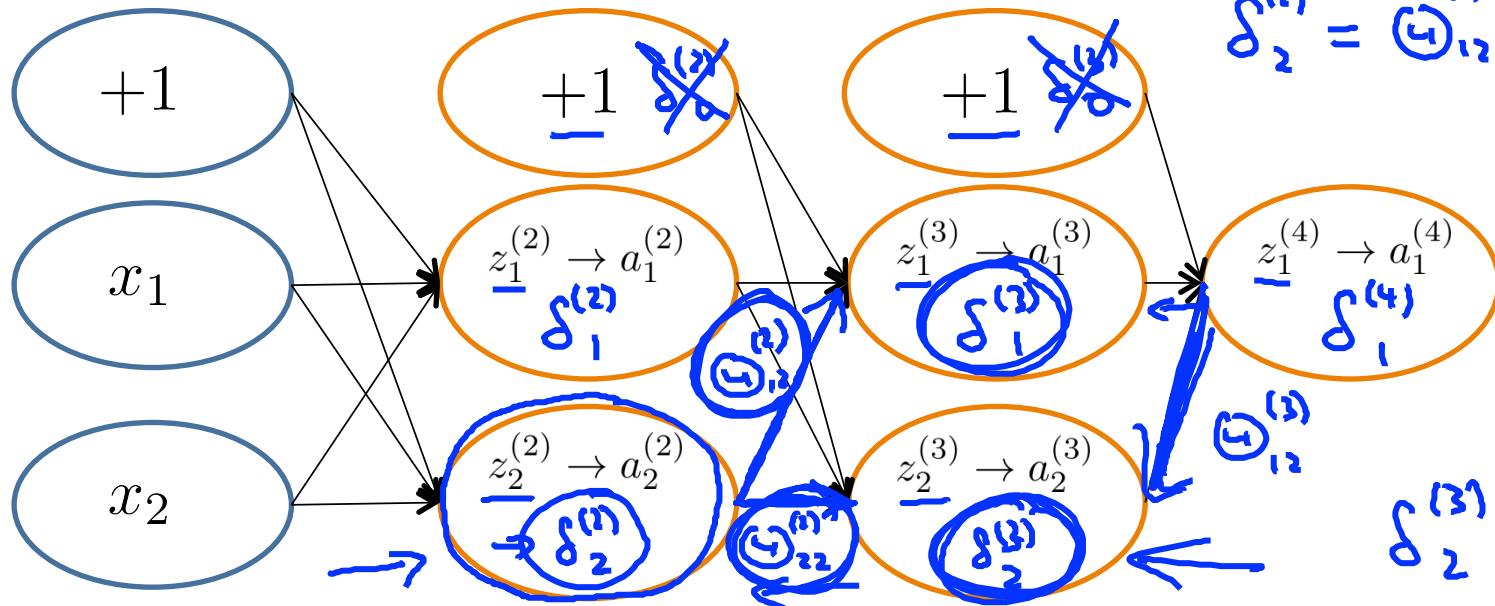


$\rightarrow \delta_j^{(l)}$  = “error” of cost for  $a_j^{(l)}$  (unit  $j$  in layer  $l$ ).

Formally,  $\delta_j^{(l)} = \frac{\partial \text{cost}(i)}{\partial z_j^{(l)}}$  (for  $j \geq 0$ ), where  
 $\text{cost}(i) = y^{(i)} \log h_\Theta(x^{(i)}) + (1 - y^{(i)}) \log \underline{h_\Theta(x^{(i)})}$

$$\delta_1^{(4)} = \underline{y^{(i)}} - \underline{a_1^{(4)}}$$

$$\delta_2^{(2)} = \underline{G_{1,2}^{(2)}} \delta_1^{(3)} + \underline{G_{2,2}^{(2)}} \delta_2^{(3)}$$

$$\delta_2^{(3)} = \underline{G_{1,2}^{(3)}} \cdot \delta_1^{(4)}$$

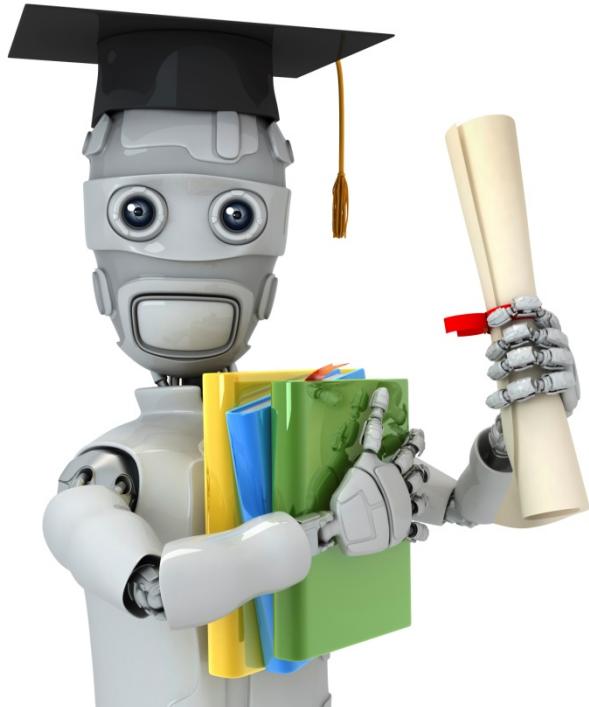

Machine Learning

# Neural Networks:

## Learning

### Implementation note: Unrolling parameters

## Advanced optimization

```
function [jVal, gradient] = costFunction(theta)
    ...
optTheta = fminunc(@costFunction, initialTheta, options)
```

Annotations: Handwritten arrows point from the gradient parameter to  $\mathbb{R}^{n+1}$ , from theta to  $\mathbb{R}^{n+1}$  labeled "(vectors)", and from the options parameter to the Neural Network section.

Neural Network (L=4):

→  $\Theta^{(1)}, \Theta^{(2)}, \Theta^{(3)}$  - matrices (Theta1, Theta2, Theta3)

→  $D^{(1)}, D^{(2)}, D^{(3)}$  - matrices (D1, D2, D3)

"Unroll" into vectors

## Example

$$s_1 = 10, s_2 = 10, s_3 = 1$$

→  $\Theta^{(1)} \in \mathbb{R}^{10 \times 11}$ ,  $\Theta^{(2)} \in \mathbb{R}^{10 \times 11}$ ,  $\Theta^{(3)} \in \mathbb{R}^{1 \times 11}$

→  $D^{(1)} \in \mathbb{R}^{10 \times 11}$ ,  $D^{(2)} \in \mathbb{R}^{10 \times 11}$ ,  $D^{(3)} \in \mathbb{R}^{1 \times 11}$


→ `thetaVec = [ Theta1(:); Theta2(:); Theta3(:) ];`

→ `DVec = [D1(:); D2(:); D3(:)];`

→ `Theta1 = reshape(thetaVec(1:110), 10, 11);`

→ `Theta2 = reshape(thetaVec(111:220), 10, 11);`

→ `Theta3 = reshape(thetaVec(221:231), 1, 11);`

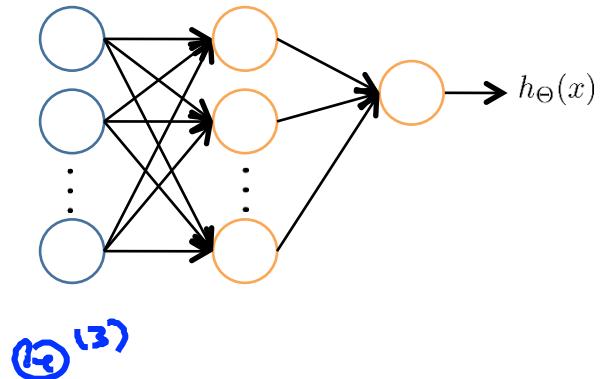


## Learning Algorithm

- Have initial parameters  $\Theta^{(1)}, \Theta^{(2)}, \Theta^{(3)}$ .
- Unroll to get `initialTheta` to pass to
- `fminunc(@costFunction, initialTheta, options)`

```
function [jval, gradientVec] = costFunction(thetaVec)
```

- From thetaVec, get  $\Theta^{(1)}, \Theta^{(2)}, \Theta^{(3)}$ . reshape
- Use forward prop/back prop to compute  $D^{(1)}, D^{(2)}, D^{(3)}$  and  $D_{\cdot}^{(1)}, D_{\cdot}^{(2)}, D_{\cdot}^{(3)}$
- Unroll                    to get gradientVec.

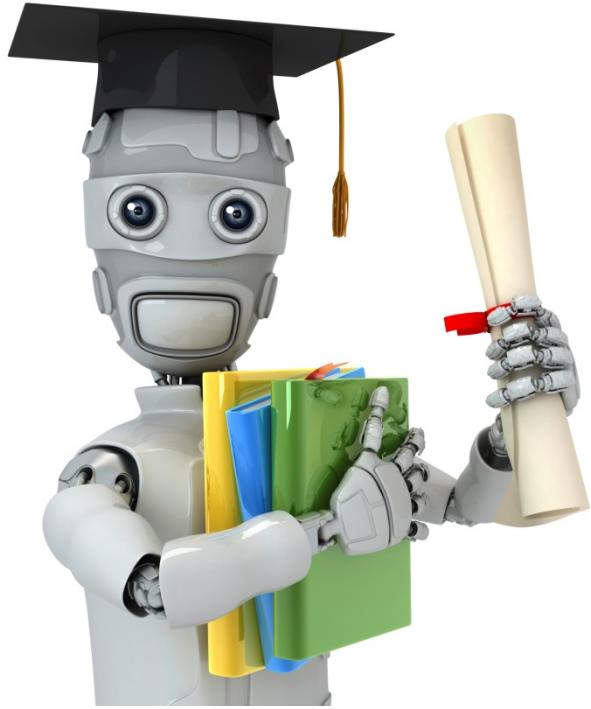


Machine Learning

# Neural Networks: Learning

## Gradient checking

## Numerical estimation of gradients

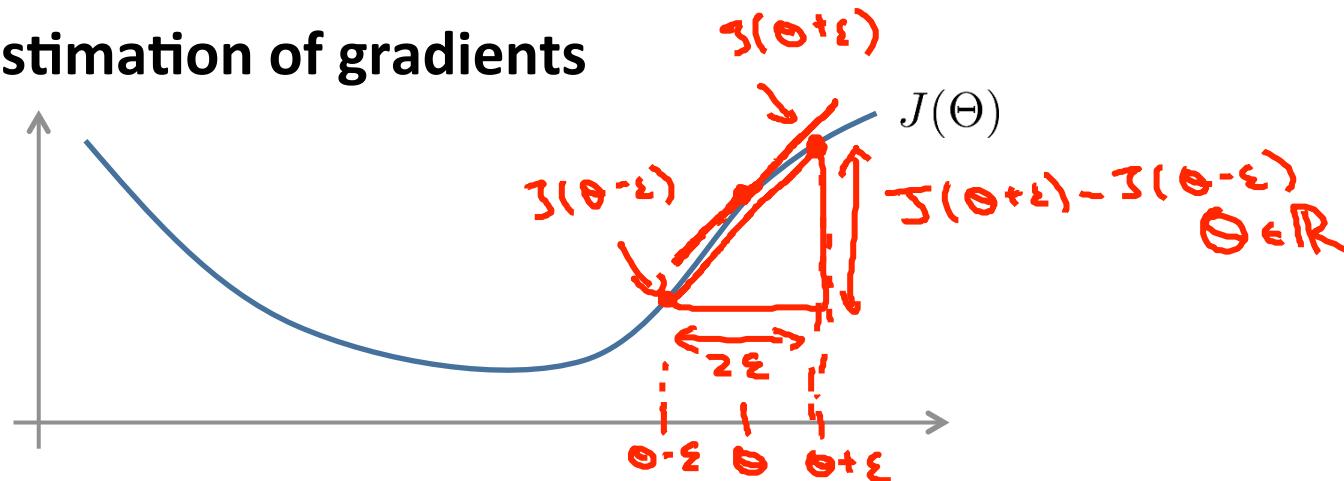

$$\frac{d}{d\theta} J(\theta) \approx$$

$$\frac{J(\theta + \epsilon) - J(\theta - \epsilon)}{2 \epsilon}$$

$$\epsilon = 10^{-4}$$

$$\cancel{\frac{J(\theta + \epsilon) - J(\theta)}{\epsilon}}$$

Implement: gradApprox =  $\frac{(J(\text{theta} + \text{EPSILON}) - J(\text{theta} - \text{EPSILON}))}{(2 * \text{EPSILON})}$

## Parameter vector $\theta$

→  $\theta \in \mathbb{R}^n$  (E.g.  $\theta$  is “unrolled” version of  $\underline{\Theta^{(1)}}, \underline{\Theta^{(2)}}, \underline{\Theta^{(3)}}$ )

→  $\theta = [\theta_1, \theta_2, \theta_3, \dots, \theta_n]$

→  $\frac{\partial}{\partial \theta_1} J(\theta) \approx \frac{J(\theta_1 + \epsilon, \theta_2, \theta_3, \dots, \theta_n) - J(\theta_1 - \epsilon, \theta_2, \theta_3, \dots, \theta_n)}{2\epsilon}$

→  $\frac{\partial}{\partial \theta_2} J(\theta) \approx \frac{J(\theta_1, \theta_2 + \epsilon, \theta_3, \dots, \theta_n) - J(\theta_1, \theta_2 - \epsilon, \theta_3, \dots, \theta_n)}{2\epsilon}$

⋮

⋮

→  $\frac{\partial}{\partial \theta_n} J(\theta) \approx \frac{J(\theta_1, \theta_2, \theta_3, \dots, \theta_n + \epsilon) - J(\theta_1, \theta_2, \theta_3, \dots, \theta_n - \epsilon)}{2\epsilon}$

```

for i = 1:n,
    thetaPlus = theta;
    thetaPlus(i) = thetaPlus(i) + EPSILON;
    thetaMinus = theta;
    thetaMinus(i) = thetaMinus(i) - EPSILON;
    gradApprox(i) = (J(thetaPlus) - J(thetaMinus))
                    / (2*EPSILON);
end;

```

$\frac{\partial}{\partial \theta_i} J(\theta)$ .

$$\begin{bmatrix} \theta_1 \\ \theta_2 \\ \vdots \\ \theta_i + \epsilon \\ \vdots \\ \theta_n \end{bmatrix} \rightarrow \begin{bmatrix} \theta_1 \\ \theta_2 \\ \vdots \\ \theta_i - \epsilon \\ \vdots \\ \theta_n \end{bmatrix}$$

Check that gradApprox  $\approx$  DVec


From back prop.

## Implementation Note:

- - Implement backprop to compute DVec (unrolled  $D^{(1)}, D^{(2)}, D^{(3)}$ ). 
- - Implement numerical gradient check to compute gradApprox. 
- - Make sure they give similar values.
- - Turn off gradient checking. Using backprop code for learning.

## Important:

- - Be sure to disable your gradient checking code before training your classifier. If you run numerical gradient computation on every iteration of gradient descent (or in the inner loop of `costFunction(...)`) your code will be very slow.
- 

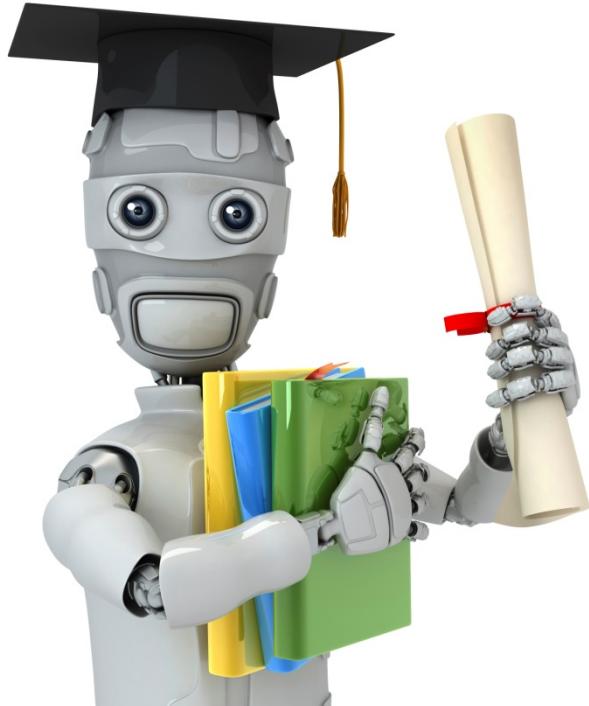

Machine Learning

# Neural Networks: Learning

## Random initialization

## Initial value of $\Theta$


For gradient descent and advanced optimization method, need initial value for  $\Theta$ .

```
optTheta = fminunc(@costFunction,  
                    initialTheta, options)
```

Consider gradient descent

Set initialTheta = zeros(n,1) ?

## Zero initialization

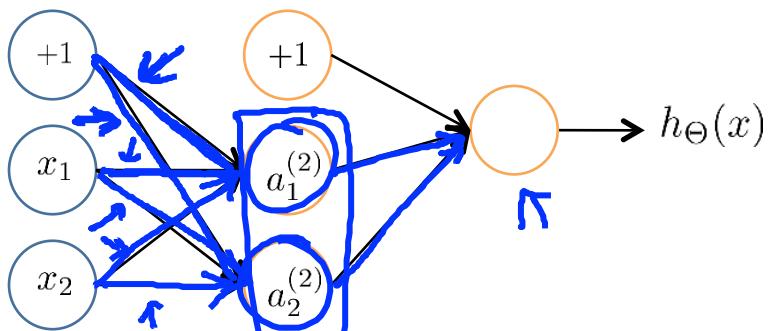

$$\Rightarrow \Theta_{ij}^{(l)} = 0 \text{ for all } i, j, l.$$

Also  $\delta_i^{(l)} = \delta_j^{(l)}$ .

$$\frac{\partial}{\partial \Theta_{01}^{(l)}} J(\Theta) = \frac{\partial}{\partial \Theta_{02}^{(l)}} J(\Theta)$$


$$\underline{\Theta_{01}^{(l)}} = \underline{\Theta_{02}^{(l)}}$$

After each update, parameters corresponding to inputs going into each of two hidden units are identical.

$$\underline{\Theta_{01}^{(l)}} = \underline{\Theta_{02}^{(l)}}$$

## Random initialization: Symmetry breaking

- Initialize each  $\Theta_{ij}^{(l)}$  to a random value in  $[-\epsilon, \epsilon]$   
(i.e.  $-\epsilon \leq \Theta_{ij}^{(l)} \leq \epsilon$ )
- E.g.
- $\Theta_{\text{eta1}} = \boxed{\text{rand}(10, 11) * (2 * \text{INIT\_EPSILON})}$       Random  $10 \times 11$  matrix (betw. 0 and 1)  
                 $- \underline{\text{INIT\_EPSILON}}$ ;       $[-\epsilon, \epsilon]$
- $\Theta_{\text{eta2}} = \boxed{\text{rand}(1, 11) * (2 * \text{INIT\_EPSILON})}$   
                 $- \underline{\text{INIT\_EPSILON}}$ ;

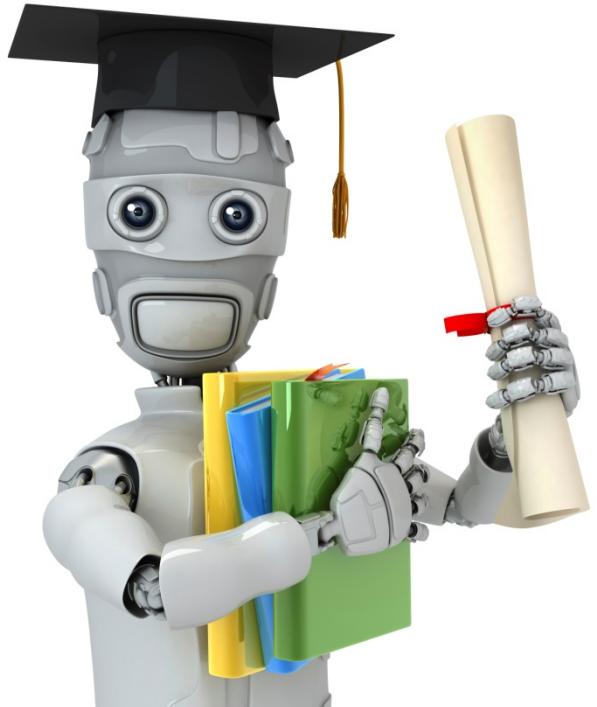


Machine Learning

Neural Networks:  
Learning

Putting it  
together

## Training a neural network

Pick a network architecture (connectivity pattern between neurons)

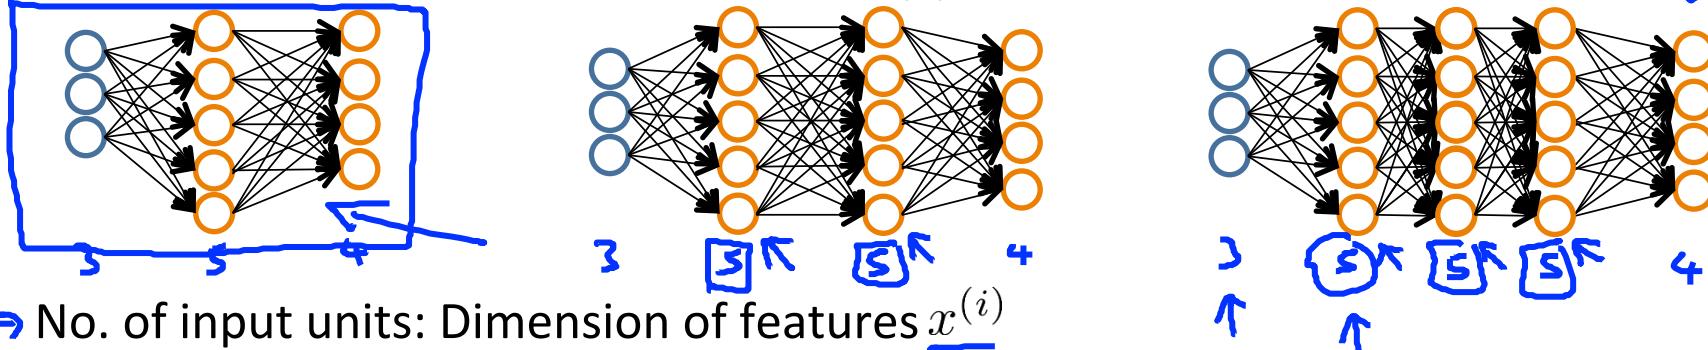

→ No. of input units: Dimension of features  $x^{(i)}$

→ No. output units: Number of classes

Reasonable default: 1 hidden layer, or if >1 hidden layer, have same no. of hidden units in every layer (usually the more the better)

$$y \in \{1, 2, 3, \dots, 103\}$$


~~$y \in \{1, 2, 3, \dots, 103\}$~~

$$y = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \vdots \\ 0 \end{bmatrix} \text{ or } \begin{bmatrix} 0 \\ 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix}$$

$\left[ \begin{array}{c} 0 \\ 0 \\ \vdots \\ 1 \\ 0 \end{array} \right]$

## Training a neural network

- 1. Randomly initialize weights
- 2. Implement forward propagation to get  $h_{\Theta}(x^{(i)})$  for any  $x^{(i)}$
- 3. Implement code to compute cost function  $J(\Theta)$
- 4. Implement backprop to compute partial derivatives  $\frac{\partial}{\partial \Theta_{jk}^{(l)}} J(\Theta)$
- for  $i = 1:m$  {  $(x^{(1)}, y^{(1)})$ ,  $(x^{(2)}, y^{(2)})$ , ...,  $(x^{(m)}, y^{(m)})$ 
  - Perform forward propagation and backpropagation using example  $(x^{(i)}, y^{(i)})$
  - Get activations  $a^{(l)}$  and delta terms  $\delta^{(l)}$  for  $l = 2, \dots, L$ .
- $\Delta^{(l)} := \Delta^{(l)} + \delta^{(l)} (a^{(l)})^T$
- ...
- ...
  - compute  $\frac{\partial}{\partial \Theta_{jk}^{(l)}} J(\Theta)$ .

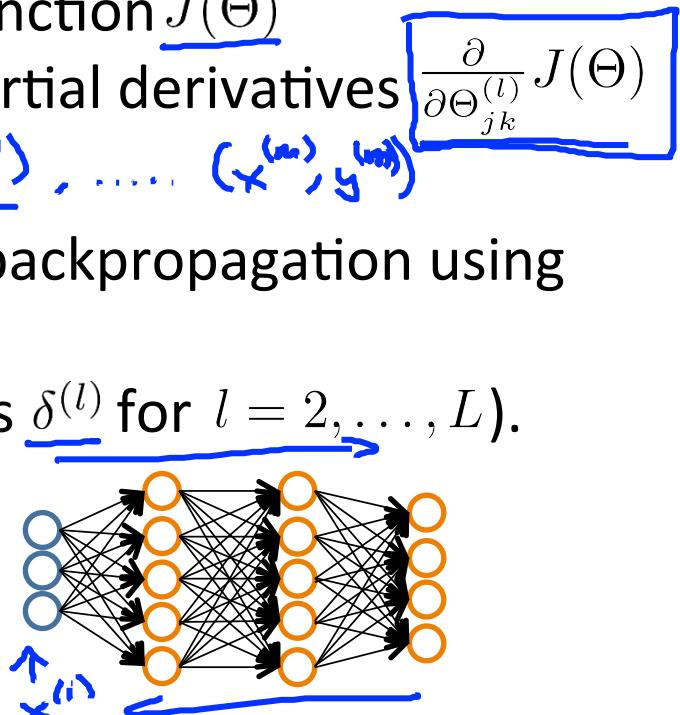



## Training a neural network

- 5. Use gradient checking to compare  $\frac{\partial}{\partial \Theta_{jk}^{(l)}} J(\Theta)$  computed using backpropagation vs. using numerical estimate of gradient of  $J(\Theta)$ .
  - Then disable gradient checking code.
- 6. Use gradient descent or advanced optimization method with backpropagation to try to minimize  $J(\Theta)$  as a function of parameters  $\Theta$

$$\frac{\partial}{\partial \Theta_{jk}^{(l)}} J(\Theta) \quad \overbrace{\qquad\qquad\qquad}$$

$J(\Theta)$  — non-convex.

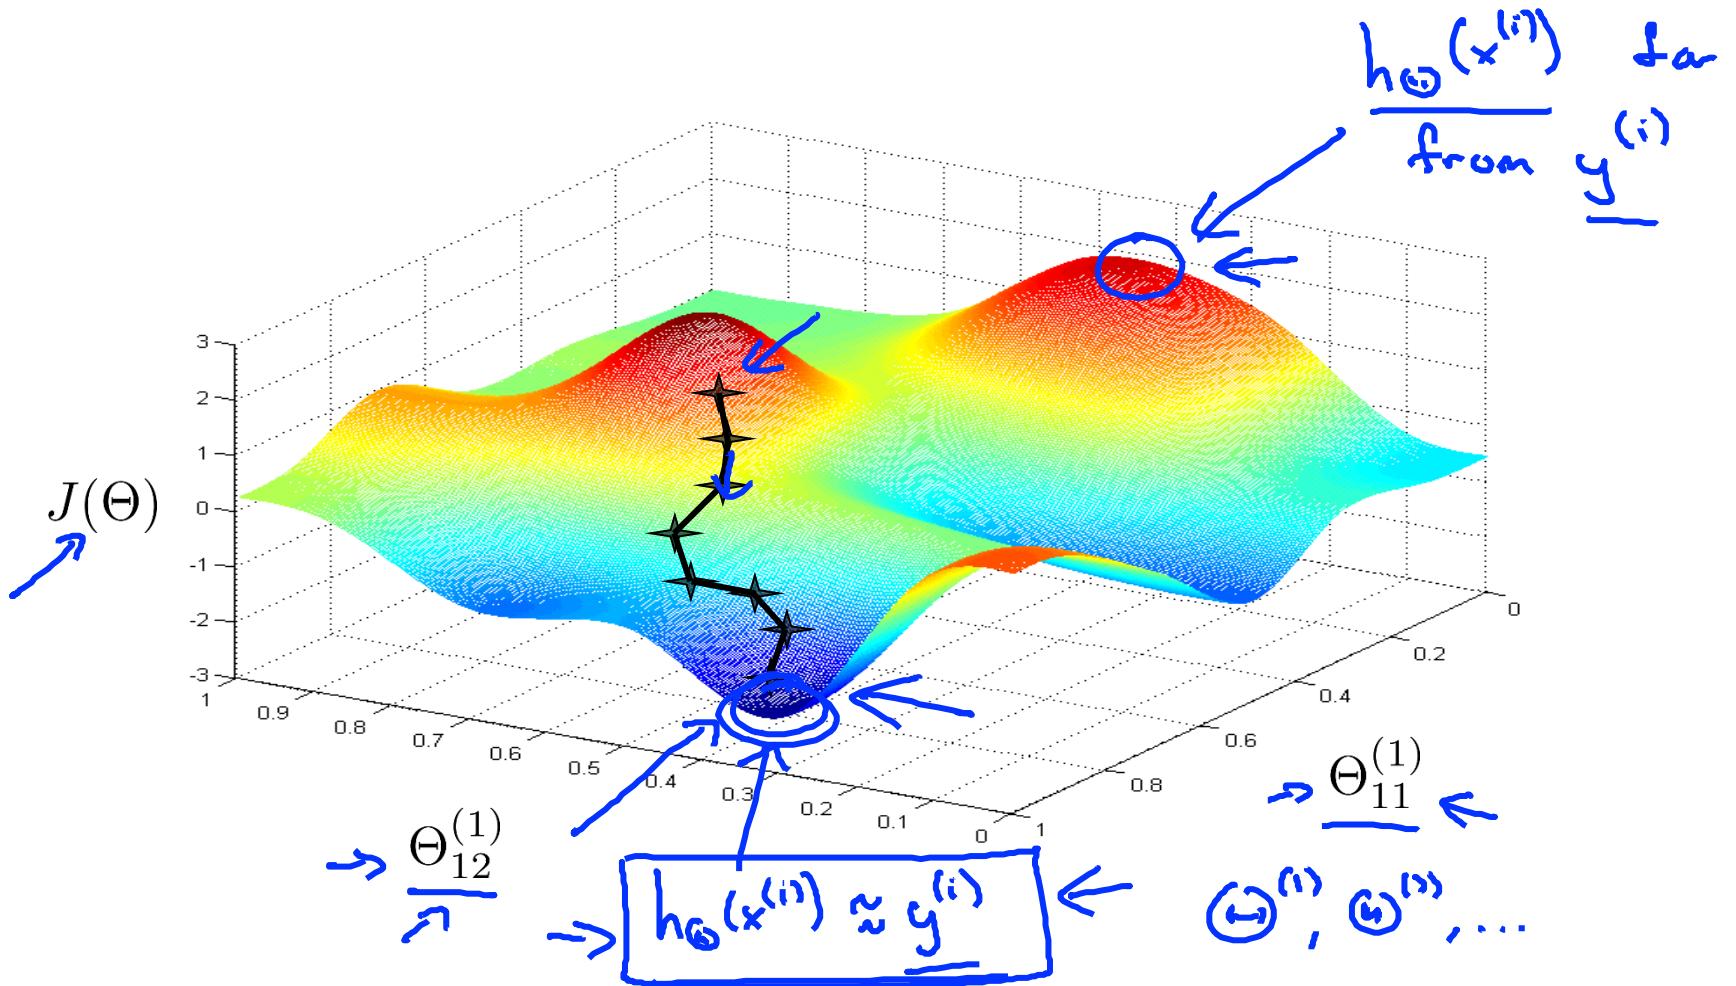


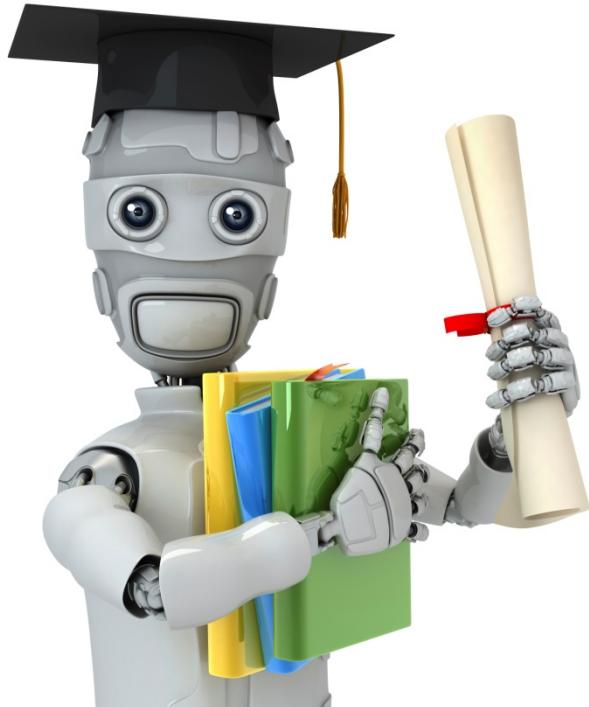

Machine Learning


# Neural Networks: Learning

Backpropagation  
example: Autonomous  
driving (optional)

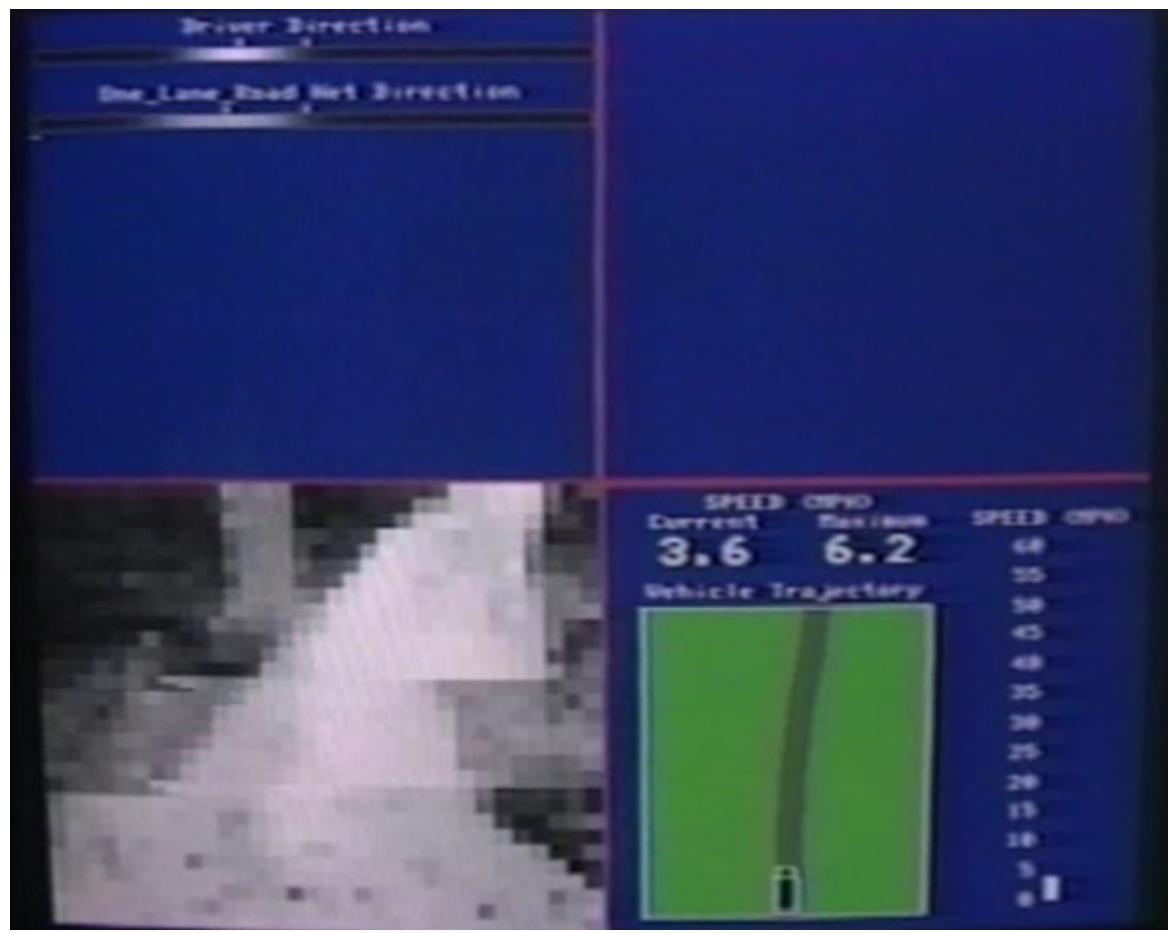

[Courtesy of Dean Pomerleau]

### 4.3 NN

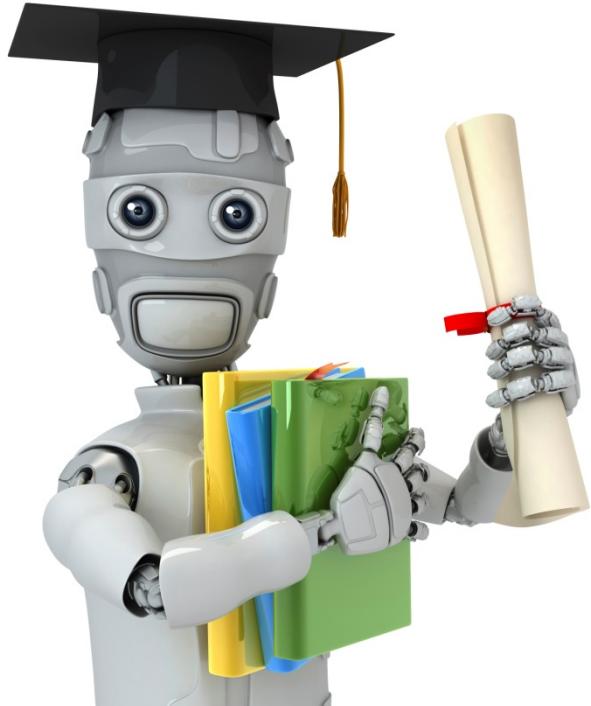

Machine Learning

Advice for applying  
machine learning

---

Deciding what  
to try next

## Debugging a learning algorithm:

Suppose you have implemented regularized linear regression to predict housing prices.

$$\rightarrow J(\theta) = \frac{1}{2m} \left[ \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2 + \lambda \sum_{j=1}^m \theta_j^2 \right]$$


However, when you test your hypothesis on a new set of houses, you find that it makes unacceptably large errors in its predictions. What should you try next?

- - Get more training examples
- Try smaller sets of features  $x_1, x_2, x_3, \dots, x_{100}$
- - Try getting additional features
  - Try adding polynomial features ( $x_1^2, x_2^2, x_1x_2$ , etc.)
  - Try decreasing  $\lambda$
  - Try increasing  $\lambda$

## **Machine learning diagnostic:**

Diagnostic: A test that you can run to gain insight what is/isn't working with a learning algorithm, and gain guidance as to how best to improve its performance.

Diagnostics can take time to implement, but doing so can be a very good use of your time.

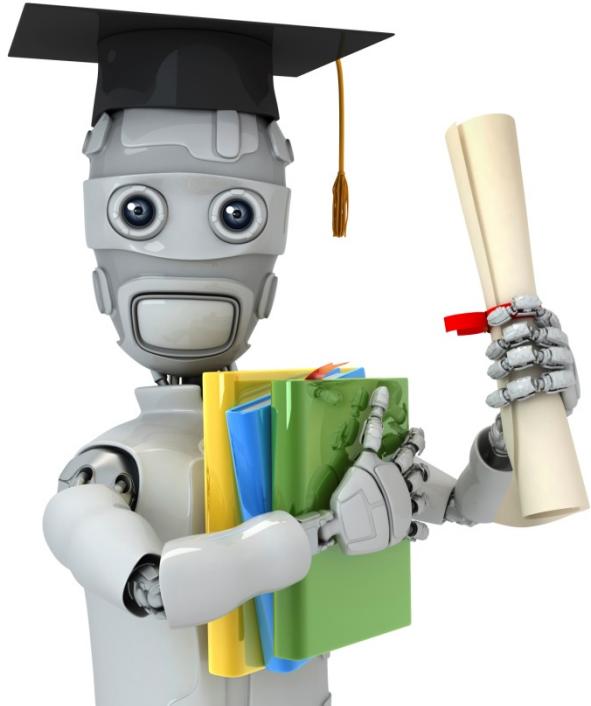


Machine Learning

Advice for applying  
machine learning

---

Evaluating a  
hypothesis

## Evaluating your hypothesis

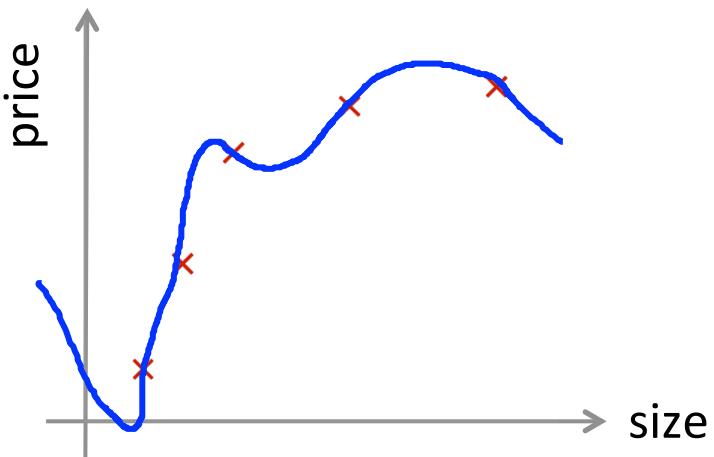

$$\rightarrow h_{\theta}(x) = \theta_0 + \theta_1x + \theta_2x^2 + \theta_3x^3 + \theta_4x^4$$

Fails to generalize to new examples not in training set.

- $x_1$  = size of house
- $x_2$  = no. of bedrooms
- $x_3$  = no. of floors
- $x_4$  = age of house
- $x_5$  = average income in neighborhood
- $x_6$  = kitchen size
- :
- :
- $x_{100}$

# Evaluating your hypothesis

Dataset:

Size	Price
2104	400
1600	330
2400	369
1416	232
3000	540
1985	300
1534	315
<hr/>	
1427	199
1380	212
1494	243

*70% Training set*

*30% Test set*

$(x^{(1)}, y^{(1)})$   
 $(x^{(2)}, y^{(2)})$   
⋮  
 $(x^{(m)}, y^{(m)})$

$(x_{test}^{(1)}, y_{test}^{(1)})$   
 $(x_{test}^{(2)}, y_{test}^{(2)})$   
⋮  
 $(x_{test}^{(m_{test})}, y_{test}^{(m_{test})})$

$m_{test}$  = no. of test example  
 $(x_{test}^{(1)}, y_{test}^{(1)})$

# Training/testing procedure for linear regression

- - Learn parameter  $\underline{\theta}$  from training data (minimizing training error  $J(\theta)$ )  
 $J(\theta)$  *70%*
- Compute test set error:


$$J_{\text{test}}(\theta) = \frac{1}{2m_{\text{test}}} \sum_{i=1}^{m_{\text{test}}} \left( h_{\theta}(x_{\text{test}}^{(i)}) - y_{\text{test}}^{(i)} \right)^2$$

## Training/testing procedure for logistic regression

- Learn parameter  $\theta$  from training data
- Compute test set error:

$$J_{test}(\theta) = -\frac{1}{m_{test}} \sum_{i=1}^{m_{test}} y_{test}^{(i)} \log h_\theta(x_{test}^{(i)}) + (1 - y_{test}^{(i)}) \log (1 - h_\theta(x_{test}^{(i)}))$$

- Misclassification error (0/1 misclassification error):

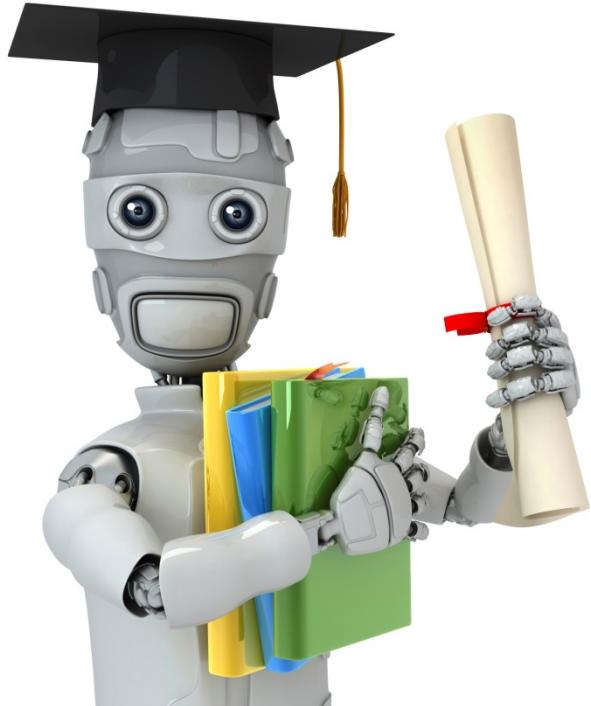


Machine Learning

## Advice for applying machine learning

---

Model selection and  
training/validation/test  
sets

## Overfitting example

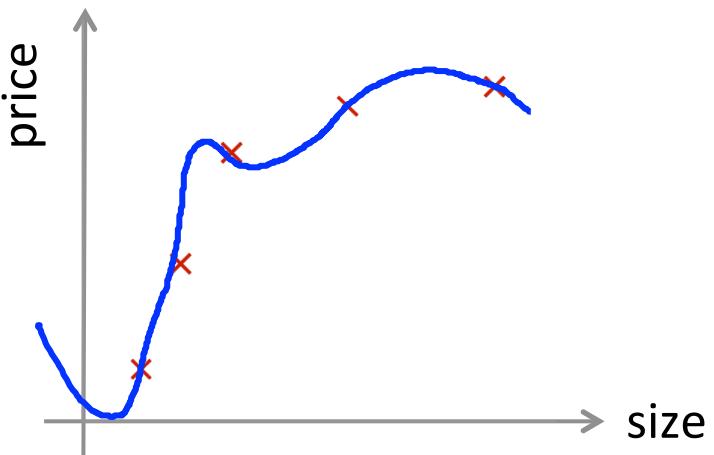

$$h_{\theta}(x) = \underline{\theta_0} + \underline{\theta_1}x + \underline{\theta_2}x^2 + \underline{\theta_3}x^3 + \underline{\theta_4}x^4$$

Once parameters  $\theta_0, \theta_1, \dots, \theta_4$  were fit to some set of data (training set), the error of the parameters as measured on that data (the training error  $J(\theta)$ ) is likely to be lower than the actual generalization error.

## Model selection

$$d=1 \quad 1. \quad h_{\theta}(x) = \theta_0 + \theta_1 x$$

$$d=2 \quad 2. \quad h_{\theta}(x) = \theta_0 + \theta_1 x + \theta_2 x^2$$

$$d=3 \quad 3. \quad h_{\theta}(x) = \theta_0 + \theta_1 x + \dots + \theta_3 x^3$$

⋮

⋮

$$d=10 \quad 10. \quad h_{\theta}(x) = \theta_0 + \theta_1 x + \dots + \theta_{10} x^{10}$$

$\rightarrow d = \text{degree of polynomial}$

$$\Theta^{(1)} \rightarrow J_{test}(\Theta^{(1)})$$

$$\Theta^{(2)} \rightarrow J_{test}(\Theta^{(2)})$$

$$\Theta^{(3)} \rightarrow J_{test}(\Theta^{(3)})$$

⋮

$$\Theta^{(10)} \rightarrow J_{test}(\Theta^{(10)})$$

Choose  $\theta_0 + \dots + \theta_5 x^5$

$\Theta^{(5)}$

How well does the model generalize? Report test set error  $J_{test}(\theta^{(5)})$ .

$\Theta_0, \Theta_1, \dots$

Problem:  $J_{test}(\theta^{(5)})$  is likely to be an optimistic estimate of generalization error. I.e. our extra parameter (d = degree of polynomial) is fit to test set.


# Evaluating your hypothesis

Dataset:

Size	Price
2104	400
1600	330
2400	369
1416	232
3000	540
1985	300
<hr/>	
1534	315
1427	199
<hr/>	
1380	212
1494	243

60%      20%      20%

Train set      Cross validation set (CV)      Test set

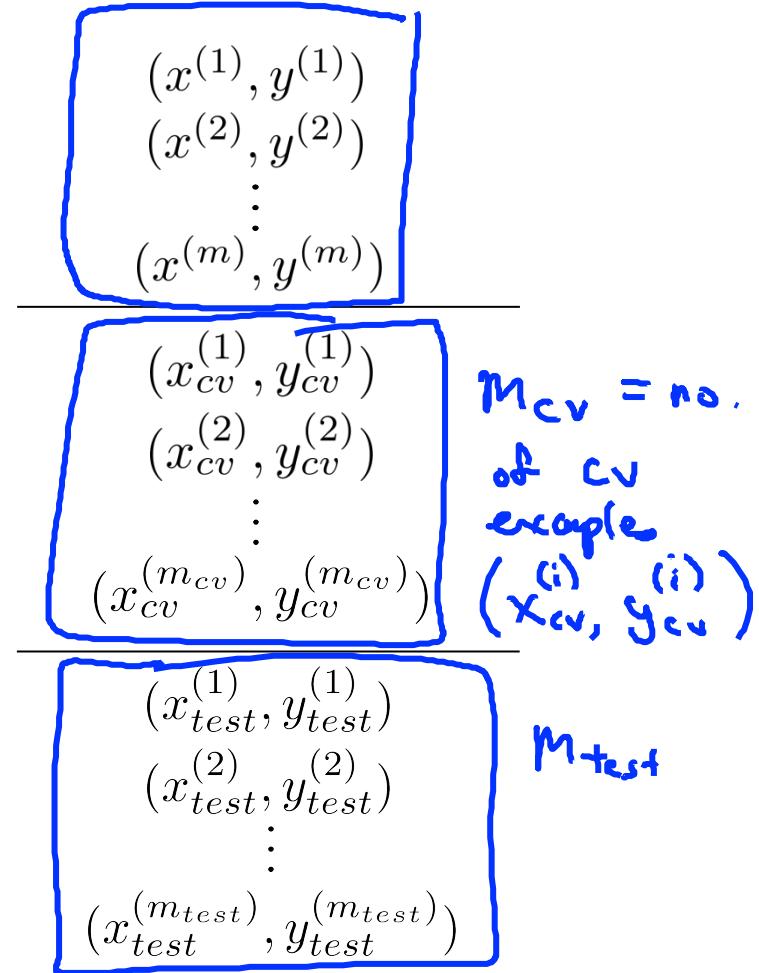

## Train/validation/test error

Training error:

$$\rightarrow J_{train}(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2 \quad \text{J}(\theta)$$


Cross Validation error:

$$\rightarrow J_{cv}(\theta) = \frac{1}{2m_{cv}} \sum_{i=1}^{m_{cv}} (h_\theta(x_{cv}^{(i)}) - y_{cv}^{(i)})^2$$

Test error:


$$\rightarrow J_{test}(\theta) = \frac{1}{2m_{test}} \sum_{i=1}^{m_{test}} (h_\theta(x_{test}^{(i)}) - y_{test}^{(i)})^2$$

## Model selection

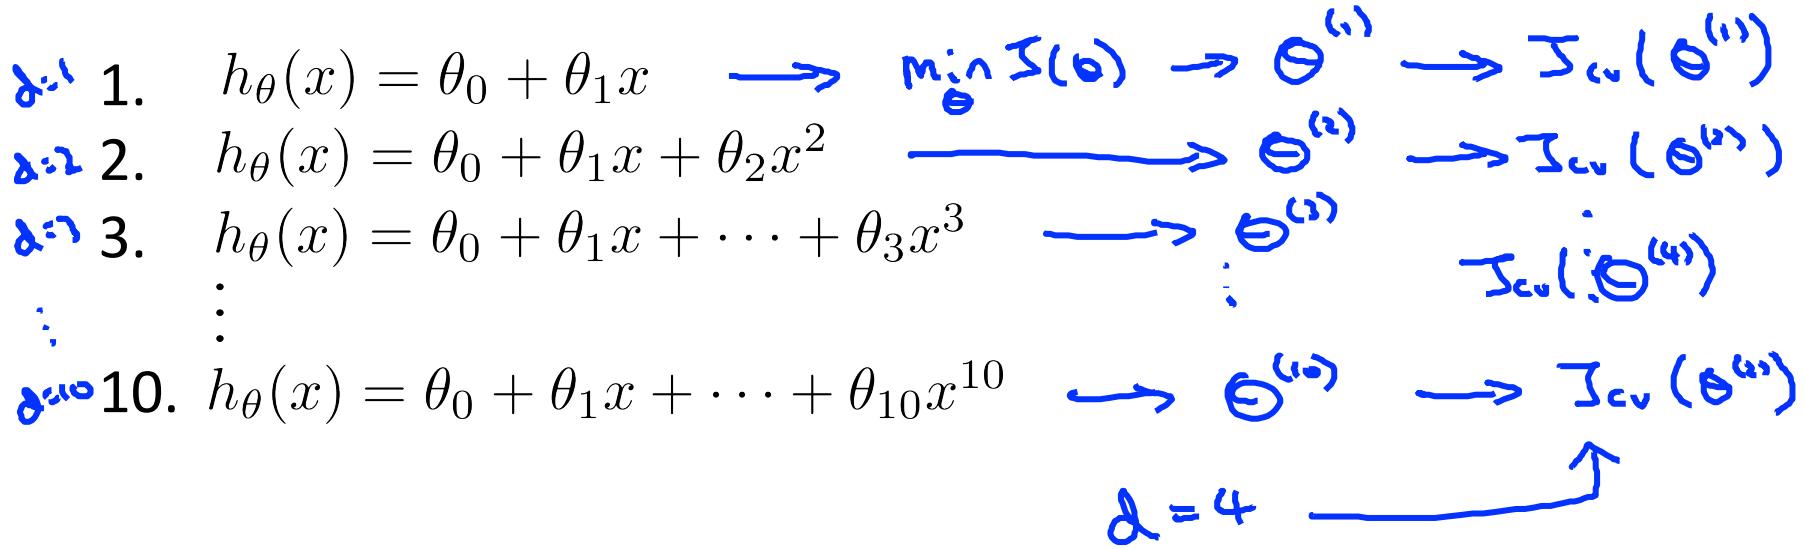

Pick  $\theta_0 + \theta_1 x_1 + \dots + \theta_4 x^4$

Estimate generalization error for test set  $J_{test}(\theta^{(4)})$

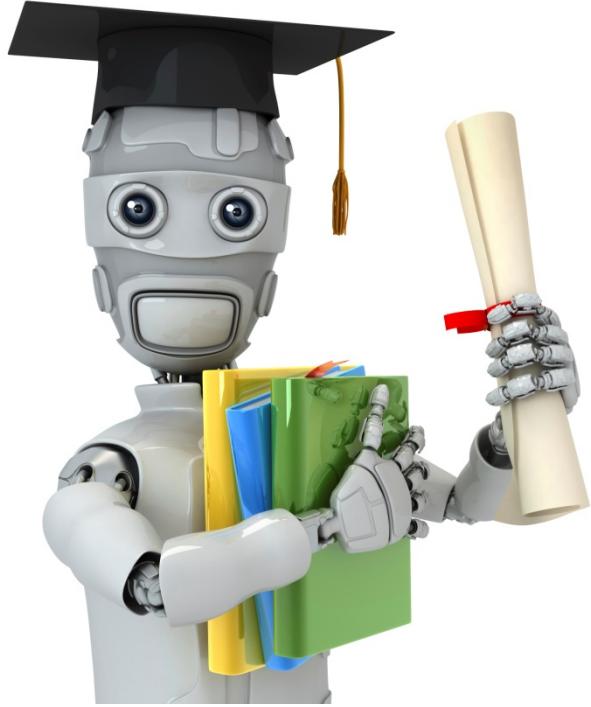


Machine Learning

## Advice for applying machine learning


---

### Diagnosing bias vs. variance


# Bias/variance

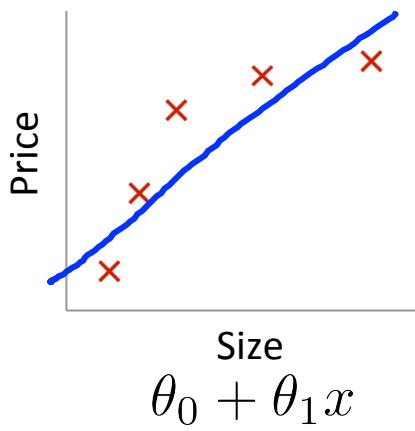

High bias  
(underfit)  
 $d=1$

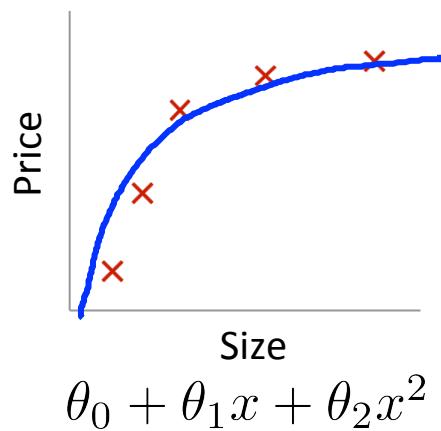

“Just right”  
 $d=2$

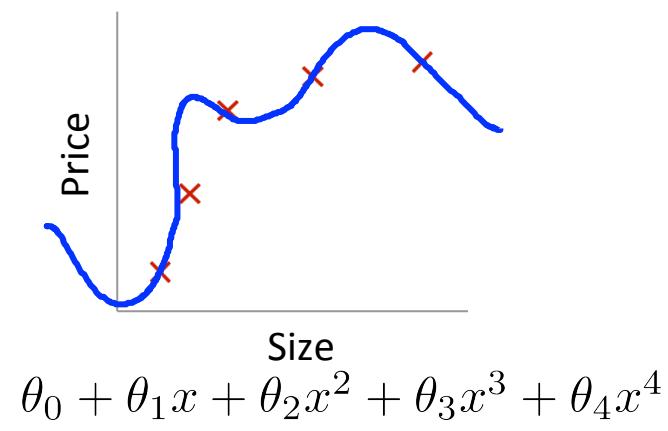


High variance  
(overfit)  
 $d=4$

## Bias/variance


Training error:  $\underline{J_{train}(\theta)} = \frac{1}{2m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2$

Cross validation error:  $\underline{J_{cv}(\theta)} = \frac{1}{2m_{cv}} \sum_{i=1}^{m_{cv}} (h_\theta(x_{cv}^{(i)}) - y_{cv}^{(i)})^2$  (or  $J_{test}(\theta)$ )

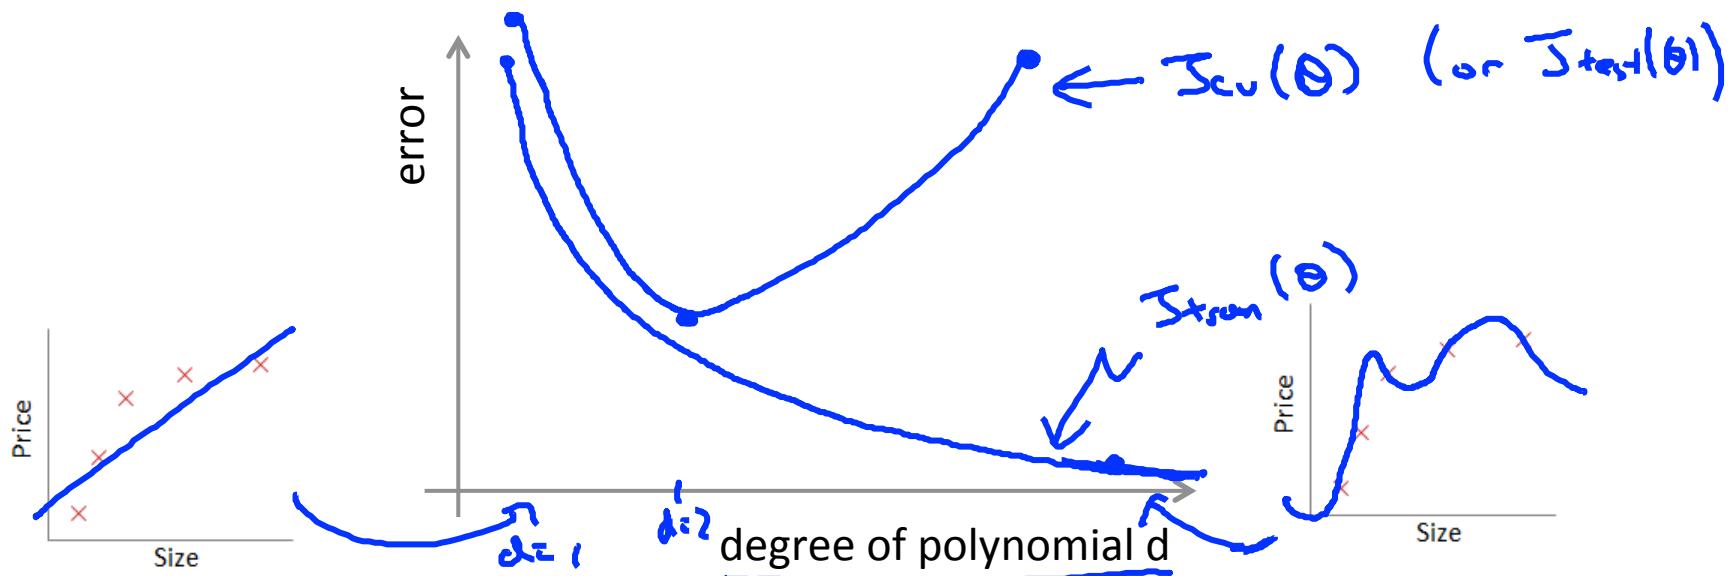

## Diagnosing bias vs. variance

Suppose your learning algorithm is performing less well than you were hoping. ( $J_{cv}(\theta)$  or  $J_{test}(\theta)$  is high.) Is it a bias problem or a variance problem?

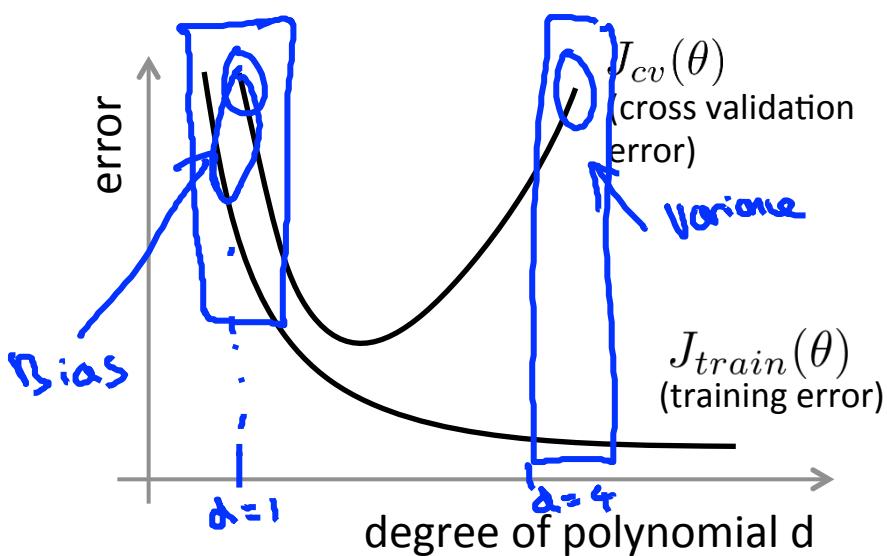


Bias (underfit):

$\rightarrow J_{train}(\theta)$  will be high }  
 $J_{cv}(\theta) \approx J_{train}(\theta)$  }

Variance (overfit):

$\rightarrow J_{train}(\theta)$  will be low }  
 $J_{cv}(\theta) \gg J_{train}(\theta)$  }

»

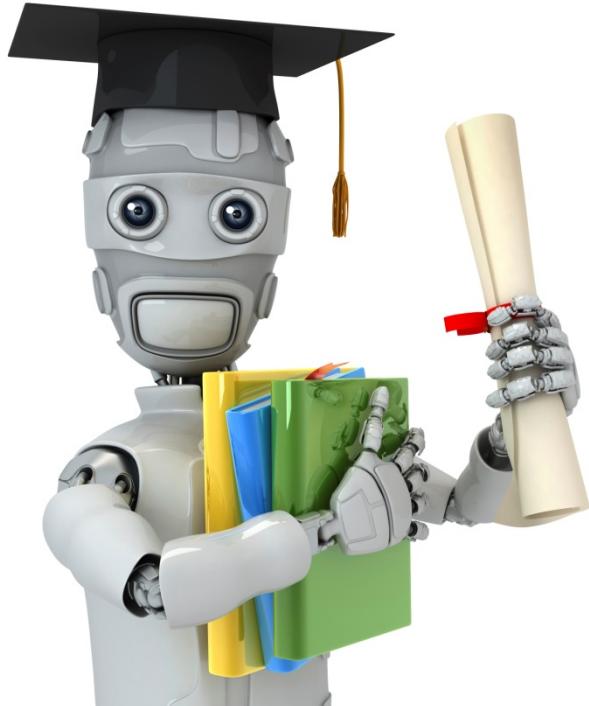

Machine Learning

## Advice for applying machine learning


---

### Regularization and bias/variance

## Linear regression with regularization


Model: 
$$h_{\theta}(x) = \theta_0 + \theta_1 x + \theta_2 x^2 + \theta_3 x^3 + \theta_4 x^4$$

$$J(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2 + \frac{\lambda}{2m} \sum_{j=1}^m \theta_j^2$$

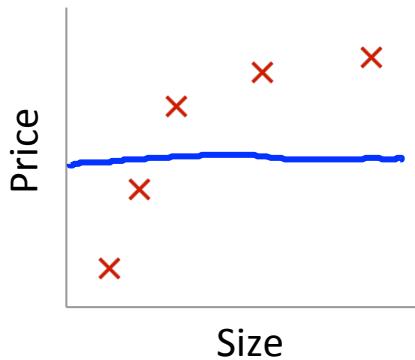


Large  $\lambda$  ←

→ High bias (underfit)  
→  $\lambda = 10000$ .  $\theta_1 \approx 0, \theta_2 \approx 0, \dots$   
 $h_{\theta}(x) \approx \theta_0$

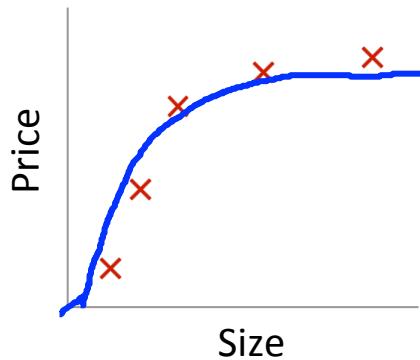

Intermediate  $\lambda$  ←  
"Just right"

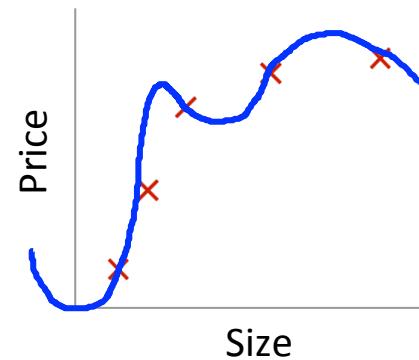

→ Small  $\lambda$   
High variance (overfit)  
→  $\lambda = 0$

## Choosing the regularization parameter $\lambda$

$$h_{\theta}(x) = \theta_0 + \theta_1 x + \theta_2 x^2 + \theta_3 x^3 + \theta_4 x^4 \quad \leftarrow$$

$$J(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2 + \frac{\lambda}{2m} \sum_{j=1}^m \theta_j^2 \quad \leftarrow$$

$$\Rightarrow J_{train}(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2 \quad \underbrace{\qquad\qquad\qquad}_{J(\theta)}$$

$$J_{cv}(\theta) = \frac{1}{2m_{cv}} \sum_{i=1}^{m_{cv}} (h_{\theta}(x_{cv}^{(i)}) - y_{cv}^{(i)})^2$$

$$J_{test}(\theta) = \frac{1}{2m_{test}} \sum_{i=1}^{m_{test}} (h_{\theta}(x_{test}^{(i)}) - y_{test}^{(i)})^2$$

$J_{train}$   
 $J_{cv}$   
 $J_{test}$

## Choosing the regularization parameter $\lambda$

Model:  $h_{\theta}(x) = \theta_0 + \theta_1 x + \theta_2 x^2 + \theta_3 x^3 + \theta_4 x^4$

$$J(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2 + \frac{\lambda}{2m} \sum_{j=1}^m \theta_j^2$$


1. Try  $\lambda = 0$   $\xrightarrow{\min_{\Theta} J(\Theta)} \Theta^{(0)} \rightarrow J_{cv}(\Theta^{(0)})$
  2. Try  $\lambda = 0.01$   $\xrightarrow{\min_{\Theta} J(\Theta)} \Theta^{(1)} \rightarrow J_{cv}(\Theta^{(1)})$
  3. Try  $\lambda = 0.02$   $\xrightarrow{\dots} \Theta^{(2)} \rightarrow J_{cv}(\Theta^{(2)})$
  4. Try  $\lambda = 0.04$   $\vdots$
  5. Try  $\lambda = 0.08$   $\vdots$
  6. Try  $\lambda = 0.12$
  7. Try  $\lambda = 0.16$
  8. Try  $\lambda = 0.20$
  9. Try  $\lambda = 0.24$
  10. Try  $\lambda = 0.28$
  11. Try  $\lambda = 0.32$
  12. Try  $\lambda = 10$   $\xrightarrow{\Theta^{(12)}} J_{cv}(\Theta^{(12)})$
- Pick (say)  $\theta^{(5)}$ . Test error:  $J_{test}(\Theta^{(5)})$


## Bias/variance as a function of the regularization parameter $\lambda$

$$\rightarrow J(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2 + \boxed{\frac{\lambda}{2m} \sum_{j=1}^m \theta_j^2}$$

$$\rightarrow \underline{J_{train}(\theta)} = \frac{1}{2m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2$$

$$\rightarrow \boxed{J_{cv}(\theta)} = \frac{1}{2m_{cv}} \sum_{i=1}^{m_{cv}} (h_\theta(x_{cv}^{(i)}) - y_{cv}^{(i)})^2$$

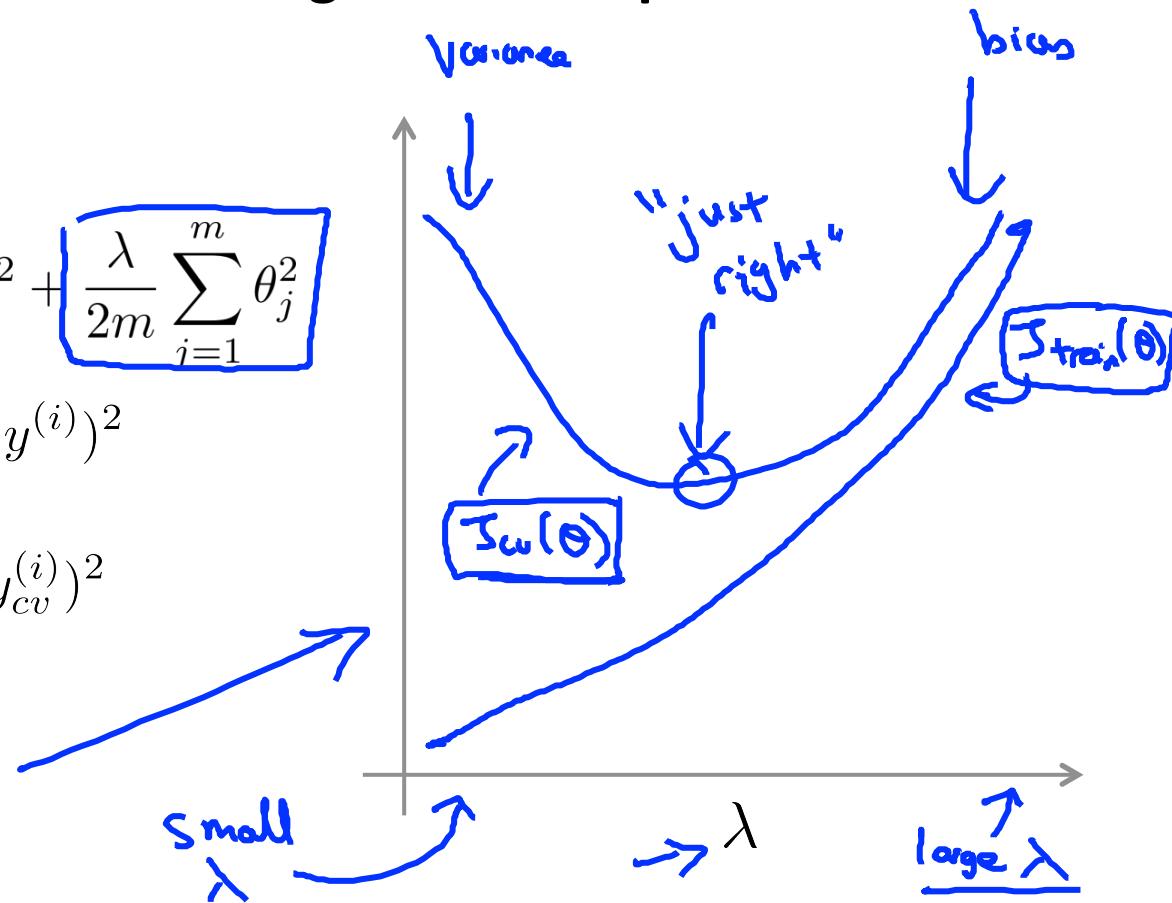

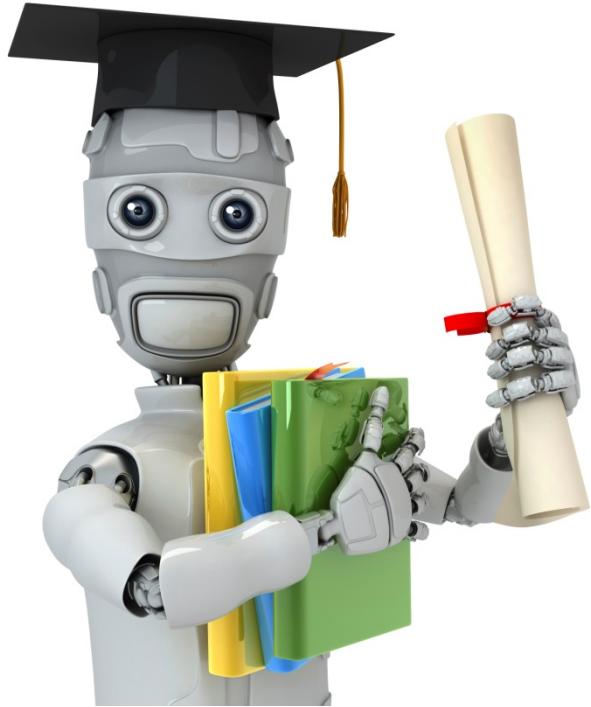

Machine Learning

Advice for applying  
machine learning


---

Learning curves


## Learning curves

$$\rightarrow \underline{J_{train}(\theta)} = \frac{1}{2m} \sum_{i=1}^m (h_\theta(x^{(i)}) - y^{(i)})^2$$


$$\rightarrow J_{cv}(\theta) = \frac{1}{2m_{cv}} \sum_{i=1}^{m_{cv}} (h_\theta(x_{cv}^{(i)}) - y_{cv}^{(i)})^2$$

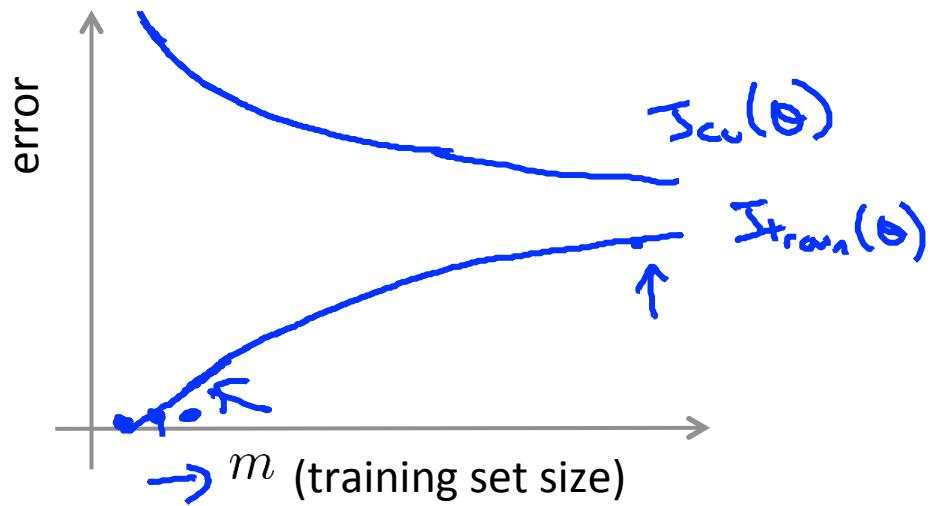


$$h_\theta(x) = \underline{\theta_0 + \theta_1 x + \theta_2 x^2}$$

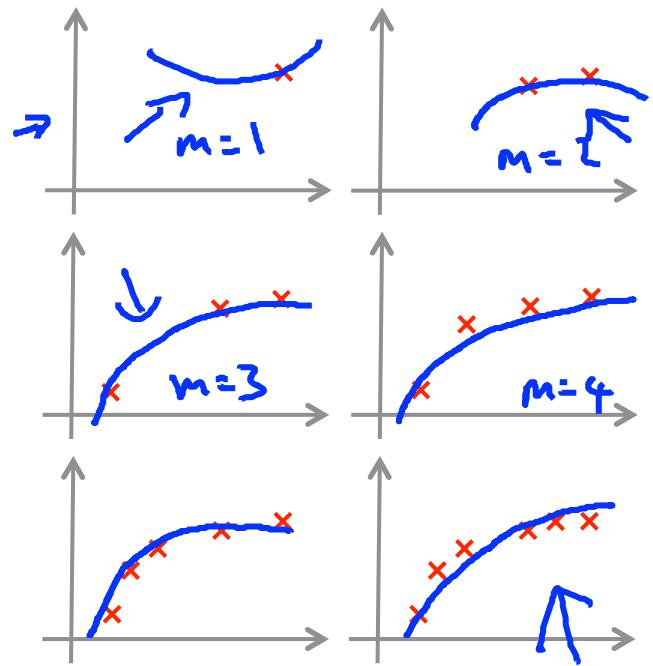


## High bias

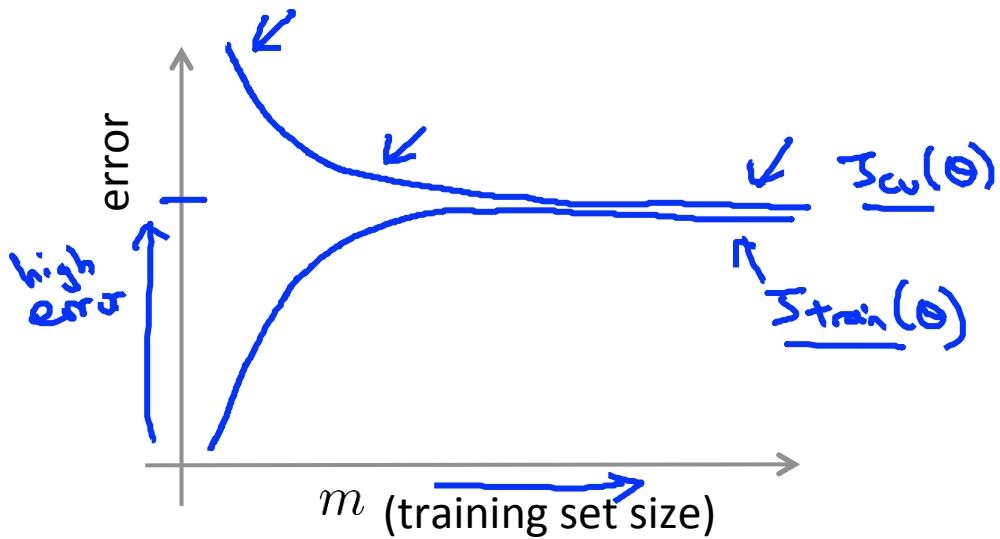

If a learning algorithm is suffering from high bias, getting more training data will not (by itself) help much.

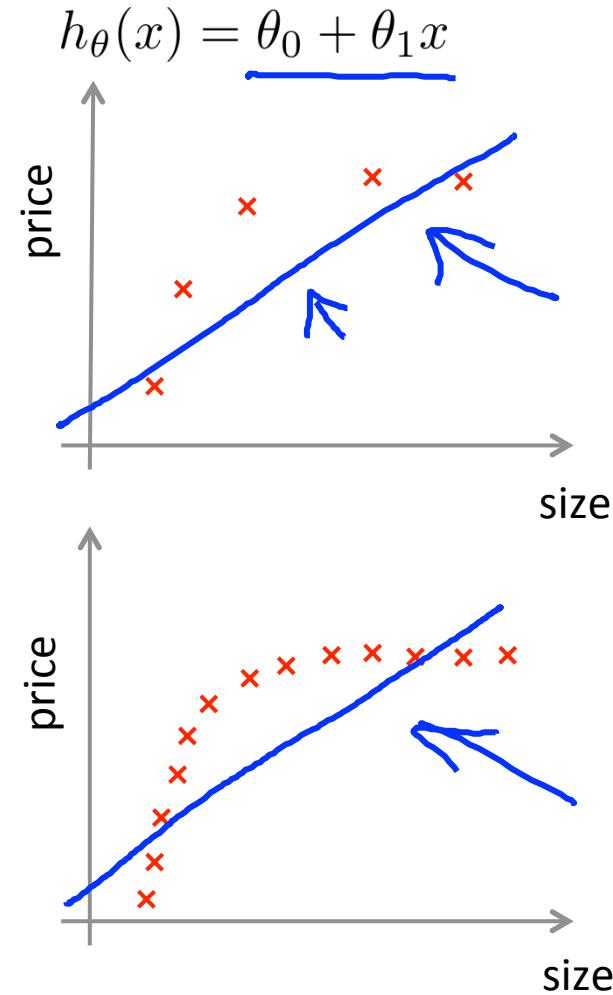


## High variance

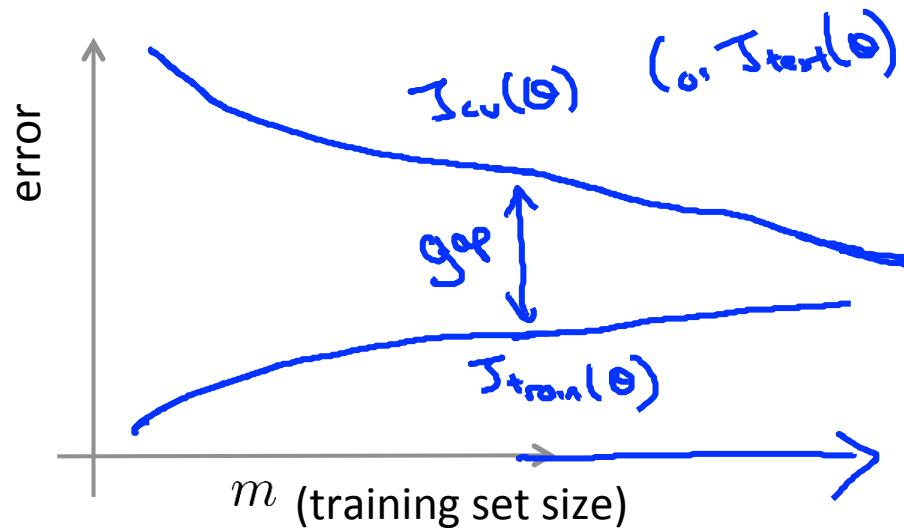


If a learning algorithm is suffering from high variance, getting more training data is likely to help. ↪

$$h_{\theta}(x) = \theta_0 + \theta_1 x + \cdots + \theta_{100} x^{100}$$

(and small  $\lambda$ )

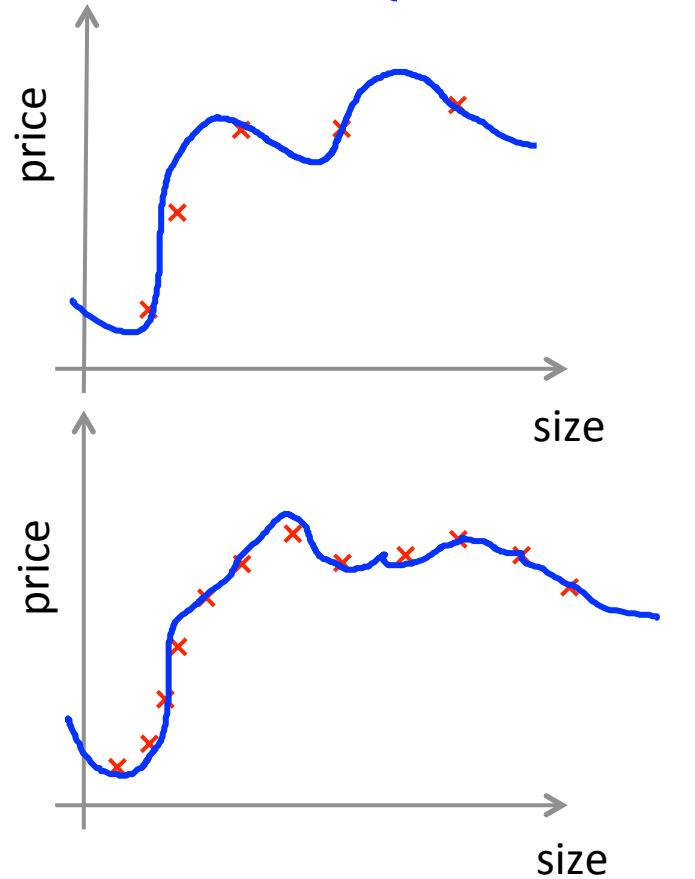

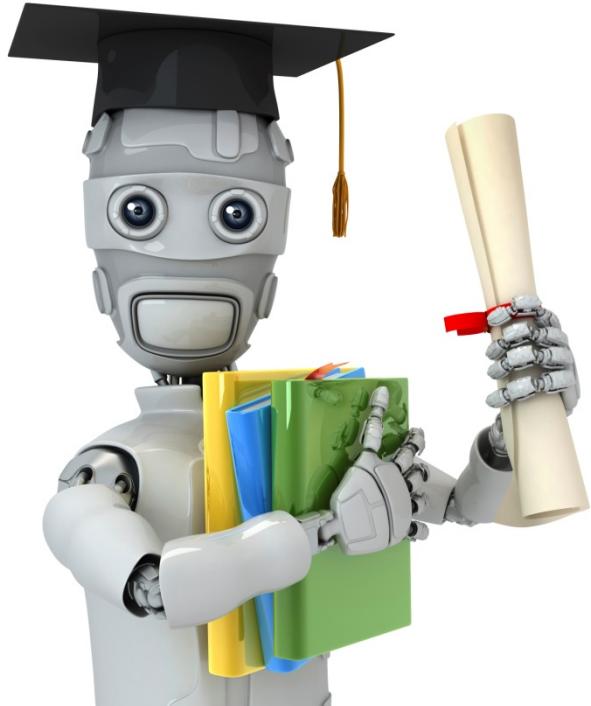

Machine Learning

## Advice for applying machine learning

---

### Deciding what to try next (revisited)


## Debugging a learning algorithm:

Suppose you have implemented regularized linear regression to predict housing prices. However, when you test your hypothesis in a new set of houses, you find that it makes unacceptably large errors in its prediction. What should you try next?

- Get more training examples → fixes high variance
- Try smaller sets of features → fixes high variance
- Try getting additional features → fixes high bias
- Try adding polynomial features( $x_1^2, x_2^2, x_1x_2$ , etc) → fixes high bias.
- Try decreasing  $\lambda$  → fixes high bias
- Try increasing  $\lambda$  → fixes high variance


## Neural networks and overfitting

→ “Small” neural network  
(fewer parameters; more prone to underfitting)

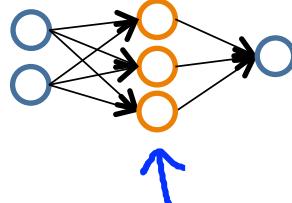

Computationally cheaper

→ “Large” neural network  
(more parameters; more prone to overfitting)

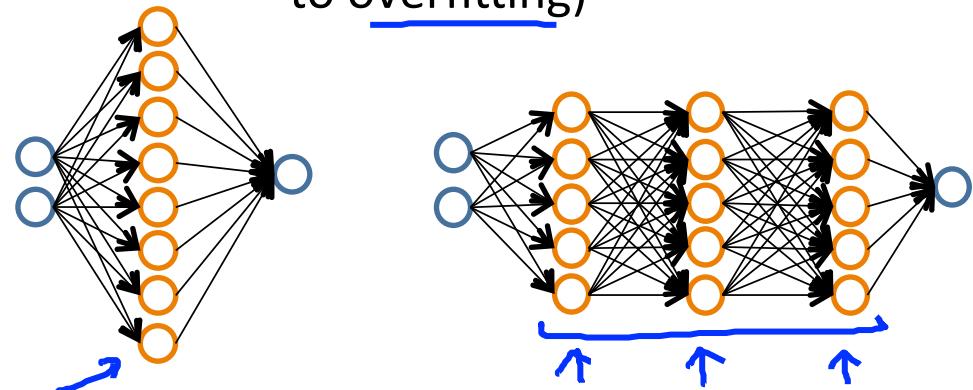

Computationally more expensive.

Use regularization ( $\lambda$ ) to address overfitting.

$$\mathcal{J}_{\text{reg}}(\theta)$$

