


Panopto ILIAS-Plugin Overview


..

Date:	25. November 2011
Version:	1.0
Author:	Fabian Schmid, studer + raimann ag

1 New Panopto Folder in ILIAS

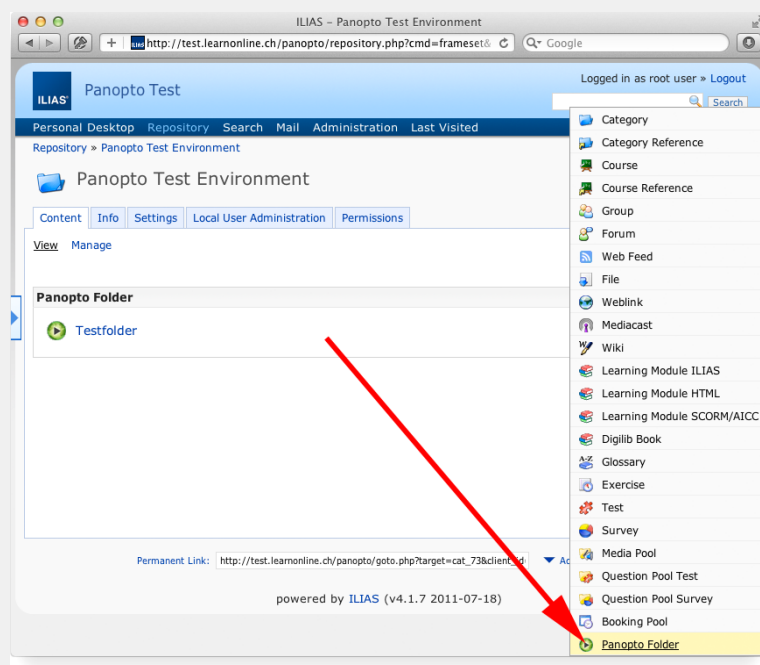


- Select “Add new Item”
- ILIAS shows a list of all Repository Objects, which the user is allowed to create.
- Select „Panopto Folder“ from the bottom of the list.

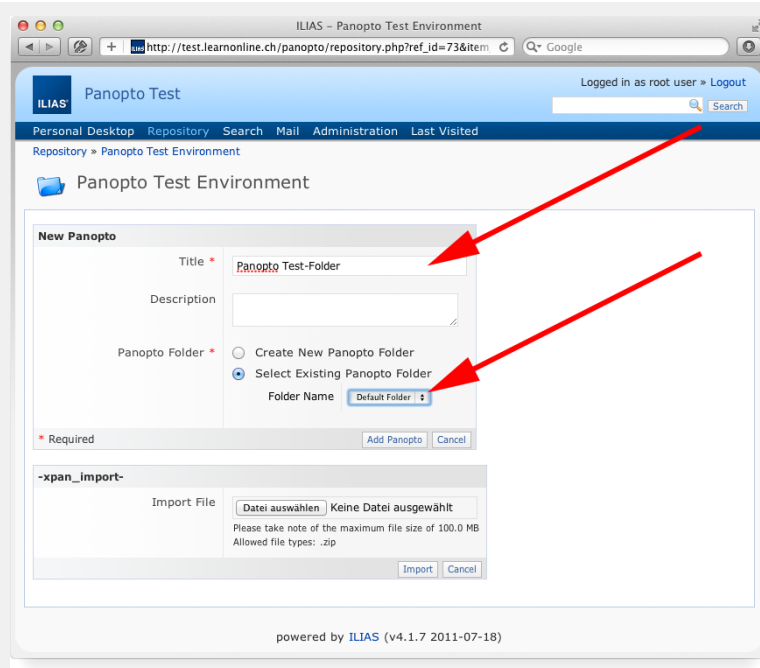


- Set a title in the first field. If the radiobutton “Panopto Folder” is set to “Create New Panopto Folder”, this title is used on the Panopto-Server.
- Use the second field to set a description.
- Decide whether you’d like to create a new Panopto-Folder on the Panopto-Server or you’d like to select an existing.

2 Player

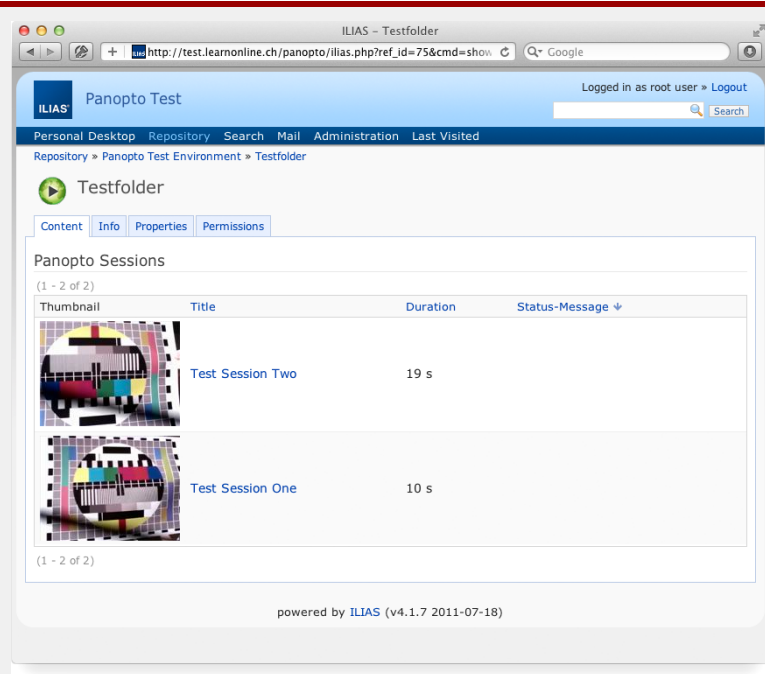

- In a ILIAS Panopto-Folder all Sessions are listed with thumbnail.
- By clicking the thumbnail or the Session-Title the defined player starts (for Player-Definition see Installation).

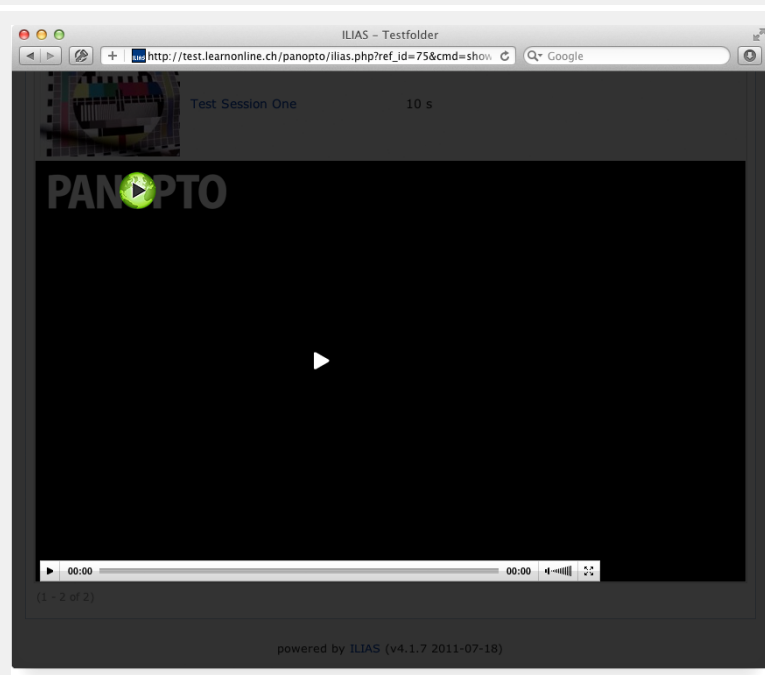

- Use the player by clicking Play.
- Close the player by clicking outside the player or by pressing "esc" on your keyboard.

3 Installation

The Panopto ILIAS-Plugin is delivered in a ZIP-Archive which has to be extracted tot he following directory in your ILIAS-Installation:

Customizing/global/plugins/Services/Repository/RepositoryObject/

All configurations can be done in the file panopto.ini:

Item	Value
Server	Your Panopto-Server, e.g. https://studerraimann.hosted.panopto.com
InstanceName	Defined in „System“ -> „Providers“ on your Panopto-Server, e.g. ilias
ApplicationKey	Defined in „System“ -> „Providers“ on your Panopto-Server
UserKey	Username of a Admin on your Panopto-Server
Password	Password of a Admin on your Panopto-Server
TimeOut	SOAP-Timeout, 240
Player	Value can be 1-4: <ol style="list-style-type: none"> 1. flowplayer 2. QuickTime 3. Panopto-Player 4. mediaplayer
APIVersion	Current API-Version 4.0
APIs[]	All used Panopto-APIs

Activate your plugin in ILIAS-Administration („Administration“ -> „Modules, Services and Plugins“ -> „Administrate“ -> „Activate“.