


ESENCI 21a WINE SHANN

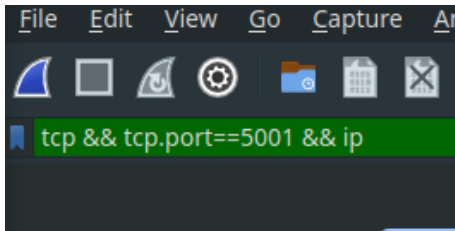

- ← filtriamo segmenti:
- (a) TCP
 - (b) che usano porta 5001
 - (c) IP v4

127.0.0.1

LoopBack

↑
sarebbe sufficiente
da sole

SERVER ↓

```
Terminal - andrea@aquinas: ~
File Edit View Terminal Tabs Help
andrea@aquinas:~
$ nc -l -p 5001
andrea@aquinas:~
$ nc -l -p 5001
Maradona
sfogliatella
```

echeggia ("echo") quanto
digitato sul client, rispondendo
con ACK senza dati

CLIENT ↓

```
Terminal - andrea@aquinas: ~/Downloads/trash
File Edit View Terminal Tabs Help
andrea@aquinas:~/Downloads/trash
$ netstat | grep 5001
andrea@aquinas:~/Downloads/trash
$ nc localhost 5001
^C
andrea@aquinas:~/Downloads/trash
$ nc localhost 5001
Maradona
sfogliatella
█
```

invia stringhe ASCII e
riceve ACK

INVIO FILE CON NC

SERVER ↓

```
Terminal - andrea@aquinas: ~
File Edit View Terminal Tabs Help
andrea@aquinas:~
$ nc -l -p 5001
andrea@aquinas:~
$ nc -l -p 5001
Maradona
sfogliatella
andrea@aquinas:~
$ nc -l -p 12338
andrea@aquinas:~
$ nc -l -p 12338 > real2.doc
andrea@aquinas:~
$
```

ascolta su porta # 12338
e scrive su file real2.doc

CLIENT ↓

```
Terminal - andrea@aquinas: ~/Downloads/trash
File Edit View Terminal Tabs Help
andrea@aquinas:~/Downloads/trash
$ nc 127.0.0.1 12338 < real.doc
^C
andrea@aquinas:~/Downloads/trash
$
```

invia il file real.doc
a loopback (127.0.0.1)
su porta # 12338