Papilot

A guided product tour

Write on the page your readers will see.

Papilot brings PDF notes, coding agents, and typeset review into one workspace. Point to a phrase, equation, or figure. Your agent finds the source, edits the LaTeX, and returns a comparison you can read on the page.

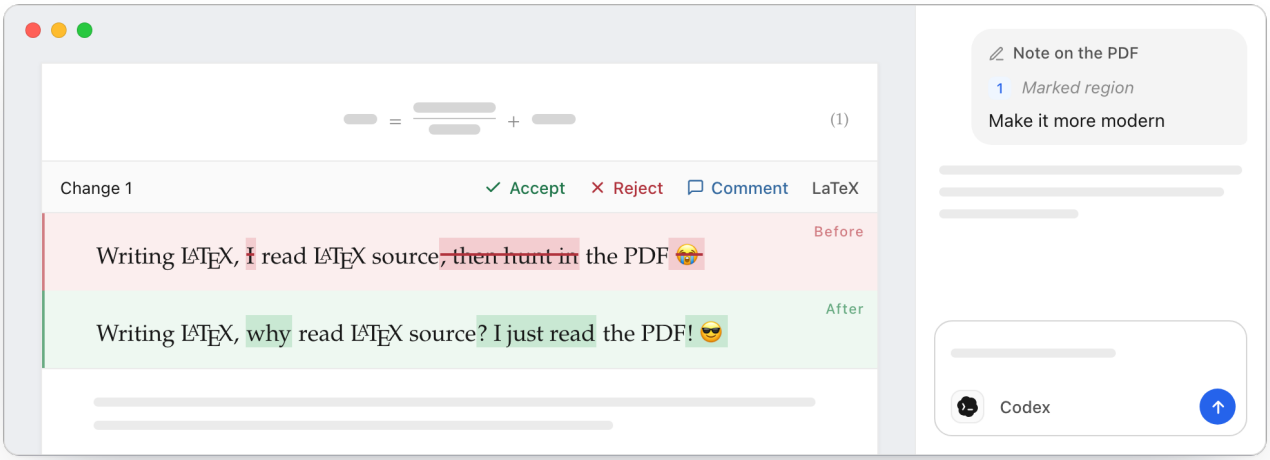


Figure 1. A proposed edit, shown as a typeset before-and-after.

1 Philosophy: the page comes first

Read what your reader sees. Meaning depends on symbols, line breaks, figures and their context. Papilot puts the review on the rendered page, so you can judge the actual result without mentally compiling a source diff.

Delegate the edit. Keep the judgment. The author decides. Your manuscript stays, of course, under your control. At any time, you can inspect the LaTeX behind an edit.

Keep your tools and ownership. Your project remains ordinary local files. Git records the history and supports collaboration. Use the coding agent you already have, with its own login or API key. Papilot is free and open source, for macOS, Linux and Windows.

01 Mark precisely ⟶ 02 Ask your agent ⟶ 03 Review each change

BRING YOUR AGENT

Codex Claude Cursor Copilot Grok Antigravity

Kimi GLM DeepSeek Qwen OpenCode

Choose model, effort and Fast mode where supported.

A small model of responsible editing.

These equations explain the workflow: where a note points, what the review compares, and which proposals become part of the manuscript.

2 A note has a precise address

Mark a word, a symbol, or a region. A note keeps its page and bounding box; an agent can use that location to find the source. Normalized coordinates let the same box follow the page as you zoom or resize.

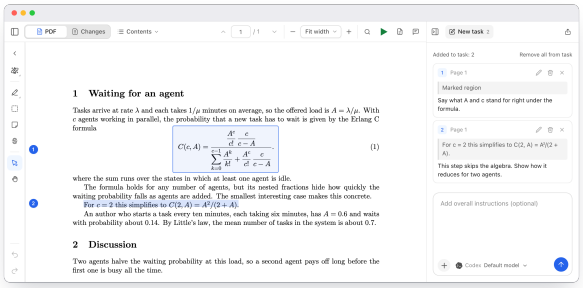


Figure 2. Notes retain the selected text or region.

For page bounds $(x_{\min}, y_{\min}, x_{\max}, y_{\max})$, let $b = (x_0, y_0, x_1, y_1)$ be a selected box. Its normalized coordinates are

$$\widehat{b} = \left(\frac{x_0 - x_{\min}}{x_{\max} - x_{\min}}, \frac{y_0 - y_{\min}}{y_{\max} - y_{\min}}, \frac{x_1 - x_{\min}}{x_{\max} - x_{\min}}, \frac{y_1 - y_{\min}}{y_{\max} - y_{\min}} \right). \tag{1}$$

A 600×800 page makes the example concrete:

Page origin	Selected box	Normalized box
$(20, 40)$	$(80, 120, 200, 160)$	$(0.10, 0.10, 0.30, 0.15)$

3 Render first. Review. Then apply.

Let S be the source, S' an agent's proposal, and $\mathcal{R}$ the LaTeX renderer. The review compares the resulting pages:

$$P = \mathcal{R}(S), \qquad P' = \mathcal{R}(S'), \qquad \Delta_{\text{PDF}} = \mathcal{D}(P, P'). \tag{2}$$

Here $\mathcal{D}$ denotes the visual comparison. Text, equations and layout remain visible together. For proposed edits E, the author chooses an accepted subset:

$$E_{\text{accepted}} = \{e \in E \mid \text{decision}(e) = \text{accept}\}, \qquad S_{\text{next}} = \text{Apply}(S, E_{\text{accepted}}). \tag{3}$$

Reject an edit, comment for another pass, or undo a decision. These equations describe the workflow; editorial judgment remains with the author.

Try the notes and diffs in this static demo. Tasks here do not run. Download Papilot to open your own project and run real tasks.