

HTML Form Controls

There are different types of form controls that you can use to collect data using HTML form –

<input> - It defines an **input control**.

The **<input>** element can be displayed in several ways, depending on the **type** attribute.

Type		Description
<input type="text">		Defines a one-line text input field
<input type="password">		Defines a password field
<input type="checkbox">	☒	Defines a checkbox
<input type="button">	OK	Defines a clickable button (mostly used with a JavaScript to activate a script)
<input type="file">	<input type="file"/>	Defines a file-select field and a "Browse" button (for file uploads)
<input type="radio">	☒ RadioButton 2	Defines a radio button (for selecting one of many choices)
<input type="submit">	<input type="submit" value="SUBMIT"/>	Defines a submit button (for submitting the form)

```
Male <input type="radio" name="gender"> Female <input type="radio" name="gender"> Other <input type="radio" name="gender"><br><br>
Language : -----<br>
English <input type="checkbox" name="lang"> Hindi <input type="checkbox" name="lang"> Urdu <input type="checkbox" name="lang">
```

Date of Birth :

Gender : -----

Male ☐ Female ☐ Other ☐

- 1. Text field
- 2. Password Field
- 3. Text Area
- 4. Checkbox
- 5. Radio Box
- 6. Select Box
- 7. File Select boxes
- 8. Buttons

value of type attribute	
button	password
checkbox	radio
color	range
date	reset
datetime-local	search
email	submit
file	tel
hidden	text
image	time
month	url
number	week

Here are a few important attributes you can use with the `` tag:

1. **Type:** This is like telling the magic box what kind of information you want. For example, you can use "text" for normal words, "password" for secret codes, "number" for counting, and more. It helps the magic box understand how to handle the stuff people put inside it.
2. **Placeholder:** Imagine you want to give a hint to people about what they should put inside the magic box. The placeholder is like a little message inside the box that shows before they start typing. It helps them know what kind of information you're looking for.
3. **Name:** Sometimes you have lots of magic boxes on your website, and you want to know which box someone typed their answer into. That's when you give each magic box a name. It's like writing labels on your toy boxes so you know what's inside each one.
4. **Value:** If you want to show some information already inside the magic box when someone visits your website, you can use the value attribute. It's like putting a surprise toy inside a box before giving it to someone.
5. **Required:** When you want to make sure that people don't forget to put something in the magic box, you can use the required attribute. It's like saying, "Hey, you have to put something in here before you can continue!"
6. **Maxlength:** Imagine you have a small box that can only fit a certain number of blocks. The maxlength attribute lets you say how many letters or numbers can fit in the magic box. It's like setting a limit on how much someone can write.
7. **Disabled:** Sometimes you want to hide the magic box and not let anyone use it for a while. The disabled attribute makes the box grayed out, like a toy you can't play with right now.

1. Text field (or) Single-line text input control

This control is used for items that require only *one line of user input*, such as search boxes or names. They are created using HTML **<input>** tag.

Sr.No	Attribute & Description
type	Indicates the type of input control and for text input.
name	Used to give a name to the control
value	This can be used to provide an initial value
size	Allows to specify the width of the text-input control in terms of characters.
maxlength	Allows to specify the maximum number of characters a user can enter into the text box.

```
<html>
<head>
  <title>Text Input Control</title>
</head>
<body>
  <form >
    First name: <input type = "text" name = "first_name" />
    <br>
    Last name: <input type = "text" name = "last_name" />
  </form>
</body>
</html>
```



2. Password Field

- This is also a **single-line text** input but it masks the character as soon as a user enters it.
- They are also created using HTML **<input>** tag but type attribute is set to **password**.

User ID :


Password:

```
<html>
<head> <title>Password Input Control</title> </head>
<body>
  <form >
    User ID : <input type = "text" name = "user_id" />
    <br> Password:
    <input type = "password" name = "password" />
  </form>
</body>
</html>
```

3. Text Area (or) Multiple-Line Text Input Control

This is used when the user is required to give details that may be longer than a single sentence. Multi-line input controls are created using HTML **<textarea>** tag.

Description :

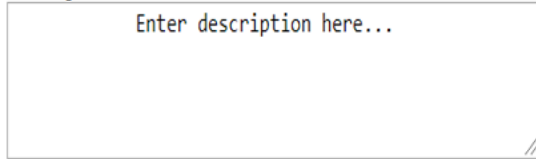


Enter description here...

```
<html>
  <head>
    <title>Multiple-Line Input Control</title>
  </head>

  <body>
    <form>
      Description :<br>
      <textarea rows = "5" cols = "50" name = "description">
        Enter description here...
      </textarea>
    </form>
  </body>
</html>
```

4. Checkbox Control

Checkboxes are used when more than one option is required to be selected. They are also created using HTML **<input>** tag but type attribute is set to checkbox.

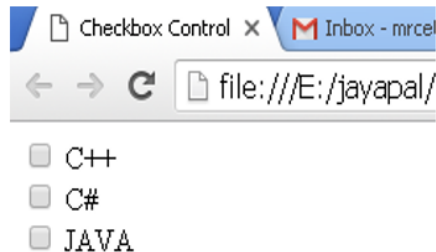

Checkbox Control


file:///E:/jayapal/

☒ C++
☐ C#
☐ JAVA

```
<html> <head> <title>Checkbox Control</title> </head>
<body>
  <form>
    <input type="checkbox" name="C++" value="on"> C++
    <br>
    <input type="checkbox" name="C#" value="on"> C#
    <br>
    <input type="checkbox" name="JAVA" value="on"> JAVA
  </form>
</body> </html>
```

5. Radio Button Control


Radio buttons are used when out of many options, just one option is required to be selected. They are also created using HTML `<input>` tag but type attribute is set to radio

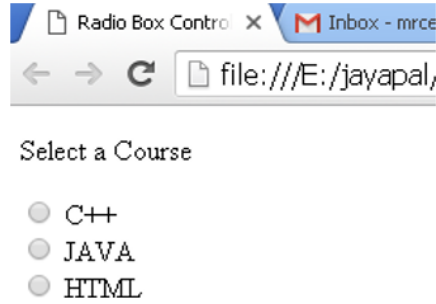

```
<html>
<head>
<title>Radio Box Control
</title> </head>
<body> <p>Select a Course</p>
<form>
    <input type="radio" name="subject" value="C++"> C++
    <br>
    <input type="radio" name="subject" value="JAVA"> JA VA
    <br>
    <input type="radio" name="subject" value="HTML"> HTML
</form> </body> </html>
```

6. Select Box Controls

A **select box**, also called **drop down box** which provides option to list down various options in the form of drop down list, from where a user can select one or more options

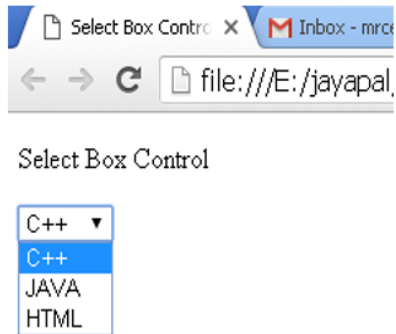

```
<html>
<head>
<title>Select Box Control</title>
</head>
<body>
<form>
    <select name="dropdown">
        <option value="C++" selected>C++</option>
        <option value="JAVA">JA VA</option>
        <option value="HTML">HTML</option>
    </select>
</form>
</body>
</html>
```

7. File Select boxes

If we want to allow a user to **upload a file** to web site, we will need to use a file upload box, also known as a file select box. This is also created using the <input > element but type attribute is set to file.



File Upload Box

Choose File No file chosen


```
<html>
<head>
<title>File Upload Box</title>
</head>
<body>
<p>File Upload Box</p>
<form>
  <input type="file" name="fileupload" >
</form>
</body>
```

8. Buttons

There are various ways in HTML to create clickable buttons. we can also create a clickable button using **<input>** tag by setting its type attribute to **button**. The type

Sr.No	Type & Description
submit	This creates a button that automatically submits a form.
reset	This creates a button that automatically resets form controls to their initial values.
button	This creates a button that is used to trigger a client-side script when the user clicks that button.
image	This creates a clickable button but we can use an image as background of the button.

```
<html>
<head>
<title>File Upload Box</title>
</head>
<body>
<form>
  <input type="submit" name="submit" value="Submit" />
  <input type="reset" name="reset" value="Reset" />
  <input type="button" name="ok" value="OK" />
  <input type="image" name="imagebutton" src="test1.png" />
</form>
</body>
</html>
```



Displaying date picker

9. HTML `<input type="date">`

- The `<input type="date">` defines a date picker.
- The resulting value includes the year, month, and day.attribute

DOB:

April 2023 ▾

↑ ↓

Su	Mo	Tu	We	Th	Fr	Sa
26	27	28	29	30	31	1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	1	2	3	4	5	6

Clear Today

```
<html>
<body>

<h1>Show a Date Control</h1>

<form>
  DOB: <input type="date" id="birthday" name="birthday">
  <input type="submit">
</form>

</body>
</html>
```

- ``id`` is used for uniquely identifying elements on the page, primarily for styling and JavaScript purposes.
- ``name`` is used to identify form input elements, specifying the name of the data that will be sent to the server when the form is submitted.

Displaying date picker with dd/mm/yyyy format and ranges

10. HTML `<input type="date">`

- To set and get the input type date in `dd-mm-yyyy` format we will use attribute `placeholder="dd-mm-yyyy"`.
- We can also mention the **start** and **end dates** for the date picker with `min` and `max` attributes.

Date format

Get input date in dd-mm-yyyy format

Enter the Date:

April 2023

↑

↓

Su	Mo	Tu	We	Th	Fr	Sa
26	27	28	29	30	31	1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	1	2	3	4	5	6

Clear

Today

```
<html>
<body>
  <h1>Date format</h1>
  <h3>Get input date in
    dd-mm-yyyy format </h3>
  <label for="start"> Enter the Date: </label>
  <input type="date" name="start"
    placeholder="dd-mm-yyyy"
    min="1997-01-01" max="2030-12-31">
</body>
</html>
```

Label is applied to id of input tag

12. `<input type="tel">`

The `<input type="tel">` defines a telephone number.

Enter your phone number:

Format: 91-456-7890

11. HTML `<input type="time">`

- The `<input type="date">` defines a date picker.
`placeholder="dd-mm-yyyy"`.
- We can also mention the **start** and **end dates** for the date picker with `min` and `max` attributes.

Time Picker

Choose a time for your meeting:

```
<html>
<body>
  <label for="appt">Choose a time for your
    meeting:</label>
  <input type="time" id="appt" name="appt"
    min="09:00" max="18:00" required>
  <small>Office hours are 9am to 6pm</small>
</body>
</html>
```