

Project Report-Indian Judiciary System (District Court Level)

Problem statement and Approach:

This database aims to create a system which will facilitate centralized storage of data related to legal entities across all districts. Judiciary system consist of legal entities like Case, Petitions, Acts, Sections which makes it very complex and huge. This hampers the case judgements process as it lacks transparency. It also results into delay in the case proceedings which ultimately affects the society.

Through this system we can easily track the case proceedings, hearings. It is convenient for high courts and district courts to track the number of pending cases. As soon a case is created system will expediate the process of allocation of judges and hearings. Every hearing status and remarks are updated which will trigger the remaining process.

Users involved in System:

- Administrator
- Judge
- Lawyer
- Respondent
- Petitioner

Entities involved in System:


- High Court
- District Court
- Judges
- Lawyer
- Petitioner
- Respondent
- Petition
- Witness
- Act
- Section

- Hearings
- FIR
- Police Station
- Verdict
- Case
- People

Relationships:

- District Court comes under a single High court. A High court can have multiple District Court.
- Every District court consist of many cases and a case can be only at one District court.
- Judge can work on many or zero cases. But a case is assigned only to one judge.
- Every case can have any number of petitioner, respondent, witness and multiple cases can have same petitioner, respondent or witness.
- Every case has two lawyers (Lawyer for petitioner and respondent).
- A case can be filed against single FIR but can have multiple sections or acts.
- Many sections can have a single act.
- FIR is filed under a police station.
- Case can have multiple number of hearings.
- Every case has single verdict

Final ER Diagram:

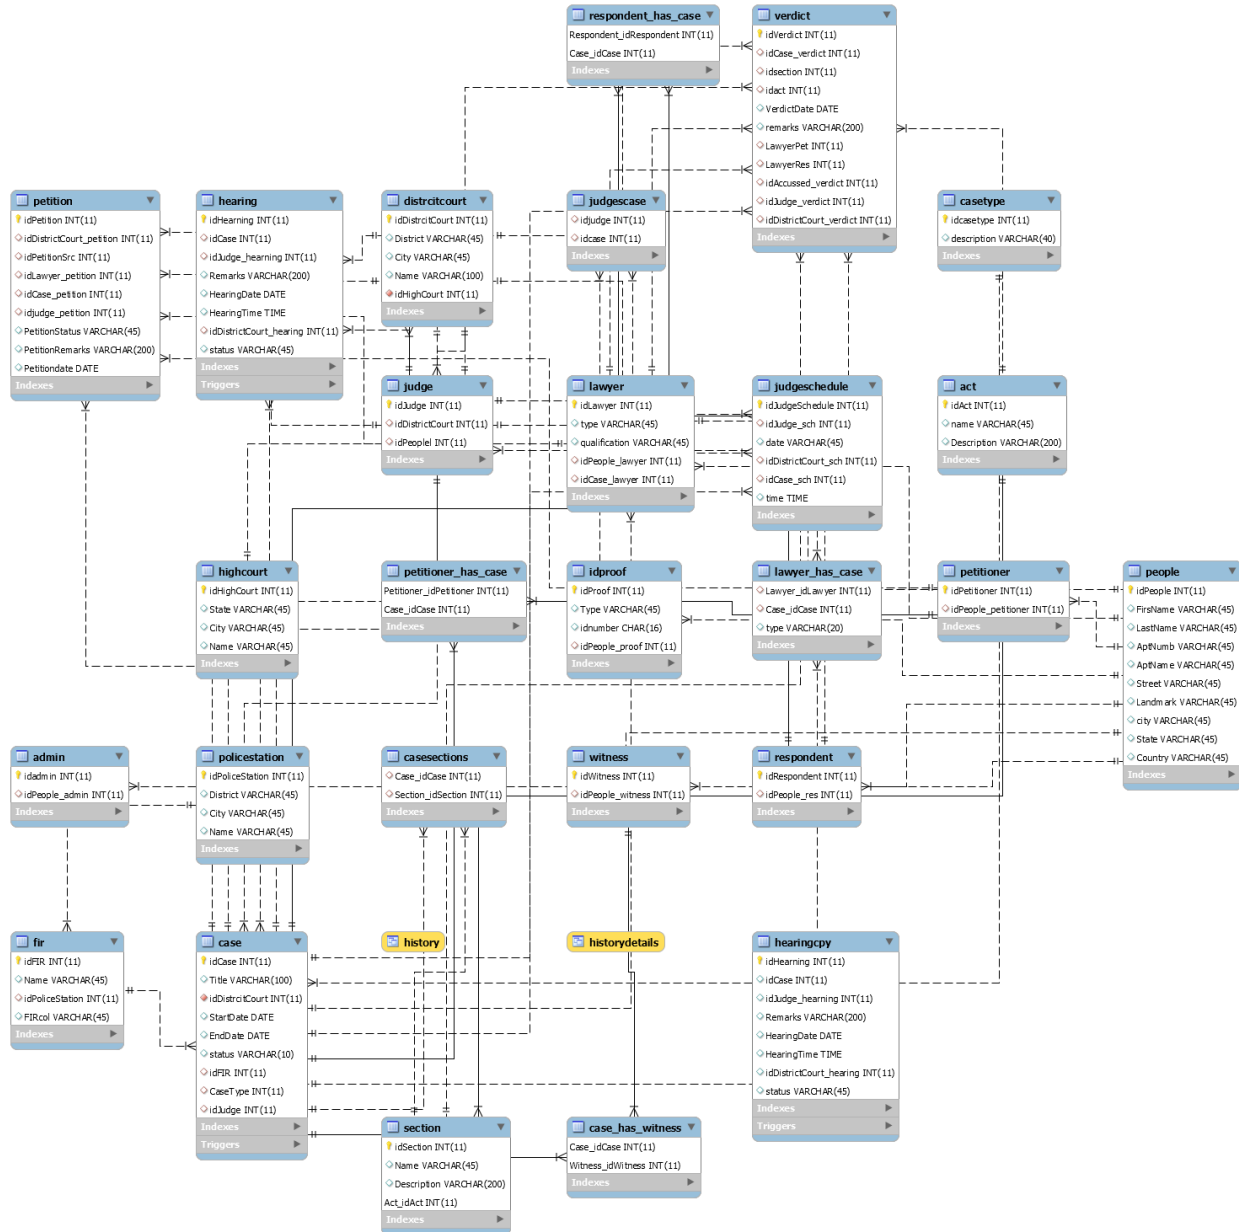

Normalization Steps:

Table Case:

Here data is not in the normalized form as a case can have multiple number of petitioners, respondent and lawyers.


And also, there can be multiple number of hearings for cases.

	Field	Type	Null	Key	Default	Extra
►	idcase	int(11)	YES		NULL	
	districtcourt	int(11)	YES		NULL	
	title	varchar(20)	YES		NULL	
	petitioner	int(11)	YES		NULL	
	respondent	int(11)	YES		NULL	
	lawyer_petitioner	int(11)	YES		NULL	
	lawyer_respondent	int(11)	YES		NULL	
	judge	int(11)	YES		NULL	
	casetype	int(11)	YES		NULL	
	startdate	date	YES		NULL	
	enddate	date	YES		NULL	
	idfir	int(11)	YES		NULL	
	status	varchar(20)	YES		NULL	
	hearingdate	date	YES		NULL	
	remarks	varchar(20)	YES		NULL	

So, through normalization we have created multiple table which will store data like petitioners, respondent, lawyers, hearings.

Normalized tables are available in the above Final ER diagram.

Use Case Diagram:

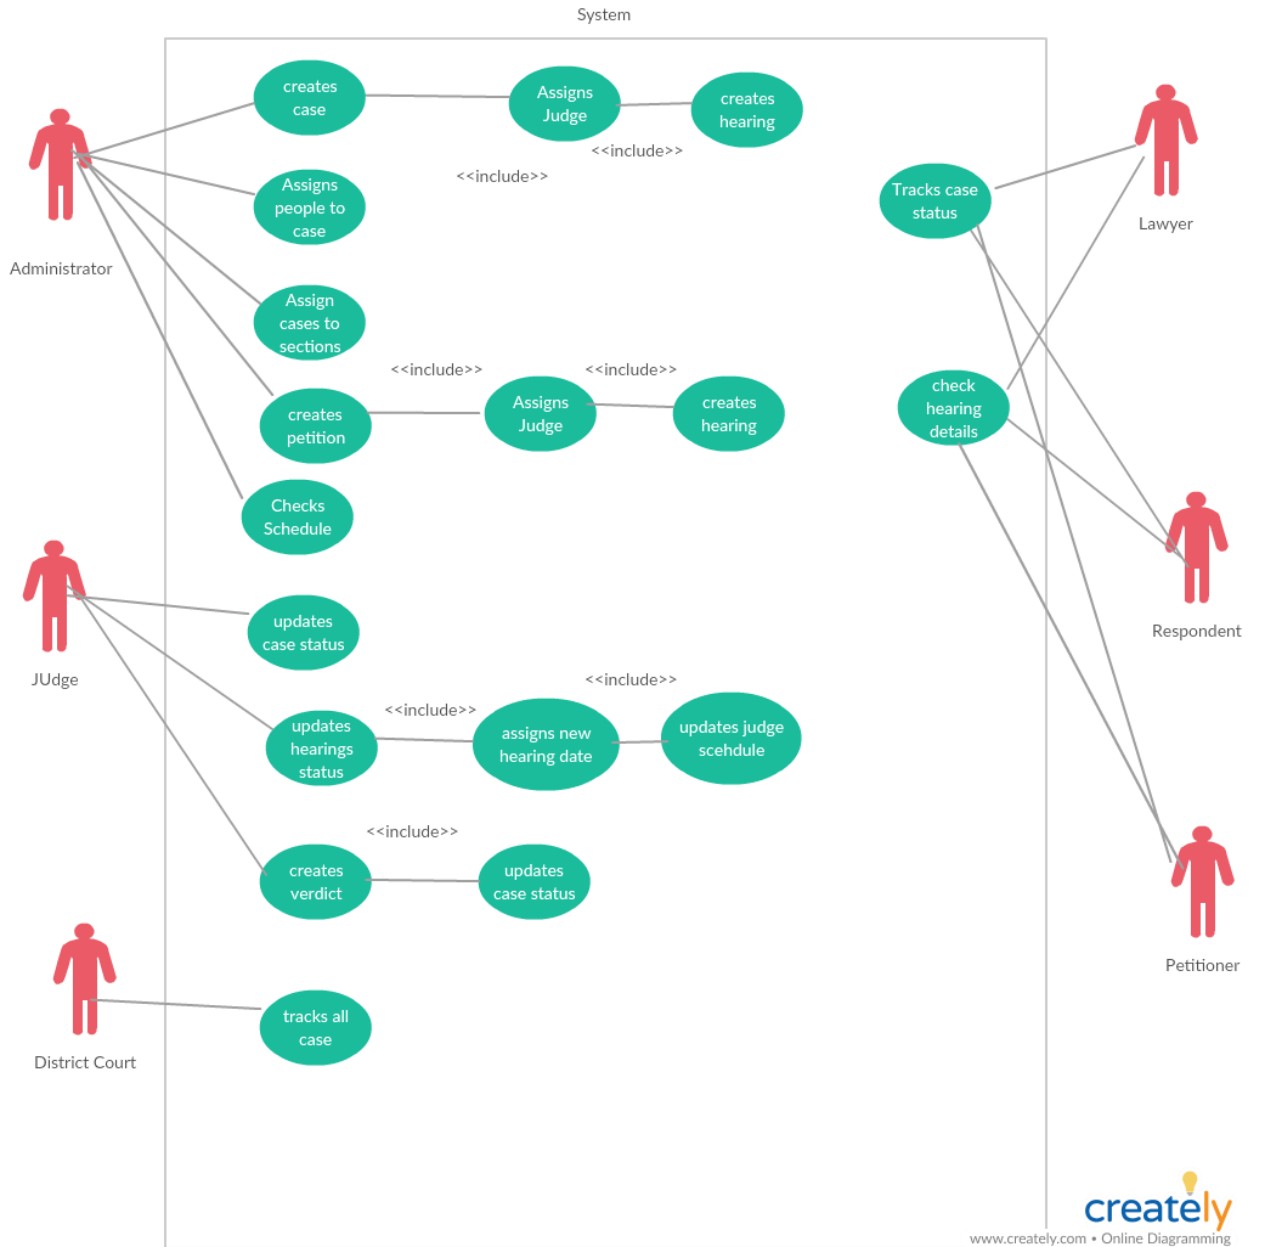

Store Procedures /Triggers/View:

- **Creation of case.**

1.With this store procedure case can be created. Here we need to pass all data related to case, system assigns judge based on availability. Judge with least number of cases is always assigned to the case.

2.Sytem also assigns judges

3.And the judge schedule is updated with the new hearing details.

delimiter \\\

```
create procedure Creationcases3(in lvl_title varchar(45),lvl_iddistrict int,lvl_startDate  
date,lvl_idfir int,lvl_casetype int)
```

```
begin
```

```
insert into `case` values(null,lvl_title,lvl_iddistrict,lvl_startDate,'9999-01-  
01','Created',lvl_idfir,lvl_casetype,(select idjudge from judgesCase group by idjudge order by  
count(idjudge) asc limit 1));
```

```
end;
```

4.To create new hearing and update the judge schedule we have used trigger .

Trigger to generate hearing on case insertion

delimiter \\\

```
create trigger UpdateCaseHearing
```

```
after insert on `case`
```

```
for each row
```

```
begin
```

```
insert into hearing  
values(null,new.idcase,new.idJudge,"NA",DATE(date(NOW()))+15,new.idDistrcitCourt,"Proces  
s",null);
```

```
insert into judgeschedule  
values(null,new.idJudge,DATE(date(NOW()))+15,new.idDistrcitCourt,new.idcase);
```

```
end;
```

- **Creation of petition**

1. With this store procedure petition can be created. Here we need to pass all data related to petition, system assigns judge based on availability. Judge with least number of cases/Petition is always assigned to the case.

2. And the next hearing date is also created.

delimiter \\\

```
create procedure CreationPetition(in lvl_district int,lvl_petitionerid int ,lvl_lawyer int,
lvl_caseid int,lvl_date date)
```

```
begin
```

```
insert into petition values(null,lvl_district,lvl_petitionerid,lvl_lawyer,lvl_caseid,(select idjudge
from judgesCase group by idjudge order by count(idjudge) asc limit 1),'Created',lvl_date);
```

```
end;
```

3.This trigger creates new hearing for the case and also assign judge to it .

4.The judge schedule is updated accordingly.

-Trigger to generate hearing for case

delimiter \\\

```
create trigger UpdatePetitionHearing
```

```
after insert on petition
```

```
for each row
```

```
begin
```

```
insert into hearing
```

```
values(null,new.idCase_petition,new.idjudge_petition,"NA",DATE(date(NOW()))+15),new.idDis
trictCourt_petition,"Process",new.idPetition);
```

```
insert into judgeschedule
```

```
values(null,idjudge_petition,DATE(date(NOW()))+15),new.idDistrictCourt_petition,new.idCase_
petition);
```

```
end;
```

- **Store Procedure to create next hearing for case and petition:**

1. After the case hearing when the judge updates the case/petition remarks and status.
2. It indicates that the hearing is completed so new hearing date is given to the case/petition and judge schedule is also updated.

delimiter \\\

```
create procedure updateHearing2(in lvl_status varchar(10), lvl_Remarks varchar(45), lvl_idcase
int, lvl_hearingid int, lvl_petition int)
```

```
begin
```

```
update Hearing
```

```
set status = lvl_status where idHearing = lvl_hearingid;
```

```
update hearing
```

```
set Remarks = lvl_remarks where idHearing = lvl_hearingid;
```

```
insert into hearing select
```

```
null, idcase, idjudge, "NA", date(date(now())+15), idDistrcitCourt, "Process", lvl_petition from
`case` where idcase=lvl_idcase;
```

```
insert into judgeschedule select null, idjudge, date(date(now())+15), idDistrcitCourt, idcase from
`case` where idcase = lvl_idcase;
```

```
end;
```

- **Overview of all hearings and case details which can be available to lawyers, petitioner, respondent.**

This view will provide an overview of all hearing history for every case.

```
create view history as select
```

```
`case`.idcase, title, startdate, hearing.idHearing, hearing.Remarks, hearing.status, hearing.HearingD
ate from `case` inner join hearing on `case`.idCase= hearing.idCase;
```

- **Admin responsibilities:**

Procedure which admin can use to create entities in system.

-Creation of people

Here it will check if a person entry is new by checking his Id Proof number: If same number exist new entry is not created.

delimiter \\\


```

create procedure createPeopleDetails(in lvl_Fname varchar(45),lvl_Lname
varchar(45),lvl_Aptno varchar(45),lvl_Aptname varchar(45),lvl_Aptstreet
varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state varchar(45),lvl_country
varchar(45),lvl_no varchar(16))

begin

if((select count(*) from idproof where idnumber = lvl_no)<1)

then

insert into people
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit
y,lvl_state,lvl_country);

end if;

end;

\\

```

-Store Procedure to create caseentities like respondent,petition,lawyer related to case.

```

delimiter \\

create procedure caseentities(in lvl_caseid int,lvl_resid int,lvl_petid int,lvl_lawyerP
int,lvl_lawyerR int)

begin

if((select count(*) from `case` where idcase = lvl_caseid)=1 && (select count(*) from lawyer
where idlwayer in(lvl_lawyerP,lvl_lawyerR)=2 &&(select count(*) from respondent where
idRespondent = lvl_resid) =1&&(select count(*) from petitioner where
idPetitioner=lvl_petid)=1))

then

insert into lawyer_has_case values(lvl_lawyerP,lvl_caseid,'Petitioner');

insert into lawyer_has_case values(lvl_lawyerR,lvl_caseid,'Respondent');

insert into respondent_has_case values(lvl_resid,lvl_caseid);

insert into petitioner_has_case values(lvl_petid,lvl_caseid);

end if;

end;

```

-Procedure to create respondent

```
delimiter \\  
  
create procedure CreateAllRes(lvl_idpeople int)  
  
begin  
  
if((select count(*) from people where idpeople=lvl_idpeople)=1)  
  
then  
  
insert into respondent values(null,lvl_idpeople);  
  
end if;  
  
end;  
  
-
```

- **Procedure to update Verdict**

After the case proceedings when the judge creates verdict this procedure is used to create verdict and update case table for the particular case

```
delimiter //  
  
create procedure addverdict(in lvl_case int,lvl_idsec int,lvl_idact int,lvl_verdictdate  
date,lvl_remarks varchar(40),lvl_lawP int,lvl_lawR int,lvl_acc int,lvl_judge int,lvl_district int)  
  
begin  
  
insert into verdict  
values(null,lvl_case,lvl_idsec,lvl_idact,lvl_verdictdate,lvl_remarks,lvl_lawP,lvl_lawR,lvl_acc,lvl_judge,lvl_district);  
  
update `case` set status ="verdict" where idcase = lvl_case;  
  
end
```

- **View to fetch Petitioner details**

This view will provide details regarding all petitioners and the cases in which they are involved.

```
create view PetitionerDetails as select `case`.idcase,`case`.Title,petitioner_idpetitioner from  
`case` inner join petitioner_has_case on idcase = case_idcase inner join petitioner on  
petitioner_idpetitioner = idpetitioner inner join people as p on idpeople_petitioner =  
idpeople;
```

- **View to fetch Witness details**

This view will provide details regarding all witness and the cases in which they are involved.

```
create view witnessdetails as select `case`.idcase,`case`.Title,witness_idwitness from `case`  
inner join case_has_witness on idcase = case_idcase inner join witness on witness_idwitness =  
idwitness inner join people as p on idpeople_witness = idpeople;
```

Creation of Roles and User:

```
-- create role 'admin';  
  
grant all privileges on judiciarysystem3 to 'admin';  
  
-- grant all privileges on *.* to 'parsa'@'localhost'  
  
-- create role 'viewAll';  
  
-- grant select on judiciarysystem3.* to 'viewAll'  
  
-- create role 'updateHearning';  
  
grant update,insert on judiciarysystem3.hearing to 'updateHearning';  
  
-- create role 'createVerdicts';  
  
-- grant create,update on judiciarysystem3.verdict to 'createVerdicts'  
  
-- create role 'caseView';  
  
grant select on judiciarysystem3.case to 'caseView';  
  
create role 'PetitionView';  
  
grant select on judiciarysystem3.petition to 'PetitionView';  
  
create role 'firView';  
  
grant select on judiciarysystem3.fir to 'firView';  
  
create role 'VerdictView';  
  
grant select on judiciarysystem3.verdict to 'VerdictView';  
  
  
create role 'HearingView';  
  
grant select on judiciarysystem3.hearing to 'HearingView';  
  
  
create role 'ActsView';
```

grant select on judicarysystem3.act to 'ActsView';

create role 'SectionView';

grant select on judicarysystem3.section to 'SectionView';

create role 'casesections';

grant select on judicarysystem3.casesections to 'casesections';

Grant these roles to users:

CREATE USER 'Admin1'@'localhost' IDENTIFIED BY 'dev1pass';

grant 'admin' to 'Admin1'@'localhost';

CREATE USER 'JUDGE'@'LOCALHOST' identified BY 'dev1pass';

grant 'viewAll','updateHearing','hearingCpy' to 'JUDGE'@'LOCALHOST';

create USER 'LAWYER1'@'LOCALHOST' identified BY 'dev1pass';

GRANT

'caseView','PetitionView','firView','VerdictView','HearingView','ActsView','SectionView','casesections' TO 'LAWYER1'@'LOCALHOST';

create user 'Petition/Respondent'@'LOCALHOST' identified BY 'dev1pass';

GRANT

'caseView','PetitionView','firView','VerdictView','HearingView','ActsView','SectionView' TO 'Petition/Respondent'@'LOCALHOST';

Optimization

Indexing technique is used to provide optimization in queries.

Foreign keys and Primary keys are used in indexing which can help query optimization as they used for many queries.

Table: Case

Index for columns :IdCase, Title, idDistrictcourt, idFir, idJudge, Casetype.

Table: District Court

Index for columns: idDistrictCourt,idhighCourt

Table: Fir

Index for columns: idFIR.

Table: Hearing

Index for columns: iddistrict, idcase, idhearing

Index Table: Judge

for columns: idJudge, idDistrict, idPeople

Table: lawyer

Index for columns: idLawyer ,idPeople

Table:Case_has_witness

Index for columns: case_idcase, witness_idwitness

Table:DistrictCourt

Index for columns: iddistrictCourt, district,City,idHighCourt

Table: JudgeSchedule

Index for columns:idjudgeSchedule,idjudge,idDistrictCourt,idCase

Table: Respondent

Index for columns:idPeople,idrespondent

Table: Verdict

Index for columns: idcase,idsection,idact,idjudge,lawyer,iddistrictCourt

Appendix:

```
CREATE DATABASE IF NOT EXISTS `judicarysystem3` /*!40100 DEFAULT
CHARACTER SET utf8 COLLATE utf8_bin */;

USE `judicarysystem3`;

-- MySQL dump 10.13  Distrib 8.0.12, for Win64 (x86_64)

--

-- Host: localhost  Database: judicarysystem3

-- -----

-- Server version      8.0.12

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS
*/;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
SET NAMES utf8 ;
/*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
/*!40103 SET TIME_ZONE='+00:00' */;
/*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0
*/;
/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS,
FOREIGN_KEY_CHECKS=0 */;
/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE,
SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
/*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;

--

-- Table structure for table `act`

--
```

```

DROP TABLE IF EXISTS `act`;

/*!40101 SET @saved_cs_client      = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `act` (
  `idAct` int(11) NOT NULL AUTO_INCREMENT,
  `name` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `Description` varchar(200) COLLATE utf8_bin DEFAULT NULL,
  PRIMARY KEY (`idAct`)
) ENGINE=InnoDB AUTO_INCREMENT=3 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `act`
--

LOCK TABLES `act` WRITE;

/*!40000 ALTER TABLE `act` DISABLE KEYS */;

INSERT INTO `act` VALUES (1,'05A','Indian Penal Code'),(2,'05A','Indian Penal Code');

/*!40000 ALTER TABLE `act` ENABLE KEYS */;

UNLOCK TABLES;

--
-- Table structure for table `admin`
--

DROP TABLE IF EXISTS `admin`;

/*!40101 SET @saved_cs_client      = @@character_set_client */;

SET character_set_client = utf8mb4 ;

```

```
CREATE TABLE `admin` (  
  `idadmin` int(11) NOT NULL AUTO_INCREMENT,  
  `idPeople_admin` int(11) DEFAULT NULL,  
  PRIMARY KEY (`idadmin`),  
  KEY `idPeople_idx` (`idPeople_admin`),  
  CONSTRAINT `idPeople_admin` FOREIGN KEY (`idPeople_admin`) REFERENCES  
  `people` (`idpeople`)  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;  
/*!40101 SET character_set_client = @saved_cs_client */;
```

```
--  
-- Dumping data for table `admin`  
--
```

```
LOCK TABLES `admin` WRITE;  
/*!40000 ALTER TABLE `admin` DISABLE KEYS */;  
/*!40000 ALTER TABLE `admin` ENABLE KEYS */;  
UNLOCK TABLES;
```

```
--  
-- Table structure for table `case`  
--
```

```
DROP TABLE IF EXISTS `case`;  
/*!40101 SET @saved_cs_client = @@character_set_client */;  
SET character_set_client = utf8mb4 ;  
CREATE TABLE `case` (  
  `idCase` int(11) NOT NULL AUTO_INCREMENT,  
  `Title` varchar(100) COLLATE utf8_bin DEFAULT NULL,
```



```

`idDistrcitCourt` int(11) NOT NULL,
`StartDate` date DEFAULT NULL,
`EndDate` date DEFAULT NULL,
`status` varchar(10) COLLATE utf8_bin DEFAULT NULL,
`idFIR` int(11) DEFAULT NULL,
`CaseType` int(11) DEFAULT NULL,
`idJudge` int(11) DEFAULT NULL,
PRIMARY KEY (`idCase`),
UNIQUE KEY `Title_UNIQUE` (`Title`),
KEY `idFIR_idx` (`idFIR`),
KEY `idJudge_idx` (`idJudge`),
KEY `idDistrcitCourt_idx` (`idDistrcitCourt`),
KEY `CaseType` (`CaseType`),
CONSTRAINT `case_ibfk_1` FOREIGN KEY (`CaseType`) REFERENCES `casetype`
(`idcasetype`),
CONSTRAINT `idDistrcitCourt` FOREIGN KEY (`idDistrcitCourt`) REFERENCES
`distrcitcourt` (`iddistrcitcourt`),
CONSTRAINT `idFIR` FOREIGN KEY (`idFIR`) REFERENCES `fir` (`idfir`),
CONSTRAINT `idJudge` FOREIGN KEY (`idJudge`) REFERENCES `judge` (`idjudge`)
) ENGINE=InnoDB AUTO_INCREMENT=27 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `case`
--

LOCK TABLES `case` WRITE;
/*!40000 ALTER TABLE `case` DISABLE KEYS */;

```

```

INSERT INTO `case` VALUES (3,'wedcc',1,'2000-01-01','9999-01-01','Created',NULL,NULL,NULL),(4,'11',1,'2000-01-01','9999-01-01','Created',NULL,1,NULL),(6,'1rr1',1,'2000-01-01','9999-01-01','Created',NULL,1,2),(8,'1rr551',1,'2000-01-01','9999-01-01','Created',NULL,1,2),(10,'1r66r1',1,'2000-01-01','9999-01-01','verdict',NULL,1,NULL),(11,'1rrrr1',1,'2000-01-01','9999-01-01','Created',NULL,1,NULL),(13,'1r22wwwrrr1',1,'2000-01-01','9999-01-01','Created',NULL,1,NULL),(14,'1yuwrrr1',1,'2000-01-01','9999-01-01','Created',NULL,1,NULL),(15,'1yeuwrrr1',1,'2000-01-01','9999-01-01','Created',NULL,1,NULL),(16,'case1:',1,'2000-11-11','9999-01-01','Created',NULL,1,NULL),(18,'case51:',1,'2000-11-11','9999-01-01','Created',NULL,1,NULL),(19,'aaa',1,'2000-01-01','9999-01-01','Created',NULL,1,NULL),(24,'casuuue1:',1,'2000-11-11','9999-01-01','Created',NULL,1,2),(25,'acbdd',1,'2000-01-01','9999-01-01','Created',NULL,1,2),(26,'sjgdbdm',1,'2000-01-01','9999-01-01','Created',NULL,1,2);

```

```

/*!40000 ALTER TABLE `case` ENABLE KEYS */;

```

```

UNLOCK TABLES;

```

```

/*!50003 SET @saved_cs_client = @@character_set_client */;

```

```

/*!50003 SET @saved_cs_results = @@character_set_results */;

```

```

/*!50003 SET @saved_col_connection = @@collation_connection */;

```

```

/*!50003 SET character_set_client = utf8mb4 */;

```

```

/*!50003 SET character_set_results = utf8mb4 */;

```

```

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */;

```

```

/*!50003 SET @saved_sql_mode = @@sql_mode */;

```

```

/*!50003 SET sql_mode =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;

```

```

DELIMITER ;;

```

```

/*!50003 CREATE*/ /*!50017 DEFINER=`root`@`localhost`*/ /*!50003 TRIGGER
`UpdateCaseHearing` AFTER INSERT ON `case` FOR EACH ROW begin

```

```

insert into hearing
values(null,new.idcase,new.idJudge,"NA",DATE(date(NOW())+15),new.idDistrcitCourt,"Processes",null);

```

```

insert into judgeschedule
values(null,new.idJudge,DATE(date(NOW())+15),new.idDistrcitCourt,new.idcase);

```

```

end *;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;

--
-- Table structure for table `case_has_witness`
--

DROP TABLE IF EXISTS `case_has_witness`;
/*!40101 SET @saved_cs_client      = @@character_set_client */;
SET character_set_client = utf8mb4 ;
CREATE TABLE `case_has_witness` (
  `Case_idCase` int(11) NOT NULL,
  `Witness_idWitness` int(11) NOT NULL,
  PRIMARY KEY (`Case_idCase`,`Witness_idWitness`),
  KEY `fk_Case_has_Witness_Witness1_idx` (`Witness_idWitness`),
  KEY `fk_Case_has_Witness_Case1_idx` (`Case_idCase`),
  CONSTRAINT `fk_Case_has_Witness_Case1` FOREIGN KEY (`Case_idCase`)
REFERENCES `case` (`idcase`),
  CONSTRAINT `fk_Case_has_Witness_Witness1` FOREIGN KEY (`Witness_idWitness`)
REFERENCES `witness` (`idwitness`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;
/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `case_has_witness`

```

--

```
LOCK TABLES `case_has_witness` WRITE;
/*!40000 ALTER TABLE `case_has_witness` DISABLE KEYS */;
INSERT INTO `case_has_witness` VALUES (19,1),(24,2),(25,3),(26,4);
/*!40000 ALTER TABLE `case_has_witness` ENABLE KEYS */;
UNLOCK TABLES;
```

--

-- Table structure for table `casesections`

--

```
DROP TABLE IF EXISTS `casesections`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
SET character_set_client = utf8mb4 ;
CREATE TABLE `casesections` (
  `Case_idCase` int(11) DEFAULT NULL,
  `Section_idSection` int(11) DEFAULT NULL,
  KEY `fk_Case_has_Section_Section1_idx` (`Section_idSection`),
  KEY `fk_Case_has_Section_Case1_idx` (`Case_idCase`),
  CONSTRAINT `fk_Case_has_Section_Case1` FOREIGN KEY (`Case_idCase`)
REFERENCES `case` (`idcase`),
  CONSTRAINT `fk_Case_has_Section_Section1` FOREIGN KEY (`Section_idSection`)
REFERENCES `section` (`idsection`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;
/*!40101 SET character_set_client = @saved_cs_client */;
```

--

-- Dumping data for table `casesections`

--

LOCK TABLES `casesections` WRITE;

/*!40000 ALTER TABLE `casesections` DISABLE KEYS */;

INSERT INTO `casesections` VALUES (8,1),(26,1),(25,1),(24,1),(19,1),(3,1),(4,1);

/*!40000 ALTER TABLE `casesections` ENABLE KEYS */;

UNLOCK TABLES;

--

-- Table structure for table `casetype`

--

DROP TABLE IF EXISTS `casetype`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `casetype` (

 `idcasetype` int(11) NOT NULL,

 `description` varchar(40) COLLATE utf8_bin DEFAULT NULL,

 PRIMARY KEY (`idcasetype`)

) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--

-- Dumping data for table `casetype`

--

LOCK TABLES `casetype` WRITE;

/*!40000 ALTER TABLE `casetype` DISABLE KEYS */;

```
INSERT INTO `casetype` VALUES (1,'Civil Miscellaneous '),(2,'Tax
sale'),(3,'Murder'),(4,'Criminal Miscellaneous'),(5,'Juvenile Miscellaneous');
```

```
/*!40000 ALTER TABLE `casetype` ENABLE KEYS */;
```

```
UNLOCK TABLES;
```

```
--
```

```
-- Table structure for table `distrcitcourt`
```

```
--
```

```
DROP TABLE IF EXISTS `distrcitcourt`;
```

```
/*!40101 SET @saved_cs_client = @@character_set_client */;
```

```
SET character_set_client = utf8mb4 ;
```

```
CREATE TABLE `distrcitcourt` (
```

```
  `idDistrcitCourt` int(11) NOT NULL AUTO_INCREMENT,
```

```
  `District` varchar(45) COLLATE utf8_bin DEFAULT NULL,
```

```
  `City` varchar(45) COLLATE utf8_bin DEFAULT NULL,
```

```
  `Name` varchar(100) COLLATE utf8_bin DEFAULT NULL,
```

```
  `idHighCourt` int(11) NOT NULL,
```

```
  PRIMARY KEY (`idDistrcitCourt`),
```

```
  UNIQUE KEY `District_UNIQUE` (`District`),
```

```
  UNIQUE KEY `City_UNIQUE` (`City`),
```

```
  KEY `idHighCourt_idx` (`idHighCourt`),
```

```
  CONSTRAINT `idHighCourt` FOREIGN KEY (`idHighCourt`) REFERENCES `highcourt`
(`idhighcourt`)
```

```
) ENGINE=InnoDB AUTO_INCREMENT=3 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;
```

```
/*!40101 SET character_set_client = @saved_cs_client */;
```

```
--
```

```
-- Dumping data for table `distrcitcourt`
```

```
--
```

```
LOCK TABLES `distrcitcourt` WRITE;
```

```
/*!40000 ALTER TABLE `distrcitcourt` DISABLE KEYS */;
```

```
INSERT INTO `distrcitcourt` VALUES (1,'q','ss','ss',1),(2,'Thane','Thane','Thane District Court',1);
```

```
/*!40000 ALTER TABLE `distrcitcourt` ENABLE KEYS */;
```

```
UNLOCK TABLES;
```

```
--
```

```
-- Table structure for table `fir`
```

```
--
```

```
DROP TABLE IF EXISTS `fir`;
```

```
/*!40101 SET @saved_cs_client = @@character_set_client */;
```

```
SET character_set_client = utf8mb4 ;
```

```
CREATE TABLE `fir` (
```

```
  `idFIR` int(11) NOT NULL AUTO_INCREMENT,
```

```
  `Name` varchar(45) COLLATE utf8_bin DEFAULT NULL,
```

```
  `idPoliceStation` int(11) DEFAULT NULL,
```

```
  `FIRcol` varchar(45) COLLATE utf8_bin DEFAULT NULL,
```

```
  PRIMARY KEY (`idFIR`),
```

```
  KEY `idPoliceStation_idx` (`idPoliceStation`),
```

```
  CONSTRAINT `idPoliceStation` FOREIGN KEY (`idPoliceStation`) REFERENCES `policestation` (`idpolicestation`)
```

```
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;
```

```
/*!40101 SET character_set_client = @saved_cs_client */;
```

--

-- Dumping data for table `fir`

--

LOCK TABLES `fir` WRITE;

/*!40000 ALTER TABLE `fir` DISABLE KEYS */;

/*!40000 ALTER TABLE `fir` ENABLE KEYS */;

UNLOCK TABLES;

--

-- Table structure for table `hearing`

--

DROP TABLE IF EXISTS `hearing`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `hearing` (

 `idHearing` int(11) NOT NULL AUTO_INCREMENT,

 `idCase` int(11) DEFAULT NULL,

 `idJudge_hearing` int(11) DEFAULT NULL,

 `Remarks` varchar(200) COLLATE utf8_bin DEFAULT NULL,

 `HearingDate` date DEFAULT NULL,

 `idDistrictCourt_hearing` int(11) DEFAULT NULL,

 `status` varchar(45) COLLATE utf8_bin DEFAULT NULL,

 `HearingPetitionId` int(11) DEFAULT NULL,

 PRIMARY KEY (`idHearing`),

 KEY `idcase_idx` (`idCase`),

 KEY `idDisctrictCourt_hearing_idx` (`idDistrictCourt_hearing`),


```

KEY `idjudge_hearning_idx` (`idJudge_hearning`),
KEY `HearingPetitionId` (`HearingPetitionId`),
CONSTRAINT `hearing_ibfk_1` FOREIGN KEY (`HearingPetitionId`) REFERENCES
`petition` (`idpetition`),
CONSTRAINT `idDisctrictCourt_hearing` FOREIGN KEY (`idDistrictCourt_hearing`)
REFERENCES `distrcitcourt` (`iddistrctcourt`),
CONSTRAINT `idcase` FOREIGN KEY (`idCase`) REFERENCES `case` (`idcase`),
CONSTRAINT `idjudge_hearning` FOREIGN KEY (`idJudge_hearning`) REFERENCES
`judge` (`idjudge`)
) ENGINE=InnoDB AUTO_INCREMENT=8 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

```

```

/*!40101 SET character_set_client = @saved_cs_client */;

```

```
--
```

```
-- Dumping data for table `hearing`
```

```
--
```

```
LOCK TABLES `hearing` WRITE;
```

```
/*!40000 ALTER TABLE `hearing` DISABLE KEYS */;
```

```

INSERT INTO `hearing` VALUES (1,8,2,'NA','2018-12-
12',1,'Process',NULL),(2,25,2,'new1','2018-12-28',1,'Complete',NULL),(3,4,NULL,'NA','2000-
01-01',1,'Process',NULL),(4,25,2,'NA','2018-12-28',1,'Process',NULL),(5,8,2,'NA','2018-12-
28',1,'Process',3),(6,25,2,'NA','2018-12-28',1,'Process',NULL),(7,26,2,'NA','2018-12-
28',1,'Process',NULL);

```

```
/*!40000 ALTER TABLE `hearing` ENABLE KEYS */;
```

```
UNLOCK TABLES;
```

```
--
```

```
-- Table structure for table `hearingcopy`
```

```
--
```

```

DROP TABLE IF EXISTS `hearingcopy`;

/*!40101 SET @saved_cs_client    = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `hearingcopy` (
  `idHearing` int(11) NOT NULL AUTO_INCREMENT,
  `idCase` int(11) DEFAULT NULL,
  `idJudge_hearing` int(11) DEFAULT NULL,
  `Remarks` varchar(200) COLLATE utf8_bin DEFAULT NULL,
  `HearingDate` date DEFAULT NULL,
  `idDistrictCourt_hearing` int(11) DEFAULT NULL,
  `status` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `HearingPetitionId` int(11) DEFAULT NULL,
  PRIMARY KEY (`idHearing`),
  KEY `idcase_idx` (`idCase`),
  KEY `idDisctrictCourt_hearing_idx` (`idDistrictCourt_hearing`),
  KEY `idjudge_hearing_idx` (`idJudge_hearing`),
  KEY `HearingPetitionId` (`HearingPetitionId`)
) ENGINE=InnoDB AUTO_INCREMENT=4 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `hearingcopy`
--

LOCK TABLES `hearingcopy` WRITE;

/*!40000 ALTER TABLE `hearingcopy` DISABLE KEYS */;

/*!40000 ALTER TABLE `hearingcopy` ENABLE KEYS */;

UNLOCK TABLES;

```

```

/*!50003 SET @saved_cs_client      = @@character_set_client */;
/*!50003 SET @saved_cs_results     = @@character_set_results */;
/*!50003 SET @saved_col_connection = @@collation_connection */;
/*!50003 SET character_set_client  = utf8mb4 */;
/*!50003 SET character_set_results = utf8mb4 */;
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */;
/*!50003 SET @saved_sql_mode       = @@sql_mode */;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;
DELIMITER ;;

/*!50003 CREATE*/ /*!50017 DEFINER=`root`@`localhost`*/ /*!50003 TRIGGER
`UpdatestatusFinal2` AFTER INSERT ON `hearingcopy` FOR EACH ROW begin

insert into hearing
values(null,new.idcase,new.idJudge_hearning,"NA",DATE(date(NOW()))+15,new.idDistrictCo
urt_hearing,new.status,null);

end */;;

DELIMITER ;

/*!50003 SET sql_mode              = @saved_sql_mode */;
/*!50003 SET character_set_client  = @saved_cs_client */;
/*!50003 SET character_set_results = @saved_cs_results */;
/*!50003 SET collation_connection  = @saved_col_connection */;

--

-- Table structure for table `highcourt`

--

DROP TABLE IF EXISTS `highcourt`;

/*!40101 SET @saved_cs_client      = @@character_set_client */;

```

```

SET character_set_client = utf8mb4 ;

CREATE TABLE `highcourt` (
  `idHighCourt` int(11) NOT NULL AUTO_INCREMENT,
  `State` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `City` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `Name` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  PRIMARY KEY (`idHighCourt`)
) ENGINE=InnoDB AUTO_INCREMENT=4 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `highcourt`
--

LOCK TABLES `highcourt` WRITE;

/*!40000 ALTER TABLE `highcourt` DISABLE KEYS */;

INSERT INTO `highcourt` VALUES
(1,'jj','kk','ll'),(2,'jj','kk','ll'),(3,'Maharashtra','Mumbai','Mumbai Highcourt');

/*!40000 ALTER TABLE `highcourt` ENABLE KEYS */;

UNLOCK TABLES;

--
-- Temporary view structure for view `history`
--

DROP TABLE IF EXISTS `history`;

/*!50001 DROP VIEW IF EXISTS `history` */;

SET @saved_cs_client = @@character_set_client;

```

```

SET character_set_client = utf8mb4;

/*!50001 CREATE VIEW `history` AS SELECT
  1 AS `idcase`,
  1 AS `title`,
  1 AS `startdate`,
  1 AS `idHearning`,
  1 AS `Remarks`,
  1 AS `status`,
  1 AS `HearingDate`*/;

SET character_set_client = @saved_cs_client;

--
-- Temporary view structure for view `historydetails`
--

DROP TABLE IF EXISTS `historydetails`;

/*!50001 DROP VIEW IF EXISTS `historydetails`*/;

SET @saved_cs_client = @@character_set_client;
SET character_set_client = utf8mb4;

/*!50001 CREATE VIEW `historydetails` AS SELECT
  1 AS `idcase`,
  1 AS `title`,
  1 AS `startdate`,
  1 AS `idHearning`,
  1 AS `Remarks`,
  1 AS `status`,
  1 AS `HearingDate`*/;

SET character_set_client = @saved_cs_client;

```

--

-- Table structure for table `idproof`

--

DROP TABLE IF EXISTS `idproof`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `idproof` (

 `idProof` int(11) NOT NULL AUTO_INCREMENT,

 `Type` varchar(45) COLLATE utf8_bin DEFAULT NULL,

 `idnumber` char(16) COLLATE utf8_bin DEFAULT NULL,

 `idPeople_proof` int(11) DEFAULT NULL,

 PRIMARY KEY (`idProof`),

 KEY `idPeople_idx` (`idPeople_proof`),

 CONSTRAINT `idPeople_proof` FOREIGN KEY (`idPeople_proof`) REFERENCES `people`
 (`idpeople`)

) ENGINE=InnoDB AUTO_INCREMENT=4 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--

-- Dumping data for table `idproof`

--

LOCK TABLES `idproof` WRITE;

/*!40000 ALTER TABLE `idproof` DISABLE KEYS */;

INSERT INTO `idproof` VALUES

(1,'Adhar','1234567890123456',1),(2,'Adhar','1234567890123456',2),(3,'Adhar','1234567890123456',2);

```

/*!40000 ALTER TABLE `idproof` ENABLE KEYS */;

UNLOCK TABLES;


--
-- Table structure for table `judge`
--

DROP TABLE IF EXISTS `judge`;

/*!40101 SET @saved_cs_client = @@character_set_client */;
SET character_set_client = utf8mb4 ;

CREATE TABLE `judge` (
  `idJudge` int(11) NOT NULL AUTO_INCREMENT,
  `idDistrictCourt` int(11) DEFAULT NULL,
  `idPeople` int(11) DEFAULT NULL,
  PRIMARY KEY (`idJudge`),
  KEY `idDistrictCourt_idx` (`idDistrictCourt`),
  KEY `idPeople_idx` (`idPeople`),
  CONSTRAINT `idDistrictCourt` FOREIGN KEY (`idDistrictCourt`) REFERENCES
`distrcitcourt` (`iddistrcitcourt`),
  CONSTRAINT `idPeople` FOREIGN KEY (`idPeople`) REFERENCES `people` (`idpeople`)
) ENGINE=InnoDB AUTO_INCREMENT=6 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;


--
-- Dumping data for table `judge`
--

LOCK TABLES `judge` WRITE;

```

```

/*!40000 ALTER TABLE `judge` DISABLE KEYS */;
INSERT INTO `judge` VALUES (1,1,1),(2,1,7),(3,1,7),(4,1,8),(5,1,9);
/*!40000 ALTER TABLE `judge` ENABLE KEYS */;

UNLOCK TABLES;


--
-- Table structure for table `judgescase`
--


DROP TABLE IF EXISTS `judgescase`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
SET character_set_client = utf8mb4 ;
CREATE TABLE `judgescase` (
  `idjudge` int(11) DEFAULT NULL,
  `idcase` int(11) DEFAULT NULL,
  KEY `idjudge` (`idjudge`),
  KEY `idcase` (`idcase`),
  CONSTRAINT `judgescase_ibfk_1` FOREIGN KEY (`idjudge`) REFERENCES `judge`
(`idjudge`),
  CONSTRAINT `judgescase_ibfk_2` FOREIGN KEY (`idcase`) REFERENCES `case`
(`idcase`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;
/*!40101 SET character_set_client = @saved_cs_client */;


--
-- Dumping data for table `judgescase`
--


LOCK TABLES `judgescase` WRITE;

```



```

/*!40000 ALTER TABLE `judgescase` DISABLE KEYS */;
INSERT INTO `judgescase` VALUES (1,3),(2,6),(1,8),(5,25),(5,26),(2,19),(3,13),(4,14),(4,16);
/*!40000 ALTER TABLE `judgescase` ENABLE KEYS */;

UNLOCK TABLES;


--
-- Table structure for table `judgeschedule`
--


DROP TABLE IF EXISTS `judgeschedule`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
SET character_set_client = utf8mb4 ;
CREATE TABLE `judgeschedule` (
  `idJudgeSchedule` int(11) NOT NULL AUTO_INCREMENT,
  `idJudge_sch` int(11) DEFAULT NULL,
  `date` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `idDistrictCourt_sch` int(11) DEFAULT NULL,
  `idCase_sch` int(11) DEFAULT NULL,
  PRIMARY KEY (`idJudgeSchedule`),
  KEY `idjudge_idx` (`idJudge_sch`),
  KEY `idDistrictcourt_idx` (`idDistrictCourt_sch`),
  KEY `idCase_idx` (`idCase_sch`),
  CONSTRAINT `idCase_sch` FOREIGN KEY (`idCase_sch`) REFERENCES `case` (`idcase`),
  CONSTRAINT `idDistrictcourt_sch` FOREIGN KEY (`idDistrictCourt_sch`) REFERENCES `distrcitcourt` (`iddistrcitcourt`),
  CONSTRAINT `idjudge_sch` FOREIGN KEY (`idJudge_sch`) REFERENCES `judge` (`idjudge`)
) ENGINE=InnoDB AUTO_INCREMENT=2 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

```

```

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `judgeschedule`
--

LOCK TABLES `judgeschedule` WRITE;
/*!40000 ALTER TABLE `judgeschedule` DISABLE KEYS */;
INSERT INTO `judgeschedule` VALUES (1,2,'2018-12-28',1,26);
/*!40000 ALTER TABLE `judgeschedule` ENABLE KEYS */;
UNLOCK TABLES;

--
-- Table structure for table `lawyer`
--

DROP TABLE IF EXISTS `lawyer`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
SET character_set_client = utf8mb4 ;
CREATE TABLE `lawyer` (
  `idLawyer` int(11) NOT NULL AUTO_INCREMENT,
  `type` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `qualification` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `idPeople_lawyer` int(11) DEFAULT NULL,
  `idCase_lawyer` int(11) DEFAULT NULL,
  PRIMARY KEY (`idLawyer`),
  UNIQUE KEY `idPeople_lawyer` (`idPeople_lawyer`),
  KEY `idPeople_idx` (`idPeople_lawyer`),

```

```

KEY `idCase_lawyer_idx` (`idCase_lawyer`),
CONSTRAINT `idCase_lawyer` FOREIGN KEY (`idCase_lawyer`) REFERENCES `case`
(`idcase`),
CONSTRAINT `idPeople_lawyer` FOREIGN KEY (`idPeople_lawyer`) REFERENCES
`people` (`idpeople`)
) ENGINE=InnoDB AUTO_INCREMENT=8 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `lawyer`
--

LOCK TABLES `lawyer` WRITE;

/*!40000 ALTER TABLE `lawyer` DISABLE KEYS */;

INSERT INTO `lawyer` VALUES
(1,'Criminal','LLB',1,NULL),(2,'Criminal','LLB',2,NULL),(4,'criminal','llb',3,NULL),(5,'Crimina
l','llb',4,NULL),(6,'respondent','llb',5,NULL),(7,'petitioner','llb',6,NULL);

/*!40000 ALTER TABLE `lawyer` ENABLE KEYS */;

UNLOCK TABLES;

--
-- Table structure for table `lawyer_has_case`
--

DROP TABLE IF EXISTS `lawyer_has_case`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `lawyer_has_case` (
  `Lawyer_idLawyer` int(11) DEFAULT NULL,

```

```

`Case_idCase` int(11) DEFAULT NULL,
`type` varchar(20) COLLATE utf8_bin DEFAULT NULL,
KEY `fk_Lawyer_has_Case_Case1_idx` (`Case_idCase`),
KEY `fk_Lawyer_has_Case_Lawyer1_idx` (`Lawyer_idLawyer`),
CONSTRAINT `fk_Lawyer_has_Case_Case1` FOREIGN KEY (`Case_idCase`)
REFERENCES `case` (`idcase`),
CONSTRAINT `fk_Lawyer_has_Case_Lawyer1` FOREIGN KEY (`Lawyer_idLawyer`)
REFERENCES `lawyer` (`idlawyer`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;
/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `lawyer_has_case`
--

LOCK TABLES `lawyer_has_case` WRITE;
/*!40000 ALTER TABLE `lawyer_has_case` DISABLE KEYS */;
INSERT INTO `lawyer_has_case` VALUES
(1,3,'Petitioner'),(2,3,'Respondent'),(4,26,'Respondent'),(5,26,'Petitioner'),(6,25,'Respondent'),(7,2
5,'Petitioner');
/*!40000 ALTER TABLE `lawyer_has_case` ENABLE KEYS */;
UNLOCK TABLES;

--
-- Table structure for table `people`
--

DROP TABLE IF EXISTS `people`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
SET character_set_client = utf8mb4 ;

```

```

CREATE TABLE `people` (
  `idPeople` int(11) NOT NULL AUTO_INCREMENT,
  `FirsName` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `LastName` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `AptNumb` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `AptName` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `Street` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `Landmark` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `city` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `State` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `Country` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  PRIMARY KEY (`idPeople`)
) ENGINE=InnoDB AUTO_INCREMENT=41 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `people`
--

LOCK TABLES `people` WRITE;

/*!40000 ALTER TABLE `people` DISABLE KEYS */;

INSERT INTO `people` VALUES (1,'anil','kadam','12','abc','rambaug','opp
hotel','mumbai','Maharashtra','India'),(2,'ram','kapoor','12','abc','rambaug','opp
hotel','mumbai','Maharashtra','India'),(3,'keshav','shinde','12','abc','rambaug','opp
hotel','mumbai','Maharashtra','India'),(4,'asmita','k','12','abc','rambaug','opp
hotel','mumbai','Maharashtra','India'),(5,'raj','singh','12','abc','rambaug','opp
hotel','mumbai','Maharashtra','India'),(6,'ankita','dhawali','12','abc','rambaug','opp
hotel','mumbai','Maharashtra','India'),(7,'amrish','puri','23','ramb','near','mum','mh','in','kiran'),(8,'r
a','23','mk','ck
road','opp','pune','mh','in','ram'),(9,'kapoor','9','la','kj','opp','tahne','mh','in','ms'),(10,'amrish','puri','
23','ramb','near','mum','mh','in','kiran'),(11,'ra','23','mk','ck

```

```

road','opp','pune','mh','in','ram'),(12,'kapoor','9','la','kj','opp','tahne','mh','in','ms'),(13,'amrish','puri',
'23','ramb','near','mum','mh','in','kiran'),(14,'ra','23','mk','ck
road','opp','pune','mh','in','ram'),(15,'kapoor','9','la','kj','opp','tahne','mh','in','ms'),(16,'amrish','puri',
'23','ramb','near','mum','mh','in','kiran'),(17,'ra','23','mk','ck
road','opp','pune','mh','in','ram'),(18,'kapoor','9','la','kj','opp','tahne','mh','in','ms'),(19,'amrish','puri',
'23','ramb','near','mum','mh','in','kiran'),(20,'ra','23','mk','ck
road','opp','pune','mh','in','ram'),(21,'kapoor','9','la','kj','opp','tahne','mh','in','ms'),(22,'amrish','puri',
'23','ramb','near','mum','mh','in','kiran'),(23,'ra','23','mk','ck
road','opp','pune','mh','in','ram'),(24,'kapoor','9','la','kj','opp','tahne','mh','in','ms'),(25,'dhoni','23','ne
w','aa','12','aa','122','in','o'),(26,'amrish','puri','23','ramb','near','mum','mh','in','kiran'),(27,'ra','23','m
k','ck
road','opp','pune','mh','in','ram'),(28,'kapoor','9','la','kj','opp','tahne','mh','in','ms'),(29,'dhoni','23','ne
w','aa','12','aa','122','in','o'),(30,'amrish','puri','23','ramb','near','mum','mh','in','kiran'),(31,'ra','23','m
k','ck
road','opp','pune','mh','in','ram'),(32,'kapoor','9','la','kj','opp','tahne','mh','in','ms'),(33,'dhoni','23','ne
w','aa','12','aa','122','in','o'),(34,'pari','karpe','23','abc','street','opp','mumbai','maharashtra','india'),(3
5,'pari','karpe','23','abc','street','opp','mumbai','maharashtra','india'),(36,'pari','karpe','23','abc','stree
t','opp','mumbai','maharashtra','india'),(37,'parlll','karpe','23','abc','street','opp','mumbai','maharashtr
a','india'),(38,'parlll','karpe','23','abc','street','opp','mumbai','maharashtra','india'),(39,'parlll','karpe'
,'23','abc','street','opp','mumbai','maharashtra','india'),(40,'parlll','karpe','23','abc','street','opp','mum
bai','maharashtra','india');

```

```

/*!40000 ALTER TABLE `people` ENABLE KEYS */;

```

```

UNLOCK TABLES;

```

```

--

```

```

-- Table structure for table `petition`

```

```

--

```

```

DROP TABLE IF EXISTS `petition`;

```

```

/*!40101 SET @saved_cs_client = @@character_set_client */;

```

```

SET character_set_client = utf8mb4 ;

```

```

CREATE TABLE `petition` (

```

```

`idPetition` int(11) NOT NULL AUTO_INCREMENT,

```

```

`idDistrictCourt_petition` int(11) DEFAULT NULL,

```

```

`idPetitionSrc` int(11) DEFAULT NULL,

```

```

`idLawyer_petition` int(11) DEFAULT NULL,
`idCase_petition` int(11) DEFAULT NULL,
`idjudge_petition` int(11) DEFAULT NULL,
`PetitionStatus` varchar(45) COLLATE utf8_bin DEFAULT NULL,
`Petitiondate` date DEFAULT NULL,
PRIMARY KEY (`idPetition`),
KEY `idcase_idx` (`idCase_petition`),
KEY `idDistrictCourt_idx` (`idDistrictCourt_petition`),
KEY `idAccused_idx` (`idPetitionSrc`),
KEY `idLawyer_idx` (`idLawyer_petition`),
KEY `idJudge_idx` (`idjudge_petition`),
CONSTRAINT `idDistrictCourt_petition` FOREIGN KEY (`idDistrictCourt_petition`)
REFERENCES `distrcitcourt` (`iddistrcitcourt`),
CONSTRAINT `idJudge_petition` FOREIGN KEY (`idjudge_petition`) REFERENCES
`judge` (`idjudge`),
CONSTRAINT `idLawyer_petition` FOREIGN KEY (`idLawyer_petition`) REFERENCES
`lawyer` (`idlawyer`),
CONSTRAINT `idPetitionsrc` FOREIGN KEY (`idPetitionSrc`) REFERENCES `petitioner`
(`idpetitioner`),
CONSTRAINT `idcase_petition` FOREIGN KEY (`idCase_petition`) REFERENCES `case`
(`idcase`)
) ENGINE=InnoDB AUTO_INCREMENT=4 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `petition`
--

LOCK TABLES `petition` WRITE;

/*!40000 ALTER TABLE `petition` DISABLE KEYS */;

```

```
INSERT INTO `petition` VALUES (2,1,1,1,8,2,'Created','2018-01-01'),(3,1,1,1,8,2,'Created','2000-01-01');
```

```
/*!40000 ALTER TABLE `petition` ENABLE KEYS */;
```

```
UNLOCK TABLES;
```

```
/*!50003 SET @saved_cs_client      = @@character_set_client */;
```

```
/*!50003 SET @saved_cs_results     = @@character_set_results */;
```

```
/*!50003 SET @saved_col_connection = @@collation_connection */;
```

```
/*!50003 SET character_set_client  = utf8mb4 */;
```

```
/*!50003 SET character_set_results = utf8mb4 */;
```

```
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */;
```

```
/*!50003 SET @saved_sql_mode       = @@sql_mode */;
```

```
/*!50003 SET sql_mode              =  
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;
```

```
DELIMITER ;;
```

```
/*!50003 CREATE*/ /*!50017 DEFINER=`root`@`localhost`*/ /*!50003 TRIGGER  
`UpdatePetitionHearing` AFTER INSERT ON `petition` FOR EACH ROW begin
```

```
insert into hearing  
values(null,new.idCase_petition,new.idjudge_petition,"NA",DATE(date(NOW()))+15,new.idDis  
trictCourt_petition,"Process",new.idPetition);
```

```
insert into judgeschedule  
values(null,idjudge_petition,DATE(date(NOW()))+15,new.idDistrictCourt_petition,new.idCase_  
petition);
```

```
end */;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode              = @saved_sql_mode */;
```

```
/*!50003 SET character_set_client  = @saved_cs_client */;
```

```
/*!50003 SET character_set_results = @saved_cs_results */;
```

```
/*!50003 SET collation_connection  = @saved_col_connection */;
```

```
--
```


-- Table structure for table `petitioner`

--

DROP TABLE IF EXISTS `petitioner`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `petitioner` (

 `idPetitioner` int(11) NOT NULL,

 `idPeople_petitioner` int(11) DEFAULT NULL,

 PRIMARY KEY (`idPetitioner`),

 UNIQUE KEY `idPetitioner` (`idPetitioner`),

 UNIQUE KEY `idPeople_petitioner` (`idPeople_petitioner`),

 KEY `idPeople_idx` (`idPeople_petitioner`),

 CONSTRAINT `idPeople_petitioner` FOREIGN KEY (`idPeople_petitioner`) REFERENCES
 `people` (`idpeople`)

) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--

-- Dumping data for table `petitioner`

--

LOCK TABLES `petitioner` WRITE;

/*!40000 ALTER TABLE `petitioner` DISABLE KEYS */;

INSERT INTO `petitioner` VALUES (1,1),(2,12),(3,13),(4,15);

/*!40000 ALTER TABLE `petitioner` ENABLE KEYS */;

UNLOCK TABLES;

--

```

-- Table structure for table `petitioner_has_case`
--

DROP TABLE IF EXISTS `petitioner_has_case`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
SET character_set_client = utf8mb4 ;
CREATE TABLE `petitioner_has_case` (
  `Petitioner_idPetitioner` int(11) NOT NULL,
  `Case_idCase` int(11) NOT NULL,
  PRIMARY KEY (`Petitioner_idPetitioner`,`Case_idCase`),
  KEY `fk_Petitioner_has_Case_Case1_idx` (`Case_idCase`),
  KEY `fk_Petitioner_has_Case_Petitioner1_idx` (`Petitioner_idPetitioner`),
  CONSTRAINT `fk_Petitioner_has_Case_Case1` FOREIGN KEY (`Case_idCase`)
REFERENCES `case` (`idcase`),
  CONSTRAINT `fk_Petitioner_has_Case_Petitioner1` FOREIGN KEY
(`Petitioner_idPetitioner`) REFERENCES `petitioner` (`idpetitioner`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;
/*!40101 SET character_set_client = @saved_cs_client */;

--

-- Dumping data for table `petitioner_has_case`
--

LOCK TABLES `petitioner_has_case` WRITE;
/*!40000 ALTER TABLE `petitioner_has_case` DISABLE KEYS */;
INSERT INTO `petitioner_has_case` VALUES (1,3),(4,24),(3,25),(2,26);
/*!40000 ALTER TABLE `petitioner_has_case` ENABLE KEYS */;
UNLOCK TABLES;

```

```

--
-- Table structure for table `policestation`
--

DROP TABLE IF EXISTS `policestation`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
SET character_set_client = utf8mb4 ;
CREATE TABLE `policestation` (
  `idPoliceStation` int(11) NOT NULL AUTO_INCREMENT,
  `District` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `City` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `Name` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  PRIMARY KEY (`idPoliceStation`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;
/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `policestation`
--

LOCK TABLES `policestation` WRITE;
/*!40000 ALTER TABLE `policestation` DISABLE KEYS */;
/*!40000 ALTER TABLE `policestation` ENABLE KEYS */;
UNLOCK TABLES;

--
-- Table structure for table `respondent`
--

```

```

DROP TABLE IF EXISTS `respondent`;

/*!40101 SET @saved_cs_client      = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `respondent` (
  `idRespondent` int(11) NOT NULL AUTO_INCREMENT,
  `idPeople_res` int(11) DEFAULT NULL,
  PRIMARY KEY (`idRespondent`),
  KEY `idPeople_idx` (`idPeople_res`),
  CONSTRAINT `idPeople_res` FOREIGN KEY (`idPeople_res`) REFERENCES `people`
(`idpeople`)
) ENGINE=InnoDB AUTO_INCREMENT=6 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--

-- Dumping data for table `respondent`

--

LOCK TABLES `respondent` WRITE;

/*!40000 ALTER TABLE `respondent` DISABLE KEYS */;

INSERT INTO `respondent` VALUES (1,1),(3,20),(4,21),(5,22);

/*!40000 ALTER TABLE `respondent` ENABLE KEYS */;

UNLOCK TABLES;

--

-- Table structure for table `respondent_has_case`

--

```

```

DROP TABLE IF EXISTS `respondent_has_case`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `respondent_has_case` (
  `Respondent_idRespondent` int(11) NOT NULL,
  `Case_idCase` int(11) NOT NULL,
  PRIMARY KEY (`Respondent_idRespondent`,`Case_idCase`),
  KEY `fk_Respondent_has_Case_Case1_idx` (`Case_idCase`),
  KEY `fk_Respondent_has_Case_Respondent1_idx` (`Respondent_idRespondent`),
  CONSTRAINT `fk_Respondent_has_Case_Case1` FOREIGN KEY (`Case_idCase`)
REFERENCES `case` (`idcase`),
  CONSTRAINT `fk_Respondent_has_Case_Respondent1` FOREIGN KEY
(`Respondent_idRespondent`) REFERENCES `respondent` (`idrespondent`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--

-- Dumping data for table `respondent_has_case`

--

LOCK TABLES `respondent_has_case` WRITE;

/*!40000 ALTER TABLE `respondent_has_case` DISABLE KEYS */;

INSERT INTO `respondent_has_case` VALUES (1,3),(5,25),(3,26),(4,26);

/*!40000 ALTER TABLE `respondent_has_case` ENABLE KEYS */;

UNLOCK TABLES;

--

-- Table structure for table `section`

--

```

```

DROP TABLE IF EXISTS `section`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `section` (
  `idSection` int(11) NOT NULL AUTO_INCREMENT,
  `Name` varchar(45) COLLATE utf8_bin DEFAULT NULL,
  `Description` varchar(200) COLLATE utf8_bin DEFAULT NULL,
  `Act_idAct` int(11) NOT NULL,
  PRIMARY KEY (`idSection`,`Act_idAct`),
  KEY `fk_Section_Act1_idx` (`Act_idAct`),
  CONSTRAINT `fk_Section_Act1` FOREIGN KEY (`Act_idAct`) REFERENCES `act`
(`idact`)
) ENGINE=InnoDB AUTO_INCREMENT=3 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--

-- Dumping data for table `section`

--

LOCK TABLES `section` WRITE;

/*!40000 ALTER TABLE `section` DISABLE KEYS */;

INSERT INTO `section` VALUES (1,'12A','Defination of criminal
conspiracy',1),(2,'300','Muder',1);

/*!40000 ALTER TABLE `section` ENABLE KEYS */;

UNLOCK TABLES;

--

```

-- Table structure for table `verdict`

--

DROP TABLE IF EXISTS `verdict`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `verdict` (

 `idVerdict` int(11) NOT NULL AUTO_INCREMENT,

 `idCase_verdict` int(11) DEFAULT NULL,

 `idsection` int(11) DEFAULT NULL,

 `idact` int(11) DEFAULT NULL,

 `VerdictDate` date DEFAULT NULL,

 `remarks` varchar(200) COLLATE utf8_bin DEFAULT NULL,

 `LawyerPet` int(11) DEFAULT NULL,

 `LawyerRes` int(11) DEFAULT NULL,

 `idAccussed_verdict` int(11) DEFAULT NULL,

 `idJudge_verdict` int(11) DEFAULT NULL,

 `idDistrictCourt_verdict` int(11) DEFAULT NULL,

 PRIMARY KEY (`idVerdict`),

 KEY `idcase_idx` (`idCase_verdict`),

 KEY `idsection_idx` (`idsection`),

 KEY `idact_idx` (`idact`),

 KEY `idjudge_idx` (`idJudge_verdict`),

 KEY `Lawyerdef_idx` (`LawyerPet`),

 KEY `Lawyerpros_idx` (`LawyerRes`),

 KEY `idDistrictCourt_idx` (`idDistrictCourt_verdict`),

 KEY `idAccussed_verdict_idx` (`idAccussed_verdict`),

 CONSTRAINT `Lawyerdef` FOREIGN KEY (`LawyerPet`) REFERENCES `lawyer`
 (`idlawyer`),

```

    CONSTRAINT `Lawyerpros` FOREIGN KEY (`LawyerRes`) REFERENCES `lawyer`
(`idlawyer`),

    CONSTRAINT `idAccused_verdict` FOREIGN KEY (`idAccused_verdict`) REFERENCES
`respondent` (`idrespondent`),

    CONSTRAINT `idDistrictCourt_verdict` FOREIGN KEY (`idDistrictCourt_verdict`)
REFERENCES `distrcitcourt` (`iddistrcitcourt`),

    CONSTRAINT `idact` FOREIGN KEY (`idact`) REFERENCES `act` (`idact`),

    CONSTRAINT `idcase_verdict` FOREIGN KEY (`idCase_verdict`) REFERENCES `case`
(`idcase`),

    CONSTRAINT `idjudge_verdict` FOREIGN KEY (`idJudge_verdict`) REFERENCES `judge`
(`idjudge`),

    CONSTRAINT `idsection` FOREIGN KEY (`idsection`) REFERENCES `section` (`idsection`)
) ENGINE=InnoDB AUTO_INCREMENT=2 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `verdict`
--

LOCK TABLES `verdict` WRITE;
/*!40000 ALTER TABLE `verdict` DISABLE KEYS */;
INSERT INTO `verdict` VALUES (1,10,1,1,'2018-12-13','guilty',1,2,1,1,1);
/*!40000 ALTER TABLE `verdict` ENABLE KEYS */;
UNLOCK TABLES;

--
-- Table structure for table `witness`
--

DROP TABLE IF EXISTS `witness`;

```



```

/*!40101 SET @saved_cs_client      = @@character_set_client */;

SET character_set_client = utf8mb4 ;

CREATE TABLE `witness` (
  `idWitness` int(11) NOT NULL AUTO_INCREMENT,
  `idPeople_witness` int(11) DEFAULT NULL,
  PRIMARY KEY (`idWitness`),
  KEY `idPeople_witness_idx` (`idPeople_witness`),
  CONSTRAINT `idPeople_witness` FOREIGN KEY (`idPeople_witness`) REFERENCES
`people` (`idpeople`)
) ENGINE=InnoDB AUTO_INCREMENT=5 DEFAULT CHARSET=utf8
COLLATE=utf8_bin;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `witness`
--

LOCK TABLES `witness` WRITE;

/*!40000 ALTER TABLE `witness` DISABLE KEYS */;
INSERT INTO `witness` VALUES (4,25),(3,26),(2,27),(1,28);
/*!40000 ALTER TABLE `witness` ENABLE KEYS */;

UNLOCK TABLES;

--
-- Temporary view structure for view `witnessdetails`
--

DROP TABLE IF EXISTS `witnessdetails`;

/*!50001 DROP VIEW IF EXISTS `witnessdetails` */;

```

```

SET @saved_cs_client    = @@character_set_client;
SET character_set_client = utf8mb4;
/*!50001 CREATE VIEW `witnessdetails` AS SELECT
  1 AS `idcase`,
  1 AS `Title`,
  1 AS `witness_idwitness`*/;
SET character_set_client = @saved_cs_client;

```

```

--
-- Dumping events for database 'judicarysystem3'
--

```

```

--
-- Dumping routines for database 'judicarysystem3'
--

```

```

/*!50003 DROP PROCEDURE IF EXISTS `addverdict` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */;
/*!50003 SET @saved_cs_results     = @@character_set_results */;
/*!50003 SET @saved_col_connection = @@collation_connection */;
/*!50003 SET character_set_client  = utf8mb4 */;
/*!50003 SET character_set_results = utf8mb4 */;
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */;
/*!50003 SET @saved_sql_mode       = @@sql_mode */;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;
DELIMITER ;;

```

```

CREATE DEFINER=`root`@`localhost` PROCEDURE `addverdict`(in lvl_case int,lvl_idsec
int,lvl_idact int,lvl_verdictdate date,lvl_remarks varchar(40),lvl_lawP int,lvl_lawR int,lvl_acc
int,lvl_judge int,lvl_district int)

```

```

begin

insert into verdict
values(null,lv1_case,lv1_idsec,lv1_idact,lv1_verdictdate,lv1_remarks,lv1_lawP,lv1_lawR,lv1_acc,lv1_judge,lv1_district);

update `case` set status ="verdict" where idcase = lv1_case;

end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `caseentities` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;
/*!50003 SET sql_mode            =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `caseentities`(in lv1_caseid int,lv1_resid
int,lv1_petid int,lv1_lawyerP int,lv1_lawyerR int)

begin

if((select count(*) from `case` where idcase = lv1_caseid)=1 && (select count(*) from lawyer
where idlawyer in(lv1_lawyerP,lv1_lawyerR)=2 &&(select count(*) from respondent where
idRespondent = lv1_resid) =1&&(select count(*) from petitioner where
idPetitioner=lv1_petid)=1))

then

insert into lawyer_has_case values(lv1_lawyerP,lv1_caseid,'Petitioner');

```

```

insert into lawyer_has_case values(lvl_lawyerR,lvl_caseid,'Respondent');
insert into respondent_has_case values(lvl_resid,lvl_caseid);
insert into petitioner_has_case values(lvl_petid,lvl_caseid);
end if;
end ;;

DELIMITER ;

/*!50003 SET sql_mode            = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `CreateAllLawyer` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results    = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `CreateAllLawyer`(in lvl_type
varchar(45),lvl_qualify varchar(45),lvl_idpeople int)
begin
if((select count(*) from people where idpeople=lvl_idpeople)=1)
then
insert into lawyer values(null,lvl_type,lvl_qualify,lvl_idpeople,null);
end if;
end ;;

```

DELIMITER ;

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `CreateAllPetitioner` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `CreateAllPetitioner`(lv1_idpeople int)

begin

if((select count(*) from people where idpeople=lv1_idpeople)=1)

then

insert into petitioner values(null,lv1_idpeople);

end if;

end ;;

DELIMITER ;

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `CreateAllPetitioners` */;
```

```

/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client  = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `CreateAllPetitioners`(lvl_idpeople int)
begin
if((select count(*) from people where idpeople=lvl_idpeople)=1)
then
insert into petitioner values(null,lvl_idpeople);
end if;
end ;;

DELIMITER ;

/*!50003 SET sql_mode              = @saved_sql_mode */ ;
/*!50003 SET character_set_client  = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection  = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `CreateAllRes` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client  = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;

```

```

/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;

/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `CreateAllRes`(lvl_idpeople int)
begin
if((select count(*) from people where idpeople=lvl_idpeople)=1)
then
insert into respondent values(null,lvl_idpeople);
end if;
end ;;

DELIMITER ;

/*!50003 SET sql_mode              = @saved_sql_mode */ ;

/*!50003 SET character_set_client  = @saved_cs_client */ ;

/*!50003 SET character_set_results = @saved_cs_results */ ;

/*!50003 SET collation_connection = @saved_col_connection */ ;

/*!50003 DROP PROCEDURE IF EXISTS `CreateLawyer` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */ ;

/*!50003 SET @saved_cs_results    = @@character_set_results */ ;

/*!50003 SET @saved_col_connection = @@collation_connection */ ;

/*!50003 SET character_set_client  = utf8mb4 */ ;

/*!50003 SET character_set_results = utf8mb4 */ ;

/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;

/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;

/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `CreateLawyer`(in lvl_type
varchar(45),lvl_qualify varchar(45),lvl_idpeople int)

```

```

if((select count(*) from people where idpeople=lvl_people)=1)
then
insert into lawyer values(null,lvl_type,lvl_qualify,lvl_idpeople,null);
end if ;;

DELIMITER ;

/*!50003 SET sql_mode            = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `CreateLawyerf` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client  = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `CreateLawyerf` (in lvl_type
varchar(45),lvl_qualify varchar(45),lvl_idpeople int)

if((select count(*) from people where idpeople=lvl_people)=1)
then
insert into lawyer values(null,lvl_type,lvl_qualify,lvl_idpeople,null);
end if ;;

DELIMITER ;

/*!50003 SET sql_mode            = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;

```



```

/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `CreateLawyers` */;
/*!50003 SET @saved_cs_client = @@character_set_client */ ;
/*!50003 SET @saved_cs_results = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode = @@sql_mode */ ;
/*!50003 SET sql_mode =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `CreateLawyers`(in lvl_type
varchar(45),lvl_qualify varchar(45),lvl_idpeople int)
if((select count(*) from people where idpeople=lvl_idpeople)=1)
then
insert into lawyer values(null,lvl_type,lvl_qualify,lvl_idpeople,null);
end if ;;
DELIMITER ;

/*!50003 SET sql_mode = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `CreateLawyers7` */;
/*!50003 SET @saved_cs_client = @@character_set_client */ ;
/*!50003 SET @saved_cs_results = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client = utf8mb4 */ ;

```

```

/*!50003 SET character_set_results = utf8mb4 */ ;

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;

/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;

/*!50003 SET sql_mode            =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `CreateLawyers7`(in lvl_type
varchar(45),lvl_qualify varchar(45),lvl_idpeople int)

if((select count(*) from people where idpeople=lvl_idpeople)=1)

then

insert into lawyer values(null,lvl_type,lvl_qualify,lvl_idpeople,null);

end if ;;

DELIMITER ;

/*!50003 SET sql_mode            = @saved_sql_mode */ ;

/*!50003 SET character_set_client = @saved_cs_client */ ;

/*!50003 SET character_set_results = @saved_cs_results */ ;

/*!50003 SET collation_connection = @saved_col_connection */ ;

/*!50003 DROP PROCEDURE IF EXISTS `createPeople` */;

/*!50003 SET @saved_cs_client     = @@character_set_client */ ;

/*!50003 SET @saved_cs_results   = @@character_set_results */ ;

/*!50003 SET @saved_col_connection = @@collation_connection */ ;

/*!50003 SET character_set_client = utf8mb4 */ ;

/*!50003 SET character_set_results = utf8mb4 */ ;

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;

/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;

/*!50003 SET sql_mode            =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeople`(in lvl_Fname
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname

```

```
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state  
varchar(45),lvl_country varchar(45),lvl_idno char(16))
```

```
begin
```

```
set @set = null;
```

```
select @s:=count(idnumber) from idproof where idnumber=lvl_idno;
```

```
if(@s <0)
```

```
then insert into people
```

```
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit  
y,lvl_state,lvl_country);
```

```
insert into idproof values(null,'Adhar',lvl_idno,new.idpeople);
```

```
end if;
```

```
end ;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
```

```
/*!50003 SET character_set_client = @saved_cs_client */ ;
```

```
/*!50003 SET character_set_results = @saved_cs_results */ ;
```

```
/*!50003 SET collation_connection = @saved_col_connection */ ;
```

```
/*!50003 DROP PROCEDURE IF EXISTS `createPeople0` */;
```

```
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
```

```
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
```

```
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
```

```
/*!50003 SET character_set_client  = utf8mb4 */ ;
```

```
/*!50003 SET character_set_results = utf8mb4 */ ;
```

```
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
```

```
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
```

```
/*!50003 SET sql_mode              =  
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

```
DELIMITER ;;
```

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeople0` (in lvl_Fname  
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
```

```
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state  
varchar(45),lvl_country varchar(45),lvl_idno char(16))
```

```
begin
```

```
if(select count(idnumber) from idproof where idnumber=lvl_idno <0)
```

```
then insert into people  
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit  
y,lvl_state,lvl_country);
```

```
insert into idproof values(null,'Adhar',lvl_idno,new.idpeople);
```

```
end if;
```

```
end ;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
```

```
/*!50003 SET character_set_client = @saved_cs_client */ ;
```

```
/*!50003 SET character_set_results = @saved_cs_results */ ;
```

```
/*!50003 SET collation_connection = @saved_col_connection */ ;
```

```
/*!50003 DROP PROCEDURE IF EXISTS `createPeople7` */;
```

```
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
```

```
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
```

```
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
```

```
/*!50003 SET character_set_client  = utf8mb4 */ ;
```

```
/*!50003 SET character_set_results = utf8mb4 */ ;
```

```
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
```

```
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
```

```
/*!50003 SET sql_mode              =  
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

```
DELIMITER ;;
```

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeople7` (in lvl_Fname  
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
```

```
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state  
varchar(45),lvl_country varchar(45),lvl_idno char(16))
```

```
begin
```

```
insert into people  
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit  
y,lvl_state,lvl_country);
```

```
insert into idproof values(null,'Adhar',lvl_idno,new.idpeople);
```

```
end ;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
```

```
/*!50003 SET character_set_client = @saved_cs_client */ ;
```

```
/*!50003 SET character_set_results = @saved_cs_results */ ;
```

```
/*!50003 SET collation_connection = @saved_col_connection */ ;
```

```
/*!50003 DROP PROCEDURE IF EXISTS `createPeople71` */;
```

```
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
```

```
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
```

```
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
```

```
/*!50003 SET character_set_client  = utf8mb4 */ ;
```

```
/*!50003 SET character_set_results = utf8mb4 */ ;
```

```
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
```

```
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
```

```
/*!50003 SET sql_mode              =  
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

```
DELIMITER ;;
```

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeople71`(in lvl_Fname  
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
```

```
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state  
varchar(45),lvl_country varchar(45),lvl_idno char(16))
```

```
begin
```

```
insert into people  
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit  
y,lvl_state,lvl_country);
```

```
insert into idproof values(null,'Adhar',lvl_idno,1);
```

```
end ;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
```

```
/*!50003 SET character_set_client = @saved_cs_client */ ;
```

```
/*!50003 SET character_set_results = @saved_cs_results */ ;
```

```
/*!50003 SET collation_connection = @saved_col_connection */ ;
```

```
/*!50003 DROP PROCEDURE IF EXISTS `createPeopleDetails` */;
```

```
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
```

```
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
```

```
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
```

```
/*!50003 SET character_set_client  = utf8mb4 */ ;
```

```
/*!50003 SET character_set_results = utf8mb4 */ ;
```

```
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
```

```
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
```

```
/*!50003 SET sql_mode              =  
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

```
DELIMITER ;;
```

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeopleDetails`(in lvl_Fname  
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
```

```
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state  
varchar(45),lvl_country varchar(45),lvl_no varchar(16))
```

```
begin
```

```
if((select count(*) from idproof where idnumber = lvl_no)<1)
```

```
then
```

```
insert into people
```

```
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit  
y,lvl_state,lvl_country);
```

```
end if;
```

```
end ;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
```

```
/*!50003 SET character_set_client = @saved_cs_client */ ;
```

```
/*!50003 SET character_set_results = @saved_cs_results */ ;
```

```
/*!50003 SET collation_connection = @saved_col_connection */ ;
```

```
/*!50003 DROP PROCEDURE IF EXISTS `createPeople` */;
```

```
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
```

```
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
```

```
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
```

```
/*!50003 SET character_set_client  = utf8mb4 */ ;
```

```
/*!50003 SET character_set_results = utf8mb4 */ ;
```

```
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
```

```
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
```

```
/*!50003 SET sql_mode              =  
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

```
DELIMITER ;;
```

```

CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeoplef`(in lvl_Fname
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state
varchar(45),lvl_country varchar(45),lvl_idno char(16))

begin

if(select count(idnumber) from idproof where idnumber=lvl_idno <0)

then insert into people
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit
y,lvl_state,lvl_country);

insert into idproof values(null,'Adhar',lvl_idno,new.idpeople);

end if;

end ;;

DELIMITER ;

/*!50003 SET sql_mode            = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `createPeoplef` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client  = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
DELIMITER ;;

```



```

CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeopleif` (in lvl_Fname
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state
varchar(45),lvl_country varchar(45),lvl_no varchar(16))

begin

if((select count(*) from idproofs where idnumber = lvl_no)<0)

then

insert into people
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit
y,lvl_state,lvl_country);

end if;

end ;;

DELIMITER ;

/*!50003 SET sql_mode            = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `createPeopleif` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results    = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client  = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
DELIMITER ;;

```

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeopleif0`(in lvl_Fname  
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname  
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state  
varchar(45),lvl_country varchar(45),lvl_no varchar(16))
```

```
begin
```

```
if((select count(*) from idproof where idnumber = lvl_no)<1)
```

```
then
```

```
insert into people
```

```
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit  
y,lvl_state,lvl_country);
```

```
insert into idproof values(null,'Adhar',lvl_no,new.people.idPeople);
```

```
end if;
```

```
end ;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
```

```
/*!50003 SET character_set_client = @saved_cs_client */ ;
```

```
/*!50003 SET character_set_results = @saved_cs_results */ ;
```

```
/*!50003 SET collation_connection = @saved_col_connection */ ;
```

```
/*!50003 DROP PROCEDURE IF EXISTS `createPeopleif02` */;
```

```
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
```

```
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
```

```
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
```

```
/*!50003 SET character_set_client = utf8mb4 */ ;
```

```
/*!50003 SET character_set_results = utf8mb4 */ ;
```

```
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;
```

```
/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;
```

```
/*!50003 SET sql_mode              =  
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

DELIMITER ;;

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeopleif02`(in lvl_Fname  
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname  
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state  
varchar(45),lvl_country varchar(45),lvl_no varchar(16))
```

begin

```
if((select count(*) from idproof where idnumber = lvl_no)<1)
```

then

insert into people

```
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit  
y,lvl_state,lvl_country);
```

```
insert into idproof values(null,'Adhar',lvl_no,people.idPeople);
```

end if;

end ;;

DELIMITER ;

```
/*!50003 SET sql_mode          = @saved_sql_mode */;
```

```
/*!50003 SET character_set_client = @saved_cs_client */;
```

```
/*!50003 SET character_set_results = @saved_cs_results */;
```

```
/*!50003 SET collation_connection = @saved_col_connection */;
```

```
/*!50003 DROP PROCEDURE IF EXISTS `createPeopleifs` */;
```

```
/*!50003 SET @saved_cs_client      = @@character_set_client */;
```

```
/*!50003 SET @saved_cs_results     = @@character_set_results */;
```

```
/*!50003 SET @saved_col_connection = @@collation_connection */;
```

```
/*!50003 SET character_set_client  = utf8mb4 */;
```

```
/*!50003 SET character_set_results = utf8mb4 */;
```

```
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */;
```

```
/*!50003 SET @saved_sql_mode       = @@sql_mode */;
```

```

/*!50003 SET sql_mode          =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeopleifs`(in lvl_Fname
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state
varchar(45),lvl_country varchar(45),lvl_no varchar(16))

begin

if((select count(*) from idproof where idnumber = lvl_no)<0)

then

insert into people
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_city,
lvl_state,lvl_country);

end if;

end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */;

/*!50003 SET character_set_client = @saved_cs_client */;

/*!50003 SET character_set_results = @saved_cs_results */;

/*!50003 SET collation_connection = @saved_col_connection */;

/*!50003 DROP PROCEDURE IF EXISTS `createPeopleifss` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */;

/*!50003 SET @saved_cs_results    = @@character_set_results */;

/*!50003 SET @saved_col_connection = @@collation_connection */;

/*!50003 SET character_set_client = utf8mb4 */;

/*!50003 SET character_set_results = utf8mb4 */;

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */;

/*!50003 SET @saved_sql_mode      = @@sql_mode */;

```

```

/*!50003 SET sql_mode          =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeopleifss`(in lvl_Fname
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state
varchar(45),lvl_country varchar(45),lvl_no varchar(16))

begin

if((select count(*) from idproof where idnumber = lvl_no)<1)

then

insert into people
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_cit
y,lvl_state,lvl_country);

end if;

end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */;

/*!50003 SET character_set_client = @saved_cs_client */;

/*!50003 SET character_set_results = @saved_cs_results */;

/*!50003 SET collation_connection = @saved_col_connection */;

/*!50003 DROP PROCEDURE IF EXISTS `createPeopleifss` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */;

/*!50003 SET @saved_cs_results    = @@character_set_results */;

/*!50003 SET @saved_col_connection = @@collation_connection */;

/*!50003 SET character_set_client = utf8mb4 */;

/*!50003 SET character_set_results = utf8mb4 */;

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */;

/*!50003 SET @saved_sql_mode      = @@sql_mode */;

```

```

/*!50003 SET sql_mode          =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeopleifsss`(in lvl_Fname
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state
varchar(45),lvl_country varchar(45),lvl_no varchar(16))

begin

if((select count(*) from idproof where idnumber = lvl_no)<1)

then

insert into people
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_city,
lvl_state,lvl_country);

insert into idproof values(null,'Adhar',lvl_no,new.idpeople);

end if;

end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */;

/*!50003 SET character_set_client = @saved_cs_client */;

/*!50003 SET character_set_results = @saved_cs_results */;

/*!50003 SET collation_connection = @saved_col_connection */;

/*!50003 DROP PROCEDURE IF EXISTS `createPeoplek` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */;

/*!50003 SET @saved_cs_results    = @@character_set_results */;

/*!50003 SET @saved_col_connection = @@collation_connection */;

/*!50003 SET character_set_client = utf8mb4 */;

/*!50003 SET character_set_results = utf8mb4 */;

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */;

```

```

/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;

/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeoplek`(in lvl_Fname
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state
varchar(45),lvl_country varchar(45),lvl_idno char(16))

begin

insert into people
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_city,
lvl_state,lvl_country);

insert into idproof values(null,'Adhar',lvl_idno,new.idpeople);

end ;;

DELIMITER ;

/*!50003 SET sql_mode              = @saved_sql_mode */ ;

/*!50003 SET character_set_client  = @saved_cs_client */ ;

/*!50003 SET character_set_results = @saved_cs_results */ ;

/*!50003 SET collation_connection = @saved_col_connection */ ;

/*!50003 DROP PROCEDURE IF EXISTS `createPeoplek1` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */ ;

/*!50003 SET @saved_cs_results     = @@character_set_results */ ;

/*!50003 SET @saved_col_connection = @@collation_connection */ ;

/*!50003 SET character_set_client  = utf8mb4 */ ;

/*!50003 SET character_set_results = utf8mb4 */ ;

/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;

/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;

```

```

/*!50003 SET sql_mode          =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `createPeople1`(in lvl_Fname
varchar(45),lvl_Lname varchar(45),lvl_Aptno varchar(45),lvl_Aptname
varchar(45),lvl_Aptstreet varchar(45),lvl_Aptlandmark varchar(45),lvl_city varchar(45),lvl_state
varchar(45),lvl_country varchar(45),lvl_idno char(16))

begin

insert into people
values(null,lvl_Fname,lvl_Lname,lvl_Aptno,lvl_Aptname,lvl_Aptstreet,lvl_Aptlandmark,lvl_city,
lvl_state,lvl_country);

insert into idproof values(null,'Adhar',lvl_idno,new.idPeople);

end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */;

/*!50003 SET character_set_client = @saved_cs_client */;

/*!50003 SET character_set_results = @saved_cs_results */;

/*!50003 SET collation_connection = @saved_col_connection */;

/*!50003 DROP PROCEDURE IF EXISTS `Create_Case7` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */;

/*!50003 SET @saved_cs_results    = @@character_set_results */;

/*!50003 SET @saved_col_connection = @@collation_connection */;

/*!50003 SET character_set_client = utf8mb4 */;

/*!50003 SET character_set_results = utf8mb4 */;

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */;

/*!50003 SET @saved_sql_mode      = @@sql_mode */;

```



```

/*!50003 SET sql_mode          =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `Create_Case7`(in lvl_section
int,lvl_start_date date,lvl_fir int,lvl_casetype int,lvl_judge int,lvl_LawyerFnameP
varchar(45),lvl_LawyerLnameP varchar(45),lvl_LawyerPAptno varchar(10),lvl_LawyerPstreet
varchar(40),lvl_LawyerPlandmark varchar(40),lvl_LawyerPcity varchar(40),lvl_LawyerPstate
varchar(40),lvl_LawyerPcountry varchar(40),lvl_LawyerFnameR
varchar(40),lvl_LawyerLnameR varchar(40),lvl_LawyerRAptno
varchar(40),lvl_LawyerRAptname varchar(40),lvl_LawyerRstreet
varchar(40),lvl_LawyerRlandmark varchar(40),lvl_LawyerRcity varchar(40),lvl_LawyerRstate
varchar(40),lvl_LawyerRcountry varchar(40),lvl_PetFname varchar(40),lvl_PetLname
varchar(40),lvl_PetAptno varchar(40),lvl_PetAptname varchar(40),lvl_Petstreet
varchar(40),lvl_Petlandmark varchar(40),lvl_Petcity varchar(40),lvl_Petstate
varchar(40),lvl_Petcountry varchar(40),lvl_ResFname varchar(40),lvl_ResLname
varchar(40),lvl_ResAptno varchar(40),lvl_ResAptname varchar(40),lvl_Resstreet
varchar(40),lvl_Rescity varchar(40),lvl_Resstate varchar(40),lvl_Rescountry varchar(40))
begin
-- set @title = lvl_section + lvl_PetFname;

insert into `case` values(null,lvl_start_date,lvl_start_date,'9999-01-
01',lvl_fir,lvl_casetype,lvl_judge);

-- lawyers of both sides

insert into people
values(null,lvl_LawyerFnameP,lvl_LawyerLnameP,lvl_LawyerPAptno,lvl_LawyerPAptname,lvl_LawyerPstreet,lvl_LawyerPlandmark,lvl_LawyerPcity,lvl_LawyerPstate,lvl_LawyerPcountry);

insert into lawyer values(null,lvl_LawyerTypeP,lvl_LawyerQP,new.idPeople,new.idCase);

insert into people
values(null,lvl_LawyerFnameR,lvl_LawyerLnameR,lvl_LawyerRAptno,lvl_LawyerRAptname,lvl_LawyerRstreet,lvl_LawyerRlandmark,lvl_LawyerRcity,lvl_LawyerRstate,lvl_LawyerRcountry);

insert into lawyer values(null,lvl_LawyerTypeR,lvl_LawyerQR,new.idPeople,new.idCase);

-- petitioner and respondent

insert into people
values(null,lvl_PetFname,lvl_PetLname,lvl_PetAptno,lvl_PetAptname,lvl_Petstreet,lvl_Petlandmark,lvl_Petcity,lvl_Petstate,lvl_Petcountry);

```

```
insert into people
values(null,lv1_ResFname,lv1_ResLname,lv1_ResAptno,lv1_ResAptname,lv1_Resstreet,Res,lv1_
Rescity,lv1_Resstate,lv1_Rescountry);
```

```
end ;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `Create_Case7011` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

```
DELIMITER ;;
```

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `Create_Case7011`(in title
varchar(100),lv1_section int,lv1_start_date date, lv1_district int,lv1_fir int,lv1_casetype
int,lv1_judge int,lv1_LawyerFnameP varchar(45),lv1_LawyerLnameP
varchar(45),lv1_LawyerPAptno varchar(45),lv1_LawyerPAptname
varchar(45),lv1_LawyerPstreet varchar(45),lv1_LawyerPlandmark varchar(45),lv1_LawyerPcity
varchar(45),lv1_LawyerPstate varchar(45),lv1_LawyerPcountry varchar(40),lv1_LawyerFnameR
varchar(45),lv1_LawyerLnameR varchar(45),lv1_LawyerRAptno
varchar(45),lv1_LawyerRAptname varchar(45),lv1_LawyerRstreet
varchar(45),lv1_LawyerRlandmark varchar(45),lv1_LawyerRcity varchar(45),lv1_LawyerRstate
varchar(45),lv1_LawyerRcountry varchar(45),lv1_PetFname varchar(45),lv1_PetLname
varchar(45),lv1_PetAptno varchar(45),lv1_PetAptname varchar(45),lv1_Petstreet
varchar(45),lv1_Petlandmark varchar(45),lv1_Petcity varchar(45),lv1_Petstate
varchar(45),lv1_Petcountry varchar(45),lv1_ResFname varchar(45),lv1_ResLname
```

```

varchar(45),lvl_ResAptno varchar(45),lvl_ResAptname varchar(45),lvl_Resstreet
varchar(45),lvl_Rescity varchar(45),lvl_Resstate varchar(45),lvl_Rescountry varchar(45))

begin

-- set @title = lvl_section + lvl_PetFname;

insert into `case` values(null,title,lvl_start_date,lvl_district,'9999-01-
01',lvl_fir,lvl_casetype,lvl_judge);

-- lawyers of both sides

insert into people
values(null,lvl_LawyerFnameP,lvl_LawyerLnameP,lvl_LawyerPAptno,lvl_LawyerPAptname,lvl_LawyerPstreet,lvl_LawyerPlandmark,lvl_LawyerPcity,lvl_LawyerPstate,lvl_LawyerPcountry);

-- insert into lawyer values(null,lvl_LawyerTypeP,lvl_LawyerQP,new.idPeople,new.idCase);

insert into people
values(null,lvl_LawyerFnameR,lvl_LawyerLnameR,lvl_LawyerRAptno,lvl_LawyerRAptname,lvl_LawyerRstreet,lvl_LawyerRlandmark,lvl_LawyerRcity,lvl_LawyerRstate,lvl_LawyerRcountry);

-- insert into lawyer values(null,lvl_LawyerTypeR,lvl_LawyerQR,new.idPeople,new.idCase);

-- petitioner and respondent

insert into people
values(null,lvl_PetFname,lvl_PetLname,lvl_PetAptno,lvl_PetAptname,lvl_Petstreet,lvl_Petlandmark,lvl_Petcity,lvl_Petstate,lvl_Petcountry);

insert into people
values(null,lvl_ResFname,lvl_ResLname,lvl_ResAptno,lvl_ResAptname,lvl_Resstreet,Res,lvl_Rescity,lvl_Resstate,lvl_Rescountry);

end ;;

DELIMITER ;

/*!50003 SET sql_mode            = @saved_sql_mode */ ;

/*!50003 SET character_set_client = @saved_cs_client */ ;

/*!50003 SET character_set_results = @saved_cs_results */ ;

/*!50003 SET collation_connection = @saved_col_connection */ ;

/*!50003 DROP PROCEDURE IF EXISTS `Create_Case80` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */ ;

/*!50003 SET @saved_cs_results    = @@character_set_results */ ;

```

```
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
```

```
/*!50003 SET character_set_client = utf8mb4 */ ;
```

```
/*!50003 SET character_set_results = utf8mb4 */ ;
```

```
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;
```

```
/*!50003 SET @saved_sql_mode = @@sql_mode */ ;
```

```
/*!50003 SET sql_mode =  
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

```
DELIMITER ;;
```

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `Create_Case80`(in lvl_section  
int,lvl_start_date date, lvl_district int,lvl_fir int,lvl_casetype int,lvl_judge int,lvl_LawyerFnameP  
varchar(45),lvl_LawyerLnameP varchar(45),lvl_LawyerPAptno varchar(10),lvl_LawyerPstreet  
varchar(40),lvl_LawyerPlandmark varchar(40),lvl_LawyerPcity varchar(40),lvl_LawyerPstate  
varchar(40),lvl_LawyerPcountry varchar(40),lvl_LawyerFnameR  
varchar(40),lvl_LawyerLnameR varchar(40),lvl_LawyerRAptno  
varchar(40),lvl_LawyerRAptname varchar(40),lvl_LawyerRstreet  
varchar(40),lvl_LawyerRlandmark varchar(40),lvl_LawyerRcity varchar(40),lvl_LawyerRstate  
varchar(40),lvl_LawyerRcountry varchar(40),lvl_PetFname varchar(40),lvl_PetLname  
varchar(40),lvl_PetAptno varchar(40),lvl_PetAptname varchar(40),lvl_Petstreet  
varchar(40),lvl_Petlandmark varchar(40),lvl_Petcity varchar(40),lvl_Petstate  
varchar(40),lvl_Petcountry varchar(40),lvl_ResFname varchar(40),lvl_ResLname  
varchar(40),lvl_ResAptno varchar(40),lvl_ResAptname varchar(40),lvl_Resstreet  
varchar(40),lvl_Rescity varchar(40),lvl_Resstate varchar(40),lvl_Rescountry varchar(40))
```

```
begin
```

```
-- set @title = lvl_section + lvl_PetFname;
```

```
insert into `case` values(null,'as',lvl_start_date,lvl_district,'9999-01-  
01',lvl_fir,lvl_casetype,lvl_judge);
```

```
-- lawyers of both sides
```

```
insert into people
```

```
values(null,lvl_LawyerFnameP,lvl_LawyerLnameP,lvl_LawyerPAptno,lvl_LawyerPAptname,lvl_LawyerPstreet,lvl_LawyerPlandmark,lvl_LawyerPcity,lvl_LawyerPstate,lvl_LawyerPcountry);
```

```
insert into lawyer values(null,lvl_LawyerTypeP,lvl_LawyerQP,new.idPeople,new.idCase);
```

```
insert into people
```

```
values(null,lvl_LawyerFnameR,lvl_LawyerLnameR,lvl_LawyerRAptno,lvl_LawyerRAptname,lvl_LawyerRstreet,lvl_LawyerRlandmark,lvl_LawyerRcity,lvl_LawyerRstate,lvl_LawyerRcountry);
```

```

insert into lawyer values(null,lv1_LawyerTypeR,lv1_LawyerQR,new.idPeople,new.idCase);

-- petitioner and respondent

insert into people
values(null,lv1_PetFname,lv1_PetLname,lv1_PetAptno,lv1_PetAptname,lv1_Petstreet,lv1_Petland
mark,lv1_Petcity,lv1_Petstate,lv1_Petcountry);

insert into people
values(null,lv1_ResFname,lv1_ResLname,lv1_ResAptno,lv1_ResAptname,lv1_Resstreet,Res,lv1_
Rescity,lv1_Resstate,lv1_Rescountry);

end ;;

DELIMITER ;

/*!50003 SET sql_mode            = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `Create_Case801` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results    = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client  = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `Create_Case801`(in title
varchar(100),lv1_section int,lv1_start_date date, lv1_district int,lv1_fir int,lv1_casetype
int,lv1_judge int,lv1_LawyerFnameP varchar(45),lv1_LawyerLnameP
varchar(45),lv1_LawyerPAptno varchar(10),lv1_LawyerPstreet
varchar(40),lv1_LawyerPlandmark varchar(40),lv1_LawyerPcity varchar(40),lv1_LawyerPstate
varchar(40),lv1_LawyerPcountry varchar(40),lv1_LawyerFnameR
varchar(40),lv1_LawyerLnameR varchar(40),lv1_LawyerRAptno
varchar(40),lv1_LawyerRAptname varchar(40),lv1_LawyerRstreet

```

```
varchar(40),lvl_LawyerRlandmark varchar(40),lvl_LawyerRcity varchar(40),lvl_LawyerRstate  
varchar(40),lvl_LawyerRcountry varchar(40),lvl_PetFname varchar(40),lvl_PetLname  
varchar(40),lvl_PetAptno varchar(40),lvl_PetAptname varchar(40),lvl_Petstreet  
varchar(40),lvl_Petlandmark varchar(40),lvl_Petcity varchar(40),lvl_Petstate  
varchar(40),lvl_Petcountry varchar(40),lvl_ResFname varchar(40),lvl_ResLname  
varchar(40),lvl_ResAptno varchar(40),lvl_ResAptname varchar(40),lvl_Resstreet  
varchar(40),lvl_Rescity varchar(40),lvl_Resstate varchar(40),lvl_Rescountry varchar(40))
```

```
begin
```

```
-- set @title = lvl_section + lvl_PetFname;
```

```
insert into `case` values(null,title,lvl_start_date,lvl_district,'9999-01-  
01',lvl_fir,lvl_casetype,lvl_judge);
```

```
-- lawyers of both sides
```

```
insert into people  
values(null,lvl_LawyerFnameP,lvl_LawyerLnameP,lvl_LawyerPAptno,lvl_LawyerPAptname,lvl_LawyerPstreet,lvl_LawyerPlandmark,lvl_LawyerPcity,lvl_LawyerPstate,lvl_LawyerPcountry);
```

```
insert into lawyer values(null,lvl_LawyerTypeP,lvl_LawyerQP,new.idPeople,new.idCase);
```

```
insert into people  
values(null,lvl_LawyerFnameR,lvl_LawyerLnameR,lvl_LawyerRAptno,lvl_LawyerRAptname,lvl_LawyerRstreet,lvl_LawyerRlandmark,lvl_LawyerRcity,lvl_LawyerRstate,lvl_LawyerRcountry);
```

```
insert into lawyer values(null,lvl_LawyerTypeR,lvl_LawyerQR,new.idPeople,new.idCase);
```

```
-- petitioner and respondent
```

```
insert into people  
values(null,lvl_PetFname,lvl_PetLname,lvl_PetAptno,lvl_PetAptname,lvl_Petstreet,lvl_Petlandmark,lvl_Petcity,lvl_Petstate,lvl_Petcountry);
```

```
insert into people  
values(null,lvl_ResFname,lvl_ResLname,lvl_ResAptno,lvl_ResAptname,lvl_Resstreet,Res,lvl_Rescity,lvl_Resstate,lvl_Rescountry);
```

```
end ;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
```

```
/*!50003 SET character_set_client = @saved_cs_client */ ;
```

```
/*!50003 SET character_set_results = @saved_cs_results */ ;
```

```
/*!50003 SET collation_connection = @saved_col_connection */ ;
```

```

/*!50003 DROP PROCEDURE IF EXISTS `Create_Case8011` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */;

/*!50003 SET @saved_cs_results    = @@character_set_results */;

/*!50003 SET @saved_col_connection = @@collation_connection */;

/*!50003 SET character_set_client  = utf8mb4 */;

/*!50003 SET character_set_results = utf8mb4 */;

/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */;

/*!50003 SET @saved_sql_mode      = @@sql_mode */;

/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;

DELIMITER ;;

```

```

CREATE DEFINER=`root`@`localhost` PROCEDURE `Create_Case8011`(in title
varchar(100),lvl_section int,lvl_start_date date, lvl_district int,lvl_fir int,lvl_casetype
int,lvl_judge int,lvl_LawyerFnameP varchar(45),lvl_LawyerLnameP
varchar(45),lvl_LawyerPAptno varchar(10),lvl_LawyerPstreet
varchar(40),lvl_LawyerPlandmark varchar(40),lvl_LawyerPcity varchar(40),lvl_LawyerPstate
varchar(40),lvl_LawyerPcountry varchar(40),lvl_LawyerFnameR
varchar(40),lvl_LawyerLnameR varchar(40),lvl_LawyerRAptno
varchar(40),lvl_LawyerRAptname varchar(40),lvl_LawyerRstreet
varchar(40),lvl_LawyerRlandmark varchar(40),lvl_LawyerRcity varchar(40),lvl_LawyerRstate
varchar(40),lvl_LawyerRcountry varchar(40),lvl_PetFname varchar(40),lvl_PetLname
varchar(40),lvl_PetAptno varchar(40),lvl_PetAptname varchar(40),lvl_Petstreet
varchar(40),lvl_Petlandmark varchar(40),lvl_Petcity varchar(40),lvl_Petstate
varchar(40),lvl_Petcountry varchar(40),lvl_ResFname varchar(40),lvl_ResLname
varchar(40),lvl_ResAptno varchar(40),lvl_ResAptname varchar(40),lvl_Resstreet
varchar(40),lvl_Rescity varchar(40),lvl_Resstate varchar(40),lvl_Rescountry varchar(40))
begin

-- set @title = lvl_section + lvl_PetFname;

insert into `case` values(null,title,lvl_start_date,lvl_district,'9999-01-
01',lvl_fir,lvl_casetype,lvl_judge);

-- lawyers of both sides

insert into people
values(null,lvl_LawyerFnameP,lvl_LawyerLnameP,lvl_LawyerPAptno,lvl_LawyerPAptname,lvl
_LawyerPstreet,lvl_LawyerPlandmark,lvl_LawyerPcity,lvl_LawyerPstate,lvl_LawyerPcountry);

-- insert into lawyer values(null,lvl_LawyerTypeP,lvl_LawyerQP,new.idPeople,new.idCase);

```

```
insert into people
values(null,lv1_LawyerFnameR,lv1_LawyerLnameR,lv1_LawyerRAptno,lv1_LawyerRAptname,lv1_LawyerRstreet,lv1_LawyerRlandmark,lv1_LawyerRcity,lv1_LawyerRstate,lv1_LawyerRcountry);
```

```
-- insert into lawyer values(null,lv1_LawyerTypeR,lv1_LawyerQR,new.idPeople,new.idCase);
-- petitioner and respondent
```

```
insert into people
values(null,lv1_PetFname,lv1_PetLname,lv1_PetAptno,lv1_PetAptname,lv1_Petstreet,lv1_Petlandmark,lv1_Petcity,lv1_Petstate,lv1_Petcountry);
```

```
insert into people
values(null,lv1_ResFname,lv1_ResLname,lv1_ResAptno,lv1_ResAptname,lv1_Resstreet,lv1_Rescity,lv1_Resstate,lv1_Rescountry);
```

```
end ;;
```

```
DELIMITER ;
```

```
/*!50003 SET sql_mode            = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `Create_Case9` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results    = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client  = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

```
DELIMITER ;;
```

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `Create_Case9`(in lv1_section
int,lv1_start_date date,lv1_fir int,lv1_casetype int,lv1_judge int,lv1_LawyerFnameP
varchar(45),lv1_LawyerLnameP varchar(45),lv1_LawyerPAptno varchar(10),lv1_LawyerPstreet
```



```

varchar(40),lvl_LawyerPlandmark varchar(40),lvl_LawyerPcity varchar(40),lvl_LawyerPstate
varchar(40),lvl_LawyerPcountry varchar(40),lvl_LawyerFnameR
varchar(40),lvl_LawyerLnameR varchar(40),lvl_LawyerRAptno
varchar(40),lvl_LawyerRAptname varchar(40),lvl_LawyerRstreet
varchar(40),lvl_LawyerRlandmark varchar(40),lvl_LawyerRcity varchar(40),lvl_LawyerRstate
varchar(40),lvl_LawyerRcountry varchar(40),lvl_PetFname varchar(40),lvl_PetLname
varchar(40),lvl_PetAptno varchar(40),lvl_PetAptname varchar(40),lvl_Petstreet
varchar(40),lvl_Petlandmark varchar(40),lvl_Petcity varchar(40),lvl_Petstate
varchar(40),lvl_Petcountry varchar(40),lvl_ResFname varchar(40),lvl_ResLname
varchar(40),lvl_ResAptno varchar(40),lvl_ResAptname varchar(40),lvl_Resstreet
varchar(40),lvl_Rescity varchar(40),lvl_Resstate varchar(40),lvl_Rescountry varchar(40))

begin

-- set @title = lvl_section + lvl_PetFname;

insert into `case` values(null,lvl_start_date,lvl_start_date,'9999-01-
01',lvl_fir,lvl_casetype,lvl_judge);

-- lawyers of both sides

insert into people
values(null,lvl_LawyerFnameP,lvl_LawyerLnameP,lvl_LawyerPAptno,lvl_LawyerPAptname,lvl
_LawyerPstreet,lvl_LawyerPlandmark,lvl_LawyerPcity,lvl_LawyerPstate,lvl_LawyerPcountry);

insert into lawyer values(null,lvl_LawyerTypeP,lvl_LawyerQP,new.idPeople,new.idCase);

insert into people
values(null,lvl_LawyerFnameR,lvl_LawyerLnameR,lvl_LawyerRAptno,lvl_LawyerRAptname,l
vl_LawyerRstreet,lvl_LawyerRlandmark,lvl_LawyerRcity,lvl_LawyerRstate,lvl_LawyerRcount
ry);

insert into lawyer values(null,lvl_LawyerTypeR,lvl_LawyerQR,new.idPeople,new.idCase);

-- petitioner and respondent

insert into people
values(null,lvl_PetFname,lvl_PetLname,lvl_PetAptno,lvl_PetAptname,lvl_Petstreet,lvl_Petland
mark,lvl_Petcity,lvl_Petstate,lvl_Petcountry);

insert into people
values(null,lvl_ResFname,lvl_ResLname,lvl_ResAptno,lvl_ResAptname,lvl_Resstreet,Res,lvl_
Rescity,lvl_Resstate,lvl_Rescountry);

end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */ ;

```

```

/*!50003 SET character_set_client = @saved_cs_client */;
/*!50003 SET character_set_results = @saved_cs_results */;
/*!50003 SET collation_connection = @saved_col_connection */;
/*!50003 DROP PROCEDURE IF EXISTS `Create_Case90` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */;
/*!50003 SET @saved_cs_results    = @@character_set_results */;
/*!50003 SET @saved_col_connection = @@collation_connection */;
/*!50003 SET character_set_client = utf8mb4 */;
/*!50003 SET character_set_results = utf8mb4 */;
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */;
/*!50003 SET @saved_sql_mode      = @@sql_mode */;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;

```

DELIMITER ;;

```

CREATE DEFINER=`root`@`localhost` PROCEDURE `Create_Case90`(in lvl_section
int,lvl_start_date date,lvl_fir int,lvl_casetype int,lvl_judge int,lvl_LawyerFnameP
varchar(45),lvl_LawyerLnameP varchar(45),lvl_LawyerPAptno varchar(10),lvl_LawyerPstreet
varchar(40),lvl_LawyerPlandmark varchar(40),lvl_LawyerPcity varchar(40),lvl_LawyerPstate
varchar(40),lvl_LawyerPcountry varchar(40),lvl_LawyerFnameR
varchar(40),lvl_LawyerLnameR varchar(40),lvl_LawyerRAptno
varchar(40),lvl_LawyerRAptname varchar(40),lvl_LawyerRstreet
varchar(40),lvl_LawyerRlandmark varchar(40),lvl_LawyerRcity varchar(40),lvl_LawyerRstate
varchar(40),lvl_LawyerRcountry varchar(40),lvl_PetFname varchar(40),lvl_PetLname
varchar(40),lvl_PetAptno varchar(40),lvl_PetAptname varchar(40),lvl_Petstreet
varchar(40),lvl_Petlandmark varchar(40),lvl_Petcity varchar(40),lvl_Petstate
varchar(40),lvl_Petcountry varchar(40),lvl_ResFname varchar(40),lvl_ResLname
varchar(40),lvl_ResAptno varchar(40),lvl_ResAptname varchar(40),lvl_Resstreet
varchar(40),lvl_Rescity varchar(40),lvl_Resstate varchar(40),lvl_Rescountry varchar(40))

```

begin

```
-- set @title = lvl_section + lvl_PetFname;
```

```
insert into `case` values(null,'as',lvl_start_date,'9999-01-01',lvl_fir,lvl_casetype,lvl_judge);
```

```
-- lawyers of both sides
```

```

insert into people
values(null,lv1_LawyerFnameP,lv1_LawyerLnameP,lv1_LawyerPAptno,lv1_LawyerPAptname,lv1_LawyerPstreet,lv1_LawyerPlandmark,lv1_LawyerPcity,lv1_LawyerPstate,lv1_LawyerPcountry);

insert into lawyer values(null,lv1_LawyerTypeP,lv1_LawyerQP,new.idPeople,new.idCase);

insert into people
values(null,lv1_LawyerFnameR,lv1_LawyerLnameR,lv1_LawyerRAptno,lv1_LawyerRAptname,lv1_LawyerRstreet,lv1_LawyerRlandmark,lv1_LawyerRcity,lv1_LawyerRstate,lv1_LawyerRcountry);

insert into lawyer values(null,lv1_LawyerTypeR,lv1_LawyerQR,new.idPeople,new.idCase);

-- petitioner and respondent

insert into people
values(null,lv1_PetFname,lv1_PetLname,lv1_PetAptno,lv1_PetAptname,lv1_Petstreet,lv1_Petlandmark,lv1_Petcity,lv1_Petstate,lv1_Petcountry);

insert into people
values(null,lv1_ResFname,lv1_ResLname,lv1_ResAptno,lv1_ResAptname,lv1_Resstreet,lv1_Rescity,lv1_Resstate,lv1_Rescountry);

end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */ ;

/*!50003 SET character_set_client = @saved_cs_client */ ;

/*!50003 SET character_set_results = @saved_cs_results */ ;

/*!50003 SET collation_connection = @saved_col_connection */ ;

/*!50003 DROP PROCEDURE IF EXISTS `Creationcase` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */ ;

/*!50003 SET @saved_cs_results    = @@character_set_results */ ;

/*!50003 SET @saved_col_connection = @@collation_connection */ ;

/*!50003 SET character_set_client = utf8mb4 */ ;

/*!50003 SET character_set_results = utf8mb4 */ ;

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;

/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;

/*!50003 SET sql_mode            =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;

```

DELIMITER ;;

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `Creationcase`(in lvl_title  
varchar(45),lvl_iddistrict int,lvl_startDate date,lvl_idfir int,lvl_casetype int)
```

begin

```
insert into `case` values(null,lvl_title,lvl_iddistrict,lvl_startDate,'9999-01-  
01','Created',lvl_casetype,null);
```

end ;;

DELIMITER ;

```
/*!50003 SET sql_mode          = @saved_sql_mode */ ;
```

```
/*!50003 SET character_set_client = @saved_cs_client */ ;
```

```
/*!50003 SET character_set_results = @saved_cs_results */ ;
```

```
/*!50003 SET collation_connection = @saved_col_connection */ ;
```

```
/*!50003 DROP PROCEDURE IF EXISTS `Creationcases` */;
```

```
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
```

```
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
```

```
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
```

```
/*!50003 SET character_set_client  = utf8mb4 */ ;
```

```
/*!50003 SET character_set_results = utf8mb4 */ ;
```

```
/*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
```

```
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
```

```
/*!50003 SET sql_mode              =  
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
```

DELIMITER ;;

```
CREATE DEFINER=`root`@`localhost` PROCEDURE `Creationcases`(in lvl_title  
varchar(45),lvl_iddistrict int,lvl_startDate date,lvl_idfir int,lvl_casetype int)
```

begin

```
insert into `case` values(null,lvl_title,lvl_iddistrict,lvl_startDate,'9999-01-  
01','Created',lvl_idfir,lvl_casetype,null);
```

```

end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */;
/*!50003 SET character_set_client = @saved_cs_client */;
/*!50003 SET character_set_results = @saved_cs_results */;
/*!50003 SET collation_connection = @saved_col_connection */;
/*!50003 DROP PROCEDURE IF EXISTS `Creationcases1` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */;
/*!50003 SET @saved_cs_results    = @@character_set_results */;
/*!50003 SET @saved_col_connection = @@collation_connection */;
/*!50003 SET character_set_client = utf8mb4 */;
/*!50003 SET character_set_results = utf8mb4 */;
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */;
/*!50003 SET @saved_sql_mode      = @@sql_mode */;
/*!50003 SET sql_mode            =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;
DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `Creationcases1`(in lvl_title
varchar(45),lvl_iddistrict int,lvl_startDate date,lvl_idfir int,lvl_casetype int)

begin

insert into `case` values(null,lvl_title,lvl_iddistrict,lvl_startDate,'9999-01-
01','Created',lvl_idfir,lvl_casetype,(select idjudge from judgesCase group by idjudge order by
count(idjudge) asc limit 1));

end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */;
/*!50003 SET character_set_client = @saved_cs_client */;
/*!50003 SET character_set_results = @saved_cs_results */;
/*!50003 SET collation_connection = @saved_col_connection */;

```

```

/*!50003 DROP PROCEDURE IF EXISTS `Creationcases3` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */;

/*!50003 SET @saved_cs_results     = @@character_set_results */;

/*!50003 SET @saved_col_connection = @@collation_connection */;

/*!50003 SET character_set_client  = utf8mb4 */;

/*!50003 SET character_set_results = utf8mb4 */;

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */;

/*!50003 SET @saved_sql_mode       = @@sql_mode */;

/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `Creationcases3`(in lvl_title
varchar(45),lvl_iddistrict int,lvl_startDate date,lvl_idfir int,lvl_casetype int)

begin

insert into `case` values(null,lvl_title,lvl_iddistrict,lvl_startDate,'9999-01-
01','Created',lvl_idfir,lvl_casetype,(select idjudge from judgesCase group by idjudge order by
count(idjudge) asc limit 1));

end ;;

DELIMITER ;

/*!50003 SET sql_mode              = @saved_sql_mode */;

/*!50003 SET character_set_client  = @saved_cs_client */;

/*!50003 SET character_set_results = @saved_cs_results */;

/*!50003 SET collation_connection = @saved_col_connection */;

/*!50003 DROP PROCEDURE IF EXISTS `CreationPetition` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */;

/*!50003 SET @saved_cs_results     = @@character_set_results */;

/*!50003 SET @saved_col_connection = @@collation_connection */;

/*!50003 SET character_set_client  = utf8mb4 */;

/*!50003 SET character_set_results = utf8mb4 */;

```

```

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;

/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;

/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;

DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `CreationPetition`(in lvl_district
int,lvl_petitionerid int ,lvl_lawyer int, lvl_caseid int,lvl_date date)

begin

insert into petition values(null,lvl_district,lvl_petitionerid,lvl_lawyer,lvl_caseid,(select idjudge
from judgesCase group by idjudge order by count(idjudge) asc limit 1),'Created',lvl_date);

end ;;

DELIMITER ;

/*!50003 SET sql_mode              = @saved_sql_mode */ ;

/*!50003 SET character_set_client  = @saved_cs_client */ ;

/*!50003 SET character_set_results = @saved_cs_results */ ;

/*!50003 SET collation_connection = @saved_col_connection */ ;

/*!50003 DROP PROCEDURE IF EXISTS `updateHearing2` */;

/*!50003 SET @saved_cs_client      = @@character_set_client */ ;

/*!50003 SET @saved_cs_results     = @@character_set_results */ ;

/*!50003 SET @saved_col_connection = @@collation_connection */ ;

/*!50003 SET character_set_client  = utf8mb4 */ ;

/*!50003 SET character_set_results = utf8mb4 */ ;

/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;

/*!50003 SET @saved_sql_mode      = @@sql_mode */ ;

/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;

DELIMITER ;;

```

```

CREATE DEFINER=`root`@`localhost` PROCEDURE `updateHearing2`(in lvl_status
varchar(10), lvl_Remarks varchar(45), lvl_idcase int, lvl_hearingid int,lvl_petition int)

begin

update Hearing

set status = lvl_status where idHearing = lvl_hearingid;

update hearing

set Remarks = lvl_remarks where idHearing = lvl_hearingid;

insert into hearing select
null,idcase,idjudge,"NA",date(date(now()))+15),idDistrcitCourt,"Process",lvl_petition from
`case` where idcase=lvl_idcase;

insert into judgeschedule select null,idjudge,date(date(now()))+15),idDistrcitCourt,idcase from
`case` where idcase = lvl_idcase;

end ;;

DELIMITER ;

/*!50003 SET sql_mode            = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `witnessCreation` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client  = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `witnessCreation`(in lvl_peopleid int)

```



```

begin
insert into witness values(null,lv1_peopleid);
end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;
/*!50003 DROP PROCEDURE IF EXISTS `witnessstocase` */;
/*!50003 SET @saved_cs_client      = @@character_set_client */ ;
/*!50003 SET @saved_cs_results     = @@character_set_results */ ;
/*!50003 SET @saved_col_connection = @@collation_connection */ ;
/*!50003 SET character_set_client = utf8mb4 */ ;
/*!50003 SET character_set_results = utf8mb4 */ ;
/*!50003 SET collation_connection = utf8mb4_0900_ai_ci */ ;
/*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
/*!50003 SET sql_mode              =
'STRICT_TRANS_TABLES,NO_ENGINE_SUBSTITUTION' */ ;
DELIMITER ;;

CREATE DEFINER=`root`@`localhost` PROCEDURE `witnessstocase`(lv1_witnessid int,
lv1_caseid int)
begin
insert into case_has_witness values(lv1_caseid,lv1_witnessid);
end ;;

DELIMITER ;

/*!50003 SET sql_mode          = @saved_sql_mode */ ;
/*!50003 SET character_set_client = @saved_cs_client */ ;
/*!50003 SET character_set_results = @saved_cs_results */ ;
/*!50003 SET collation_connection = @saved_col_connection */ ;

```

--

-- Final view structure for view `history`

--

```
/*!50001 DROP VIEW IF EXISTS `history`*/;
```

```
/*!50001 SET @saved_cs_client      = @@character_set_client */;
```

```
/*!50001 SET @saved_cs_results     = @@character_set_results */;
```

```
/*!50001 SET @saved_col_connection = @@collation_connection */;
```

```
/*!50001 SET character_set_client  = utf8mb4 */;
```

```
/*!50001 SET character_set_results = utf8mb4 */;
```

```
/*!50001 SET collation_connection  = utf8mb4_0900_ai_ci */;
```

```
/*!50001 CREATE ALGORITHM=UNDEFINED */
```

```
/*!50013 DEFINER=`root`@`localhost` SQL SECURITY DEFINER */
```

```
/*!50001 VIEW `history` AS select `case`.`idCase` AS `idcase`,`case`.`Title` AS  
`title`,`case`.`StartDate` AS `startdate`,`hearing`.`idHearning` AS  
`idHearning`,`hearing`.`Remarks` AS `Remarks`,`hearing`.`status` AS  
`status`,`hearing`.`HearingDate` AS `HearingDate` from (`case` join `hearing`  
on((`case`.`idCase` = `hearing`.`idCase`))) */;
```

```
/*!50001 SET character_set_client  = @saved_cs_client */;
```

```
/*!50001 SET character_set_results = @saved_cs_results */;
```

```
/*!50001 SET collation_connection  = @saved_col_connection */;
```

--

-- Final view structure for view `historydetails`

--

```
/*!50001 DROP VIEW IF EXISTS `historydetails`*/;
```

```
/*!50001 SET @saved_cs_client      = @@character_set_client */;
```

```
/*!50001 SET @saved_cs_results     = @@character_set_results */;
```

```

/*!50001 SET @saved_col_connection    = @@collation_connection */;

/*!50001 SET character_set_client      = utf8mb4 */;

/*!50001 SET character_set_results     = utf8mb4 */;

/*!50001 SET collation_connection     = utf8mb4_0900_ai_ci */;

/*!50001 CREATE ALGORITHM=UNDEFINED */

/*!50013 DEFINER=`root`@`localhost` SQL SECURITY DEFINER */

/*!50001 VIEW `historydetails` AS select `case`.`idCase` AS `idcase`,`case`.`Title` AS
`title`,`case`.`StartDate` AS `startdate`,`hearing`.`idHearning` AS
`idHearning`,`hearing`.`Remarks` AS `Remarks`,`hearing`.`status` AS
`status`,`hearing`.`HearingDate` AS `HearingDate` from (`case` join `hearing`
on((`case`.`idCase` = `hearing`.`idCase`))) group by `case`.`idCase` */;

/*!50001 SET character_set_client      = @saved_cs_client */;

/*!50001 SET character_set_results     = @saved_cs_results */;

/*!50001 SET collation_connection     = @saved_col_connection */;

--

-- Final view structure for view `witnessdetails`

--

/*!50001 DROP VIEW IF EXISTS `witnessdetails` */;

/*!50001 SET @saved_cs_client          = @@character_set_client */;

/*!50001 SET @saved_cs_results        = @@character_set_results */;

/*!50001 SET @saved_col_connection    = @@collation_connection */;

/*!50001 SET character_set_client      = utf8mb4 */;

/*!50001 SET character_set_results     = utf8mb4 */;

/*!50001 SET collation_connection     = utf8mb4_0900_ai_ci */;

/*!50001 CREATE ALGORITHM=UNDEFINED */

/*!50013 DEFINER=`root`@`localhost` SQL SECURITY DEFINER */

/*!50001 VIEW `witnessdetails` AS select `case`.`idCase` AS `idcase`,`case`.`Title` AS
`Title`,`case_has_witness`.`Witness_idWitness` AS `witness_idwitness` from (((`case` join
`case_has_witness` on((`case`.`idCase` = `case_has_witness`.`Case_idCase`))) join `witness`

```

```
on((`case_has_witness`.`Witness_idWitness` = `witness`.`idWitness`))) join `people` `p`  
on((`witness`.`idPeople_witness` = `p`.`idPeople`))) */;
```

```
/*!50001 SET character_set_client    = @saved_cs_client */;
```

```
/*!50001 SET character_set_results   = @saved_cs_results */;
```

```
/*!50001 SET collation_connection   = @saved_col_connection */;
```

```
/*!40103 SET TIME_ZONE=@OLD_TIME_ZONE */;
```

```
/*!40101 SET SQL_MODE=@OLD_SQL_MODE */;
```

```
/*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */;
```

```
/*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */;
```

```
/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
```

```
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
```

```
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

```
/*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */;
```

```
-- Dump completed on 2018-12-13 11:43:24
```