Tasks 1–5: Policy-Related

Task 1 — EC2: Allow All Actions but Deny Termination

Task 2 — S3: Allow Full Access to All Buckets but Deny One Specific Bucket

Task 3 — EC2: Allow Start/Stop but Deny in Specific Region

Task 4 — VPC: Allow VPC Creation but Deny Internet Gateway Creation

Steps to apply a policy

1. Go to AWS IAM
2. Click Policies → create policy
3. Select json
4. Click next→ give policy name →create policy

attach the policy

1. Go to Users
2. Select the user
3. Click add permissions
4. Choose attach policies directly
5. Search and select your policy
6. Click add permissions

Task1

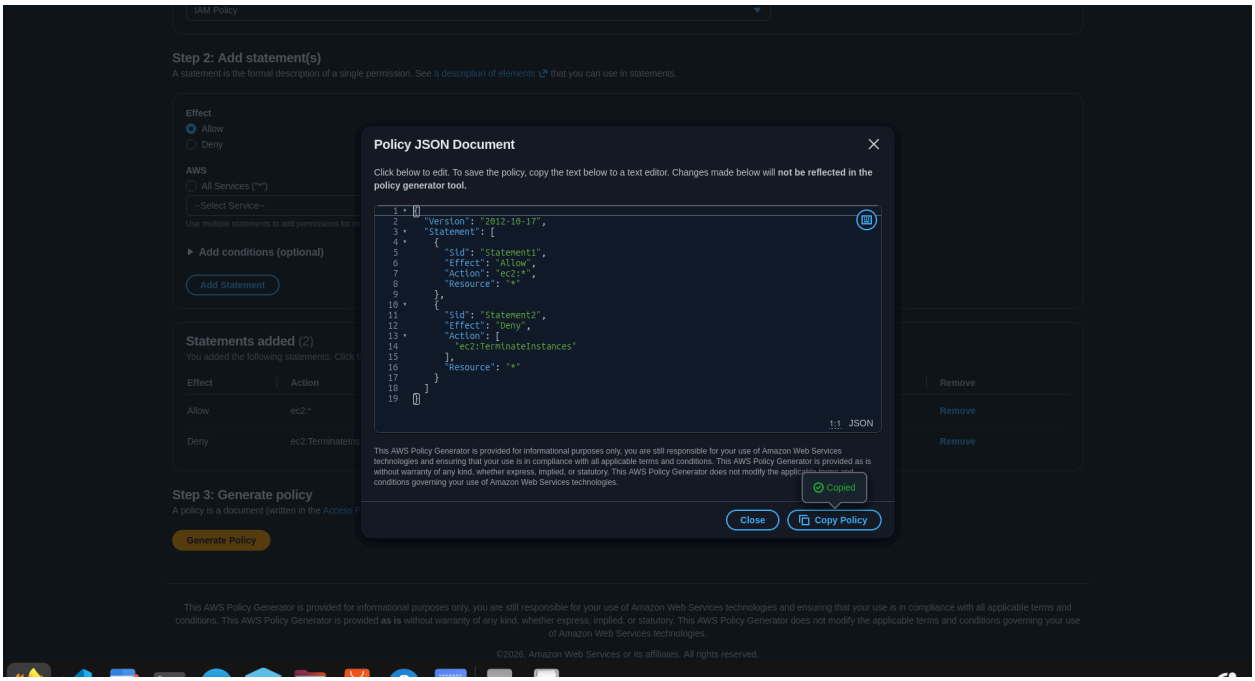
Step 2: Add statement(s)
A statement is the formal description of a single permission. See a description of elements that you can use in statements.
Effect
Allow
Deny
AWS
All Services (*:*)
--Select Service--
Add conditions (optional)
Add Statement
Statements added (2)
Effect
Action
Allow
ec2:*
Deny
Remove
Step 3: Generate policy
Generate Policy
Policy JSON Document
Click below to edit. To save the policy, copy the text below to a text editor. Changes made below will not be reflected in the policy generator tool.
{
"Version": "2012-10-17",
"Statement": [
{
"Sid": "Statement1",
"Effect": "Allow",
"Action": "ec2:*",
"Resource": "*"
},
{
"Sid": "Statement2",
"Effect": "Deny",
"Action": [
"ec2:TerminateInstances"
],
"Resource": "*"
}
]
}
1:1 JSON
This AWS Policy Generator is provided for informational purposes only, you are still responsible for your use of Amazon Web Services technologies and ensuring that your use is in compliance with all applicable terms and conditions. This AWS Policy Generator is provided as is without warranty of any kind, whether express, implied, or statutory. This AWS Policy Generator does not modify the applicable terms and conditions governing your use of Amazon Web Services technologies.
Copied
Close
Copy Policy
This AWS Policy Generator is provided for informational purposes only, you are still responsible for your use of Amazon Web Services technologies and ensuring that your use is in compliance with all applicable terms and conditions. This AWS Policy Generator is provided as is without warranty of any kind, whether express, implied, or statutory. This AWS Policy Generator does not modify the applicable terms and conditions governing your use of Amazon Web Services technologies.
©2026, Amazon Web Services or its affiliates. All rights reserved.

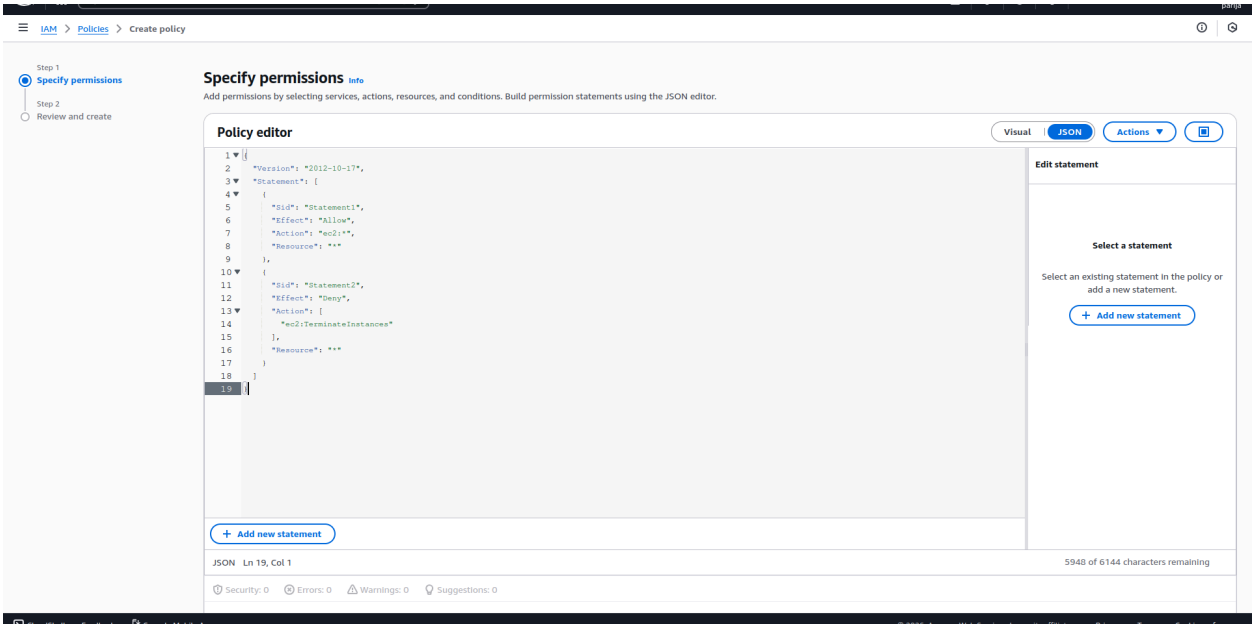
IAM > Policies > Create policy
Step 1
Specify permissions
Step 2
Review and create
Specify permissions Info
Add permissions by selecting services, actions, resources, and conditions. Build permission statements using the JSON editor.
Policy editor
Visual
JSON
Actions
{
"Version": "2012-10-17",
"Statement": [
{
"Sid": "Statement1",
"Effect": "Allow",
"Action": "ec2:*",
"Resource": "*"
},
{
"Sid": "Statement2",
"Effect": "Deny",
"Action": [
"ec2:TerminateInstances"
],
"Resource": "*"
}
]
}
Edit statement
Select a statement
Select an existing statement in the policy or add a new statement.
+ Add new statement
+ Add new statement
JSON Ln 19, Col 1
5948 of 6144 characters remaining
Security: 0
Errors: 0
Warnings: 0
Suggestions: 0

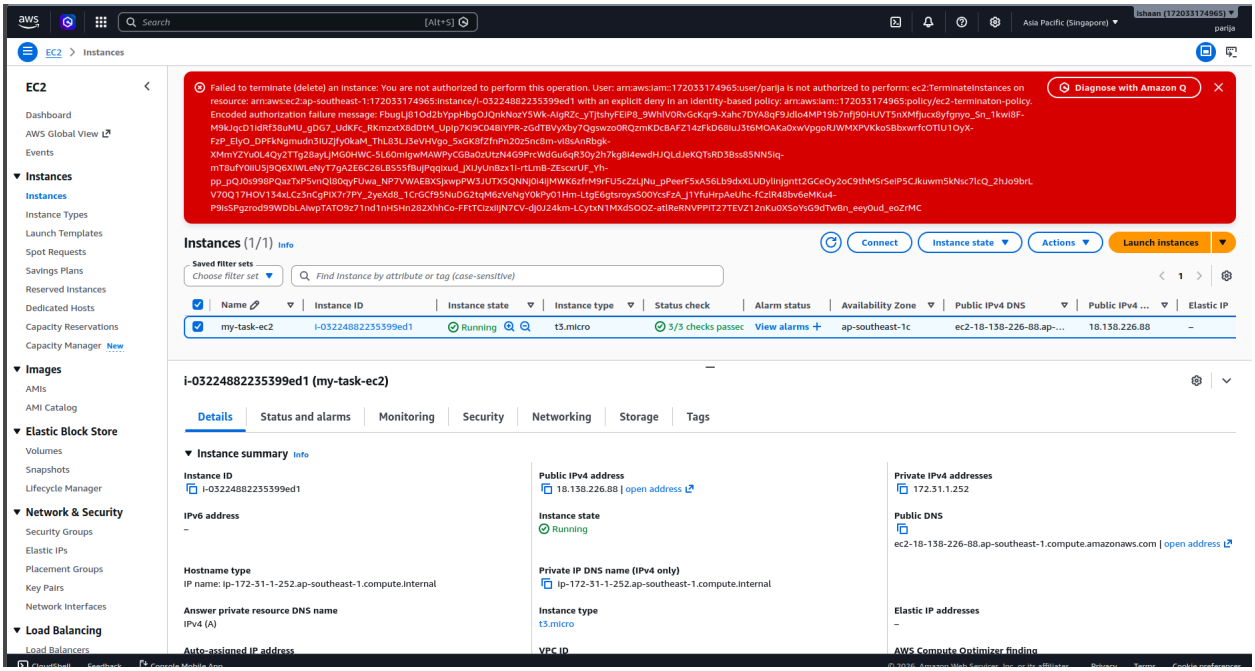
EC2 > Instances
Failed to terminate (delete) an instance: You are not authorized to perform this operation. User: arn:aws:iam::172033174965:user/parija is not authorized to perform: ec2:TerminateInstances on resource: arn:aws:ec2:ap-southeast-1:172033174965:instance/i-03224882235399ed1 with an explicit deny in an identity-based policy: arn:aws:iam::172033174965:policy/ec2-terminaton-policy.
Diagnose with Amazon Q
Instances (1/1) Info
Connect
Instance state
Actions
Launch instances
Name
Instance ID
Instance state
Instance type
Status check
Alarm status
Availability Zone
Public IPv4 DNS
Public IPv4 ...
Elastic IP
my-task-ec2
i-03224882235399ed1
Running
t3.micro
3/3 checks passed
View alarms +
ap-southeast-1c
ec2-18-138-226-88.ap-...
18.138.226.88
i-03224882235399ed1 (my-task-ec2)
Details
Status and alarms
Monitoring
Security
Networking
Storage
Tags
Instance summary Info
Instance ID
i-03224882235399ed1
Public IPv4 address
18.138.226.88 | open address
Private IPv4 addresses
172.31.1.252
IPv6 address
Instance state
Running
Public DNS
ec2-18-138-226-88.ap-southeast-1.compute.amazonaws.com | open address
Hostname type
IP name: ip-172-31-1-252.ap-southeast-1.compute.internal
Private IP DNS name (IPv4 only)
ip-172-31-1-252.ap-southeast-1.compute.internal
Answer private resource DNS name
IPv4 (A)
Instance type
t3.micro
Elastic IP addresses
Auto-assigned IP address
VPC ID
AWS Compute Optimizer finding

task 2

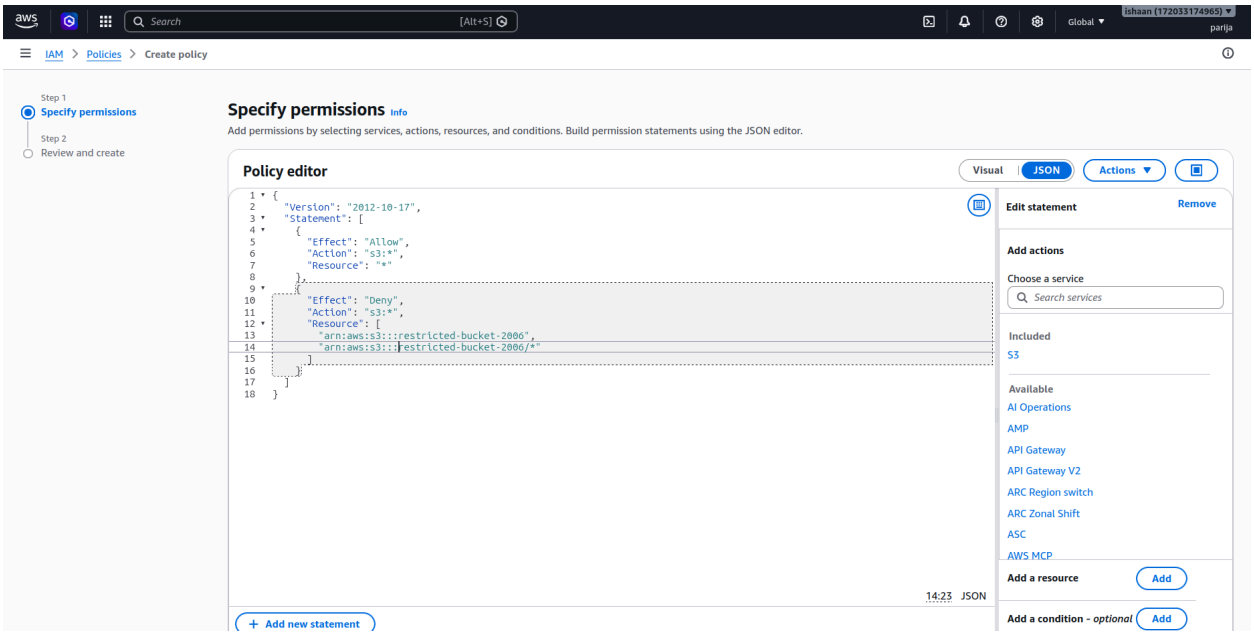
IAM > Policies > Create policy
Step 1
Specify permissions
Step 2
Review and create
Specify permissions Info
Add permissions by selecting services, actions, resources, and conditions. Build permission statements using the JSON editor.
Policy editor
Visual
JSON
Actions
{
"Version": "2012-10-17",
"Statement": [
{
"Effect": "Allow",
"Action": "s3:*",
"Resource": "*"
},
{
"Effect": "Deny",
"Action": "s3:*",
"Resource": [
"arn:aws:s3:::restricted-bucket-2006",
"arn:aws:s3:::restricted-bucket-2006/*"
]
}
]
}
14:23 JSON
+ Add new statement
Edit statement
Remove
Add actions
Choose a service
Search services
Included
S3
Available
AI Operations
AMP
API Gateway
API Gateway V2
ARC Region switch
ARC Zonal Shift
ASC
AWS MCP
Add a resource
Add
Add a condition - optional
Add

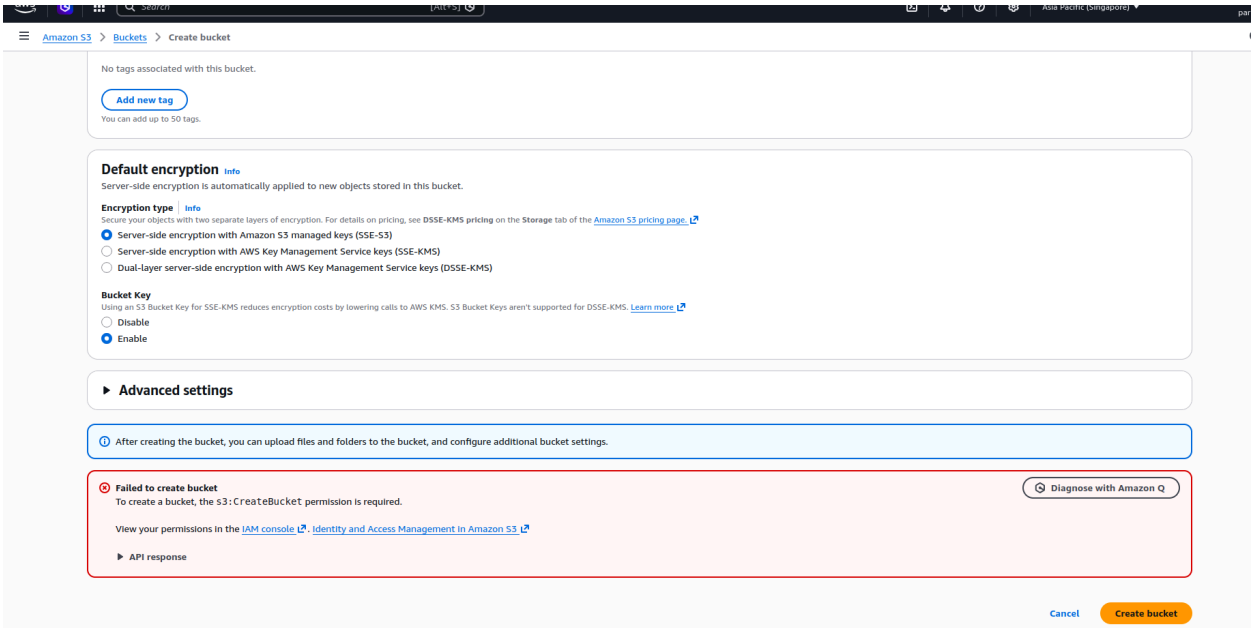
Amazon S3 > Buckets > Create bucket
No tags associated with this bucket.
Add new tag
You can add up to 50 tags.
Default encryption Info
Server-side encryption is automatically applied to new objects stored in this bucket.
Encryption type Info
Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the Amazon S3 pricing page.
Server-side encryption with Amazon S3 managed keys (SSE-S3)
Server-side encryption with AWS Key Management Service keys (SSE-KMS)
Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)
Bucket Key
Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. Learn more
Disable
Enable
Advanced settings
After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.
Failed to create bucket
To create a bucket, the s3:CreateBucket permission is required.
View your permissions in the IAM console, Identity and Access Management in Amazon S3
API response
Diagnose with Amazon Q
Cancel
Create bucket

task 3

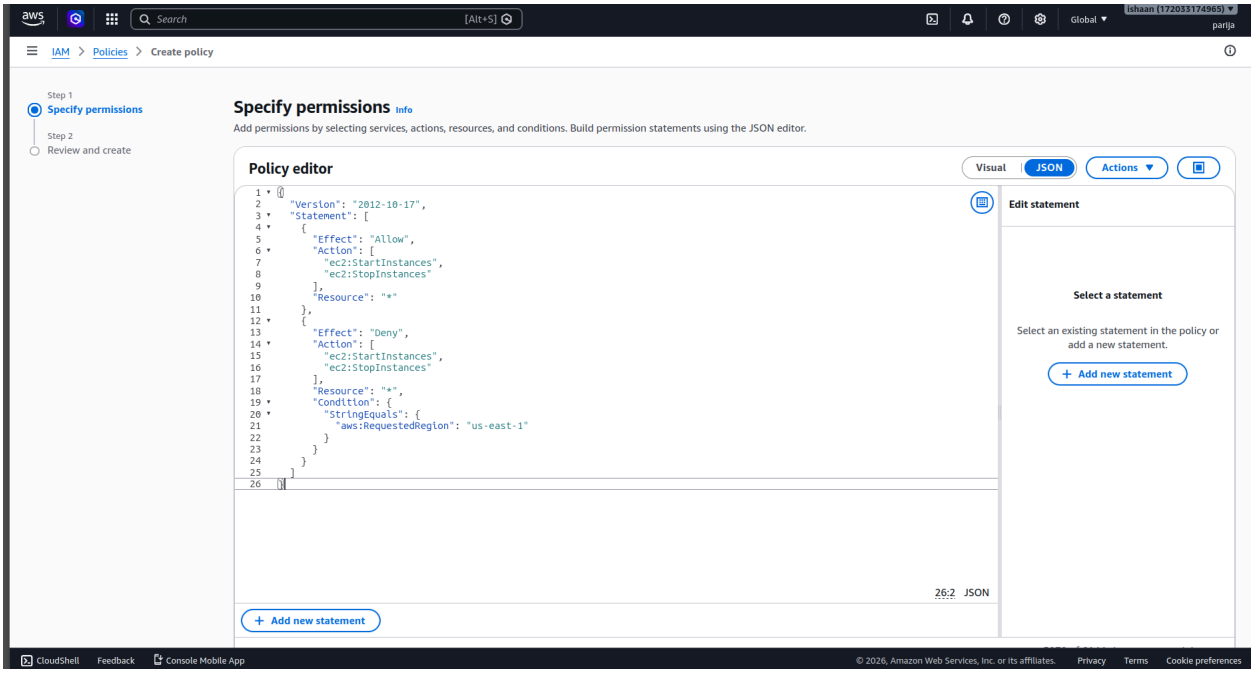
IAM > Policies > Create policy
Step 1
Specify permissions
Step 2
Review and create
Specify permissions Info
Add permissions by selecting services, actions, resources, and conditions. Build permission statements using the JSON editor.
Policy editor
Visual
JSON
Actions
{
"Version": "2012-10-17",
"Statement": [
{
"Effect": "Allow",
"Action": [
"ec2:StartInstances",
"ec2:StopInstances"
],
"Resource": "*"
},
{
"Effect": "Deny",
"Action": [
"ec2:StartInstances",
"ec2:StopInstances"
],
"Resource": "*",
"Condition": {
"StringEquals": {
"aws:RequestedRegion": "us-east-1"
}
}
}
]
}
26:2 JSON
Edit statement
Select a statement
Select an existing statement in the policy or add a new statement.
Add new statement
Add new statement
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

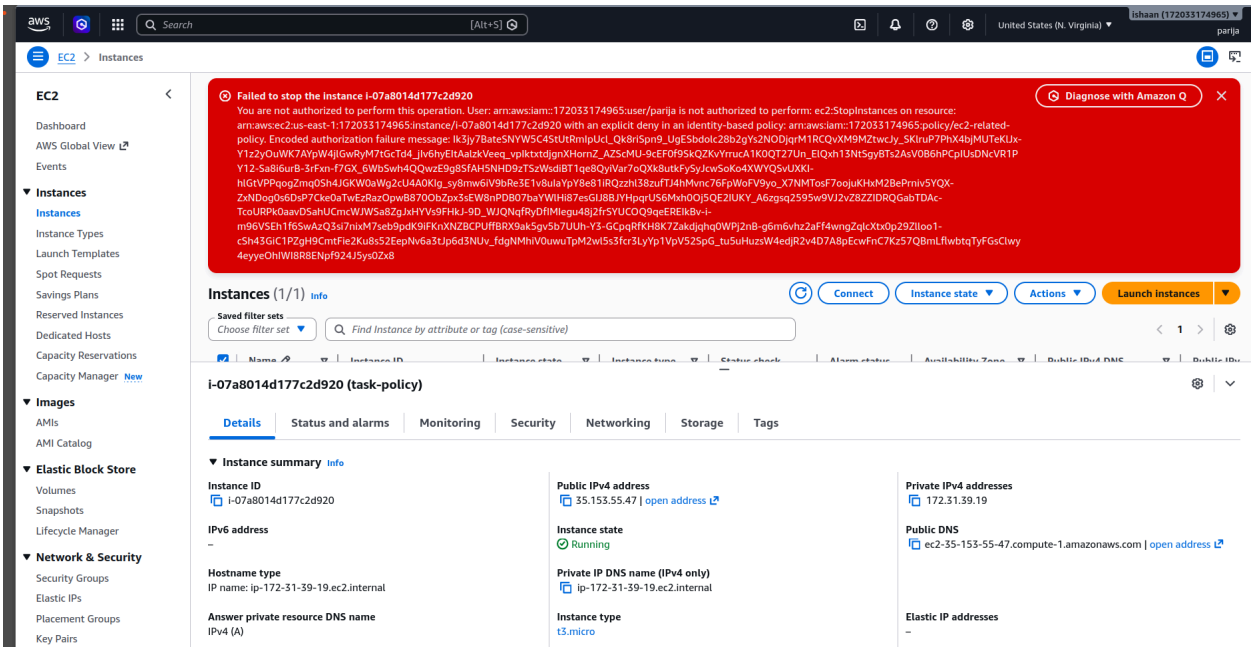
Search
[Alt+S]
United States (N. Virginia)
ishaan (172033174965)
parija
EC2 > Instances
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Snapshots
Lifecycle Manager
Network & Security
Security Groups
Elastic IPs
Placement Groups
Key Pairs
Failed to stop the instance i-07a8014d177c2d920
You are not authorized to perform this operation. User: arn:aws:iam::172033174965:user/parija is not authorized to perform: ec2:StopInstances on resource: arn:aws:ec2:us-east-1:172033174965:instance/i-07a8014d177c2d920 with an explicit deny in an identity-based policy: arn:aws:iam::172033174965:policy/ec2-related-policy. Encoded authorization failure message: Ik3jy7BateSNYW5C4StUtRmIpUcl_Qk8riSpn9_UgESbdoIc28b2gYs2NODjqrM1RCQvXM9MZtwcJy_5KlruP7PhX4bjMUTeKUJx-Y1z2yOuWK7AYpW4jlGwRyM7tGcTd4_jlv6hyEltAalzkVeeq_vplktxtdjgnXHornZ_AZScMU-9cEF0f95kQZKvYrrucA1K0QT27Un_ElQxh13NtSgyBTs2AsV0B6hPCplUsDNcVR1PY12-5a8i6urB-3rFxn-f7GX_6WbSwh4QQwzE9g8SfAH5NHD9zTSzWsdiBT1qe8QyiVar7oQXk8utkFySyJcwSoKo4XWYQSvUXKI-hIGtVPPqogZmq0Sh4JGKW0aWg2cU4A0Klg_sy8mw6iV9bRe3E1v8ulaYpY8e81iRQzzhl38zufTJ4hMvnc76FpWoFV9yo_X7NMTosF7oojuKHxM2BePrniv5YQX-ZxNDog0s6DsP7Cke0aTwEzRazOpwB870ObZpx3sEW8nPDB07baYWlHi87esGIJ8BJYHpqrUS6Mxh0Oj5QE2IUKY_A6zgsq2595w9VJ2vZ8ZZIDRQGabTDAc-TcoURPk0aavDSahUCmcWJWSa8ZgJxHYVs9FHkJ-9D_WJQNqfRyDfIMIegu48j2frSYUCOQ9qeEREIkBv-i-m96V5Eh1f6SwAzQ3si7nixM7seb9pdK9iFKnXNZBCPUffBRX9ak5gv5b7UUh-Y3-GCpqRfKH8K7Zakdjqhq0WPj2nB-g6m6vhz2aFf4wngZqIcXtx0p29ZIloo1-cSh43GiC1PZgH9CmtFie2Ku8s52EepNv6a3tUp6d3NUv_fdgNMhiV0uwuTpM2wl5s3fcr3LyYp1VpV52SpG_tu5uHuzsW4edjR2v4D7A8pEcwFnC7Kz57QBmLflwbtqTyFGsClwy4eyyeOhIWI8R8ENpf9Z4J5ys0Zx8
Diagnose with Amazon Q
Instances (1/1) Info
Connect
Instance state
Actions
Launch instances
Saved filter sets
Choose filter set
Find Instance by attribute or tag (case-sensitive)
i-07a8014d177c2d920 (task-policy)
Details
Status and alarms
Monitoring
Security
Networking
Storage
Tags
Instance summary Info
Instance ID
i-07a8014d177c2d920
IPv6 address
–
Hostname type
IP name: ip-172-31-39-19.ec2.internal
Answer private resource DNS name
IPv4 (A)
Public IPv4 address
35.153.55.47 | open address
Instance state
Running
Private IP DNS name (IPv4 only)
ip-172-31-39-19.ec2.internal
Instance type
t3.micro
Private IPv4 addresses
172.31.39.19
Public DNS
ec2-35-153-55-47.compute-1.amazonaws.com | open address
Elastic IP addresses
–

task 4

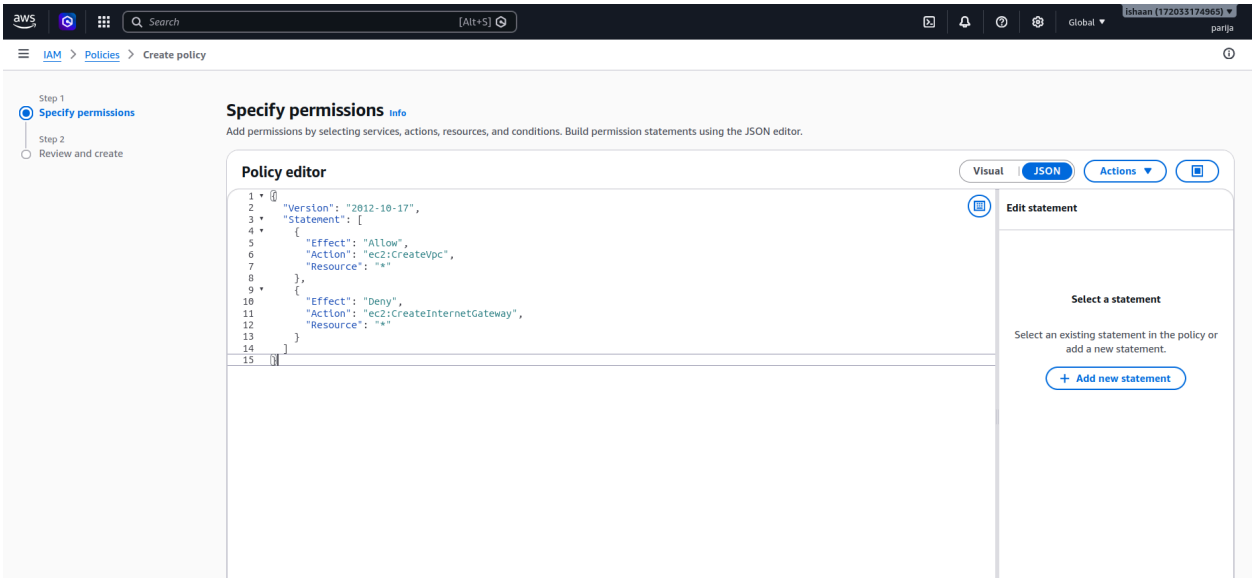
Search
[Alt+S]
Global
ishaan (172033174965)
parija
IAM > Policies > Create policy
Step 1
Specify permissions
Step 2
Review and create
Specify permissions Info
Add permissions by selecting services, actions, resources, and conditions. Build permission statements using the JSON editor.
Policy editor
Visual
JSON
Actions
1 {
2 "Version": "2012-10-17",
3 "Statement": [
4 {
5 "Effect": "Allow",
6 "Action": "ec2:CreateVpc",
7 "Resource": "*"
8 },
9 {
10 "Effect": "Deny",
11 "Action": "ec2:CreateInternetGateway",
12 "Resource": "*"
13 }
14]
15 }
Edit statement
Select a statement
Select an existing statement in the policy or add a new statement.
+ Add new statement

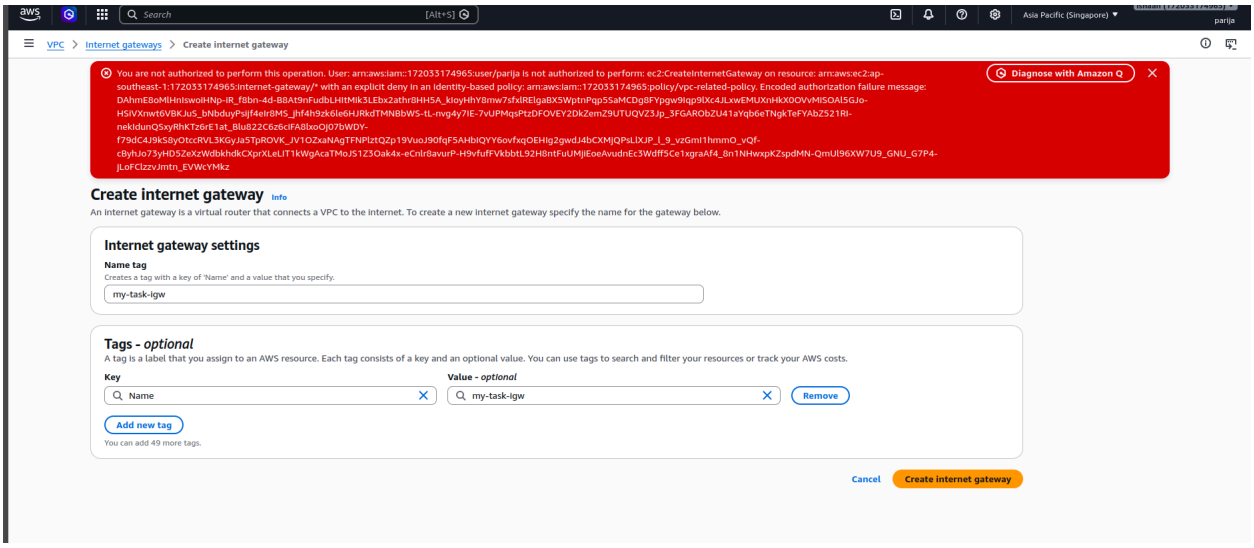
aws
Search
[Alt+S]
Asia Pacific (Singapore)
parija
VPC > Internet gateways > Create internet gateway
You are not authorized to perform this operation. User: arn:aws:iam::172033174965:user/parija is not authorized to perform: ec2:CreateInternetGateway on resource: arn:aws:ec2:ap-southeast-1:172033174965:internet-gateway/* with an explicit deny in an identity-based policy: arn:aws:iam::172033174965:policy/vpc-related-policy. Encoded authorization failure message: DAhmE8oMlHnIswoIHNp-iR_f8bn-4d-B8At9nFudbLHItMik3LEbx2athr8HH5A_kIoyHhY8mw7sfxlRElgaBX5WptnPqp55aMCDg8FYpgw9Iqp9lXc4JLxwEMUXnHkX0OVvMISOAl5GJo-HSiVXnwt6VBKJuS_bNbduyPsijf4eIr8MS_jhf4h9zk6le6HJRkdTMNBbWS-tL-nvg4y7IE-7vUPMqsPtzDFOVEY2DkZemZ9UTUQVZ3Jp_3FGARObZU41aYqb6eTNgkTeFYAbZ521RI-nekIdunQ5xyRhKTz6rE1at_Blu822C6z6cIFA8lxoOj07bWDY-f79dC4J9kS8yOtccRVL3KGyJa5TpROVK_JV1OZxaNAgTFNPlztQZp19VuoJ90fqF5AHblQYY6ovfxqOEHIg2gwdJ4bCXMjQPsLlXJP_l_9_vzGmI1hmmO_vQf-cByhJo73yHD5ZeXzWdbkhdkCXprXLeLIT1kWgAcaTMoJS1Z3Oak4x-eCnlr8avurP-H9vfufFVkbbtL92H8ntFuUMjEoeAvudnEc3Wdff5Ce1xgraAf4_8n1NHwxpKZspdMN-QmUl96XW7U9_GNU_G7P4-jLoFClzzvJmtn_EVWcYMkz
Diagnose with Amazon Q
Create internet gateway Info
An internet gateway is a virtual router that connects a VPC to the internet. To create a new internet gateway specify the name for the gateway below.
Internet gateway settings
Name tag
Creates a tag with a key of 'Name' and a value that you specify.
my-task-igw
Tags - optional
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
Key
Name
Value - optional
my-task-igw
Remove
Add new tag
You can add 49 more tags.
Cancel
Create internet gateway

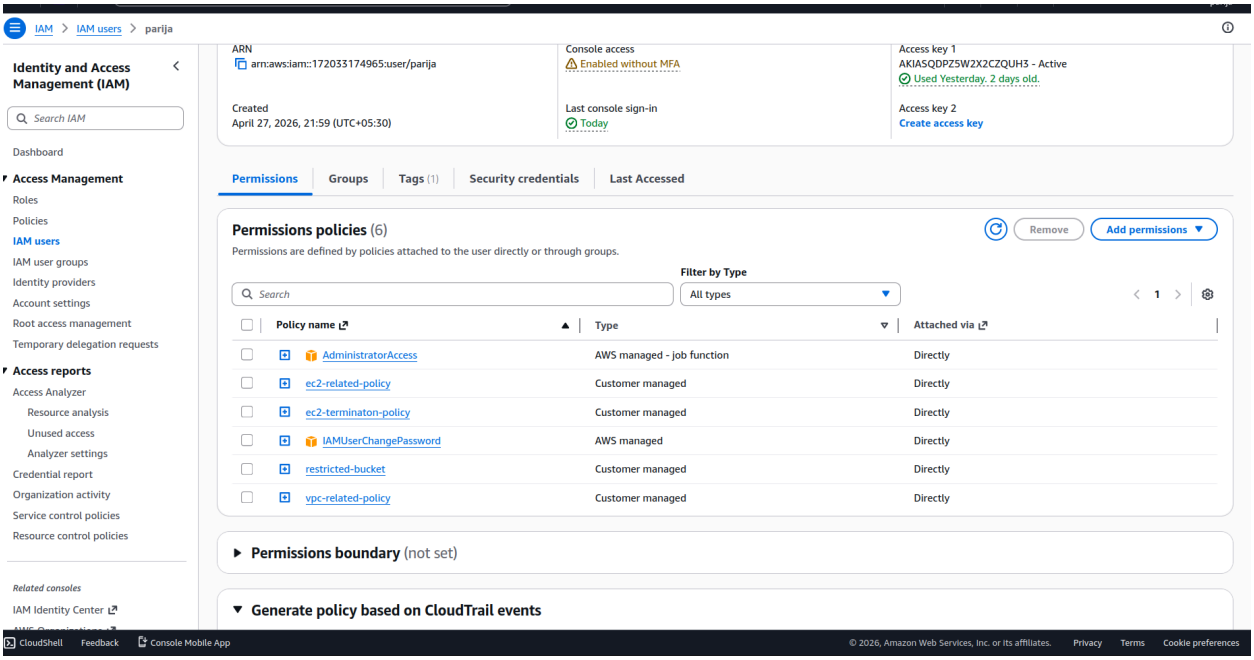
IAM > IAM users > parija
Identity and Access Management (IAM)
Search IAM
Dashboard
Access Management
Roles
Policies
IAM users
IAM user groups
Identity providers
Account settings
Root access management
Temporary delegation requests
Access reports
Access Analyzer
Resource analysis
Unused access
Analyzer settings
Credential report
Organization activity
Service control policies
Resource control policies
Related consoles
IAM Identity Center
ARN
arn:aws:iam::172033174965:user/parija
Console access
Enabled without MFA
Access key 1
AKIASQDPZ5W2X2CZQUH3 - Active
Used Yesterday, 2 days old.
Created
April 27, 2026, 21:59 (UTC+05:30)
Last console sign-in
Today
Access key 2
Create access key
Permissions
Groups
Tags (1)
Security credentials
Last Accessed
Permissions policies (6)
Permissions are defined by policies attached to the user directly or through groups.
Remove
Add permissions
Filter by Type
Search
All types
Policy name
Type
Attached via
AdministratorAccess
AWS managed - job function
Directly
ec2-related-policy
Customer managed
Directly
ec2-terminaton-policy
Customer managed
Directly
IAMUserChangePassword
AWS managed
Directly
restricted-bucket
Customer managed
Directly
vpc-related-policy
Customer managed
Directly
Permissions boundary (not set)
Generate policy based on CloudTrail events
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences