task 6

Establish path based routing using load balancer:

Domain.com/videos →
Should go Target group with videos.

Domain.com/images →
Should go Target group with images.

Steps:

Step 1: Create Target Groups

1. Go to **EC2** → **Target Groups**
2. Click **Create Target Group**

Create two target groups:

Videos Target Group

- Target type: Instance / IP
- Protocol: HTTP (or HTTPS)
- Port: 80 (or your app port)
- Register instances running video service

Images Target Group

- Same config
- Register instances running image service

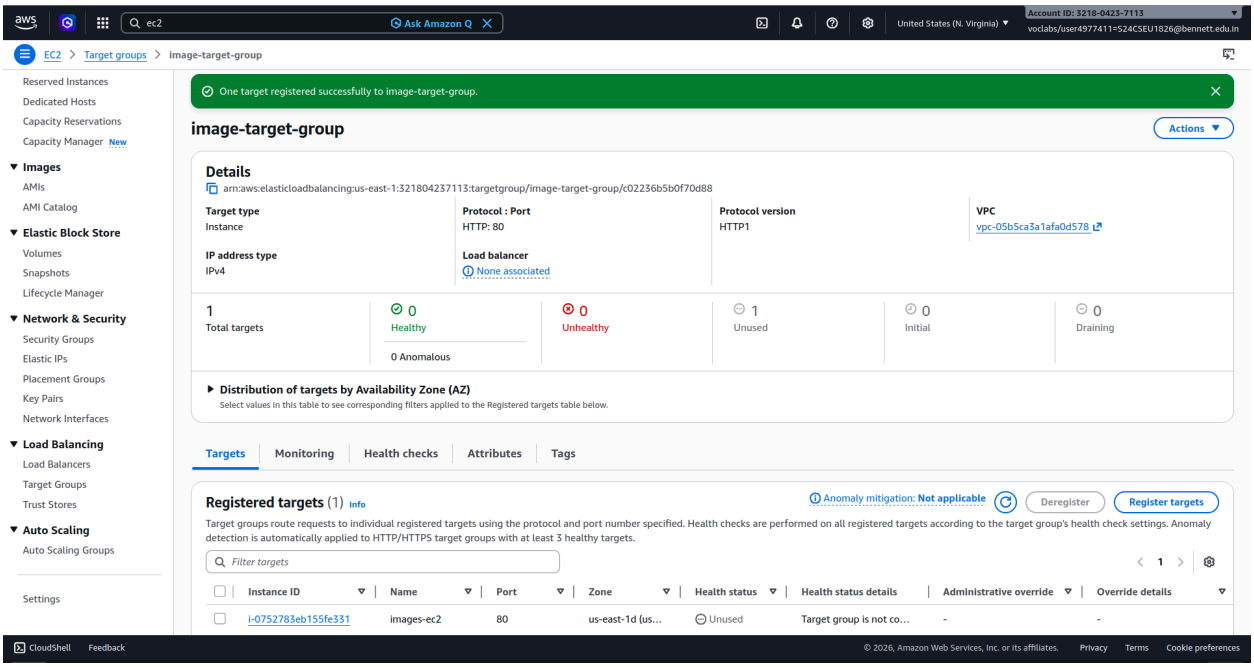

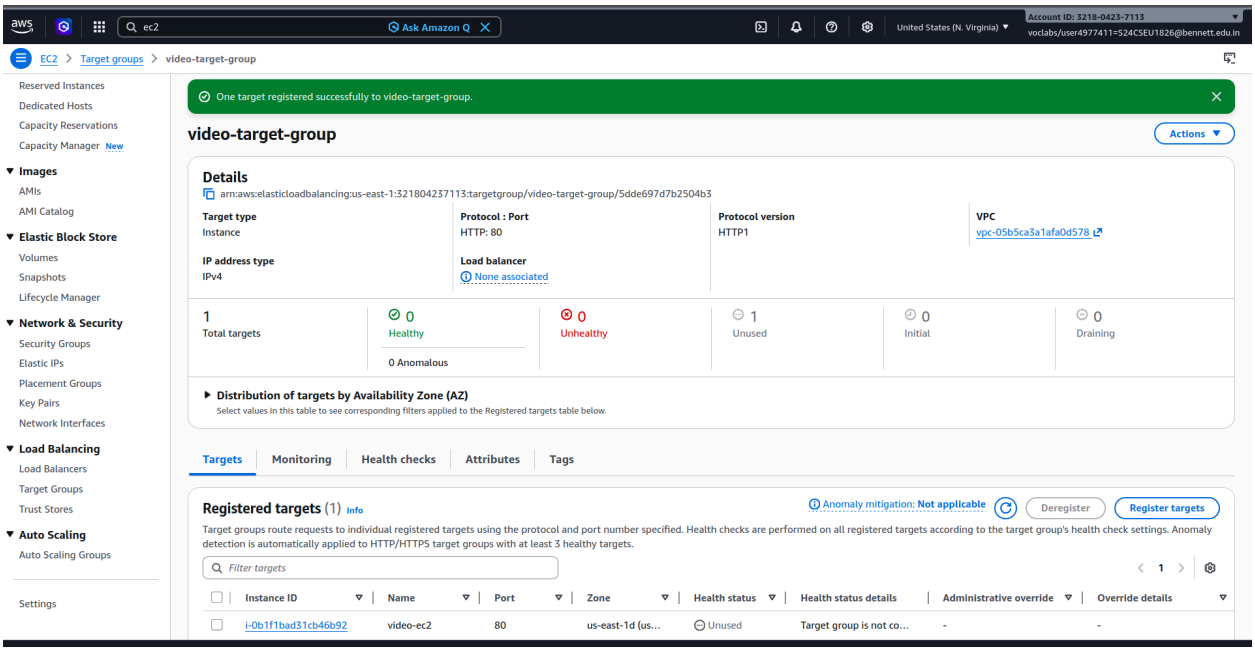

Step 2: Create Application Load Balancer

1. Go to **EC2 → Load Balancers**
2. Click **Create Load Balancer**
3. Choose **Application Load Balancer**

Configure:

- Name: my-alb
- Scheme: Internet-facing
- Listener: HTTP (80) or HTTPS (443)
- Select subnets (at least 2 AZs)
- Attach a security group (allow HTTP/HTTPS)

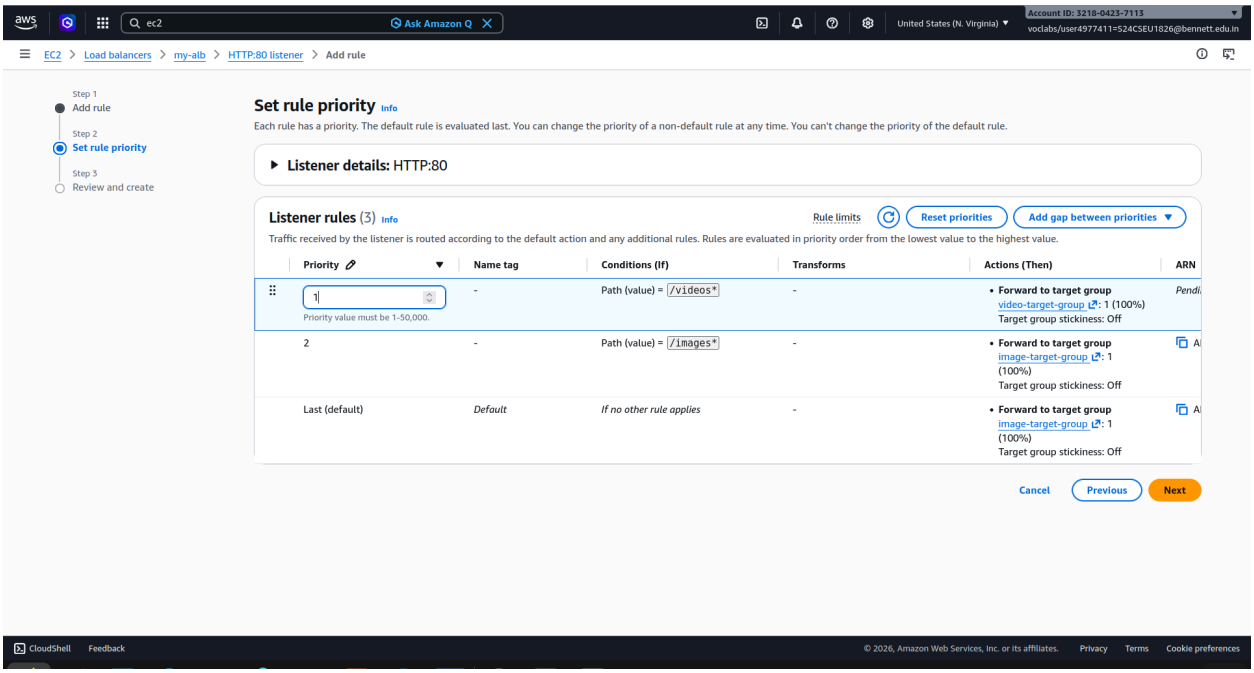

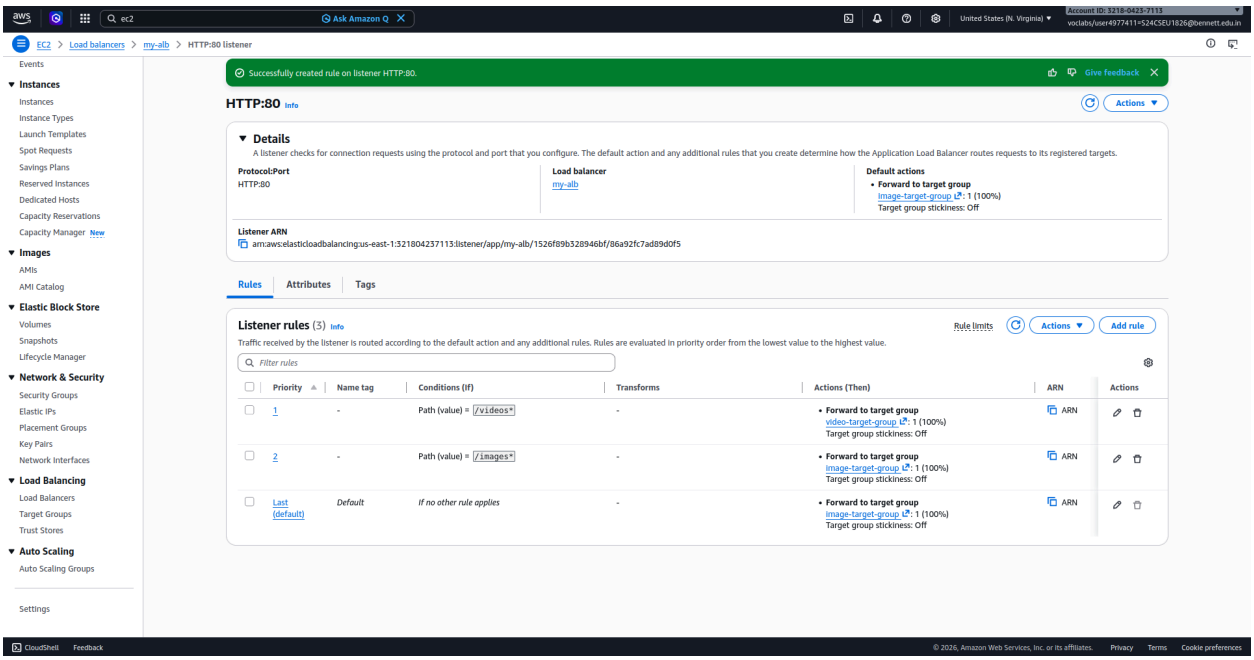

Step 3: Configure Default Target Group

- During creation, select one default target group (e.g., `videos-tg`)
- This handles unmatched routes

Step 4: Add Path-Based Routing Rules

After ALB is created:

1. Go to **Listeners** → **View/Edit Rules**
2. Click **"+ Add rule"**

Rule 1: /videos

- IF → Path = /videos*

- THEN → Forward to videos-tg

Rule 2: /images

- IF → Path = /images*
- THEN → Forward to images-tg

Step 5: Rule Priority

- /videos* → Priority 1
- /images* → Priority 2

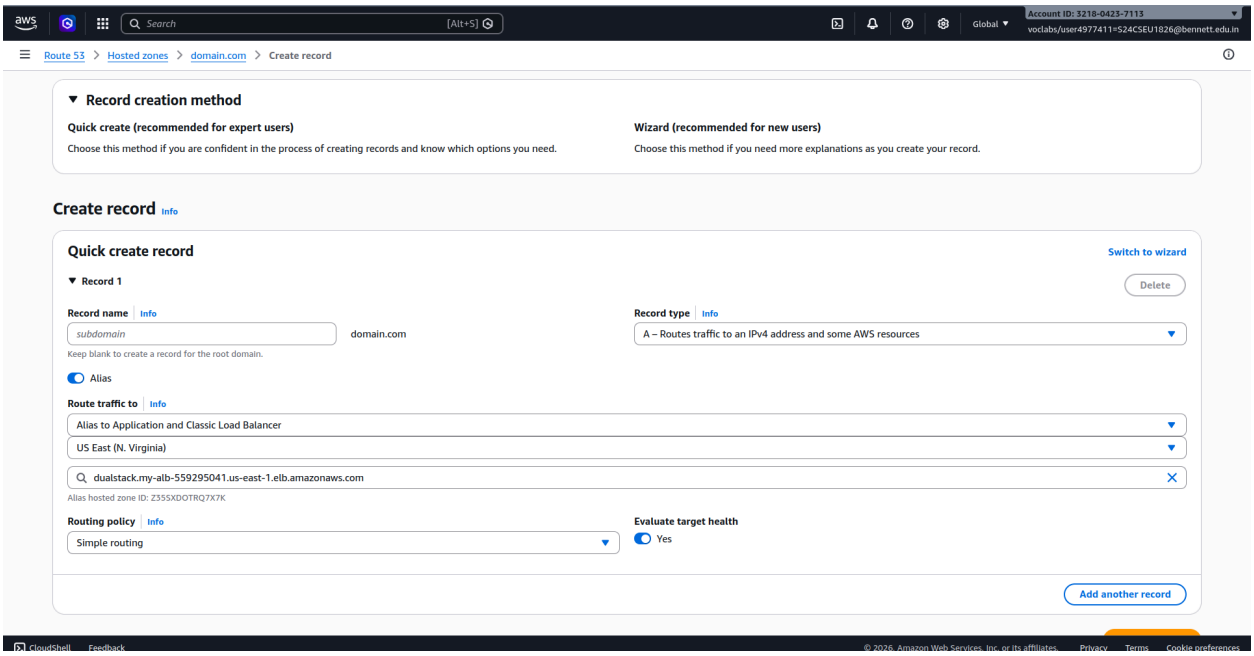
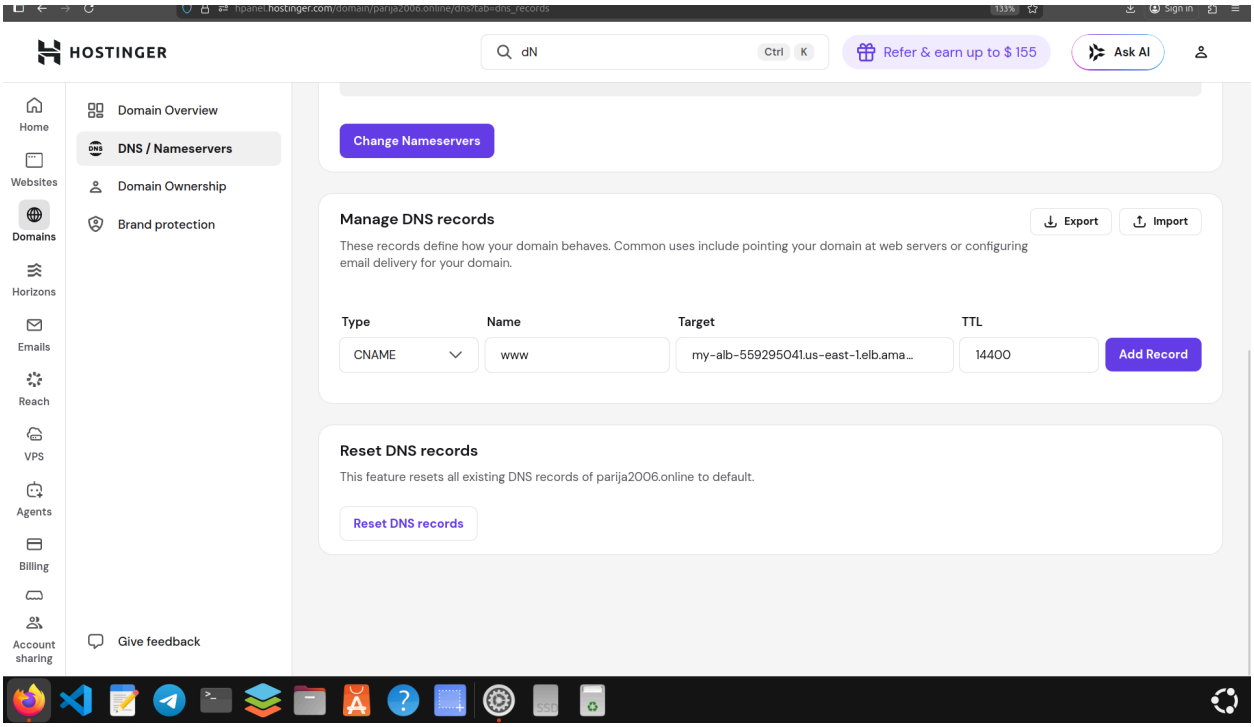
Step 6: Attach Domain