Task 8

buckets :

Create an S3 bucket where:

- Only /images/* is publicly readable
- All other objects remain private
- Public access is blocked at bucket level except required access

Enable:
Versioning

- Object Lock (Governance mode)
- Prevent deletion of objects under finance/*

Create a lifecycle rule:

- 30 days → Standard-IA
- 90 days → Glacier
- 365 days → Delete
- Applies only to uploads/*

Configure:

- Server access logging
- Logs delivered to another secure bucket
- Logs bucket must not be public

Part 1 — Create Main S3 Bucket

1. create bucket
2. remove “Block all public access”
3. enable bucket versioning

4. enable object lock

5. click create bucket

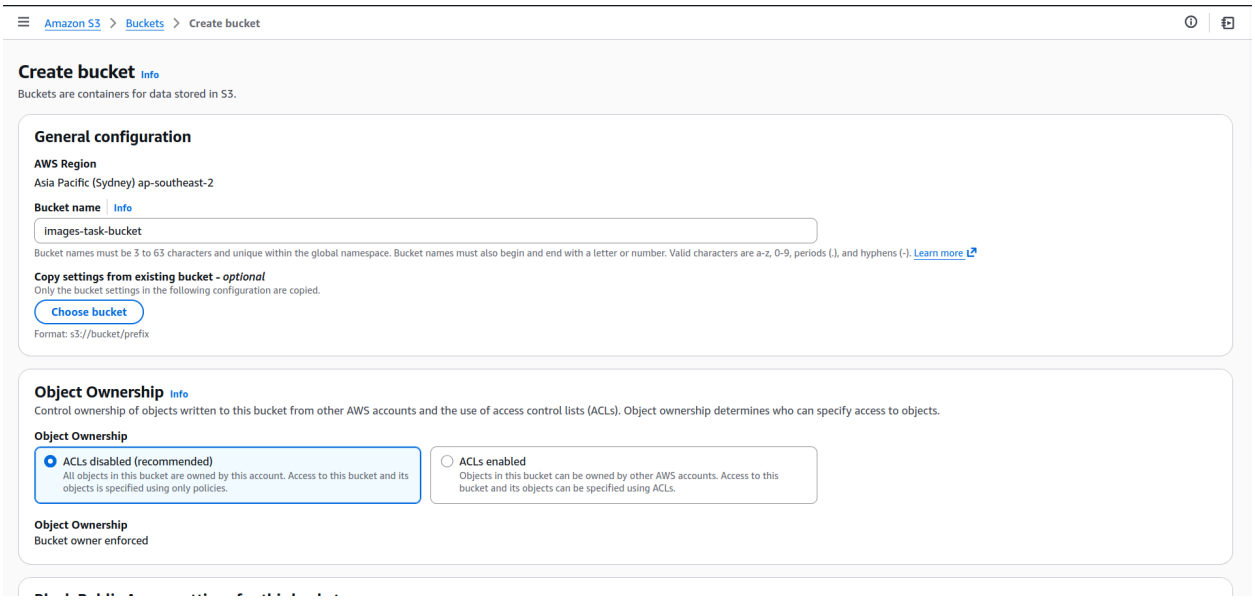

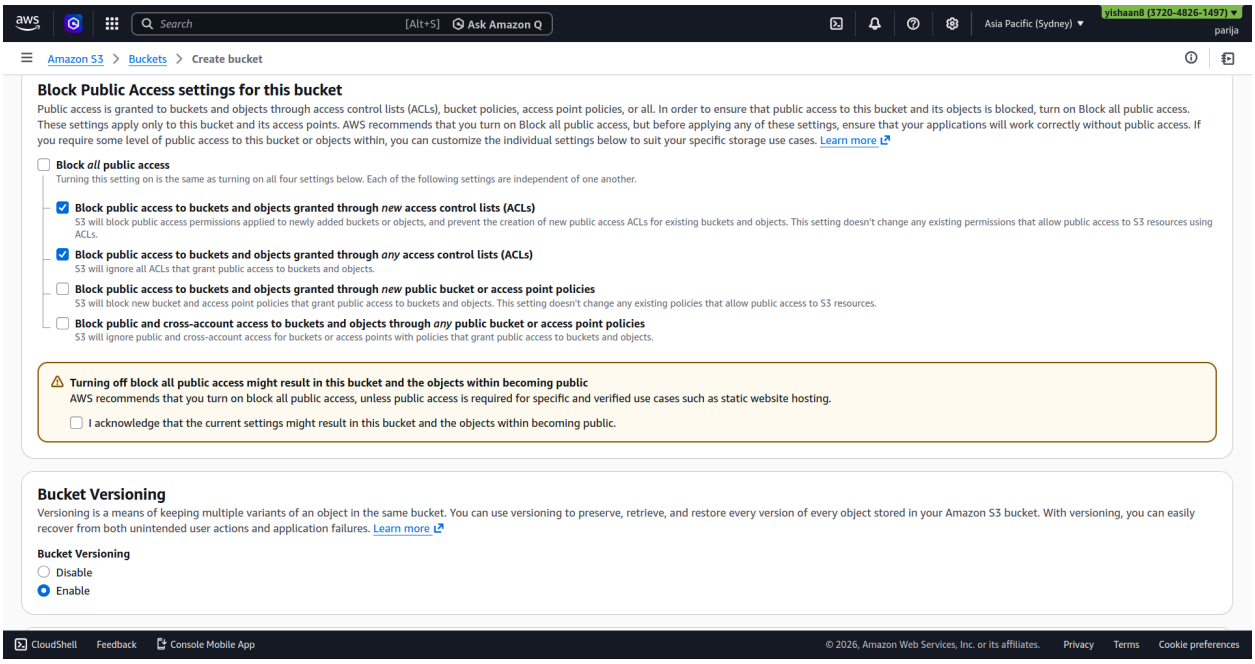

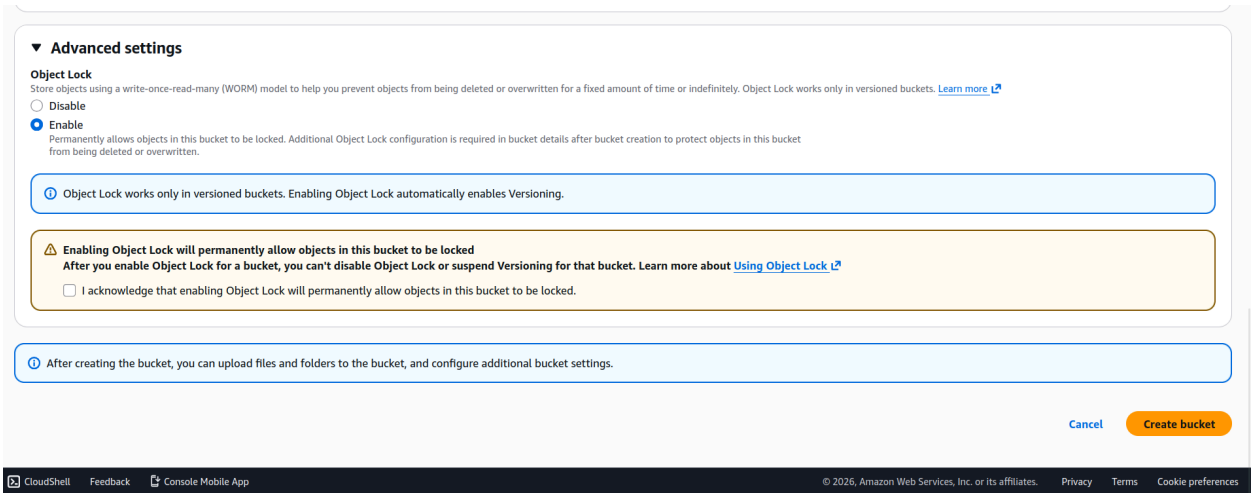

Step 2: Modify Block Public Access Settings

1. Open your bucket
2. Go to Permissions
3. Click Edit Block Public Access

Step 3: Add Bucket Policy

Go to:

Bucket → Permissions → Bucket Policy

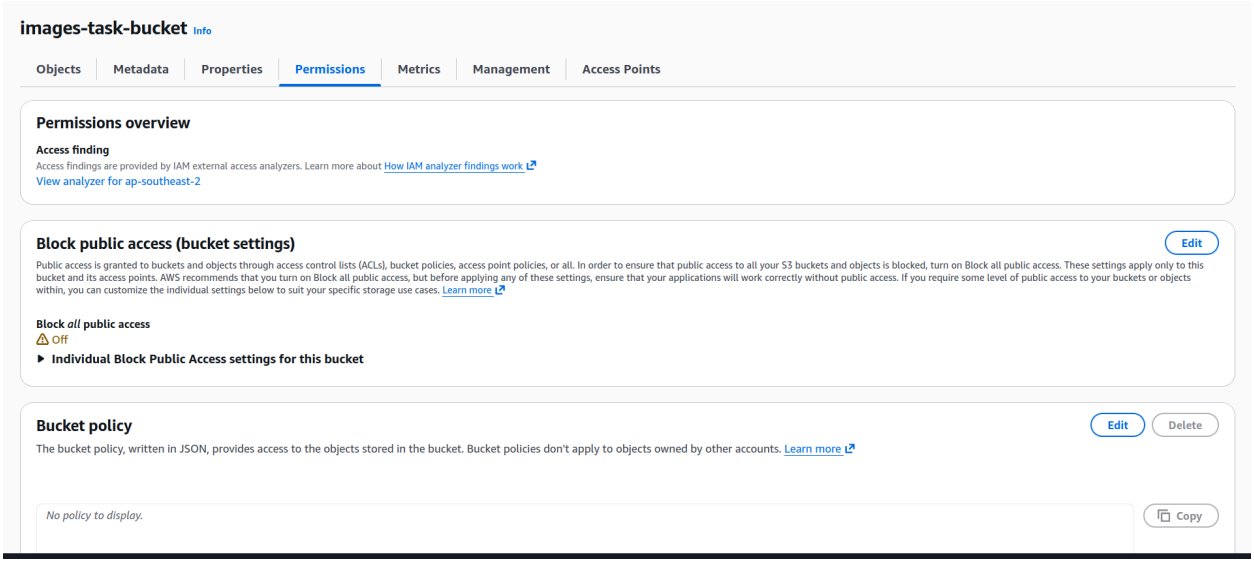

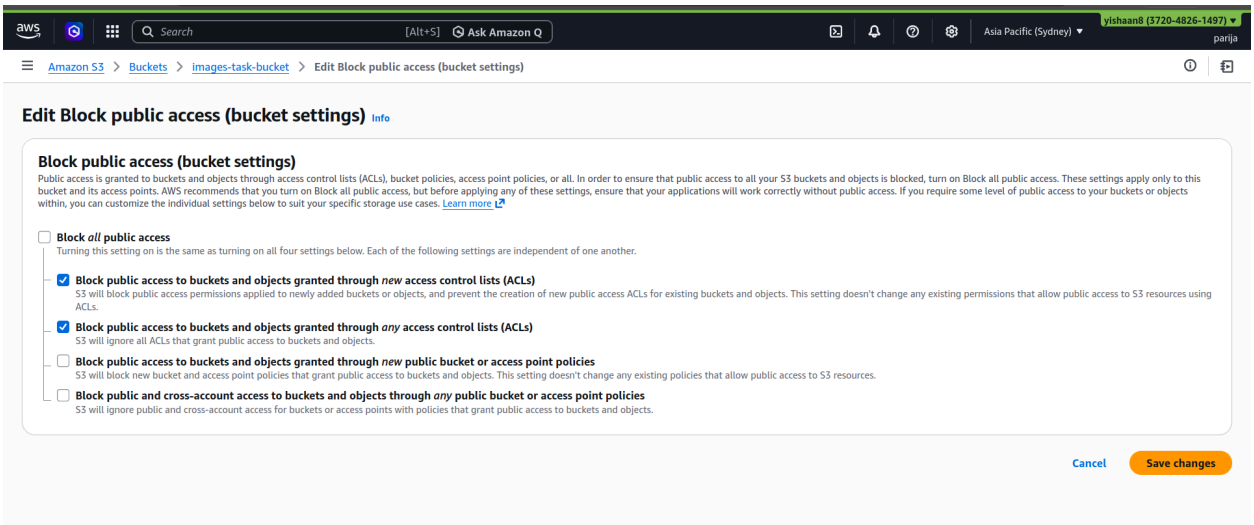
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Sydney)
yishaan8 (3720-4826-1497)
parija
Amazon S3 > Buckets > images-task-bucket > Edit Block public access (bucket settings)
Edit Block public access (bucket settings) Info
Block public access (bucket settings)
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more
Block all public access
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
Block public access to buckets and objects granted through new access control lists (ACLs)
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
Block public access to buckets and objects granted through any access control lists (ACLs)
S3 will ignore all ACLs that grant public access to buckets and objects.
Block public access to buckets and objects granted through new public bucket or access point policies
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
Block public and cross-account access to buckets and objects through any public bucket or access point policies
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.
Cancel
Save changes

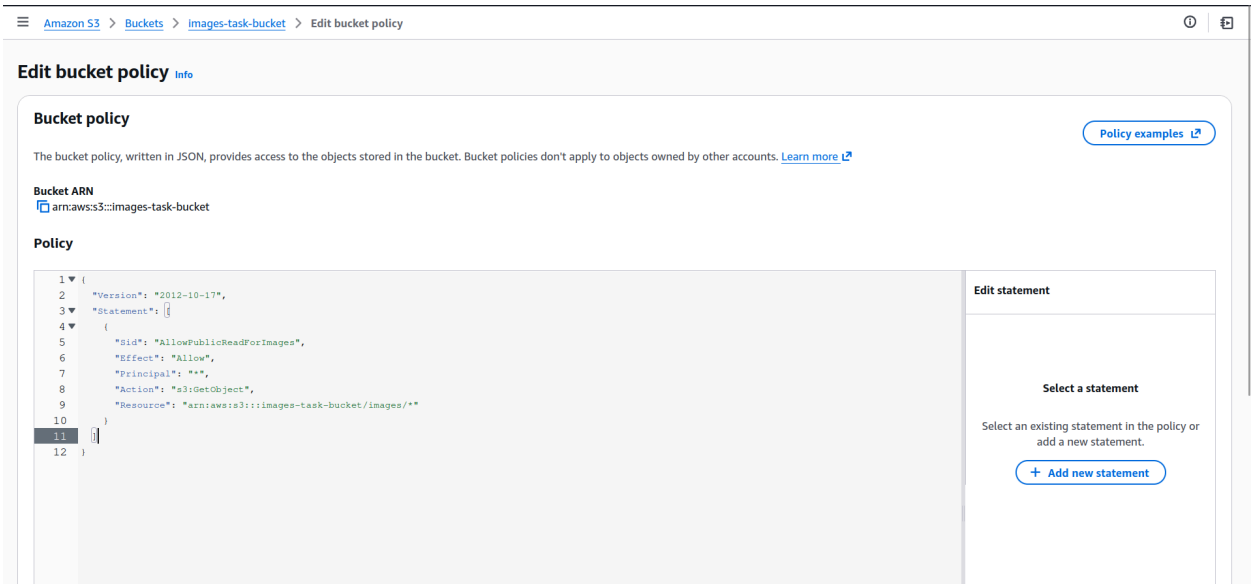
Amazon S3 > Buckets > images-task-bucket > Edit bucket policy
Edit bucket policy Info
Bucket policy
Policy examples
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. Learn more
Bucket ARN
arn:aws:s3:::images-task-bucket
Policy
{
"Version": "2012-10-17",
"Statement": [
{
"Sid": "AllowPublicReadForImages",
"Effect": "Allow",
"Principal": "*",
"Action": "s3:GetObject",
"Resource": "arn:aws:s3:::images-task-bucket/images/*"
}
]
}
Edit statement
Select a statement
Select an existing statement in the policy or add a new statement.
+ Add new statement

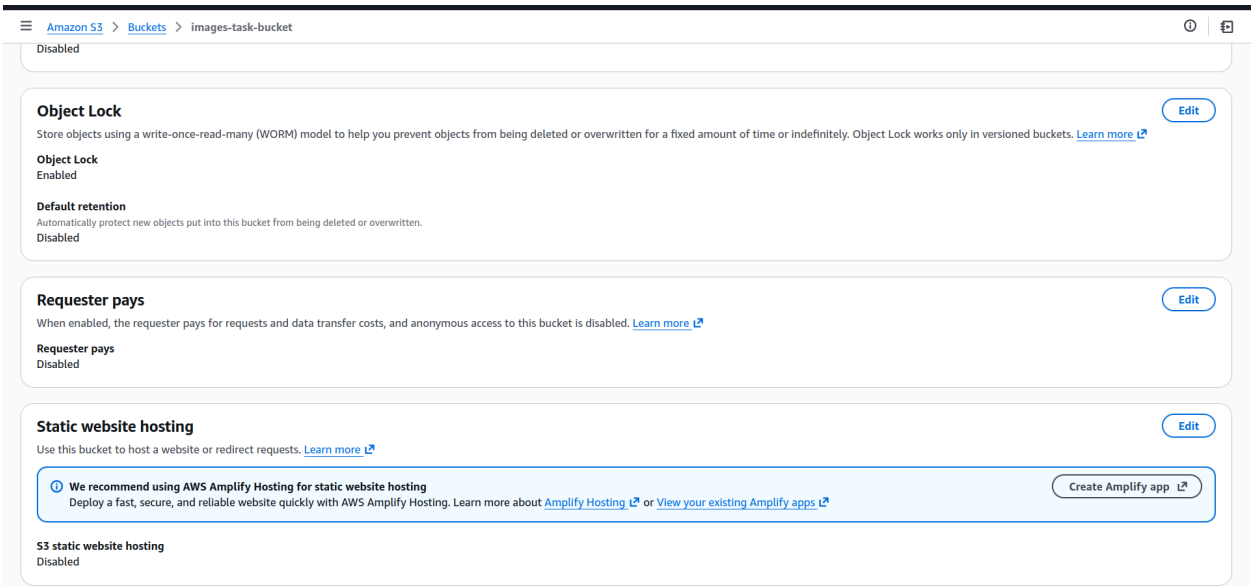

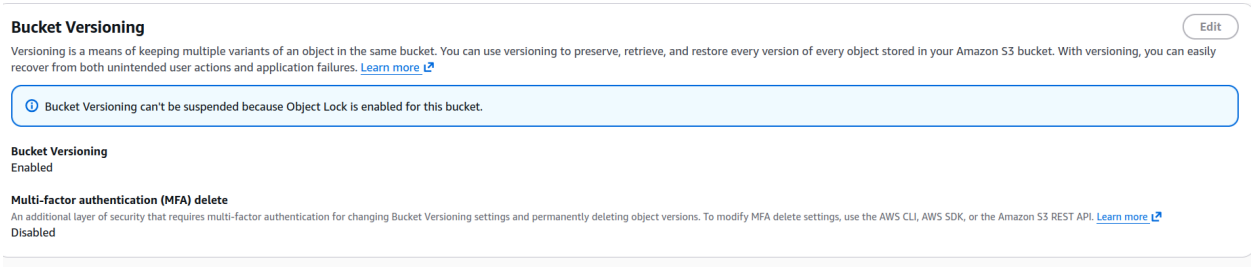

Step 4: Enable Default Retention Rule

Go to bucket then Properties

1. Scroll to Object Lock
2. Enable default retention:

Mode: Governance and set a retention period and then save

PART 4 — Prevent Deletion of finance/*

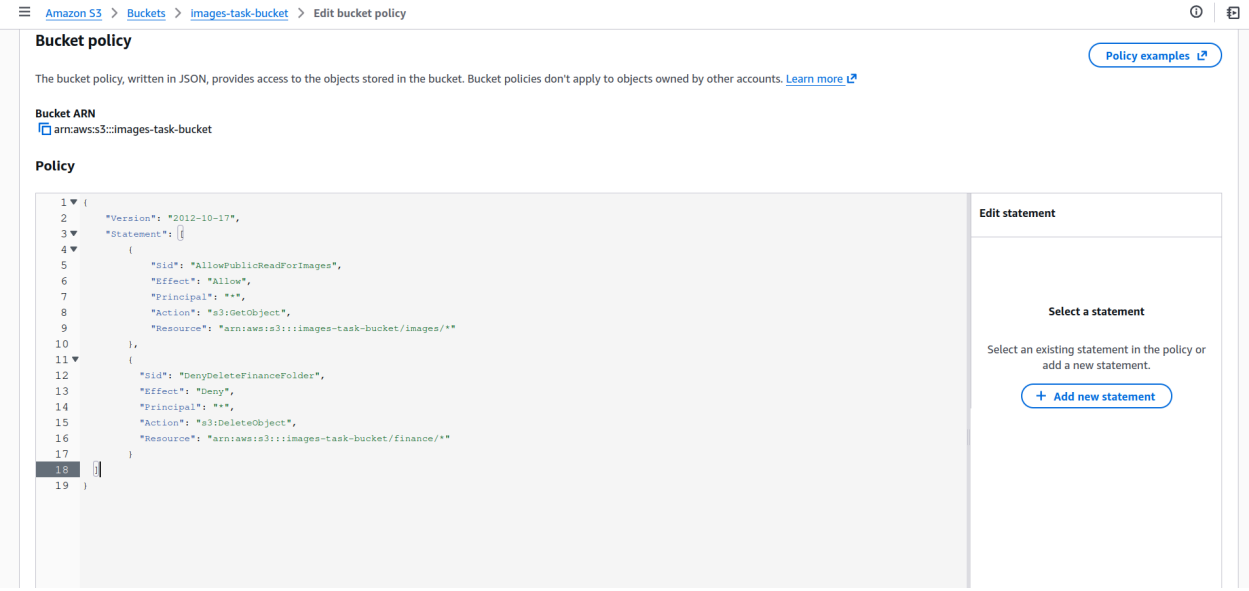

PART 5 — Lifecycle Rule

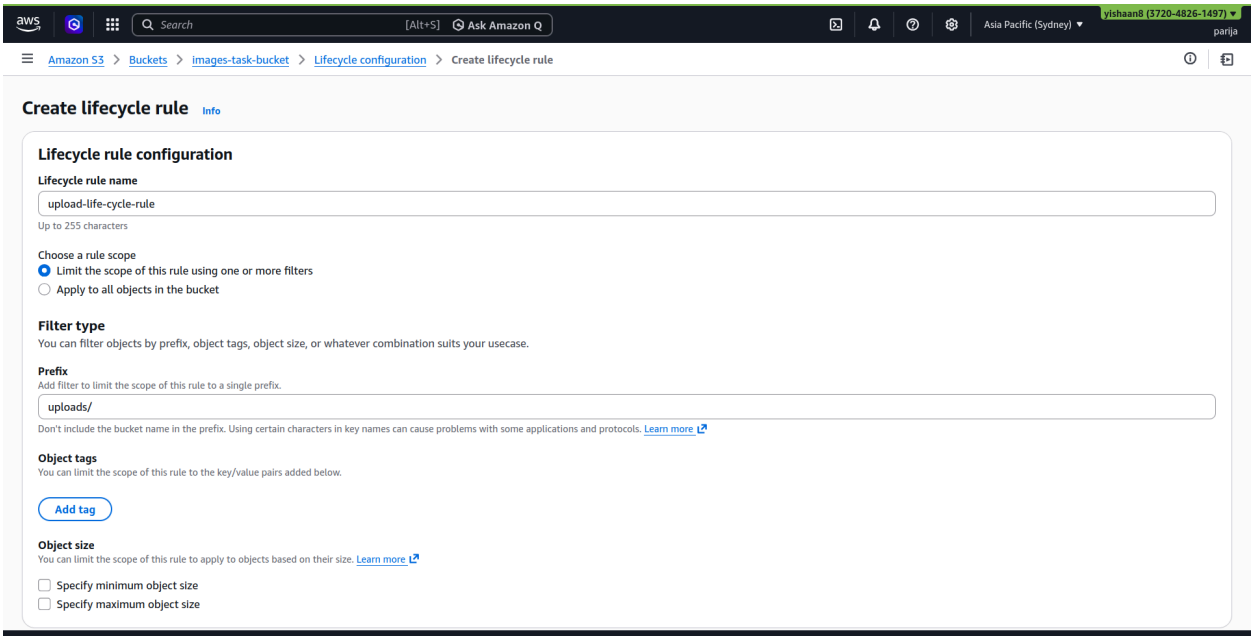

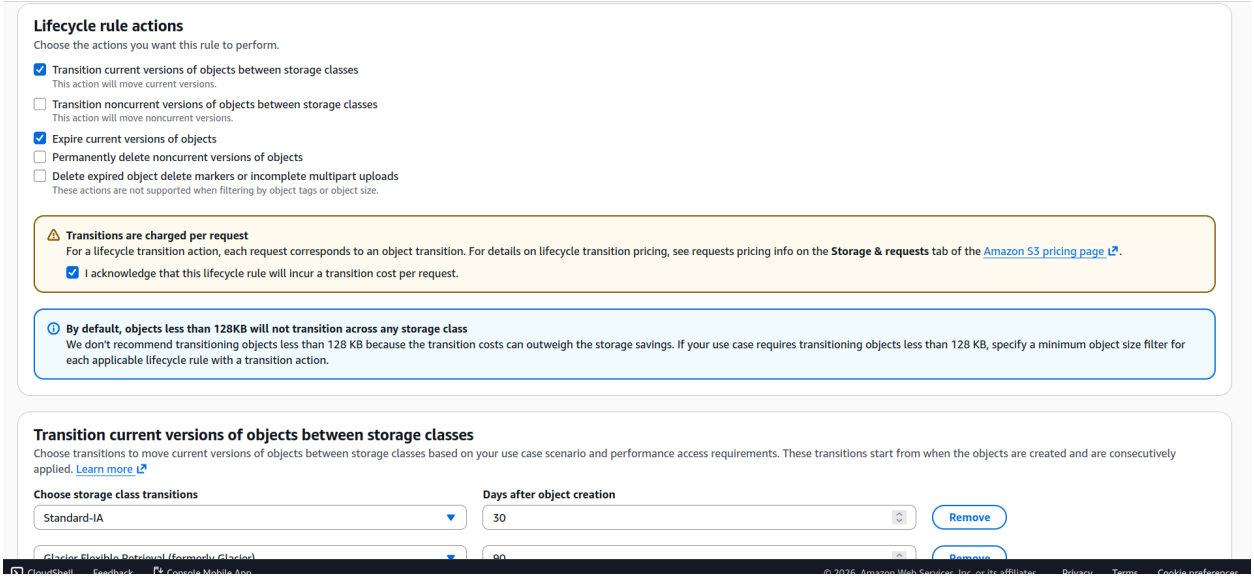

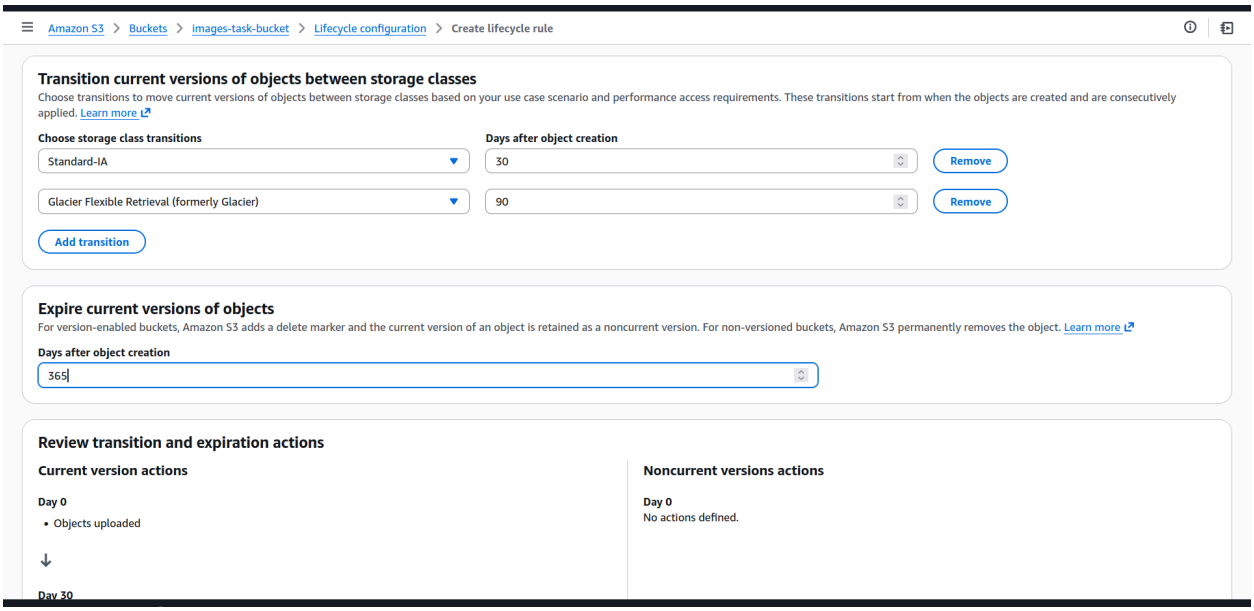

PART 6 — Enable Server Access Logging

create a new bucket server with unique name

1. Keep: block all Public Access

Create bucket.Versioning optional

go to your main bucket

go to properties and got to server access logging

- Click edit option
- Enable
- Choose:

  Target bucket → logs bucket
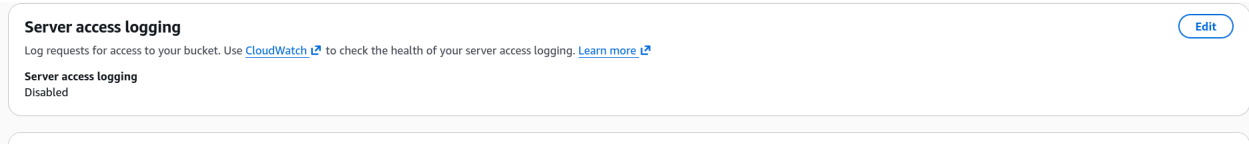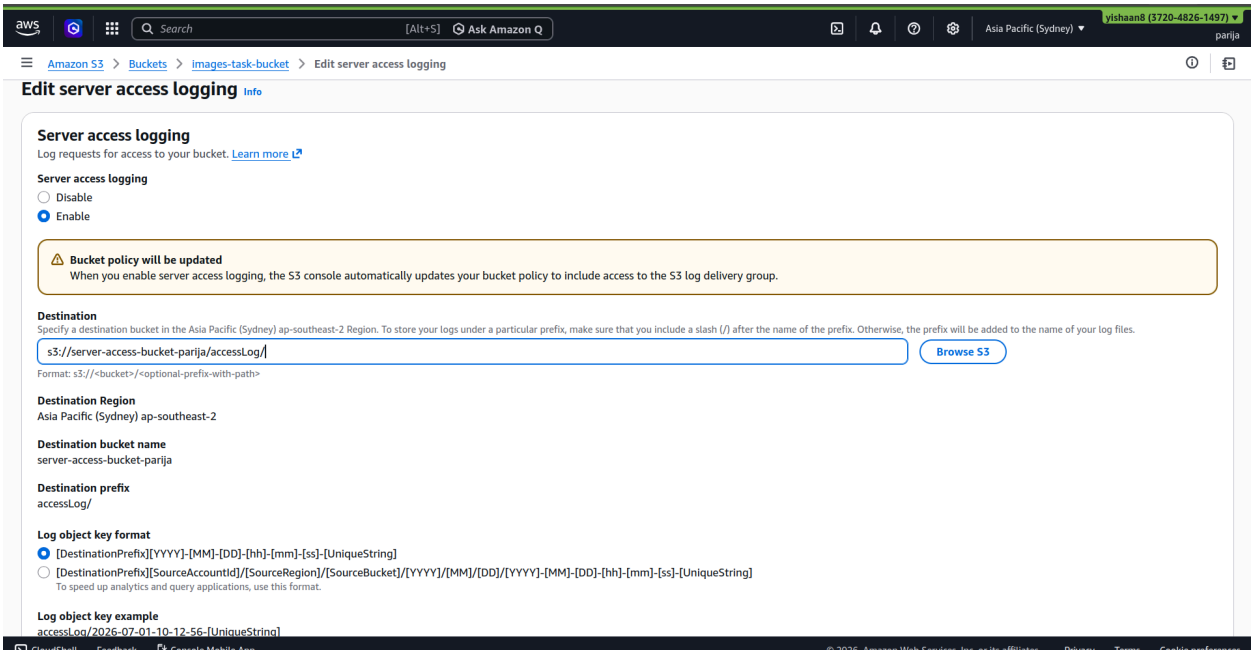
  Log prefix: