task 10

Create an S3 bucket where:

- Only /images/* is publicly readable
- All other objects remain private
- Public access is blocked at bucket level except required access

Create a bucket policy that:

- Allows PutObject only to uploads/*
- Denies DeleteObject
- Denies uploads without server-side encryption

Enable:
Versioning

- Object Lock (Governance mode)
- Prevent deletion of objects under finance/*

Create a lifecycle rule:

- 30 days → Standard-IA
- 90 days → Glacier
- 365 days → Delete
- Applies only to uploads/*

Configure:

- Server access logging
- Logs delivered to another secure bucket
- Logs bucket must not be public

steps:

- Create S3 bucket
  - Enable versioning
  - Enable object lock during creation
  - Keep block public access enabled
- Configure object lock
  - Set mode to Governance
  - Define retention period
- Create logging bucket
  - Keep it private (block all public access)
- Enable server access logging
  - Set destination bucket as logging bucket
  - Add prefix (logs/)
- Configure public access
  - Allow public read only for images/* using bucket policy
- Create bucket policy
  - Allow GetObject for images/*
  - Allow PutObject only for uploads/*
  - Deny DeleteObject for entire bucket
  - Deny PutObject without server-side encryption (AES256)
  - Explicitly deny delete for finance/*
- Create lifecycle rule
  - Apply to prefix uploads/
  - 30 days → Standard-IA
  - 90 days → Glacier Flexible Retrieval
  - 365 days → Expire objects
- Verify configuration

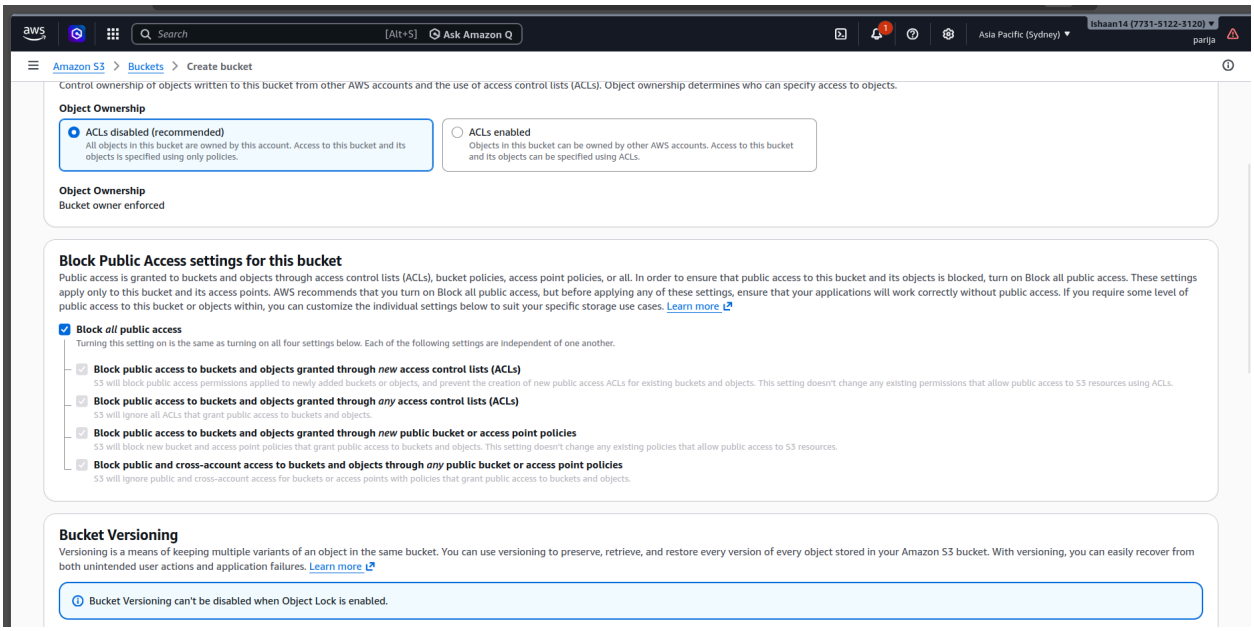
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Sydney)
ishaan14 (7731-5122-3120)
parija
Amazon S3 > Buckets > Create bucket
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.
Object Ownership
ACLs disabled (recommended)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.
Object Ownership
Bucket owner enforced
Block Public Access settings for this bucket
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more
Block all public access
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
Block public access to buckets and objects granted through new access control lists (ACLs)
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
Block public access to buckets and objects granted through any access control lists (ACLs)
S3 will ignore all ACLs that grant public access to buckets and objects.
Block public access to buckets and objects granted through new public bucket or access point policies
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
Block public and cross-account access to buckets and objects through any public bucket or access point policies
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.
Bucket Versioning
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more
Bucket Versioning can't be disabled when Object Lock is enabled.

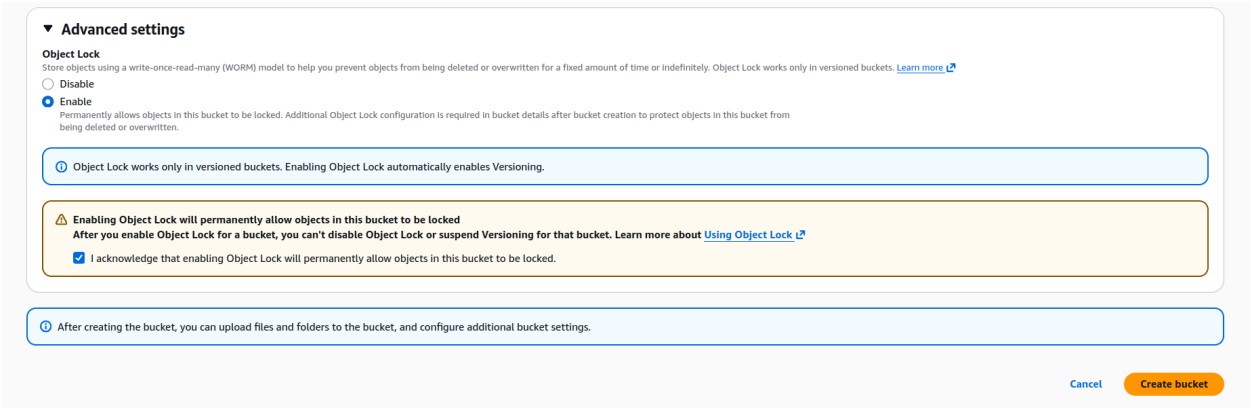
Advanced settings
Object Lock
Store objects using a write-once-read-many (WORM) model to help you prevent objects from being deleted or overwritten for a fixed amount of time or indefinitely. Object Lock works only in versioned buckets. Learn more
Disable
Enable
Permanently allows objects in this bucket to be locked. Additional Object Lock configuration is required in bucket details after bucket creation to protect objects in this bucket from being deleted or overwritten.
Object Lock works only in versioned buckets. Enabling Object Lock automatically enables Versioning.
Enabling Object Lock will permanently allow objects in this bucket to be locked
After you enable Object Lock for a bucket, you can't disable Object Lock or suspend Versioning for that bucket. Learn more about Using Object Lock
I acknowledge that enabling Object Lock will permanently allow objects in this bucket to be locked.
After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.
Cancel
Create bucket

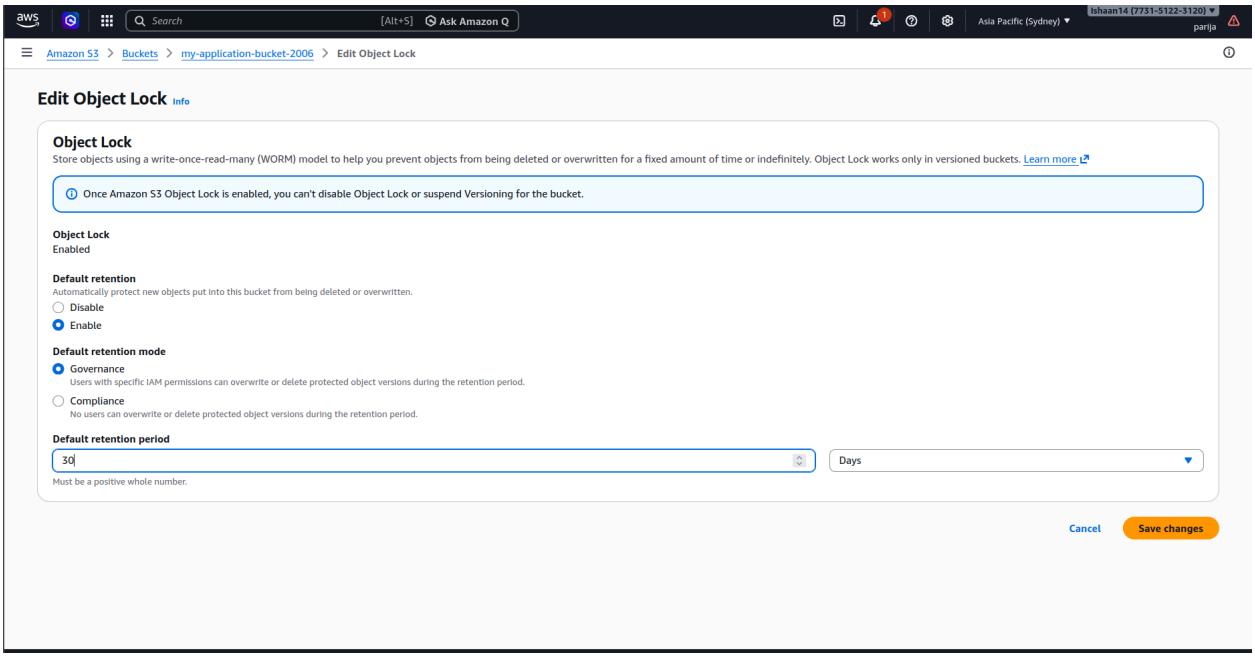
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Sydney)
Ishaan14 (7731-5122-3120)
parija
Amazon S3 > Buckets > my-application-bucket-2006 > Edit Object Lock
Edit Object Lock Info
Object Lock
Store objects using a write-once-read-many (WORM) model to help you prevent objects from being deleted or overwritten for a fixed amount of time or indefinitely. Object Lock works only in versioned buckets. Learn more
Once Amazon S3 Object Lock is enabled, you can't disable Object Lock or suspend Versioning for the bucket.
Object Lock
Enabled
Default retention
Automatically protect new objects put into this bucket from being deleted or overwritten.
Disable
Enable
Default retention mode
Governance
Users with specific IAM permissions can overwrite or delete protected object versions during the retention period.
Compliance
No users can overwrite or delete protected object versions during the retention period.
Default retention period
30
Days
Must be a positive whole number.
Cancel
Save changes

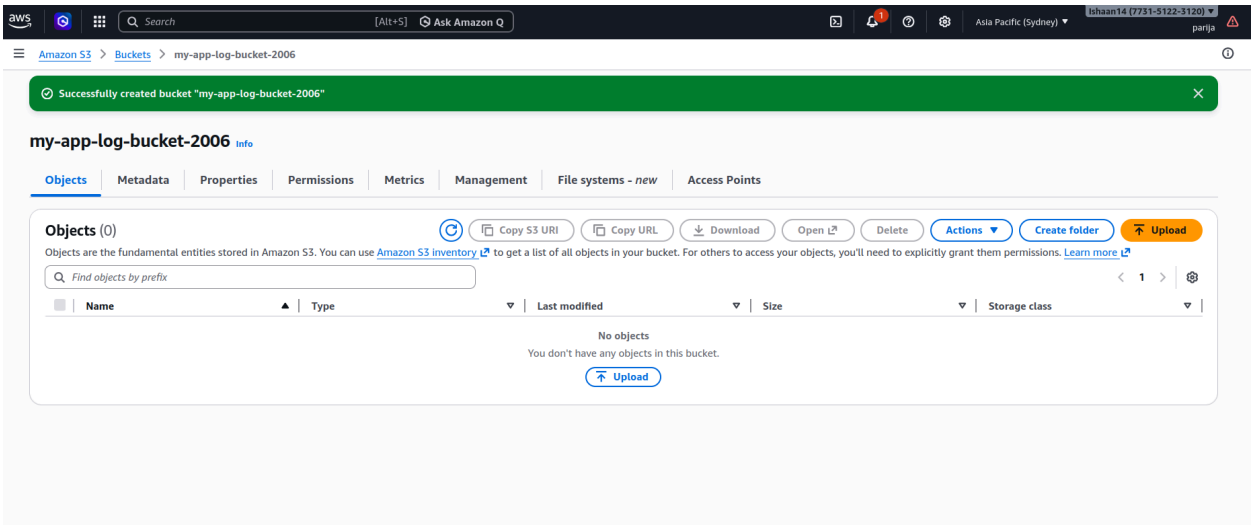
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Sydney)
Ishaan14 (7731-5122-3120)
parija
Amazon S3 > Buckets > my-app-log-bucket-2006
Successfully created bucket "my-app-log-bucket-2006"
my-app-log-bucket-2006 Info
Objects
Metadata
Properties
Permissions
Metrics
Management
File systems - new
Access Points
Objects (0)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
Name
Type
Last modified
Size
Storage class
No objects
You don't have any objects in this bucket.
Upload

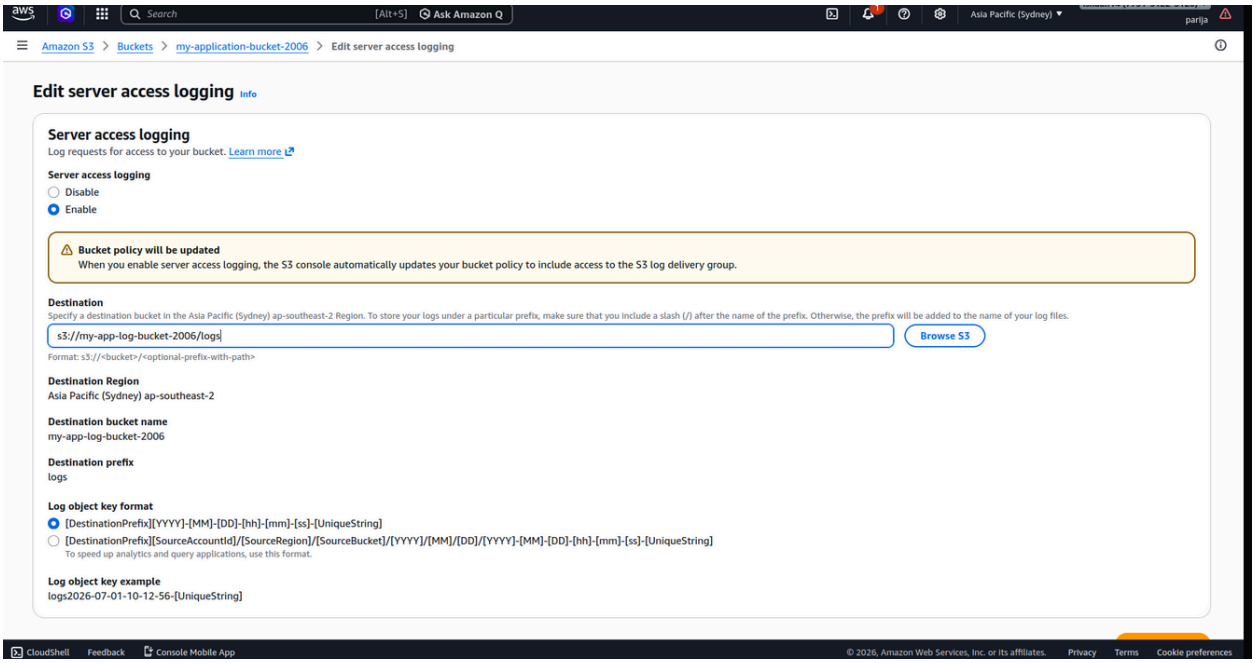
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Sydney)
parija
Amazon S3 > Buckets > my-application-bucket-2006 > Edit server access logging
Edit server access logging Info
Server access logging
Log requests for access to your bucket. Learn more
Server access logging
Disable
Enable
Bucket policy will be updated
When you enable server access logging, the S3 console automatically updates your bucket policy to include access to the S3 log delivery group.
Destination
Specify a destination bucket in the Asia Pacific (Sydney) ap-southeast-2 Region. To store your logs under a particular prefix, make sure that you include a slash (/) after the name of the prefix. Otherwise, the prefix will be added to the name of your log files.
s3://my-app-log-bucket-2006/logs
Browse S3
Format: s3://<bucket>/<optional-prefix-with-path>
Destination Region
Asia Pacific (Sydney) ap-southeast-2
Destination bucket name
my-app-log-bucket-2006
Destination prefix
logs
Log object key format
[DestinationPrefix][YYYY]-[MM]-[DD]-[hh]-[mm]-[ss]-[UniqueString]
[DestinationPrefix][SourceAccountId]/[SourceRegion]/[SourceBucket]/[YYYY]/[MM]/[DD]/[YYYY]-[MM]-[DD]-[hh]-[mm]-[ss]-[UniqueString]
To speed up analytics and query applications, use this format.
Log object key example
logs2026-07-01-10-12-56-[UniqueString]
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

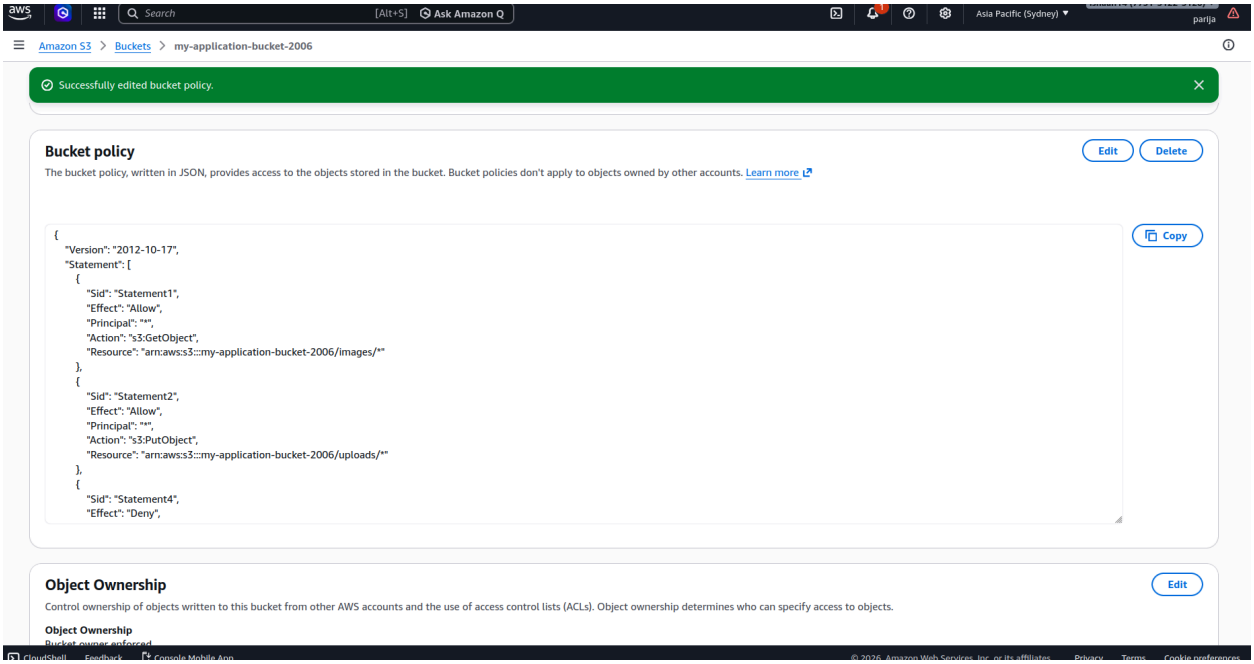
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Sydney)
parija
Amazon S3 > Buckets > my-application-bucket-2006
Successfully edited bucket policy.
Bucket policy
Edit
Delete
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. Learn more
Copy
{
"Version": "2012-10-17",
"Statement": [
{
"Sid": "Statement1",
"Effect": "Allow",
"Principal": "*",
"Action": "s3:GetObject",
"Resource": "arn:aws:s3:::my-application-bucket-2006/images/*"
},
{
"Sid": "Statement2",
"Effect": "Allow",
"Principal": "*",
"Action": "s3:PutObject",
"Resource": "arn:aws:s3:::my-application-bucket-2006/uploads/*"
},
{
"Sid": "Statement4",
"Effect": "Deny",
Object Ownership
Edit
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.
Object Ownership

Create lifecycle rule Info

Lifecycle rule configuration

Lifecycle rule name

upload-lifecycle

Up to 255 characters

Choose a rule scope

- (●) Limit the scope of this rule using one or more filters
- ( ) Apply to all objects in the bucket

Filter type

You can filter objects by prefix, object tags, object size, or whatever combination suits your usecase.

Prefix

Add filter to limit the scope of this rule to a single prefix.

uploads/

Don't include the bucket name in the prefix. Using certain characters in key names can cause problems with some applications and protocols. Learn more

Object tags

You can limit the scope of this rule to the key/value pairs added below.

Add tag

Object size

You can limit the scope of this rule to apply to objects based on their size. Learn more

- [ ] Specify minimum object size
- [ ] Specify maximum object size

Lifecycle rule actions

Choose the actions you want this rule to perform.

- [x] Transition current versions of objects between storage classes
  This action will move current versions.
- [ ] Transition noncurrent versions of objects between storage classes
  This action will move noncurrent versions.
- [x] Expire current versions of objects
- [ ] Permanently delete noncurrent versions of objects
- [ ] Delete expired object delete markers or incomplete multipart uploads
  These actions are not supported when filtering by object tags or object size.

Transitions are charged per request

For a lifecycle transition action, each request corresponds to an object transition. For details on lifecycle transition pricing, see requests pricing info on the **Storage & requests** tab of the Amazon S3 pricing page.

- [x] I acknowledge that this lifecycle rule will incur a transition cost per request.

By default, objects less than 128KB will not transition across any storage class

We don't recommend transitioning objects less than 128 KB because the transition costs can outweigh the storage savings. If your use case requires transitioning objects less than 128 KB, specify a minimum object size filter for each applicable lifecycle rule with a transition action.

Transition current versions of objects between storage classes

Choose transitions to move current versions of objects between storage classes based on your use case scenario and performance access requirements. These transitions start from when the objects are created and are consecutively applied. Learn more

Choose storage class transitions	Days after object creation	
Standard-IA	30	Remove
Glacier Flexible Retrieval (form...	90	Remove

Add transition

aws | Asia Pacific (Sydney) | ishaan14 (7731-5122-3120) parija

Amazon S3 > ... > Lifecycle configuration > Create lifecycle rule

noncurrent version. For non-versioned buckets, Amazon S3 permanently removes the object. Learn more

Days after object creation

365

Review transition and expiration actions

Current version actions

Day 0
- Objects uploaded

↓

Day 30
- Objects move to Standard-IA

↓

Day 90
- Objects move to Glacier Flexible Retrieval (formerly Glacier)

↓

Day 365
- Objects expire

Noncurrent versions actions

Day 0
No actions defined.

Cancel | Create rule

CloudShell | Feedback | Console Mobile App | Privacy | Terms | Cookie preferences

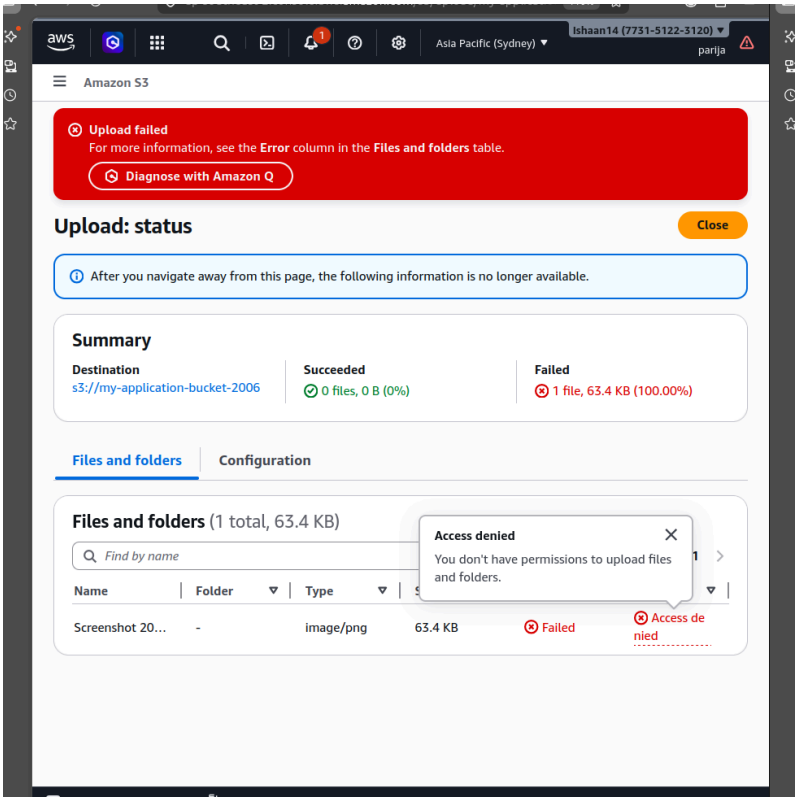
aws
Asia Pacific (Sydney)
Ishaan14 (7731-5122-3120)
parija
Amazon S3
Upload failed
For more information, see the Error column in the Files and folders table.
Diagnose with Amazon Q
Upload: status
Close
After you navigate away from this page, the following information is no longer available.
Summary
Destination
s3://my-application-bucket-2006
Succeeded
0 files, 0 B (0%)
Failed
1 file, 63.4 KB (100.00%)
Files and folders
Configuration
Files and folders (1 total, 63.4 KB)
Find by name
Access denied
You don't have permissions to upload files and folders.
Name
Folder
Type
Screenshot 20...
-
image/png
63.4 KB
Failed
Access denied

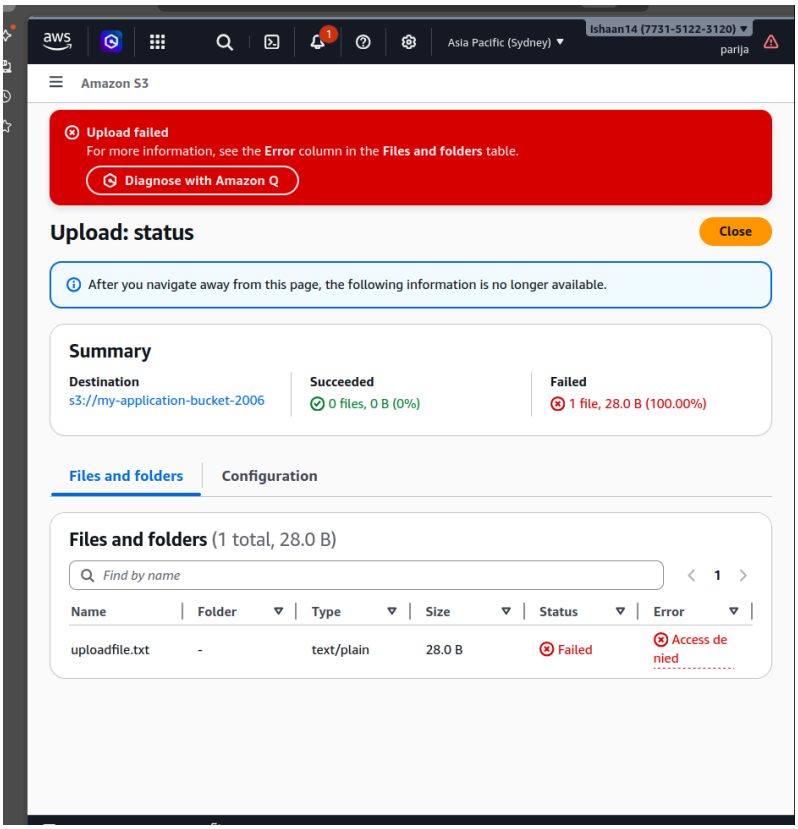
Asia Pacific (Sydney)
Ishaan14 (7731-5122-3120)
parija
Amazon S3
Upload failed
For more information, see the Error column in the Files and folders table.
Diagnose with Amazon Q
Upload: status
Close
After you navigate away from this page, the following information is no longer available.
Summary
Destination
s3://my-application-bucket-2006
Succeeded
0 files, 0 B (0%)
Failed
1 file, 28.0 B (100.00%)
Files and folders
Configuration
Files and folders (1 total, 28.0 B)
Find by name
1
Name
Folder
Type
Size
Status
Error
uploadfile.txt
-
text/plain
28.0 B
Failed
Access denied

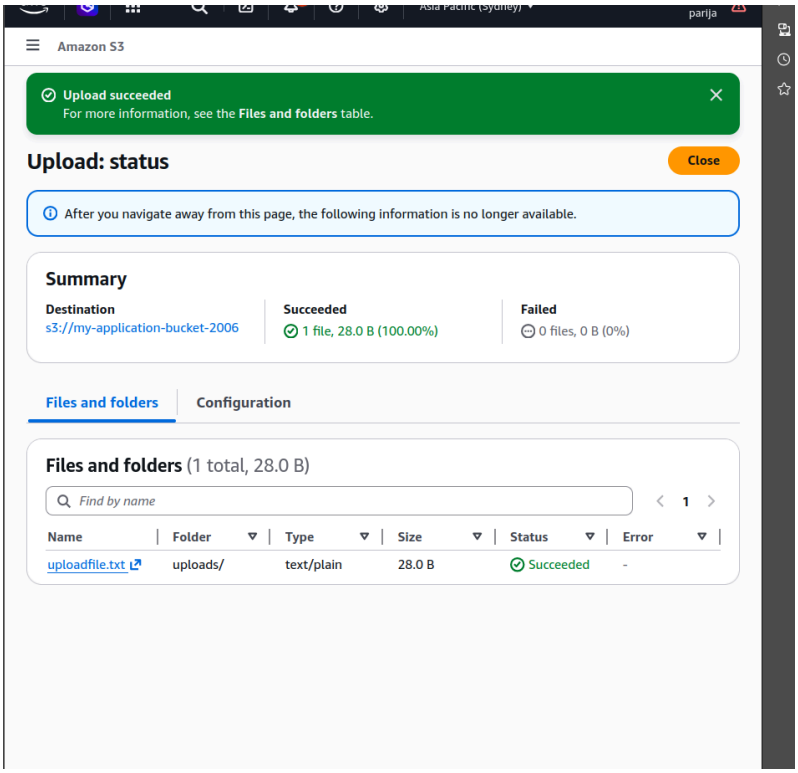
parija
Amazon S3
Upload succeeded
For more information, see the Files and folders table.
Upload: status
Close
After you navigate away from this page, the following information is no longer available.
Summary
Destination
s3://my-application-bucket-2006
Succeeded
1 file, 28.0 B (100.00%)
Failed
0 files, 0 B (0%)
Files and folders
Configuration
Files and folders (1 total, 28.0 B)
Find by name
1
Name
Folder
Type
Size
Status
Error
uploadfile.txt
uploads/
text/plain
28.0 B
Succeeded
-

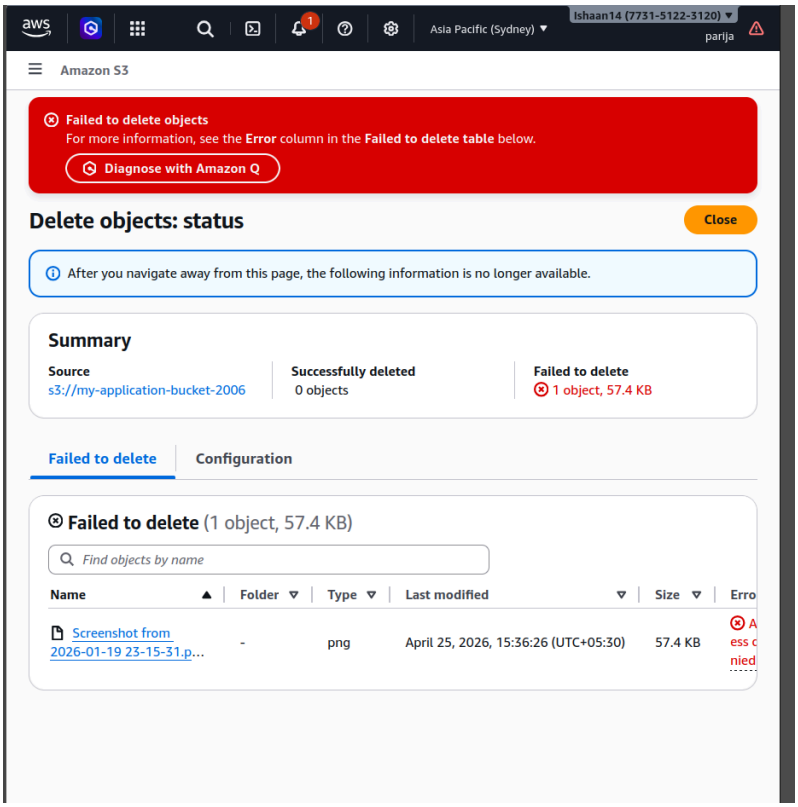
aws
Asia Pacific (Sydney)
Ishaan14 (7731-5122-3120)
parija
Amazon S3
Failed to delete objects
For more information, see the Error column in the Failed to delete table below.
Diagnose with Amazon Q
Delete objects: status
Close
After you navigate away from this page, the following information is no longer available.
Summary
Source
s3://my-application-bucket-2006
Successfully deleted
0 objects
Failed to delete
1 object, 57.4 KB
Failed to delete
Configuration
Failed to delete (1 object, 57.4 KB)
Find objects by name
Name
Folder
Type
Last modified
Size
Erro
Screenshot from 2026-01-19 23-15-31.p...
-
png
April 25, 2026, 15:36:26 (UTC+05:30)
57.4 KB