

# Usability and the Lifecycle of Linked Open Data

A Thesis

Submitted to the Faculty of Graduate Studies and Research

In Partial Fulfillment of the Requirements

For the Degree of

Master of Science

in Computer Science

University of Regina

By

Parita Dipakkumar Amin

Regina, Saskatchewan

November, 2022

© Copyright 2022: Parita Amin

## Abstract

The World Wide Web (WWW), as defined by the World Wide Web Consortium (W3C), is “the universe of network-accessible information, the embodiment of human knowledge”<sup>1</sup>. With development over the years, the global web of linked documents has become the global web of linked data, which is popularly known as the Semantic Web.

The Semantic Web is now an established topic of research but there remain many unanswered questions. Data that are linked and open facilitate discovery and reuse. Likewise, vocabularies used to describe the semantic relationships amongst linked and open data facilitate discovery and reuse. Yet, it is not always a straightforward matter to take data that may be somehow accessible on a webpage written in Hyper Text Markup Language (HTML) and publish it as Linked Open Data (LOD). Many complementary technologies are used in handling LOD on the web, particularly the Resource Description Framework (RDF), the Web Ontology Language (OWL), and the Simple Protocol and RDF Query Language (SPARQL) to name a few.

Tim Berners-Lee’s vision for a global hypertext system continues to be fulfilled. This thesis work contributes to the practice of publishing LOD by following the lifecycle of a particular dataset from spreadsheet to LOD that is accessible on the web. As such, this thesis can become a resource for other researchers, and citizens at large, to contribute their data to the world.

---

<sup>1</sup><https://www.w3.org/WWW/>

## **Acknowledgements**

I would like to take an opportunity to thank all the people who have supported me during my research period in some or the other way.

I would like to express my soulful gratitude to my supervisor Dr. Daryl H. Hepting for his valuable time, guidance, suggestions and comments throughout the course of the research. He was always open to all my questions and queries related to my research work as well as while writing this thesis. He provided me with the space required to make this study as my own work, at the same time he made sure that I am leading on the right path by giving constant feedback and suggestions whenever I was lost or stuck. I would also like to thank the Department of Computer Science and Faculty of Graduate Studies and Research for their academic as well as administrative support as and when required.

Lastly, I am grateful to my parents for always being there for me regardless of the distance and time-difference between the two different parts of the world. This would have been next to impossible for me if not for them. I would like to specially thank my brother Shivam for being the family here and for encouraging and motivating me during the times I was low. My special thanks to all my friends for all their support.

## Post-Defense Acknowledgements

# Table of Contents

|                                                           |            |
|-----------------------------------------------------------|------------|
| <b>Abstract</b>                                           | <b>i</b>   |
| <b>Acknowledgments</b>                                    | <b>ii</b>  |
| <b>Post-Defense Acknowledgments</b>                       | <b>iii</b> |
| <b>List of Figures</b>                                    | <b>vii</b> |
| <b>List of Tables</b>                                     | <b>ix</b>  |
| <b>List of Abbreviations</b>                              | <b>x</b>   |
| <b>1 Introduction</b>                                     | <b>1</b>   |
| 1.1 Motivation . . . . .                                  | 2          |
| 1.2 Contribution . . . . .                                | 3          |
| 1.3 Organization . . . . .                                | 4          |
| <b>2 Related Work</b>                                     | <b>5</b>   |
| 2.1 The Web . . . . .                                     | 5          |
| 2.1.1 Semantic Web . . . . .                              | 5          |
| 2.1.2 The Semantic Web Stack . . . . .                    | 6          |
| 2.2 Linked Open Data . . . . .                            | 7          |
| 2.2.1 Linked Data . . . . .                               | 8          |
| 2.2.2 Linked (Open) Data . . . . .                        | 10         |
| 2.3 Resource Description Framework . . . . .              | 10         |
| 2.3.1 Uniform Resource Identifier . . . . .               | 19         |
| 2.4 Linked Data Life Cycle . . . . .                      | 20         |
| 2.5 Ontology in Web Semantics . . . . .                   | 21         |
| 2.6 OWL Ontologies . . . . .                              | 22         |
| 2.6.1 Components of OWL Ontologies . . . . .              | 22         |
| 2.6.2 Ontology Editors . . . . .                          | 25         |
| 2.7 Conversion of Data from Spreadsheets to RDF . . . . . | 26         |
| 2.7.1 Open-source Tools Recommended by W3C . . . . .      | 26         |
| 2.7.2 Conversion Using RML . . . . .                      | 28         |

|          |                                                                         |           |
|----------|-------------------------------------------------------------------------|-----------|
| 2.8      | Applications of Linked Open Data . . . . .                              | 29        |
| 2.8.1    | Wikidata . . . . .                                                      | 29        |
| 2.8.2    | DBpedia . . . . .                                                       | 32        |
| <b>3</b> | <b>Methodology</b>                                                      | <b>38</b> |
| 3.1      | Describing New OWL Vocabularies . . . . .                               | 38        |
| 3.1.1    | Protégé . . . . .                                                       | 39        |
| 3.1.2    | Usability of Protégé . . . . .                                          | 40        |
| 3.2      | Procedure to Describe OWL Vocabularies Using Protégé . . . . .          | 41        |
| 3.2.1    | Classes and Class Hierarchy . . . . .                                   | 42        |
| 3.2.2    | Object Properties and Object Property Hierarchy . . . . .               | 45        |
| 3.2.3    | Data Properties and Data Property Hierarchy . . . . .                   | 47        |
| 3.2.4    | OWL Ontology Inconsistencies and Reasoner . . . . .                     | 49        |
| 3.2.5    | Data Validation . . . . .                                               | 50        |
| 3.3      | Conversion of Tabular Data into Linked Data . . . . .                   | 50        |
| 3.3.1    | Conversion Using OpenRefine . . . . .                                   | 50        |
| 3.4      | Announcing Linked Open Data . . . . .                                   | 58        |
| 3.4.1    | Licensing Linked Data . . . . .                                         | 58        |
| 3.4.2    | Publishing Linked “Open” Data . . . . .                                 | 58        |
| 3.4.3    | 5-star Rating System . . . . .                                          | 59        |
| 3.5      | Visualizing Linked Data . . . . .                                       | 59        |
| 3.5.1    | OntoGraf . . . . .                                                      | 60        |
| 3.5.2    | WebVOWL . . . . .                                                       | 61        |
| <b>4</b> | <b>Proof of Concept</b>                                                 | <b>62</b> |
| 4.1      | Modeling Ontology for Survey Using Protégé . . . . .                    | 62        |
| 4.1.1    | Classes for Survey Ontology . . . . .                                   | 62        |
| 4.1.2    | Object Properties for Survey Ontology . . . . .                         | 66        |
| 4.1.3    | Data Properties for Survey Ontology . . . . .                           | 69        |
| 4.1.4    | Individuals . . . . .                                                   | 69        |
| 4.1.5    | Final Class Hierarchy for Survey Ontology . . . . .                     | 70        |
| 4.1.6    | Data Validation Using SHACL . . . . .                                   | 72        |
| 4.2      | Querying Survey Ontology in Protégé . . . . .                           | 72        |
| 4.2.1    | DL Query . . . . .                                                      | 74        |
| 4.2.2    | SPARQL Query . . . . .                                                  | 74        |
| 4.3      | Conversion from Spreadsheets to Linked Data For Survey using OpenRefine | 78        |
| 4.3.1    | RDF Skeleton . . . . .                                                  | 78        |
| 4.3.2    | RDF Preview . . . . .                                                   | 82        |
| 4.4      | Publishing Survey Vocabulary with License . . . . .                     | 83        |
| 4.5      | Visualizing Survey Ontology . . . . .                                   | 85        |
| 4.5.1    | Representation of Survey Ontology in OntoGraf . . . . .                 | 85        |
| 4.5.2    | Representation of Survey Ontology in WebVOWL . . . . .                  | 85        |

|          |                                                           |            |
|----------|-----------------------------------------------------------|------------|
| <b>5</b> | <b>Conclusion and Future Work</b>                         | <b>87</b>  |
| 5.1      | Conclusion . . . . .                                      | 87         |
| 5.2      | Future Work . . . . .                                     | 88         |
| <b>A</b> | <b>OWL Vocabulary for Survey: survey.owl</b>              | <b>89</b>  |
| <b>B</b> | <b>SHACL Shapes for Data Validation: SurveyShapes.txt</b> | <b>106</b> |
| <b>C</b> | <b>CSV to Linked Data: sample.ttl</b>                     | <b>108</b> |
|          | <b>References</b>                                         | <b>161</b> |

# List of Figures

|      |                                                                                                                  |    |
|------|------------------------------------------------------------------------------------------------------------------|----|
| 2.1  | The Web to Semantic Web, according to Aghaei et al. [1] . . . . .                                                | 6  |
| 2.2  | Semantic Web Stack . . . . .                                                                                     | 7  |
| 2.3  | An Illustration of Code in an RDF/XML Document . . . . .                                                         | 12 |
| 2.4  | An Example of an RDF Triple . . . . .                                                                            | 12 |
| 2.5  | Graphical Representation of an RDF . . . . .                                                                     | 12 |
| 2.6  | Graphical Representation of an RDFS for a Comparatively Complex Illustration, after McBride [37] . . . . .       | 14 |
| 2.7  | English Statement for an Example of Actual RDF . . . . .                                                         | 15 |
| 2.8  | RDF Triple for English Statement in Figure 2.7, after RDF Primer [36] . . . . .                                  | 15 |
| 2.9  | RDF Graph for English Statement in Figure 2.7, after RDF Primer [36] . . . . .                                   | 16 |
| 2.10 | RDF Graph for Two Relative Statements, after RDF Primer [36] . . . . .                                           | 16 |
| 2.11 | Graphical Representation of RDF with Details of the Respondent of the Survey, after RDF Primer [36] . . . . .    | 17 |
| 2.12 | RDF Representation in Figure 2.11 without a URI (blank node) for Address Entity, after RDF Primer [36] . . . . . | 18 |
| 2.13 | Syntax Diagram of a Generic URI, after Berners-Lee et al. [12] . . . . .                                         | 21 |
| 2.14 | Components of an Example of URL, after Berners-Lee et al. [12] . . . . .                                         | 21 |
| 2.15 | Representation of Individuals in OWL . . . . .                                                                   | 23 |
| 2.16 | Representation of Properties in OWL . . . . .                                                                    | 24 |
| 2.17 | Representation of OWL Classes Consisting of Individuals and Properties . . . . .                                 | 25 |
| 2.18 | Details of University of Regina, Regina, SK on Wikidata . . . . .                                                | 31 |
| 2.19 | Wikidata Entry (RDF/XML) for University of Regina, Regina, SK . . . . .                                          | 33 |
| 2.20 | Description of University of Regina, Regina, SK on DBpedia . . . . .                                             | 36 |
| 2.21 | DBpedia Data Architecture . . . . .                                                                              | 37 |
| 3.1  | Protégé Home-screen for a New Project with an Ontology Name and an IRI . . . . .                                 | 42 |
| 3.2  | Class Hierarchy of Thing, Domain_Entity, Independent_Entity, and Value . . . . .                                 | 43 |
| 3.3  | Tools Menu to Create Class Hierarchy . . . . .                                                                   | 43 |
| 3.4  | “Enter hierarchy” Pop-up Window . . . . .                                                                        | 44 |
| 3.5  | Pop-up Window to Create Disjoint Sibling Classes . . . . .                                                       | 45 |
| 3.6  | Tools Menu to Create Object Property Hierarchy . . . . .                                                         | 46 |
| 3.7  | Object Properties for Classes “Lady” and “Parita” . . . . .                                                      | 47 |
| 3.8  | Domain and Range Classes for “hasName” and “isNameOf” . . . . .                                                  | 48 |



|      |                                                                                  |    |
|------|----------------------------------------------------------------------------------|----|
| 3.9  | Tools Menu to Create Data Property Hierarchy . . . . .                           | 48 |
| 3.10 | OpenRefine Homepage . . . . .                                                    | 51 |
| 3.11 | Create a New OpenRefine Project . . . . .                                        | 52 |
| 3.12 | Options to Set Orientation of Data in New OpenRefine Project . . . . .           | 52 |
| 3.13 | Naming the New OpenRefine Project . . . . .                                      | 52 |
| 3.14 | Exploring Data in OpenRefine - 1 of 3 . . . . .                                  | 53 |
| 3.15 | Exploring Data in OpenRefine - 2 of 3 . . . . .                                  | 54 |
| 3.16 | Exploring Data in OpenRefine - 3 of 3 . . . . .                                  | 54 |
| 3.17 | Cleaning Data in OpenRefine - 1 of 2 . . . . .                                   | 54 |
| 3.18 | Cleaning Data in OpenRefine - 2 of 2 . . . . .                                   | 55 |
| 3.19 | Transforming Data in OpenRefine - 1 of 3 . . . . .                               | 56 |
| 3.20 | Transforming Data in OpenRefine - 2 of 3 . . . . .                               | 57 |
| 3.21 | Transforming Data in OpenRefine - 3 of 3 . . . . .                               | 57 |
| 4.1  | The Student Feedback Form, from Hepting [30] . . . . .                           | 63 |
| 4.2  | Class Hierarchy in Survey Ontology . . . . .                                     | 64 |
| 4.3  | “LikertScale5” class in Survey Ontology . . . . .                                | 67 |
| 4.4  | Object Property Hierarchies, Domain and Range for Classes . . . . .              | 68 |
| 4.5  | Data Property Hierarchies, Domain and Range for Classes . . . . .                | 69 |
| 4.6  | Individuals for Survey Class . . . . .                                           | 71 |
| 4.7  | Class Hierarchy for the Final Version of Survey Ontology . . . . .               | 71 |
| 4.8  | Data Validation using SHACL Editor . . . . .                                     | 73 |
| 4.9  | SHACL Constraint Violations . . . . .                                            | 73 |
| 4.10 | DL Query on Survey Ontology . . . . .                                            | 75 |
| 4.11 | SPARQL Query on Survey Ontology . . . . .                                        | 76 |
| 4.12 | Snap SPARQL Query on Survey Ontology . . . . .                                   | 77 |
| 4.13 | RDF Skeleton for CSV using Survey Ontology . . . . .                             | 79 |
| 4.14 | Add New Prefix for Survey Ontology in OpenRefine . . . . .                       | 80 |
| 4.15 | Manage Prefixes in OpenRefine . . . . .                                          | 80 |
| 4.16 | RDF Node Settings for Index ID of Records in CSV in OpenRefine . . . . .         | 81 |
| 4.17 | Using Linked Data to Describe the Fields in CSV for Feedback Responses . . . . . | 82 |
| 4.18 | RDF Preview for CSV using Survey Ontology . . . . .                              | 83 |
| 4.19 | Link to Turtle File containing Survey Vocabulary . . . . .                       | 84 |
| 4.20 | OntoGraf for Survey Ontology . . . . .                                           | 86 |
| 4.21 | WebVOWL for Survey Ontology . . . . .                                            | 86 |

# List of Tables

|     |                                                                                             |    |
|-----|---------------------------------------------------------------------------------------------|----|
| 2.1 | Commonly used Classes and Properties of RDFS . . . . .                                      | 13 |
| 2.2 | RDF Notations for Figure 2.10, after RDF Primer [36] . . . . .                              | 16 |
| 2.3 | Definitions Used for Characterizing URI, by Berners-Lee et al. [11] . . .                   | 20 |
| 2.4 | Stages in Linked Data Life Cycle, after Ngomo et al. [38] . . . . .                         | 21 |
| 2.5 | Statement Properties and Property IDs for the University of Regina on<br>Wikidata . . . . . | 32 |
| 2.6 | Identifier Properties and Property IDs for University of Regina on Wikidata                 | 34 |
| 3.1 | 5-star Rating System for Linked Data Implementation . . . . .                               | 60 |
| 4.1 | Degrees of Agreement for Likert-scale Questions . . . . .                                   | 66 |
| 4.2 | Object Properties and Their Domain and Range . . . . .                                      | 67 |
| 4.3 | Object Properties with Their Parent Nodes and Inverse Properties . . .                      | 68 |
| 4.4 | Data Properties and Their Domain and Range . . . . .                                        | 70 |
| 4.5 | Classes and their Individuals . . . . .                                                     | 70 |



# List of Abbreviations

|        |                                                      |
|--------|------------------------------------------------------|
| API    | Application Programming Interface p. 27              |
| CERN   | Conseil Européen pour la Recherche Nucléaire p. 1    |
| CSV    | Comma Separated Value p. 26                          |
| DL     | Description Logics p. 49                             |
| ER     | Entity Relationship p. 10                            |
| GIF    | Graphics Interchange Format p. 60                    |
| GREL   | Google Refine Expression Language p. 26              |
| GUI    | Graphical User Interface p. 26                       |
| HTML   | Hyper Text Markup Language p. i                      |
| HTTP   | Hyper Text Transfer Protocol p. 2                    |
| HTTPS  | Hypertext Transfer Protocol Secure p. 2              |
| IDE    | Integrated Development Environment p. 49             |
| IRI    | Internationalized Resource Identifier p. 42          |
| ISO    | International Organization for Standardization p. 40 |
| JPEG   | Joint Photographic Experts Group p. 60               |
| JSON   | JavaScript Object Notation p. 51                     |
| LOD    | Linked Open Data p. i                                |
| N3     | Notation3 p. 12                                      |
| OBDA   | Ontology-Based Data Access p. 49                     |
| OWL    | Web Ontology Language p. i                           |
| PNG    | Portable Network Graphics p. 60                      |
| RDF    | Resource Description Framework p. i                  |
| RDFS   | Resource Description Framework Schema p. 13          |
| RML    | RDF Mapping Language p. 26                           |
| SHACL  | SHApes Constraint Language p. 50                     |
| SPARQL | Simple Protocol and RDF Query Language p. i          |
| SVG    | Scalable Vector Graphics p. 85                       |
| SWT    | Semantic Web Technologies p. 50                      |
| TSV    | Tab Separated Value p. 51                            |
| Turtle | Terse RDF Triple Language p. 12                      |
| URI    | Uniform Resource Identifier p. 2                     |
| URL    | Uniform Resource Locator p. 19                       |
| VOWL   | Visual Web Ontology Language p. 61                   |
| W3C    | World Wide Web Consortium p. i                       |
| WWW    | World Wide Web p. i                                  |
| XML    | eXtensible Markup Language p. 6                      |

# Chapter 1

## Introduction

Tim Berners-Lee is the father of the WWW. He wrote *Information Management: A Proposal*<sup>1</sup> in 1989 and 1990 to present the need for a “global hypertext system” at the Conseil Européen pour la Recherche Nucléaire (CERN). In his conclusion to that document, he wrote:

“we should work toward a universal linked information system, in which generality and portability are more important than fancy graphics techniques and complex extra facilities. The aim would be to allow a place to be found for any information or reference which one felt was important and a way of finding it afterward. The result should be sufficiently attractive to use, that is, the information contained would grow past a critical threshold so that the usefulness of the scheme would, in turn, encourage its increased use.”

In the more than 30 years that have followed that initial proposal, a great deal of progress towards Berners-Lee’s vision has been realized. The original “web of documents” is becoming the “web of data” or the “semantic web”. Is this next web sufficiently attractive to use? This thesis will examine this question in the context of an example.

---

<sup>1</sup><https://www.w3.org/History/1989/proposal.html>, dated March 1989, May 1990

## 1.1 Motivation

In his teaching practise, my supervisor collects feedback from students in his classes each semester and makes the responses available on his website<sup>2</sup>. Typically, student responses were collected on paper and then entered manually into computer-readable form. Data collection since the start of the COVID-19 pandemic has changed.

Although it is valuable to have this data available on the web, it is not published as LOD. The motivation for the research presented here was to examine the process by which existing data can be published as LOD and to consider whether that process is “sufficiently attractive to use”.

The published linked (structured) data which is available on the web can be efficiently retrieved and reused as, according to Ngomo et al. [38], linked data is “a set of best practices for publishing and connecting structured data on the web”. After the introduction of the semantic web and the four principles of linked data for publishing and connecting structured datasets on the web by Berners-Lee, the web of documents has been gradually moving towards the development of the web of data. With time, these principles have been accepted and considered as the standard to publish structured data on the semantic web [14, 16, 17, 29]. The four principles of linked data by Berners-Lee [8] are as follows:

- Use Uniform Resource Identifier (URI) as names for things
- Use Hyper Text Transfer Protocol (HTTP)<sup>3</sup> URIs to look up those names
- Provide useful information, using the standards (RDF<sup>4</sup>, SPARQL)
- Include links to other URIs to discover more things

---

<sup>2</sup><http://www2.cs.uregina.ca/~hepting/teaching/evaluation.html>

<sup>3</sup>Both HTTP and Hypertext Transfer Protocol Secure (HTTPS)

<sup>4</sup>includes all the standards belonging to RDF family

After the development of Linked Data for the semantic web, Berners-Lee also contributed to web engineering by introducing a 5-star rating system for the rating of linked data implementations. In this system, using the linked data principles, the publishers of the data on the web link their data to the existing linked data to provide reference and make it available for lookup. The data on the web, according to the 5-star system, is accepted to be 5-star data if the data:

- is structured (machine-readable)
- has open-license for access
- is described and linked to other data using URIs

A query<sup>5</sup> is used to retrieve information from a database that consists of multiple tables.

According to the W3C recommendation, a semantic (web) query depicts the techniques and protocols that are “used to retrieve information from the web of data” using computer programs. Web (semantic) queries use the semantics and the constitution of data on the web to perform data retrieval operations. Various semantic web technologies have been developed for data retrieval on the web. SPARQL is one of the semantic web technologies used for web queries, where it gathers all the data from different domains and treats all those datasets as local.

## 1.2 Contribution

The application of data science in the real world, till today, has been limited to technology firms and industries. The field is still being explored and hence, a lot of research work is going on as the focus is on the development of the technology. The use

---

<sup>5</sup><https://en.wikipedia.org/wiki/SPARQL>

of data science in day-to-day life still requires a lot of research and development work. This research work is a small trial towards using the semantic web for non-computer-related tasks. There exists almost negligible work done related to the development of linked open vocabularies for a survey that include likert items. An open-source ontology development tool, Protégé, has been used for the development of the new vocabularies. Also, OpenRefine is used to describe the CSV file in terms of linked data. For this research, the vocabulary mentioned is for the feedback survey form that Dr. Hepting uses to solicit responses from his students.

## 1.3 Organization

Following the introduction, the rest of the thesis is organized as follows. Chapter 2 describes earlier research that is pertinent to the thesis. The concepts of the semantic web, linked data, and related standards and technologies are presented in particular.

Chapter 3 describes the methodology that has been put in, to describe and query survey vocabulary, convert CSV to linked data, publish linked data with open license, and visualize survey ontology. It also focuses on the usability of tools like Protégé, SHACL4P, SPARQL, OpenRefine, OntoGraf, and WebVOWL.

Chapter 4 consists of the proof of concept for the methodology discussed.

Finally, Chapter 5 presents some conclusions and opportunities for future work.



# Chapter 2

## Related Work

This Chapter provides the theoretical and conceptual information that is the foundation for this thesis, focusing on the semantic web and linked open data from the perspectives of technology and usability.

### 2.1 The Web

The idea of the Web, as described by Berners Lee [10], came from the positive experience of a small “home-brew” personal hypertext system.

The web was first designed by Berners-Lee in 1989<sup>1</sup> while working at the CERN.

#### 2.1.1 Semantic Web

The web pages for the semantic web can be written using HTML and RDF as it is the web of data, contrary to the web of documents, where the web pages were written using HTML and the links were described using hyperlinks. In the web of data, arbitrary things can be expressed using links to represent the relationship between two entities, as shown in Figure 2.1.

The latest generation of web that is still at its research and development stage is Web

---

<sup>1</sup><https://www.w3.org/History/1989/proposal.html>

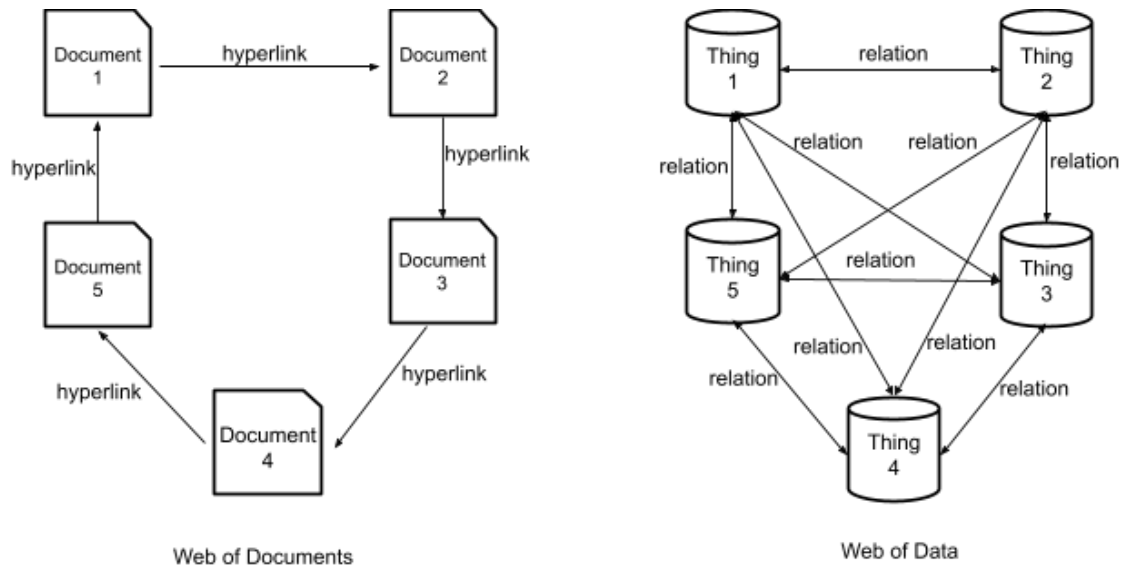


Figure 2.1: The Web to Semantic Web, according to Aghaei et al. [1]

4.0 which is supposed to be read-write-execute with the property of concurrency [19]. This version of the web is intended to work with artificial intelligence to give users an exceptional quality of experience. While describing how Web 4.0 would be, Berners Lee [13] stated “if HTML and the Web made all the online documents look like one huge book, RDF, schema, and inference languages will make all the data in the world look like one huge database”.

### 2.1.2 The Semantic Web Stack

The Semantic Web Stack<sup>2</sup> is also known as Semantic Web Cake or Semantic Web Layer Cake. The stack represents the architecture of semantic web. Figure 2.2<sup>3</sup> shows how semantic web principles are implemented in the layers of technologies.

The layers in the stack consist of different technologies. Going from the lowest level to the top level, the technologies are Unicode and URI; eXtensible Markup Language (XML), NS and xmlschema; RDF and rdfschema; Ontology vocabulary; Logic; Proof;

<sup>2</sup>[https://en.wikipedia.org/wiki/Semantic\\_Web\\_Stack](https://en.wikipedia.org/wiki/Semantic_Web_Stack)

<sup>3</sup><https://www.w3.org/2001/12/semweb-fin/w3csw>

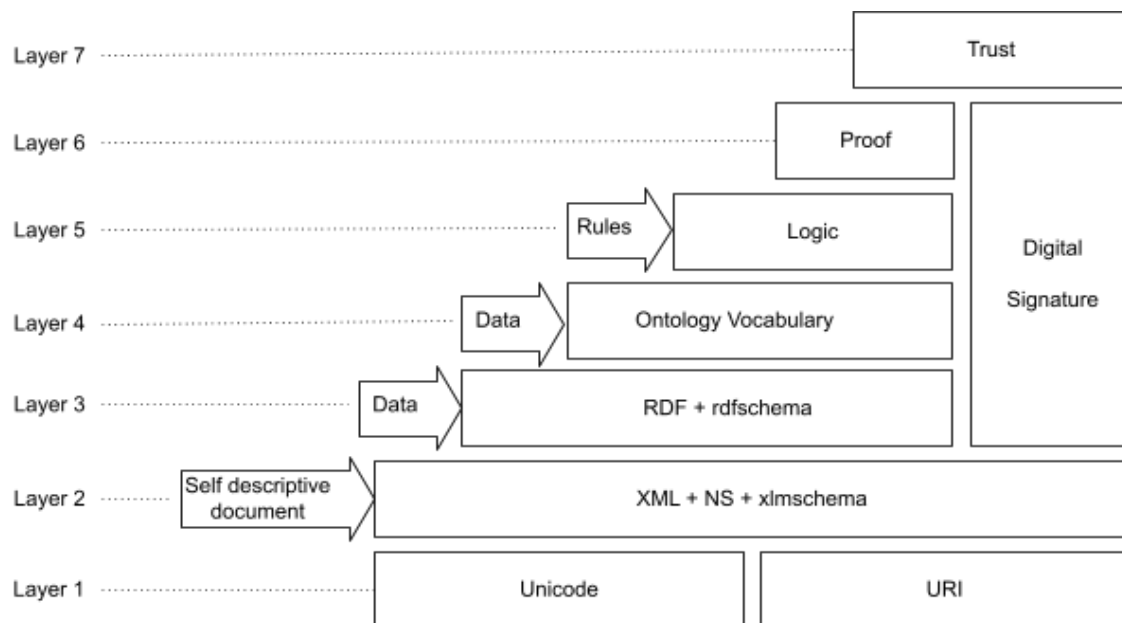


Figure 2.2: Semantic Web Stack

and Trust. Digital signatures are used as security at different levels. The layers belong to three different groups, namely, self-descriptive document, data and rules.

## 2.2 Linked Open Data

According to Berners-Lee et al. [1], “Semantic web is not limited to publication of data on the web; it is about making links to connect related data.” The concept of Linked Open Data<sup>4</sup> is an amalgamation of two technologies, Linked Data and Open Data. GraphDB<sup>5</sup> by Ontotext, an RDF database, is an example of LOD. GraphDB promotes knowledge-discovery and efficient data-driven analytics by linking large datasets from distinct sources to Open Data.

<sup>4</sup><https://www.ontotext.com/knowledgehub/fundamentals/linked-data-linked-open-data/>

<sup>5</sup><https://www.ontotext.com/knowledgehub/fundamentals/linked-data-linked-open-data/>

### 2.2.1 Linked Data

The relationships shared among the data from different sources on the web are equally important as the access to the data for efficient working of the semantic web. The technique used to manage these datasets and their relationships is referred to as Linked Data. In other words, Linked Data<sup>6</sup> can be termed as a set of various techniques of publishing structured data on the web. The W3C standards and various semantic web technologies handle the distribution and engagement of the structured data across the web to aggregate the data available on the web into one huge database [13].

In 2006, Berners-Lee [15] framed four basic rules (mentioned in section 1.1) to publish and connect the structured datasets across the web. This set of rules was termed as Linked Data principles. A brief description of these principles is as follows:

1. Use URIs as names for things:

The web identifiers, the (URIs) should be used to give unique names to all the entities (or things) on the web. URI of an entity can be used to understand that the entity in this dataset is the same as the other entity in a disparate dataset.

2. Use HTTP<sup>7</sup> URIs to look up for those names:

The HTTP/HTTPS protocols allow easy retrieval of resources. Hence, along with URIs, either of the protocols can be used to search things (entities) easily. This promotes the publication of data on the web and its addition to the global data space.

3. Provide useful information, using the standards (RDF<sup>8</sup>, SPARQL) to look up for a URI:

---

<sup>6</sup><https://www.w3.org/wiki/LinkedData>

<sup>7</sup>Both HTTP and HTTPS

<sup>8</sup>includes all the standards belonging to RDF family

When an entity is searched using the URI associated with it, it is beneficial to use standards like RDF and SPARQL to query the datasets. RDF is a framework used for graphical representation of publication and distribution of data on the web, as described in detail in section 2.3. On the contrary, SPARQL is a query language used for retrieval and manipulation of data (in RDF format) on the web. It also helps with the information on relationships related to the data being searched.

#### 4. Include links to other URIs to discover more thing:

In the semantic web, links between two entity defines the relationship using the basic entity-relationship model. Using links for URIs of the entities promotes interconnection of the data and search of things on the web. Connecting new data to already existing entities increases the reuse and interlinking within the domain and creates a computer-understandable network.

Publishing data on the web as per linked data principles can benefit the data providers by allowing them to use one global space to add all their data. An RDF data model and URIs are used by the linked data to name the things (entities). The linked datasets publish and locate the class-object data which in turn is accessed using the HTTP/HTTPS and maintains the connection among them [5].

A wide network of structured data, from a variety of domains, on the web has been formed obeying the principles of linked data by Berners-Lee. This has resulted in the formation of a huge database of structured linked data on the web which has further led to the concept of the LOD Cloud. The LOD cloud is a set of publicly [9] accessible/available linked datasets.

## 2.2.2 Linked (Open) Data

According to a handbook<sup>9</sup> by the Open Knowledge Foundation, “Open Data is data that can be freely used, re-used and redistributed by anyone - subject only, at most, to the requirement to attribute and share-alike”. To make open data available to everyone on the web, the data don’t need to be interlinked. Important features of open data are:

- Availability and access: the data should be available on the web. The users should be able to access the data easily by downloading them over the internet. It should be easy to access and modify the data.
- Re-use and redistribution: the data on the web must have permissions to re-use and redistribute in combination to other datasets.
- Universal participation: the data should be available to use, re-use, and redistribute for all the users without any discrimination to an individual or a group.

## 2.3 Resource Description Framework

The RDF, initially designed as a metadata data model, is a computer-understandable specification written in a particular format. According to a proposal by W3C<sup>10</sup>, RDF plays an important role in their “Semantic Web Vision”. RDF describes an entity (or resources) and the relationships among them on the web using basic data models like the Entity Relationship (ER) model.

RDF is a W3C<sup>11</sup> specification for describing resources on the web. RDF uses “properties” and “property values” to describe the resource which is identified by web identifiers called URI (section 2.3.1). There are three types of objects in RDF, namely,

---

<sup>9</sup><https://opendatahandbook.org/guide/en/what-is-open-data/>

<sup>10</sup><https://www.w3.org/TR/PR-rdf-syntax/Overview.html>

<sup>11</sup>[https://www.w3schools.com/xml/xml\\_rdf.asp](https://www.w3schools.com/xml/xml_rdf.asp)

resources, properties, and statements. Each data object in a dataset on the web is considered a resource and is named using a URI with an optional ID. To search for the resources on the web, the resources must be named using the HTTP/HTTPS URIs. The W3C has defined the “rdf:type” property to represent the “object of one or more classes” [21]. Resources are described by their characteristics, called “property”. The object of RDF that is used to combine a resource with a property of its value is a “statement”. A statement, in general terms, can be seen as building blocks of a statement in English, which are a subject, an object, and a predicate. An object in a statement can be either a property value, a resource, or a literal. RDF, according to Swick and Lassila [6], can be represented in three ways:

1. Using XML: an RDF/XML document
2. As triples: subject-predicate-object form
3. In graphical form

Figure 2.3 shows an example of an RDF/XML<sup>12</sup> document. The resource being described is “https://www.semanticweb.org/pda324/ontologies/survey” and “Survey Details” is the property value. The document consists of various XML tags enclosed between the angular brackets (“<” and “>”). An RDF/XML document starts and ends with <rdf : RDF> and </rdf : RDF> respectively. <rdf : Description> consists of the elements that are responsible for the creation of the statement. Description tag holds an identification for the resource.

Figure 2.4 shows an example of an RDF as a triple. An RDF triple, generally, follows subject-predicate-object format. For the illustration in the figure, the subject is “https://www.semanticweb.org/pda324/ontologies/survey”, predicate is “includes” and the object is “Survey Details”.

---

<sup>12</sup>RDF written using XML

```

<rdf : RDF>
  <rdf:Description rdf:about="https://www.semanticweb.org/pda324/ontologies/survey">
    <s:istypeof>Survey Details</s:istypeof>
  </rdf:Description>
</rdf : RDF>

```

Figure 2.3: An Illustration of Code in an RDF/XML Document

**Subject :** <https://www.semanticweb.org/pda324/ontologies/survey>  
**Predicate :** includes  
**Object :** Survey Details

Figure 2.4: An Example of an RDF Triple

Figure 2.5 shows an RDF in graphical format. Resource is indicated using an oval shape and a rectangle is used to represent a property value. A connector (an arrow) is used to represent a property to show that property (predicate) connects the resource (subject) with the value (object).

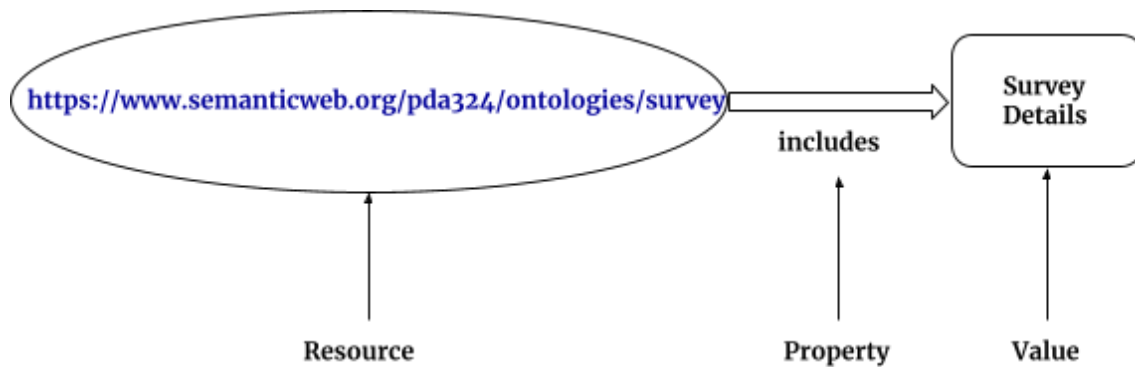


Figure 2.5: Graphical Representation of an RDF

The subject and object of the triples of RDF act as nodes in the graph. In addition to RDF/XML documentation, the RDF data model has a variety of serialization formats such as N-triples, which is a line base format where an RDF triple is used to represent each line [7]; Terse RDF Triple Language (Turtle); Notation3 (N3), which is a subset of



Turtle and N-Quads, which is an extension of N-Triples (line based) and adds a graph label to each line that allows multiple graph encoding [20].

| Class/Property     | Description                                                                                                                         |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| rdfs:Resource      | All things described by RDF are called resources                                                                                    |
| rdfs:Class         | The class of resources that are RDF classes                                                                                         |
| rdf:Property       | The class of RDF properties. It is an instance of rdfs:Class                                                                        |
| rdfs:Literal       | The class of literal values like integers and strings                                                                               |
| rdfs:Datatype      | The class of datatypes. All the objects of this class correspond to the RDF model of datatype                                       |
| rdf:HTML           | The class of HTML literal values and subclass of rdfs:Literal                                                                       |
| rdfs:range         | An instance of rdf:Property that is used to state that the values of a property are instances of one or more classes                |
| rdfs:domain        | An instance of rdf:Property that is used to state that any resource that has a given property is an instance of one or more classes |
| rdf:type           | An instance of rdf:Property that is used to state that a resource is an instance of a class                                         |
| rdfs:subClassOf    | An instance of rdf:Property that is used to state that all the instances of one class are instances of another                      |
| rdfs:label         | an instance of rdf:Property that may be used to provide a human-readable version of a resource's name                               |
| rdfs:subPropertyOf | An instance of rdf:Property that is used to state that all resources related by one property are also related by another            |

Table 2.1: Commonly used Classes and Properties of RDFS

Resource Description Framework Schema (RDFS), according to McBride [37], was introduced by the W3C as a technique to define resource types and property names. The data publishers can use RDFS to define various vocabularies in an RDF model. Some of the commonly used RDFS classes and properties<sup>13</sup> along with their description are listed in Table 2.1 [37].

Figure 2.6 shows a graph for the representation of RDFS for a comparatively complex and abstract example based on RDF Primer [36]. The graph has been drawn for the following statement:

---

<sup>13</sup><https://www.w3.org/TR/rdf-schema/>

*Romeo and Juliet is written by William Shakespeare.*

Figure 2.6 is the graphical representation of an RDF with schema as well as data. In the graph, the `rdf:type` of “Romeo and Juliet” is “Play” which in turn is an `rdf:subClassOf` “Literature”. Also, the `rdf:type` of “William Shakespeare” is “Person” which, further, is an `rdfs:range` of “is written by” of `rdfs:domain` “Literature”.

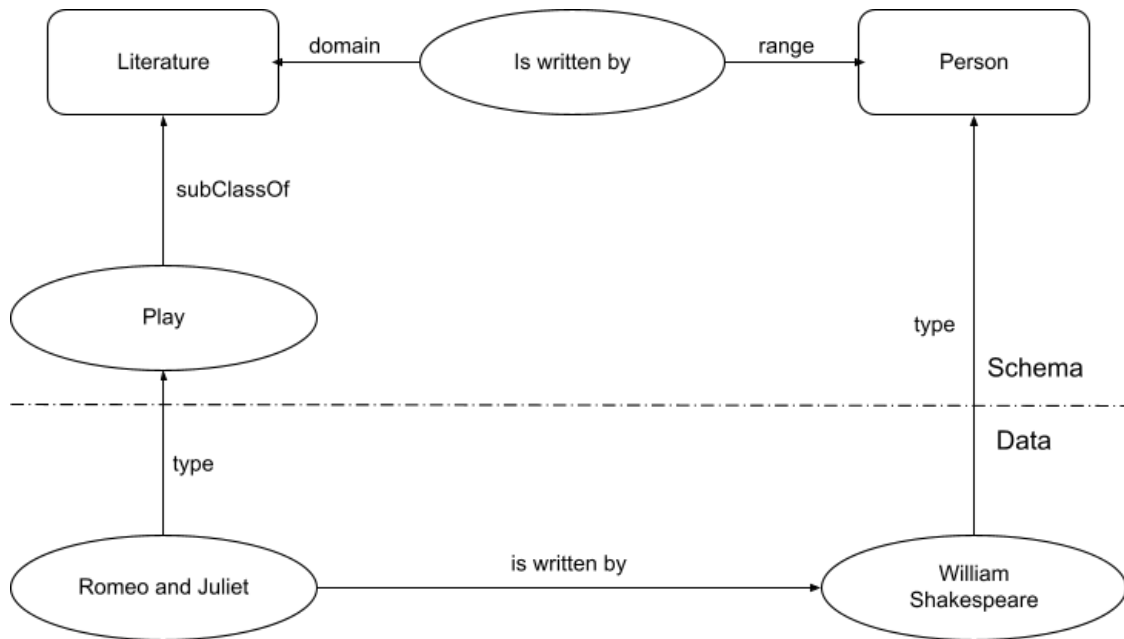


Figure 2.6: Graphical Representation of an RDFS for a Comparatively Complex Illustration, after McBride [37]

The actual RDF looks quite different from the previous example (Figures 2.3, 2.4, 2.5 and 2.6). For the representation of an actual RDF, consider Figure 2.7 for the corresponding English statement. “<http://www.semanticweb.org/survey.html>” is a subject URI with respondent and Robert James having URIs as “<http://xyz.org/1/respondent>” and “<http://www.semanticweb.org/responseID/1234>” respectively. The example represents a survey system which has responses as well as respondents and related details as a part of the environment.

**http://www.semanticweb.org/survey.html has a respondent  
whose value is Robert James**

Figure 2.7: English Statement for an Example of Actual RDF

In the form of RDF triple, the statement in Figure 2.7 can be represented as shown in Figure 2.8. URI is assigned to the subject survey.html and to the object which is the response with responseID 1234 which corresponds to the property value Robert James. A URI is also assigned to the predicate (respondent).

**SUBJECT - http://www.semanticweb.org/survey.html**  
**PREDICATE - http://xyz.org/1/respondent**  
**OBJECT - http://www.semanticweb.org/responseID/1234**

Figure 2.8: RDF Triple for English Statement in Figure 2.7, after RDF Primer [36]

Figure 2.9 shows a graphical representation of the RDF triple in Figure 2.8. The subject and the object are two entities and the predicate being the third entity acts as a connector between them. Considering an entity-relationship data model, the predicate can be treated as a relationship shared by the subject and the object. There can be more details added to the system, that is, more statements can be added which are in relation to the one in Figure 2.7. Suppose the new statement added is:

*http://www.semanticweb.org/survey.html has a date with value Sept. 08, 2020*

and the URI for the date is “http://www.semanticweb.org/respDetails/date”.

The new graph would be as shown in Figure 2.10 where as the set of statements in Table 2.2 shows the RDF triple notation for Figure 2.10. The first notation represents the entities, survey.html (subject) and Robert James (object), along with respondent

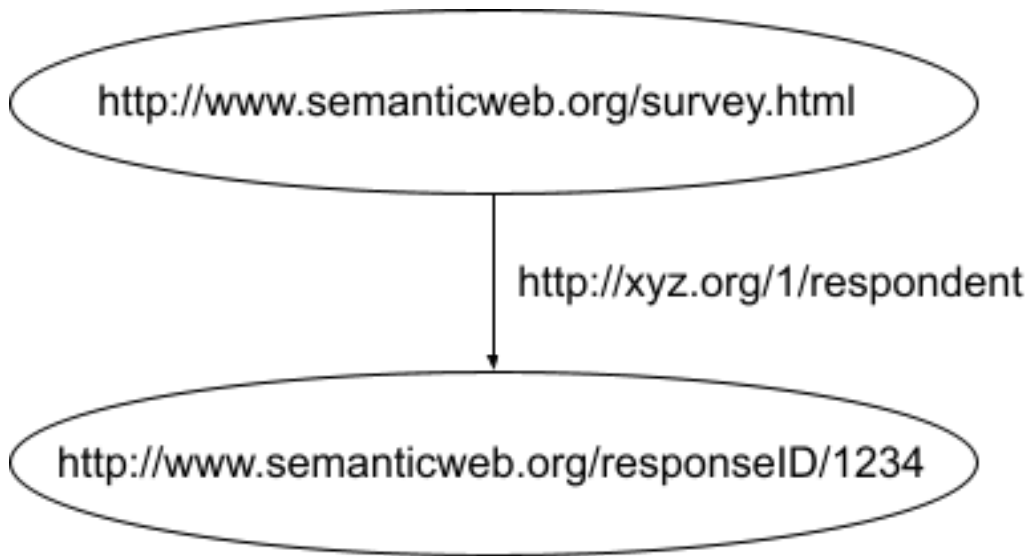


Figure 2.9: RDF Graph for English Statement in Figure 2.7, after RDF Primer [36]

(predicate) as the relation between them, using the URIs. The second notation is for the date, where instead of the URI, the value of the property, Sept. 08, 2020, is used. Here, survey.html is the subject and Sept. 08, 2020 is the object with date acting as the predicate.

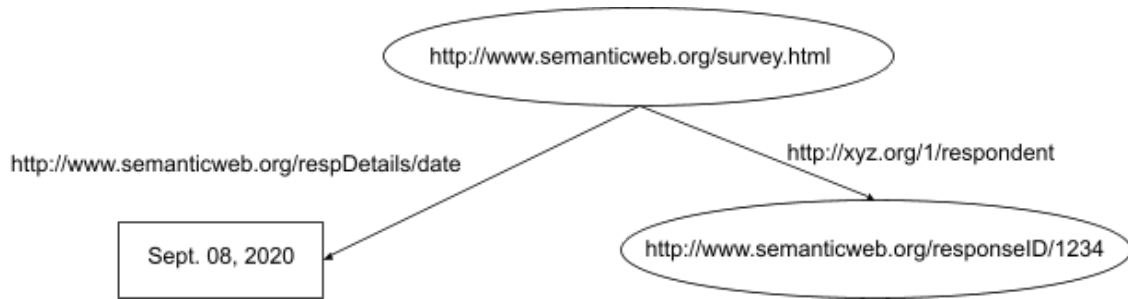


Figure 2.10: RDF Graph for Two Relative Statements, after RDF Primer [36]

|                                                                  |                                                  |
|------------------------------------------------------------------|--------------------------------------------------|
| <code>&lt;http://www.semanticweb.org/survey.html&gt;</code>      | <code>&lt;http://xyz.org/1/respondent&gt;</code> |
| <code>&lt;http://www.semanticweb.org/responseID/1234&gt;</code>  | <code>.</code>                                   |
| <code>&lt;http://www.semanticweb.org/respDetails/date&gt;</code> | <code>"Sept. 08, 2020"</code>                    |
|                                                                  | <code>.</code>                                   |

Table 2.2: RDF Notations for Figure 2.10, after RDF Primer [36]

Consider a more complex system, where the details of respondent are collected. Sup-

pose, one of the details is name and the other is address of the respondent. Figure 2.11 shows a graphical representation of this RDF system.

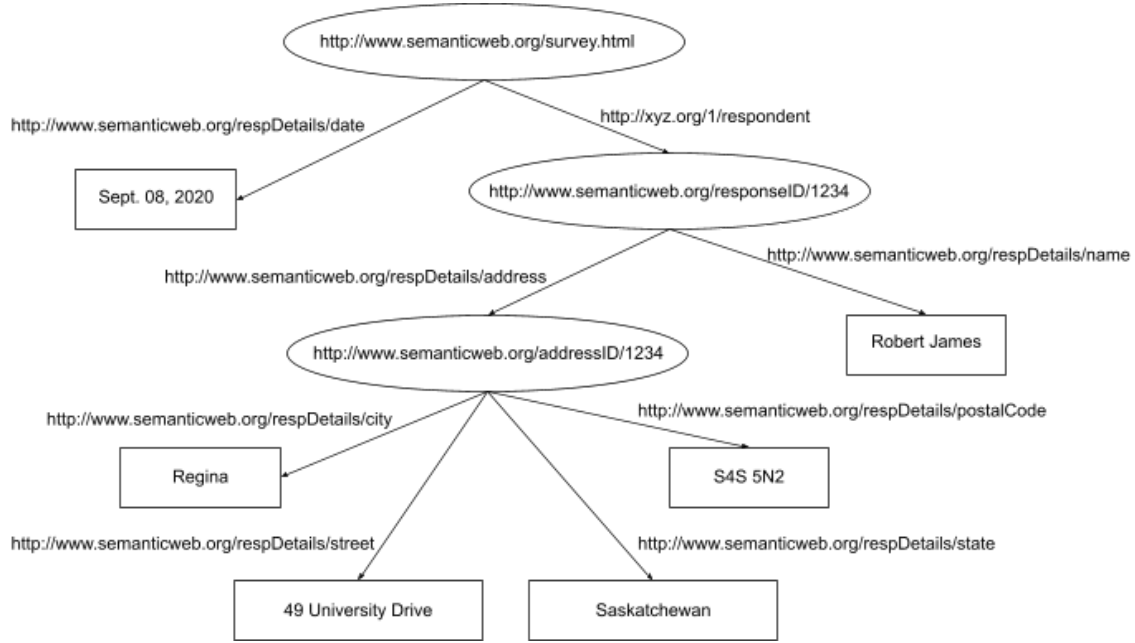


Figure 2.11: Graphical Representation of RDF with Details of the Respondent of the Survey, after RDF Primer [36]

For name, the respondent is subject and Robert James acts as object whereas respName is the predicate. The URI for respName is “<http://www.semanticweb.org/respDetails/name>” and the value, Robert James, is the object. On the other hand, respondent (subject) is connected to address (object) node, with URI “<http://www.semanticweb.org/addressID/1234>”, through respAddress (predicate) with URI “<http://www.semanticweb.org/respDetails/address>”. Further, the address node has multiple child nodes, namely, street, city, state and postal code. The address (subject) URI is connected to the values of four different object values, 49 University Drive (street), Regina (city), Saskatchewan (state) and S4S 5N2 (postalCode) where the URIs for the predicates are “<http://www.semanticweb.org/respDetails/street>”, “<http://www.semanticweb.org/respDetails/city>”, “<http://www.semanticweb.org/respDetails/state>” and “<http://www.semanticweb.org/respDetails/postalCode>” respectively. Instead of using an unnecessary

URI for the address entity, a blank node can be used to denote the entity, as shown in Figure 2.12. As the relationships of the node with other nodes give sufficient details without hindering the flow of the data tree, the node does not require a URIreference<sup>14</sup>.

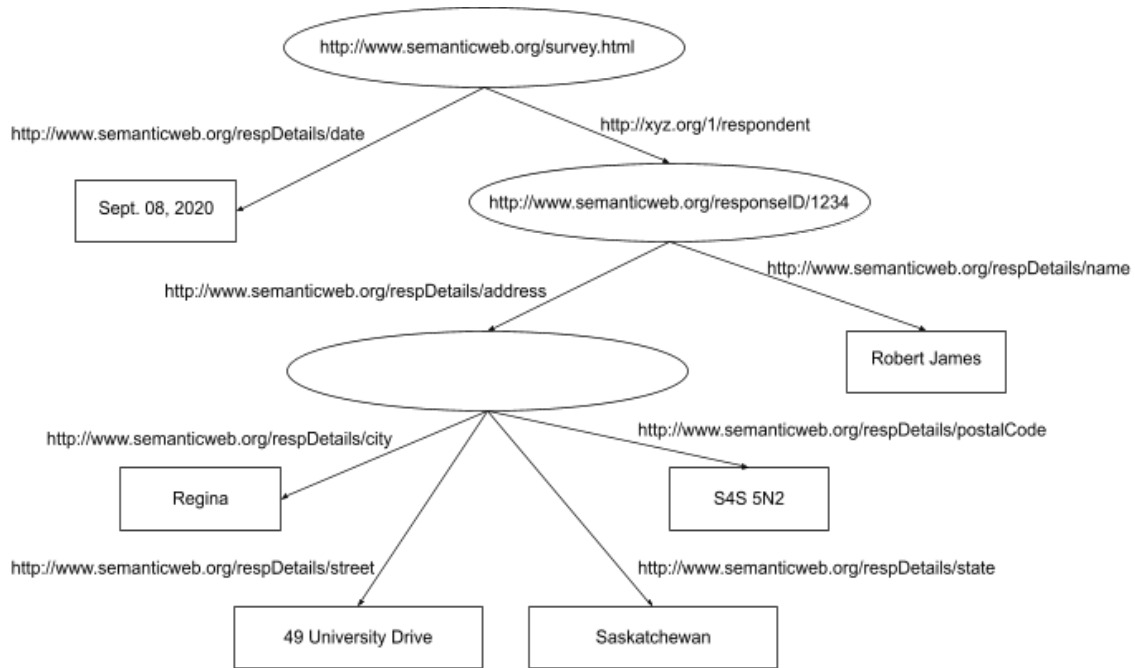


Figure 2.12: RDF Representation in Figure 2.11 without a URI (blank node) for Address Entity, after RDF Primer [36]

In 2004, W3C recommended intended goals that are to be achieved whenever an RDF is to be designed. According to the W3CRecommendation<sup>15</sup>, the design should “have a simple data model; formal semantics and provable inference; should use an extensible URI-based vocabulary and an XML-based syntax; should support the use of XML schema datatypes; and should allow any one to make statements about any resource”.

<sup>14</sup><https://lists.w3.org/Archives/Public/uri/2007Jul/0027.html>

<sup>15</sup><https://www.w3.org/TR/rdf-concepts/>

### 2.3.1 Uniform Resource Identifier

An abstract (a logical) or a physical resource on the web is identified by a unique set of ASCII characters which is referred to as a URI<sup>16</sup>. According to Berners-Lee et al. [12] in RFC 3986, the unique string, on the web, follows a set of guidelines and security considerations while defining a syntax for the generic URI and determining a process for URI references' resolution. As mentioned by W3C, for the operating systems on URIs, some specific “protocols are defined depending on the UriScheme<sup>17</sup>”. A system can perform multiple operations like “access”, “update”, “replace” and “find attributes” on the identified resources. In RFC 2396, Berners-Lee et al. [11] characterized URI using three definitions, as shown in Table 2.3.

#### 2.3.1.1 Syntax of a URI

According to Berners-Lee et al. [12], the generic syntax of a URI comprises five components in a hierarchical sequence which are as follows:

$$\text{URI} = \text{scheme:} [//\text{authority}] \text{ path } [?\text{query}] [\#\text{fragment}]$$

where the authority component consists of three more components which are:

$$\text{authority} = [\text{userinfo}@] \text{ host } [:\text{port}]$$

A syntax diagram can be modelled to represent the components of Generic Syntax<sup>18</sup> of URI along with their hierarchy as shown in Figure 2.13.

Consider the following Uniform Resource Locator (URL). Figure 2.14 shows its components.

<https://parita@www.semanticweb.org:695/ontology/?tag=survey&order=newest#top>

---

<sup>16</sup><https://www.w3.org/wiki/URI>

<sup>17</sup><https://www.w3.org/2001/tag/doc/SchemeProtocols.html>

<sup>18</sup><https://www.w3.org/Addressing/URL/uri-spec.html>

| Term       | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Uniform    | There are various benefits of achieving uniformity, like, it facilitates different procedures to access resources in the same environment using different types of resource identifiers; new types of resource identifiers can be introduced without modifying the actual usage of the existing identifiers; common syntactic conventions can be interpreted uniformly for a variety of resource identifiers on the semantic web; and the new applications or protocols can utilize the already existing large and widely-used resource identifiers as the identifiers can be reused in different contexts.                                         |
| Resource   | Anything on the web that can be uniquely identified is referred to as a resource. Some day-to-day examples of a resource are a computerized file or folder, weather-broadcasting service, an image, and a set of other resources. Some resources like books in a library, an animal, a human being, and a corporation are a set of resources that cannot be retrieved over the network. A resource is the “conceptual mapping” [11] to a set of entities independent of the corresponding entities at a particular time. Hence, if the conceptual mapping isn’t changed, a resource can remain constant irrespective of the changes in its content. |
| Identifier | An object which is used as a reference to a thing with unique identity on the web is termed as an identifier. In URI, a string of ASCII characters restricted by a specific syntax is object.                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

Table 2.3: Definitions Used for Characterizing URI, by Berners-Lee et al. [11]

## 2.4 Linked Data Life Cycle

The Linked Data Life Cycle includes multiple stages as described by Ngomo et al. [38] which are listed in Table 2.4. Each stage of this life cycle is independent yet linked to one another. So, it is not mandatory to go through all the stages sequentially to publish the data on the web. It is necessary to use a procedure that follows the life cycle to ensure the quality of data to be published as linked data. The first stage, generally, is data extraction along with conversion of the extracted data (in forms other than RDF) into RDF. Once the data is in RDF form, any or all of the other stages listed in Table 2.4 can be performed.



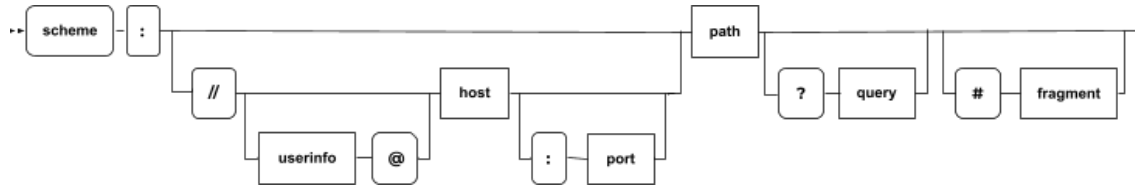


Figure 2.13: Syntax Diagram of a Generic URI, after Berners-Lee et al. [12]

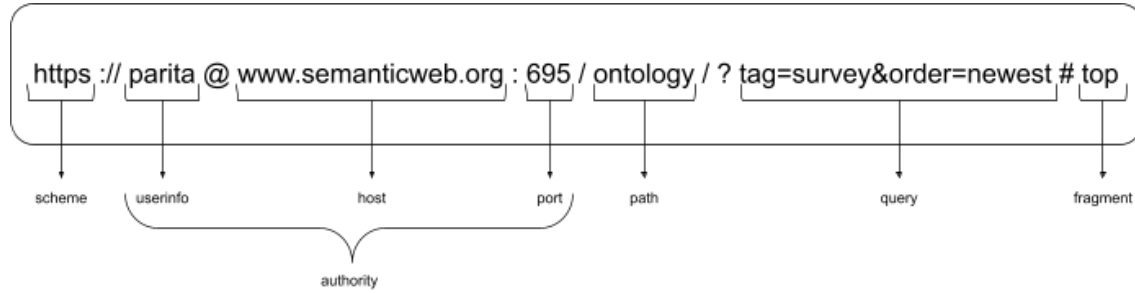


Figure 2.14: Components of an Example of URL, after Berners-Lee et al. [12]

| Stage                  | Description                                                                                     |
|------------------------|-------------------------------------------------------------------------------------------------|
| Extraction             | Extraction and conversion of unstructured and semi-structured data into RDF                     |
| Storage & Querying     | Storing the RDF data in a format that supports data querying efficiently                        |
| Authoring              | Allowing the users to create new data or to access and modify the existing data                 |
| Linking                | Creating links among the data belonging to various domains and users based on their entities    |
| Enrichment             | Data enrichment for efficient query support using various top-tier structures                   |
| Quality Analysis       | Managing data using different strategies to ensure good quality of available data on the web    |
| Browsing & Exploration | Making the structured data available on the web for the users to browse and explore effectively |

Table 2.4: Stages in Linked Data Life Cycle, after Ngomo et al. [38]

## 2.5 Ontology in Web Semantics

Ontology is a branch of information science that encloses representation, nomenclature, and definition of various properties, categories, and relationships shared among

the entities<sup>19</sup> that support any number of domains the user is interested in. In other words, Ontology is a form of defining a set of concepts for representing the subject properties and the relationships shared among them. According to Tom Gruber [27], ontology is “an explicit specification of a conceptualization”, where conceptualization is “an abstract, simplified view of the world (includes objects, concepts and other entities that are assumed to exist in some area of interest and the relationships that hold among them) that we wish to represent for some purpose”. In web semantics, an ontology is used to define the semantics of the resources briefly and methodically. The ontologies have been used to “specify the physical as well as conceptual characteristics of resources, in the form of metadata schema on the semantic web, for a fixed set of users” [33].

## 2.6 OWL Ontologies

W3C developed a standard ontology language called OWL<sup>20</sup> to define and describe concepts for ontology using different facilities and operations like intersection, union and negation. It is based on a logical model due to which a reasoner<sup>21</sup> can be used to check the mutual consistency among the statements and definitions in the ontology. The reasoner is also responsible for the identification of a suitable concept for particular definitions [31].

### 2.6.1 Components of OWL Ontologies

An OWL ontology consists of a set of components that define and describe the concepts collectively. The basic components of any OWL ontology, Individuals, Properties

---

<sup>19</sup>includes all types of data, concepts and entities

<sup>20</sup><http://www.w3.org/TR/owl-guide/>

<sup>21</sup>maintains hierarchy accurately

and Classes, are briefly explained in this section.

### 2.6.1.1 Individuals

According to Horridge et al. [31], “Individuals represent objects in the domain in which we are interested”. Individuals are the objects of classes. Figure 2.15 shows the representation of different individuals in various domains. The triangles are used here to denote the individuals in free space.



Figure 2.15: Representation of Individuals in OWL

### 2.6.1.2 Properties

The Binary Relationships<sup>22</sup> between the individuals (things) are called properties. For instance, the individuals “Max” and “Kieron” from Figure 2.15 are linked to each other by the property “hasSibling”. Each property can have its inverse. For instance, “hasSibling” can have an inverse property “isSiblingOf”. The properties can be symmetric or transitive. It is possible to have functional properties where the properties can be restricted to having only one value.

Figure 2.16 shows representation of properties between the individuals “Max” and “India”, and “Max” and “hasSibling”. The relation between “Max” and “India” is

---

<sup>22</sup>links shared by two individuals

“livesIn”. The arrow between two individuals in the figure denotes the property (relationship) between them.

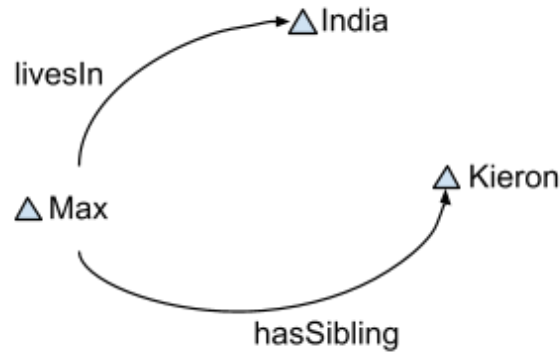


Figure 2.16: Representation of Properties in OWL

### 2.6.1.3 Classes

In OWL, the sets consisting of individuals are called OWL classes. Mathematical (formal) descriptions are used to describe the OWL classes. These descriptions include accurate statements on the requirements for the class membership. For instance, the class “Country” consists of all the individuals that are countries in the Domain of Discourse<sup>23</sup>. Inheritance in OWL classes (Class Hierarchy) may exist with the classes having subclasses and/or super-classes which is technically termed as taxonomy. “Sub-classes specialise (“are subsumed by”) their super-classes” [31]. For instance, consider the classes “Lady” and “Human”, where “Lady” is a subclass of “Human”. This implies the following statements:

- All ladies are humans
- All members of class “Lady” are members of class “Human”
- Being a “Lady” implies that individual is “Human”

---

<sup>23</sup>can contain one or more classes

- “Lady” is subsumed by “Human”

Figure 2.17 shows the representation of the classes for the individuals and properties that are shown in Figure 2.16.

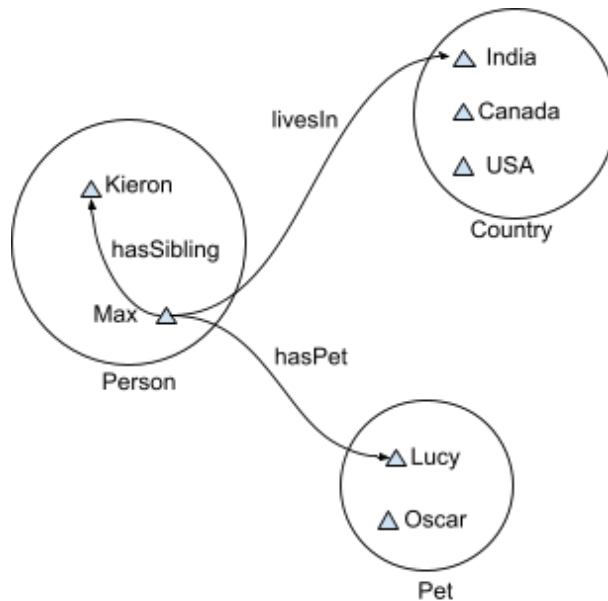


Figure 2.17: Representation of OWL Classes Consisting of Individuals and Properties

## 2.6.2 Ontology Editors

Ontology editors are used by publishers to create new ontologies when the existing vocabulary is not suitable for their purpose. W3C<sup>24</sup> has recommended a list of ontology editors that can be used to edit, manage, organize and visualize ontology. The list of editors includes Protégé, NeOn Toolkit, SWOOP, Neologism, TopBraid Composer, Vitro, Knoodl, Anzo for Excel, OWLGrEd, Fluent Editor, Semantic Turkey, VocBench. The page does not include valid links to the editors' websites. Protégé is the most popular ontology editor among researchers. There exists negligible information about most of the editors in the list which has driven the decision of the use of protégé

<sup>24</sup>[https://www.w3.org/wiki/Ontology\\_editors](https://www.w3.org/wiki/Ontology_editors)

for ontology development and OntoGraf and WebVOWL for visualization which are discussed in detail in chapter 4.

## 2.7 Conversion of Data from Spreadsheets to RDF

The preferred format of the data published on the semantic web is RDF format. Many data scientists use tables and spreadsheets to store and publish data using Comma Separated Value (CSV) files over RDF format as conversion of data to RDF is comparatively difficult. The data used by Dr. Hepting has been stored in tabular format which can be converted into RDF using different open source tools [23] recommended by W3C<sup>25</sup> or using RDF Mapping Language (RML)<sup>26</sup>.

### 2.7.1 Open-source Tools Recommended by W3C

- OpenRefine:

OpenRefine<sup>27</sup>, an RDF extension of Google Refine, is a powerful java-based set of tools that work with messy data using Google Refine Expression Language (GREL)<sup>28</sup>. It allows the users to extract, transform, export, and convert CSV, Excel, spreadsheets and other tabular data into RDF where a Graphical User Interface (GUI) is used to define schema mapping.

- RDF123:

RDF123<sup>29</sup> is a java application and servlet for the conversion of CSV and spreadsheets to RDF which uses arbitrary graphs to define schema mapping. According

---

<sup>25</sup><https://www.w3.org/wiki/ConverterToRdf>

<sup>26</sup><https://d2s.semanticscience.org/docs/convert-rml/>

<sup>27</sup><https://openrefine.org>

<sup>28</sup><https://libjohn.github.io/openrefine/grel.html>

<sup>29</sup><https://ebiquity.umbc.edu/resource/html/id/237/RDF123-java-application-v1-0>

to Han et al. [28], it uses a graphical RDF123 template to allow users to convert the data from spreadsheets to RDF.

- csv2rdf4lod:

csv2rdf4lod<sup>30</sup> is a tool that is used for the conversion of tabular data into structured and linked RDF using specifications that are based on declarative RDF enhancement parameters. It forms default namespaces for URIs and provides VoID and original metadata for the conversion using identifiers for source organization, dataset and version.

- XLWrap:

XLWrap<sup>31</sup> is a graphical template based application that allows execution of various SPARQL queries [34]. The spreadsheets are wrapped to arbitrary RDF graphs which allows:

- Streamed processing of tabular data like Excel, OpenDocument and CSV
- Loading Local/HTTP
- Expressions that include calculator operations for Excel and OpenDocument, and Custom functions
- Use of Application Programming Interface (API) and SPARQL endpoint

- Tarql:

Tarql<sup>32</sup> operates as a command-line application for the conversion of CSV to RDF using a user-defined mapping that is written in SPARQL standard 1.1.

---

<sup>30</sup><https://github.com/timrdf/csv2rdf4lod-automation/wiki>

<sup>31</sup><https://xlwrap.sourceforge.io>

<sup>32</sup><https://tarql.github.io>

## 2.7.2 Conversion Using RML

“An RML mapping defines a mapping from any logical source to RDF. It is a structure that consists of one or more triples maps.”<sup>33</sup> The RML rules can be written and tested using tools like the Matey Web UI <sup>34</sup>.

### 2.7.2.1 Tools for RML Conversion

Once the RML rules have been defined, the next step is generate RDF from the RML mappings. The list below shows multiple tools, suggested by Data2Services<sup>35</sup>, with various efficiency, stability, and features that can be used for RML conversion.

- RMLMapper:

RMLMapper<sup>36</sup> is a reference implementation written in Java. It supports custom functions and operations with small files as it loads all data in memory.

- RMLStreamer:

RMLStreamer<sup>37</sup>, written in Scala, is well-suited for large input files and continuous data streams like sensor data. It is still under development resulting in limited support for the use of custom functions.

- SDM-RDFizer:

SDM-RDFizer<sup>38</sup>, written in Python, implements optimized data structures and relational algebra operators that enable an efficient execution of RML triple maps

---

<sup>33</sup><https://rml.io/specs/rml/#example-XML>

<sup>34</sup><https://rml.io/yarrml/matey/>

<sup>35</sup><https://d2s.semanticscience.org/>

<sup>36</sup><https://github.com/RMLio/rmlmapper-java>

<sup>37</sup><https://github.com/RMLio/RMLStreamer>

<sup>38</sup><https://github.com/SDM-TIB/SDM-RDFizer>



even in the presence of Big data. A separate tools called Dragoman<sup>39</sup> can be used for the execution of custom functions.

- Morph-KGC:

Morph-KGC<sup>40</sup> is an RML conversion tool written in Python. It does not support custom functions.

- RocketRML:

RocketRML<sup>41</sup> is a JavaScript implementation for RML conversion. It provides an easy way to define custom functions.

## 2.8 Applications of Linked Open Data

A variety of projects and websites, that use linked open data, have been developed. Wikidata and DBpedia are two major projects of linked open data that present structured data on the semantic web. This section consists of a brief description of both applications.

### 2.8.1 Wikidata

According to a report by Krotzsch and Vrandečić [42], Wikidata was introduced to the world of information engineering in 2012 by Wikimedia. Wikidata can be defined as “the community-created knowledge base of Wikipedia and the central data management platform for Wikipedia and most of its Sister Projects<sup>42</sup>”, according to Erxleben et al. [24]. Wikidata was established for the collection and integration of data on the semantic web with Wikipedia. Wikidata is a free open-source tool that handles a large

---

<sup>39</sup><https://github.com/SDM-TIB/Dragoman>

<sup>40</sup><https://morph-kgc.readthedocs.io/en/latest/documentation/>

<sup>41</sup><https://github.com/semantifyit/RocketRML>

<sup>42</sup>Wikipedia, Wikivoyage, Wiktionary, Wikisource, and others

amount of structured data and maintains pages that store the data. Each entity on Wikidata represents the subject of a triple with a dedicated page. The properties of Wikidata are similar to that of RDF where the individuals and classes are indicated using items. As Wikidata is an open-source tool, the data on a page of the Wikidata is easily available for the users to access as well as edit.

For instance, the University of Regina, a university in the city of Regina (SK, Canada), has an item page allotted for it. Figure 2.18 shows the Wikidata item page of the University of Regina (<https://www.wikidata.org/wiki/Q3104287>).

Wikidata uses a method of automatically assigning unique identifiers to the entities, which are used as the labels of the item pages instead of the actual names of the entities. These identifiers are a string starting with a capital Q followed by a sequence of digits. The identifiers are assigned irrespective of the language as the Wikidata website supports multiple languages. For the University of Regina, the label used is “Q3104287”. The item page on Wikidata consists of multiple sections:

- label: The name of the subject that is treated as an entity. For the instance in Figure 2.18, the label is “University of Regina” along with the unique identifier “Q3104287”.
- description: This section consists of general introductory details about the subject. For the University of Regina, the description on wikidata is “university in Saskatchewan, Canada”.
- statements: This section consists of a list of subsections called “property”. The properties along with their property IDs for the University of Regina are listed in Table 2.5.
- identifiers: This section consists of various IDs belonging to the subject. For the University of Regina, the set of properties used for identifiers and their IDs are

University of Regina (Q3104287)

university in Saskatchewan, Canada [edit](#)  
Regina College | Regina Campus of the University of Saskatchewan

[- In more languages](#)  
[Configure](#)

| Language         | Label                | Description                        | Also known as                                                        |
|------------------|----------------------|------------------------------------|----------------------------------------------------------------------|
| English          | University of Regina | university in Saskatchewan, Canada | Regina College<br>Regina Campus of the Universit...                  |
| Canadian English | No label defined     | No description defined             |                                                                      |
| French           | université de Regina | No description defined             | Université de Régina<br>Universite de Regina<br>Université de regina |
| Italian          | No label defined     | No description defined             |                                                                      |

[All entered languages](#)

Statements

|             |                                                                                                                                                                                                                                 |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| instance of | <div><div><div><div></div><div>university</div></div><div><a href="#">edit</a></div></div></div>                                                                                                                                |
|             | <div><div><div><div></div><div>- 0 references</div></div><div><a href="#">+ add reference</a></div></div></div>                                                                                                                 |
|             | <div><div><div><div></div><div>open-access publisher</div></div><div><a href="#">edit</a></div></div></div>                                                                                                                     |
|             | <div><div><div><div></div><div>- 1 reference</div></div><div><div>stated in</div><div>Directory of Open Access Journals</div></div><div><a href="#">+ add reference</a></div></div><div><a href="#">+ add value</a></div></div> |

|       |                                                                                                                                                                           |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| image | <div><div><div><div></div><div></div></div><div><a href="#">edit</a></div></div></div> |
|       | <div><div><div><div></div><div>University of Regina Library viewed from the Oval.jpg</div></div><div>3,222 × 2,250; 662 KB</div></div></div>                              |
|       | <div><div><div><div></div><div>- 0 references</div></div><div><a href="#">+ add reference</a></div></div></div>                                                           |
|       | <div><a href="#">+ add value</a></div>                                                                                                                                    |

|           |                                                                                                                                                      |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| inception | <div><div><div><div></div><div>1911</div></div><div><a href="#">edit</a></div></div></div>                                                           |
|           | <div><div><div><div></div><div>- 1 reference</div></div><div><div>imported from Wikimedia project</div><div>French Wikipedia</div></div></div></div> |
|           |                                                                                                                                                      |
|           |                                                                                                                                                      |

Figure 2.18: Details of University of Regina, Regina, SK on Wikidata

| Statement Property                               | Property ID |
|--------------------------------------------------|-------------|
| instance of                                      | P31         |
| image                                            | P18         |
| inception                                        | P571        |
| country                                          | P17         |
| located in the administrative territorial entity | P131        |
| coordinate location                              | P625        |
| subsidiary                                       | P355        |
| official website                                 | P856        |
| commons category                                 | P373        |
| topic's main category                            | P910        |
| category for employees of the organization       | P4195       |
| category for alumni of educational institution   | P3876       |
| API endpoint                                     | P6269       |
| social media followers                           | P8687       |

Table 2.5: Statement Properties and Property IDs for the University of Regina on Wikidata

listed in Table 2.6.

The URI for an entity on Wikidata is “<https://www.wikidata.org/wiki/<id>>”, where `<id>` stands for the unique identifier. For the University of Regina, the `<id>` is the label identifier—Q3104287. Figure 2.19 shows the RDF/XML description of the University of Regina on Wikidata.

## 2.8.2 DBpedia

Jimmy Wales and Larry Sanger, in 2001, created the largest general reference work on the internet consisting of articles<sup>43</sup> in over 280 languages, the Wikipedia<sup>44</sup>, which acts as a source of data for many web projects like DBpedia<sup>45</sup>, one of the major linked open data projects. The main aim behind the development of DBpedia is the conversion

<sup>43</sup>include data comprising of templates, images, videos, categorizations, and links to other articles (pages) in multiple languages

<sup>44</sup>[https://en.wikipedia.org/wiki/Main\\_Page](https://en.wikipedia.org/wiki/Main_Page)

<sup>45</sup><https://wiki.dbpedia.org/>

```

<?xml version="1.0" encoding="utf-8" ?>
  <rdf:RDF xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema#"
    xmlns:ontolex="http://www.w3.org/ns/lemon/ontolex#"
    xmlns:wdt="http://www.wikidata.org/prop/direct/"
    xmlns:wdrn="http://www.wikidata.org/prop/direct-normalized/">
    <rdf:Description rdf:about="https://www.wikidata.org/wiki/Special:EntityData/Q3104287">
      <rdf:type rdf:resource="http://schema.org/Dataset"/>
      <schema:about rdf:resource="http://www.wikidata.org/entity/Q3104287"/>
      <cc:license rdf:resource="http://creativecommons.org/publicdomain/zero/1.0/">
      <rdf:Description rdf:about="https://en.wikipedia.org/wiki/University_of_Regina">
        <rdf:type rdf:resource="http://schema.org/Article"/>
        <schema:about rdf:resource="http://www.wikidata.org/entity/Q3104287"/>
        <schema:inLanguage>en</schema:inLanguage>
        <schema:isPartOf rdf:resource="https://en.wikipedia.org/">
        <schema:name xml:lang="en">University of Regina</schema:name>
        <schema:description xml:lang="en">university in Saskatchewan,
        Canada</schema:description>
        <wdt:P18
          rdf:resource="http://commons.wikimedia.org/wiki/Special:FilePath/University%2
          0of%20Regina%20Library%20viewed%20from%20the%20Oval.jpg"/>
        </rdf:Description>
      </rdf:Description>
    </rdf:RDF>

```

Figure 2.19: Wikidata Entry (RDF/XML) for University of Regina, Regina, SK

| Identifier Property                        | Property ID |
|--------------------------------------------|-------------|
| VIAF ID                                    | P214        |
| ISNI                                       | P213        |
| GND ID                                     | P227        |
| Library of Congress authority ID           | P244        |
| WorldCat Identities                        | P7859       |
| ARWU university ID                         | P5242       |
| Crossref funder ID                         | P3153       |
| Facebook ID                                | P2013       |
| Freebase ID                                | P646        |
| Google Maps Customer ID                    | P3749       |
| GRID ID                                    | P2427       |
| HAL structure ID                           | P6773       |
| LittleSis organization ID                  | P3393       |
| Microsoft Academic ID                      | P6366       |
| Ringgold ID                                | P3500       |
| ROR ID                                     | P6782       |
| Times Higher Education World University ID | P5586       |
| Twitter username                           | P2002       |
| U-Multirank university ID                  | P5600       |

Table 2.6: Identifier Properties and Property IDs for University of Regina on Wikidata

of unstructured data on Wikipedia into structured datasets. DBpedia enables querying the Wikipedia data as well as the generation of links among the structured datasets, resulting in the establishment of a massive web of data.

Initially, the template of the page is discovered using a Template Extraction Algorithm<sup>46</sup> which results in the identification of the structure of the template using various Pattern Matching Techniques<sup>47</sup>. Once the appropriate template is selected, the template data is parsed using a suitable algorithm and transformed into RDF triples. MediaWiki<sup>48</sup> links are identified and assigned specific URIs. On the other hand, the common units of data are recognized and assigned appropriate datatypes whereas RDF

<sup>46</sup>like Principle Components Analysis, Linear Discriminant Analysis, Logically Linear Embedding

<sup>47</sup><https://www.dummies.com/programming/big-data/data-science/how-pattern-matching-works-in-data-science>

<sup>48</sup><https://www.mediawiki.org/wiki/MediaWiki>

lists are created for the object lists. According to Auer et al. [4], DBpedia in 2007 was a platform that delivered information on “more than 1.95 million ‘things’ that includes at least 80,000 persons, 70,000 places, 35,000 music albums, 12,000 films”.

The DBpedia semantic web services are handled using the GNU Free Documentation License terms and policies. The data on DBpedia is easily accessible in different ways like accessing the datasets as linked data; using SPARQL queries for data extraction and accessibility; and in the form of a downloadable RDF snippets [18]. Figure 2.20 shows DBpedia entry for the “University of Regina, Regina, SK”. Like Wikidata, DBpedia also has a label, a description section and a set of important property-value pairs that give information related to the entity that has been described.

Figure 2.21 shows the data architecture of DBpedia. An open-link software, Virtuoso Universal Server<sup>49</sup>, is a data virtualization tool used to host and publish RDF datasets on DBpedia, which can be easily accessed using SPARQL endpoint. The HTML or RDF representation of the DBpedia resources is enabled by the data architecture using HTTP that supports the standard HTTP GET method calls from the web clients.

---

<sup>49</sup>[https://dbpedia.org/page/Virtuoso\\_Universal\\_Server](https://dbpedia.org/page/Virtuoso_Universal_Server)

| <div>  Browse using - Formats - Faceted Browser Sparql Endpoint </div>                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <h2>About: University of Regina</h2> <p>An Entity of Type : جامعة عامة, from Named Graph : <a href="http://dbpedia.org">http://dbpedia.org</a>, within Data Space : <a href="http://dbpedia.org">dbpedia.org</a></p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <p>جامعة ريجينا هي جامعة عامة في كندا، تأسست عام 1911. تقع في مدن ريجينا، ساسكاتون، سويفت كورنت</p>                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Property                                                                                                                                                                                                             | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <a href="#">dbo:abstract</a>                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>The University of Regina is a public research university located in Regina, Saskatchewan, Canada. Founded in 1911 as a private denominational high school of the Methodist Church of Canada, it began an association with the University of Saskatchewan as a junior college in 1925, and was disaffiliated by the Church and fully ceded to the University in 1934; in 1961 it attained degree-granting status as the Regina Campus of the University of Saskatchewan. It became an autonomous university in 1974. The University of Regina has an enrollment of over 15,000 full and part-time students. The university's student newspaper, The Carillon, is a member of CUP. The University of Regina is well-reputed for having a focus on experiential learning and offers internships, professional placements and practicums in addition to cooperative education placements in 41 programs. This experiential learning and career-preparation focus was further highlighted when, in 2009 the University of Regina launched the UR Guarantee Program, a unique program guaranteeing participating students a successful career launch after graduation by supplementing education with experience to achieve specific educational, career and life goals. Partnership agreements with provincial crown corporations, government departments and private corporations have helped the University of Regina both place students in work experience opportunities and help gain employment post-study. (en)</li> </ul> |
| <a href="#">dbo:affiliation</a>                                                                                                                                                                                      | <ul style="list-style-type: none"> <li><a href="#">dbr:University_of_the_Arctic</a></li> <li><a href="#">dbr:Canadian_Association_of_Research_Libraries</a></li> <li><a href="#">dbr:Canadian_Bureau_for_International_Education</a></li> <li><a href="#">dbr:Canadian_University_Society_for_Intercollegiate_Debate</a></li> <li><a href="#">dbr:International_Association_of_Universities</a></li> <li><a href="#">dbr:L'Association_des_universités_de_la_francophonie_canadienne</a></li> <li><a href="#">dbr:Canadian_University_Press</a></li> <li><a href="#">dbr:Association_of_Universities_and_Colleges_of_Canada</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <a href="#">dbo:athletics</a>                                                                                                                                                                                        | <ul style="list-style-type: none"> <li><a href="#">dbr:U_Sports</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <a href="#">dbo:city</a>                                                                                                                                                                                             | <ul style="list-style-type: none"> <li><a href="#">dbr:Regina,_Saskatchewan</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <a href="#">dbo:endowment</a>                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>9.75E7</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <a href="#">dbo:formerName</a>                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>Regina College (1911–1961) (en)</li> <li>Regina Campus of theUniversity of Saskatchewan(1961–1974) (en)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <a href="#">dbo:motto</a>                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>As one who serves</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <a href="#">dbo:numberOfPostgraduateStudents</a>                                                                                                                                                                     | <ul style="list-style-type: none"> <li>2027 (xsd:integer)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <a href="#">dbo:numberOfStudents</a>                                                                                                                                                                                 | <ul style="list-style-type: none"> <li>16501 (xsd:integer)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Figure 2.20: Description of University of Regina, Regina, SK on DBpedia



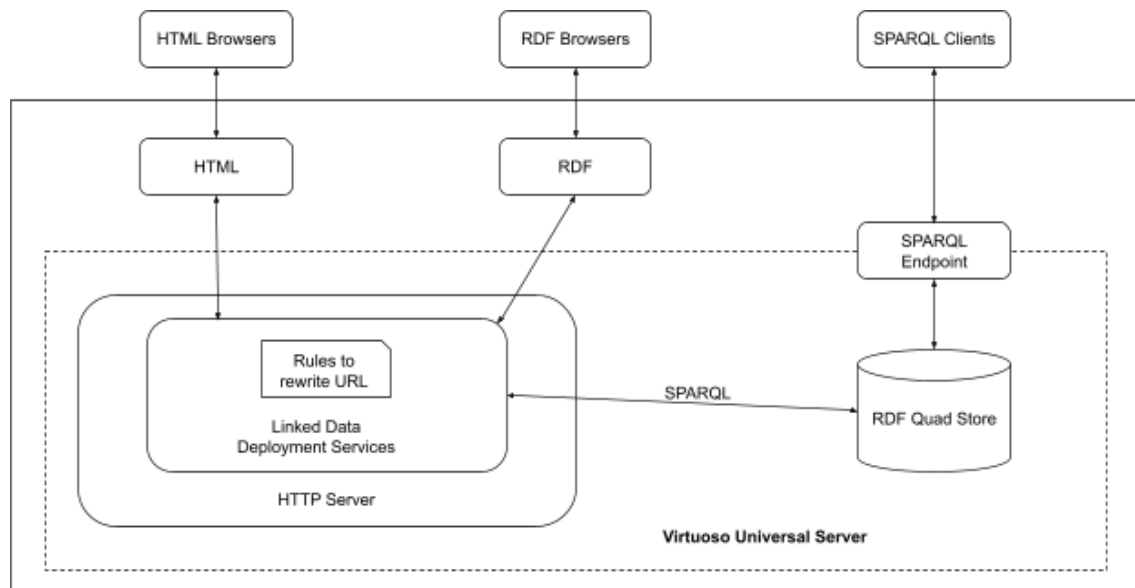


Figure 2.21: DBpedia Data Architecture

# Chapter 3

## Methodology

This chapter focuses on the usability of protégé along with the methodology involved in describing and publishing linked open data. Chapter 4 presents the proof of concept for this methodology.

### 3.1 Describing New OWL Vocabularies

In data science, for a fresh and developing branch like ontology engineering, it is difficult to find enough knowledge that can be reused. The field is still growing with research and development in progress as well as a lot still required to be explored in the future. As a result of this, linked open vocabularies are limited currently, and hence, the data publishers will have to create a vocabulary in case they do not find the required vocabulary from the already existing vocabularies.

There are editors available today that help the publishers to create their own linked open vocabularies. Alatrish at the University of Belgrad [2], in 2013, compared the most used ontology editors, namely, Apollo, OntoStudio, Protégé, Swoop, and TopBraid Composer. The editors were compared based on the following features:

- General description: developers' details, and accessibility on the internet (open source or software licensed)

- Software architecture and tools evaluation: semantic web architecture, support for plug-ins, backup management, and ontology storage
- Interoperability: interoperability with other ontology tools, support and translation for other languages
- Knowledge representation: Knowledge Representation (KR) paradigm of knowledge model, axiom language, and methodological support
- Inference services: built-in inference engine, other attached inference engines, and constraint/consistency checking
- Usability: graphical taxonomy, graphical views, zooms, collaborative working, and ontology libraries

After studying the details and comparison among the most used editors based on the above features by Alatrish [2], protégé has been used for the development of the instrument to support this research and thesis work.

### 3.1.1 Protégé

Stanford University developed a free, open-source ontology development platform, Protégé<sup>1</sup>, that offers a set of substantial tools<sup>2</sup> to build ontologies for knowledge-based applications and to implement various “knowledge-modeling structures and actions that support the creation, visualization and manipulation of ontologies in various representation formats” [2]. Protégé offers customization options to build knowledge models and to add data.

---

<sup>1</sup><https://protege.stanford.edu>

<sup>2</sup>along with various plug-ins and Java-based API

### 3.1.2 Usability of Protégé

The International Organization for Standardization (ISO) standard 9241<sup>3</sup> defines usability as “the extent to which a product can be used by specified users to achieve specified goals with effectiveness, efficiency, and satisfaction in a specified context of use”. In usability engineering, Jacob Neilson [39] suggested five qualities of a usable product: “learnability, efficiency, memorability, errors (low rate, easy to recover), and satisfaction”. These were the original five dimensions of usability which were then retermed as all five words starting with “E” by Quesenbery [41], and they became popular as the five Es of usability [41]. The new terms are “Effective”, “Efficient”, “Engaging”, “Error-tolerant”, and “Easy to learn”.

The five dimensions of usability can be considered while designing as well as for evaluation. While designing, the engineers consider the five dimensions as goals to be achieved whereas while testing and evaluation, they are considered as the requirements necessary for the designed model. The five dimensions of usability were used to assess the usability of protégé and the report of the evaluation is as follows:

- Effective: The task is completed accurately

Protégé is an effective design as it allows the users to build ontologies and use other tools precisely. The users can complete the desired tasks accurately using the set of facilities available.

- Efficient: The task is completed quickly

It is easy and straightforward to describe the vocabularies and build ontologies. All the desired tasks in protégé can be completed quickly (without wasting much time) as it is easy to look for the facilities using the menus and tools available.

Hence, protégé is an efficient ontology builder.

---

<sup>3</sup><https://www.iso.org/standard/63500.html>

- Engaging: The look and feel of the design is interactive and engaging

The tools and menus in protégé are interactive which leads to a better experience for the user. Also, the layout and the components are attractive and decent for the user to use this ontology builder whenever necessary. Overall, protégé gives an engaging and satisfactory user experience.

- Error-tolerant: Error prevention and data recovery in case any error is committed

Protégé provides options for modifications, additions, and deletions of classes, objects, and properties, which allow the users to correct the errors that were committed. Also, the deleted classes can be recovered using “Undo” from the edit menu resulting in proving protégé as an error-tolerant design.

- Easy to learn: The interface should be easy to learn

Protégé is easy to learn as it has a familiar look and commonly used names for the tools and menus making it easy for the users to adapt and know them nicely. Also, the “Help” document along with a list of some frequently asked questions is available which helps the users in the correct direction whenever they are lost.

## 3.2 Procedure to Describe OWL Vocabularies Using Protégé

This section focuses on a step-wise methodology that has been followed to create new OWL vocabularies using protégé. Protégé is available for use as a web application or it can also be downloaded<sup>4</sup> to use as a desktop application.

To commence with the process of building an ontology, a new project needs to be

---

<sup>4</sup><https://protege.stanford.edu/products.php#desktop-protege>

created with a unique Internationalized Resource Identifier (IRI)<sup>5</sup> and the ontology version. Figure 3.1 shows the protégé home-screen with a new project created and an IRI with the name and version of ontology.

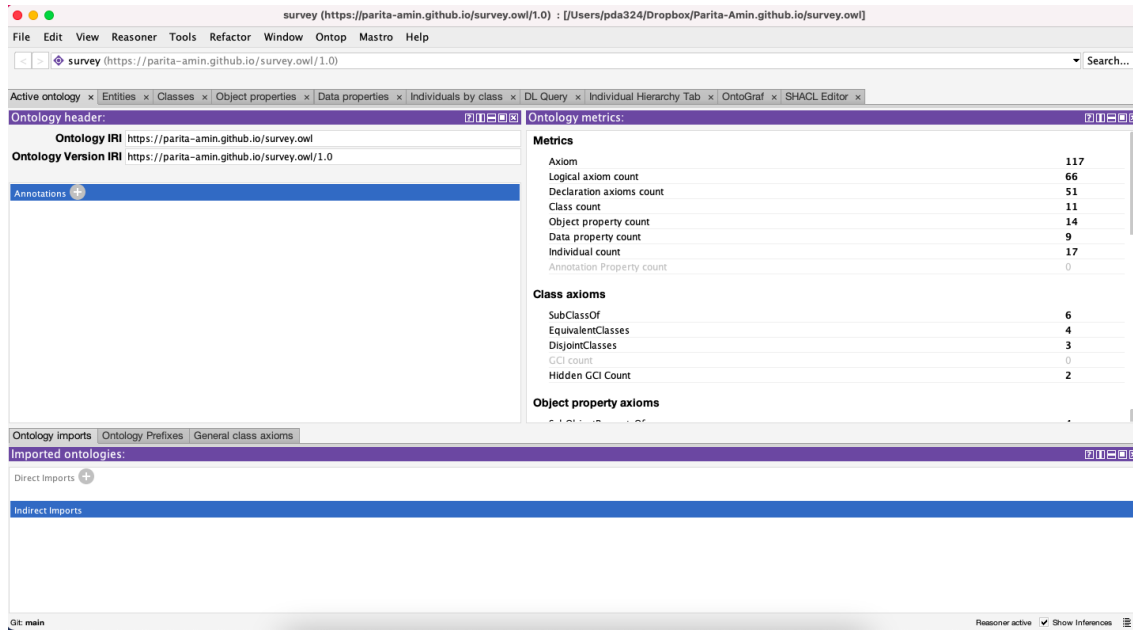


Figure 3.1: Protégé Home-screen for a New Project with an Ontology Name and an IRI

### 3.2.1 Classes and Class Hierarchy

The next step is to create classes and build the hierarchy for the class nodes. Each entity in protégé is directly or indirectly a child node of the “Thing” class. Also, each object has a name-value pair, which generally are the nodes of the “Domain\_Entity” class, an inherited class of Thing. Initially, four classes, “Thing”, “Domain\_Entity”, “Independent\_Entity”, and “Value” are created using class hierarchy, as shown in Figure 3.2. To create a class hierarchy for the classes that represent entities in an ontology, there are three steps to be followed:

1. Select “owl:Thing” in the Class Hierarchy View of the Classes tab from the Win-

<sup>5</sup><https://www.w3.org/2011/rdf-wg/wiki/IRIs/RDFConceptsProposal>

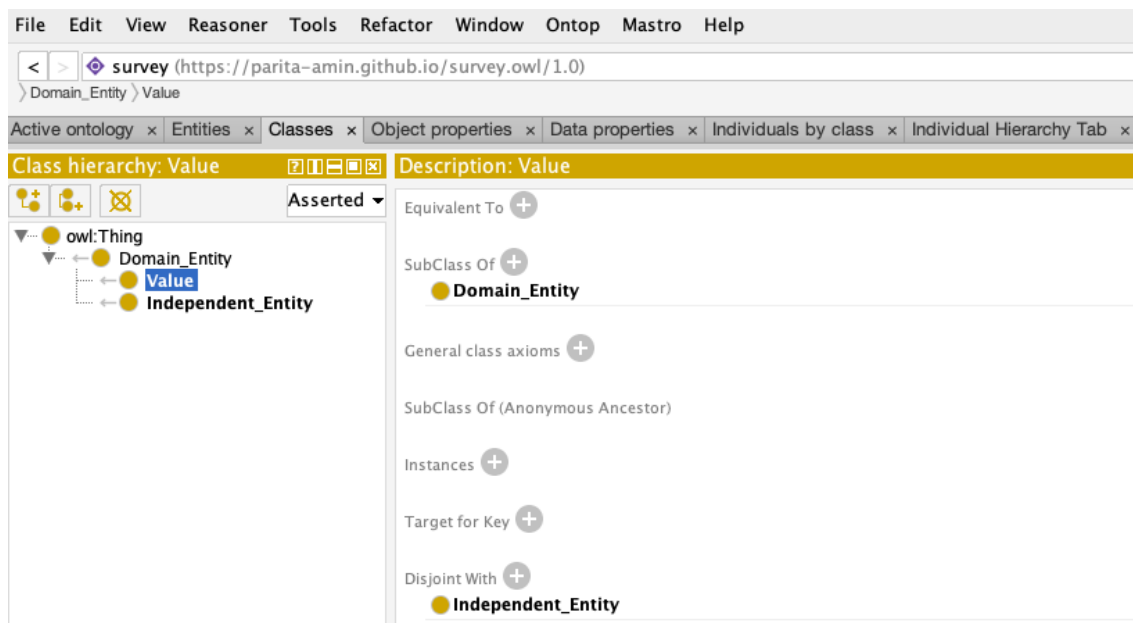


Figure 3.2: Class Hierarchy of Thing, Domain\_Entity, Independent\_Entity, and Value

dows menu followed by selecting “Create class hierarchy...” from the Tools menu, as shown in Figure 3.3 to open a “Enter hierarchy” pop-up window which allows the users to add classes to the ontology.


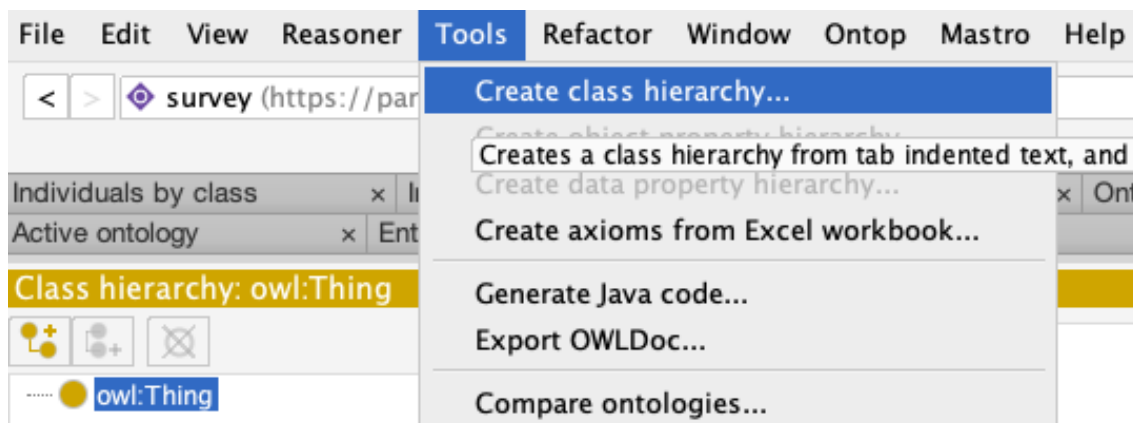


Figure 3.3: Tools Menu to Create Class Hierarchy

2. Enter the class names in the pop-up window starting from the left. For the child nodes, leave some spaces before writing the class name. Each horizontal line consists of one class name, as shown in Figure 3.4.

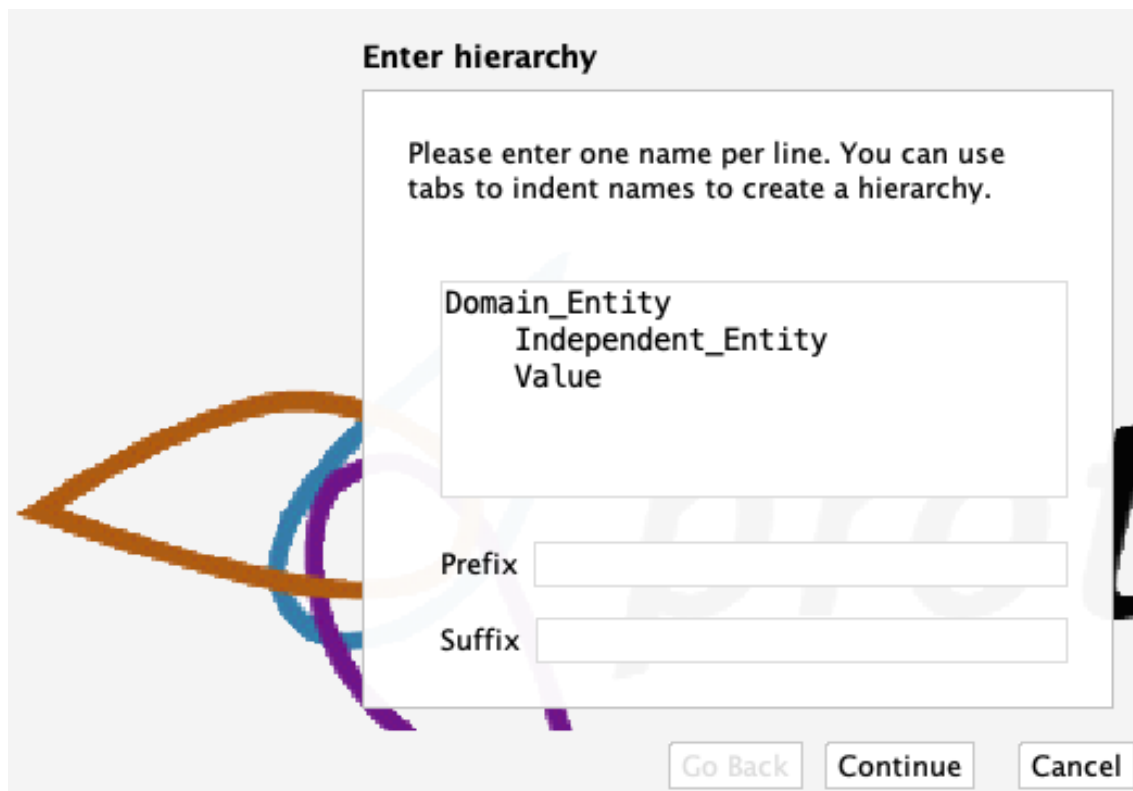

**Enter hierarchy**

Please enter one name per line. You can use tabs to indent names to create a hierarchy.

Domain\_Entity  
Independent\_Entity  
Value

Prefix

Suffix

Figure 3.4: “Enter hierarchy” Pop-up Window



3. On clicking “Continue” on the pop-up window in Figure 3.4, it opens up a new pop-up window. Here, it is important to state whether one wants the sibling classes to be disjoint or not. The checkbox needs to be checked accordingly. Usually, it is recommended to create disjoint sibling classes which can be changed later as necessary, as shown in Figure 3.5.

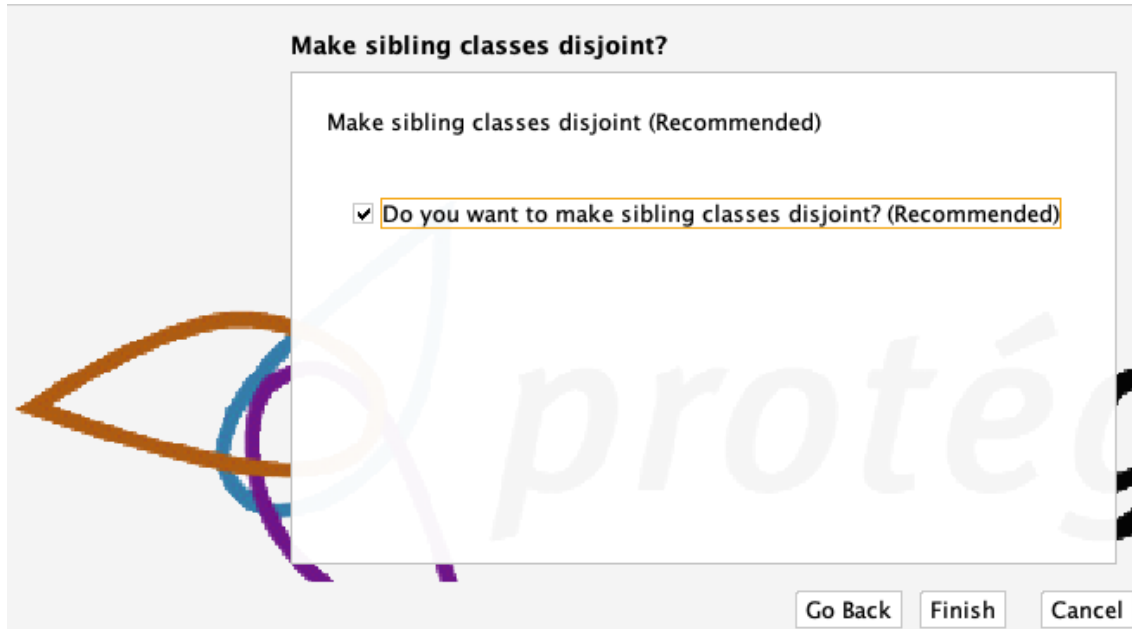


Figure 3.5: Pop-up Window to Create Disjoint Sibling Classes

Once the classes are added, the next step is to describe the classes. Descriptions of classes like “Equivalent to”, “SubClass Of”, “Instances”, “Disjoint With” and so on can be added using the Description view of the Class tab (shown in Figure 3.2). Each class can be described individually by selecting a particular class and adding details to the description view.

### 3.2.2 Object Properties and Object Property Hierarchy

The next step in building the ontology, after describing the classes, is describing the “Object Properties”. Object properties are used to link the entities (classes in protégé).

The “owl:topObjectProperty” is the root node of the object properties’ hierarchy. The hierarchy for object properties can be built by selecting a property in the Object Property Hierarchy view of the Object Property Views tab and then going to the tools menu as shown in Figure 3.6. The remaining steps are similar to the ones that are followed for building class hierarchy (Figure 3.4 and 3.5).

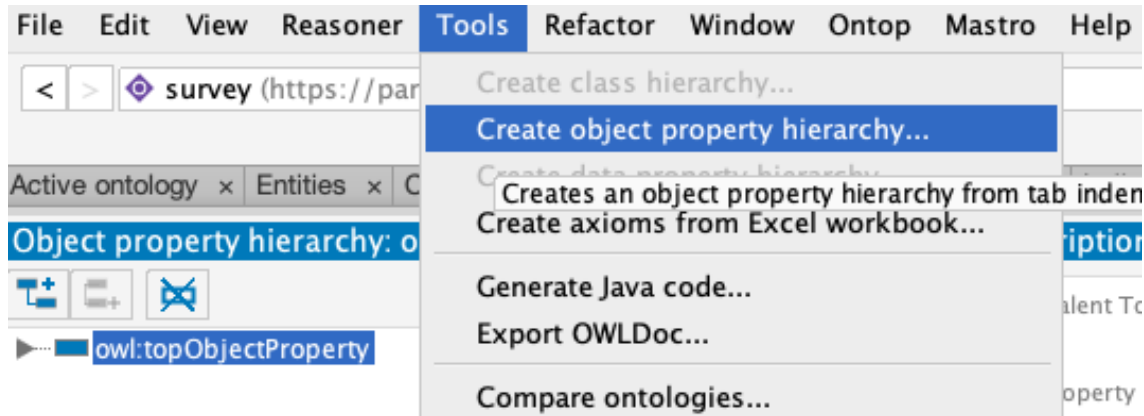


Figure 3.6: Tools Menu to Create Object Property Hierarchy

Also, the description view of object properties hierarchy allows the user to describe the object properties. The details that can be added or modified using the description view are “Equivalent To”, “SubProperty Of”, “Inverse Of”, “Domains (intersection)”, “Ranges (intersection)”, “Disjoint With”, and “SuperProperty Of (Chain)”.

The names of the object properties usually start with an “is” or a “has”. For instance, consider two classes: “Lady” (class 1) and “Parita” (class 2). To describe the link between class 1 (Lady) and class 2 (Parita) such that class 1 has value class 2 and class 2 is value of class 1, the properties “hasName” and “isNameOf” would be used respectively, as shown in Figure 3.7.

Each object property might have a corresponding inverse property. For the above instance, it can be said that:

Lady hasName Parita **is equivalent to** Parita isNameOf Lady

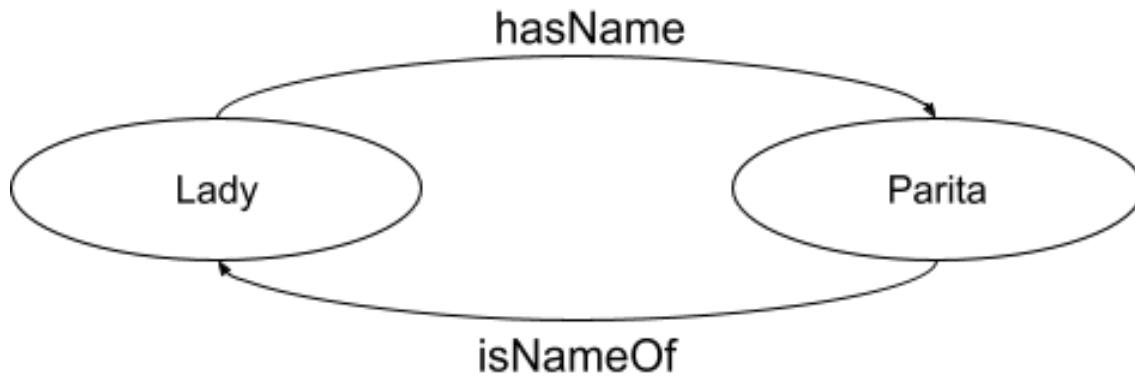


Figure 3.7: Object Properties for Classes “Lady” and “Parita”

Here, “hasName” is inverse of “isNameOf” and “isNameOf” is inverse of “hasName”. Apart from inverse, domain and range<sup>6</sup> are two other important parts of description of object properties. According to Horridge et al. [31], in OWL, “domain and range are not constraints to be checked. They are axioms which are used by the reasoner to make inferences”. As shown in Figure 3.8, “Lady” acts as the “Domain” and “Parita” acts as the “Range” for “hasName” whereas for “isNameOf”, “Parita” is the “Domain” and “Lady” is the “Range”.

### 3.2.3 Data Properties and Data Property Hierarchy

Furthermore, the “Data Properties” can also be described for ontology. “An ontology data property provides a relation to attach an entity instance to some literal datatype value (an RDF number, string or data for example) that is a measure or estimate of what that data property is about.”<sup>7</sup>

In protégé, the “owl:topDataProperty” is the root node of the data properties’ hierarchy. The data property hierarchy can be built by selecting a property in the Data Property Hierarchy view of the Data Property Views tab and then going to the tools

<sup>6</sup><http://protegeproject.github.io/protege/views/object-property-description/>

<sup>7</sup><https://ddooley.github.io/docs/data-properties/>

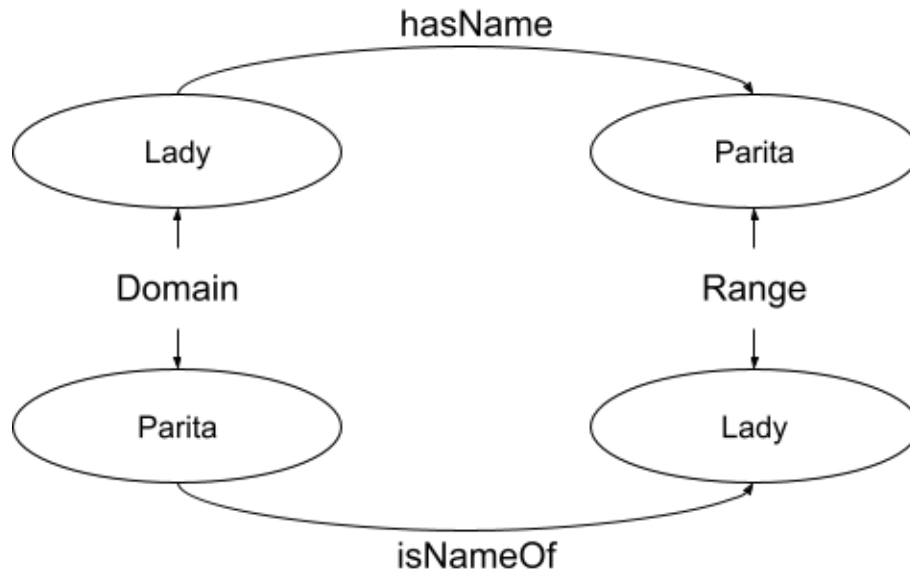


Figure 3.8: Domain and Range Classes for “hasName” and “isNameOf”

menu as shown in Figure 3.9. The remaining steps are similar to the ones that are followed for building class and object property hierarchy (Figure 3.4 and 3.5).

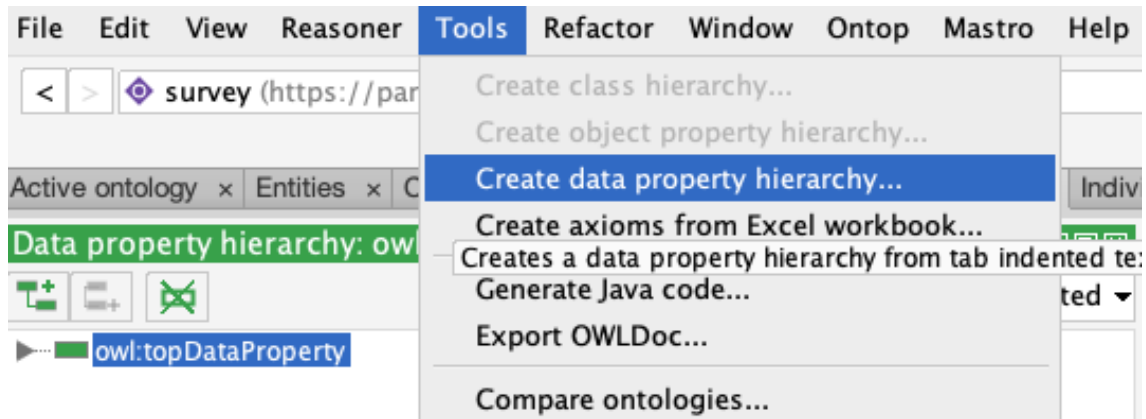


Figure 3.9: Tools Menu to Create Data Property Hierarchy

Data properties can be described using the description view of data properties of hierarchy which included details like “Equivalent To”, “SubProperty Of”, “Domains (intersection)”, “Ranges”, and “Disjoint With”.

### 3.2.4 OWL Ontology Inconsistencies and Reasoner

After describing the classes, object properties, data properties, and individuals, the next step is to determine and fix the errors and inconsistencies in the ontology using a Reasoner<sup>8</sup>. The current version of the protégé Integrated Development Environment (IDE) offers support for some built-in semantic reasoners which are listed below:

- ELK 0.4.3<sup>9</sup> : A Java-based fast reasoner for lightweight OWL2 EL which is available under Apache License 2.0
- FaCT++ 1.6.5<sup>10</sup> : A Tableaux-based reasoner for expressive OWL Description Logics (DL) which is implemented using C++
- HermiT 1.4.3.456<sup>11</sup> : A Java-based reasoner, written using OWL, that can be used to determine consistency of the ontology as well as for the identification of relationships among the classes of the ontology
- Mastro DL-Lite<sup>12</sup> : An Ontology-Based Data Access (OBDA) management system in which the DL-Lite family of languages for lightweight DL are used for ontology specifications
- Ontop 4.1.0<sup>13</sup> : A reasoner which uses SPARQL for querying datasets as Virtual RDF Graphs
- Pellet and Pellet (incremental)<sup>14</sup> : A Java-based OWL2 reasoner for the optimization of nominals, conjunctive query answering, and incremental reasoning

---

<sup>8</sup>[https://en.wikipedia.org/wiki/Semantic\\_reasoner](https://en.wikipedia.org/wiki/Semantic_reasoner)

<sup>9</sup><https://www.w3.org/2001/sw/wiki/ELK>

<sup>10</sup><https://www.w3.org/2001/sw/wiki/Fact>

<sup>11</sup><https://www.w3.org/2001/sw/wiki/Hermit>

<sup>12</sup>[https://protegewiki.stanford.edu/wiki/Mastro\\_DL-Lite\\_Reasoner](https://protegewiki.stanford.edu/wiki/Mastro_DL-Lite_Reasoner)

<sup>13</sup><https://www.w3.org/2001/sw/wiki/Ontop>

<sup>14</sup><https://www.w3.org/2001/sw/wiki/Pellet>

### 3.2.5 Data Validation

Dr. Hepting collects the feedback responses and manually stores them in spreadsheets. It is important to validate the stored data so that the data only consist of acceptable values. According to Ekaputra and Xiashuo [22], “One of the challenges of adopting Semantic Web Technologies (SWT) for enterprise data integration is to provide the means to define and validate structural constraints over RDF graphs.” To address this challenge, they developed SHACL4P, a protégé plugin. SHACL4P is used for defining and validating SHApes Constraint Language (SHACL), which is a W3C standard for the validation of contents of an RDF-style graph database<sup>15</sup>. SHACL uses “shapes” to describe constraints.

## 3.3 Conversion of Tabular Data into Linked Data

After describing the best possible version of the ontology, the next step is to convert the data stored in spreadsheets into linked data using either OpenRefine or RML-Streamer. As RMLStreamer is still under development and provides limited support for custom functions, this research uses OpenRefine.

### 3.3.1 Conversion Using OpenRefine

OpenRefine is a free, open-source powerful tool for working with messy data. OpenRefine can be downloaded and installed from the OpenRefine website<sup>16</sup>; run as a web server; and accessed using local web server in the browser. The first step is to load OpenRefine and access it in the browser. Figure 3.10 shows the homepage of OpenRefine.

---

<sup>15</sup><https://www.w3.org/TR/shacl/>

<sup>16</sup><https://openrefine.org/>



Figure 3.10: OpenRefine Homepage

OpenRefine offers options to create a new project as well as to open an existing project. The users can open an existing project using “Open Project” and continue working on the data. Creating a new project includes following steps:

1. Click on “Create Project”, select the type on sources of dataset and then click on “Choose Files” button to select data sources as shown in Figure 3.11. OpenRefine supports imports from Tab Separated Value (TSV), CSV, JavaScript Object Notation (JSON), XML, RDF/XML, Excel, and Google Data documents whereas the other file types can be supported using OpenRefine extensions.
2. The next step is to decide the orientation of the data to be displayed using various options as shown in Figure 3.12. The “Update Preview” button allows viewing the results of these modifications.
3. The final step is to mention the name of the project and click on the “Create Project »” button as shown in Figure 3.13.

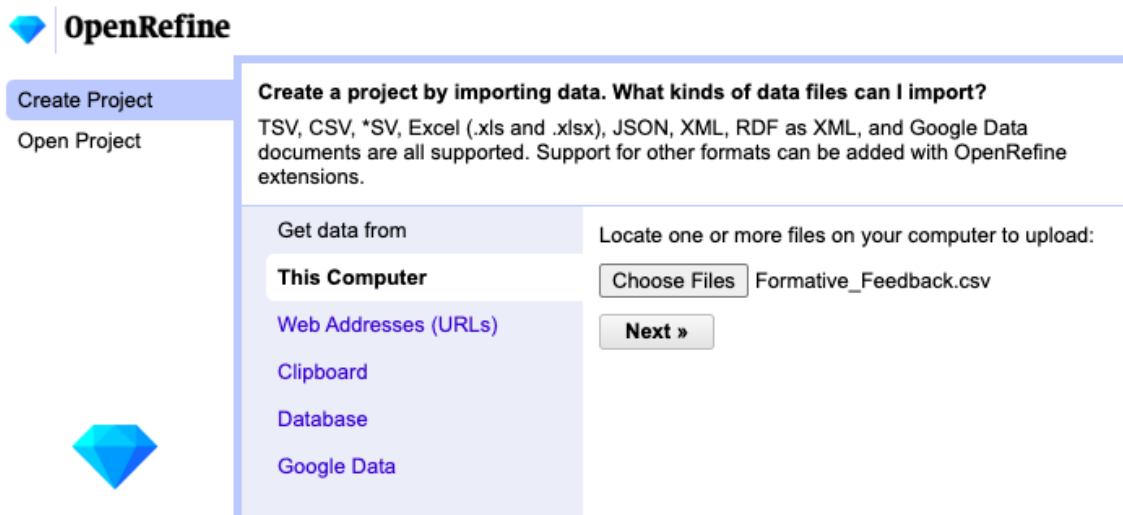


Figure 3.11: Create a New OpenRefine Project

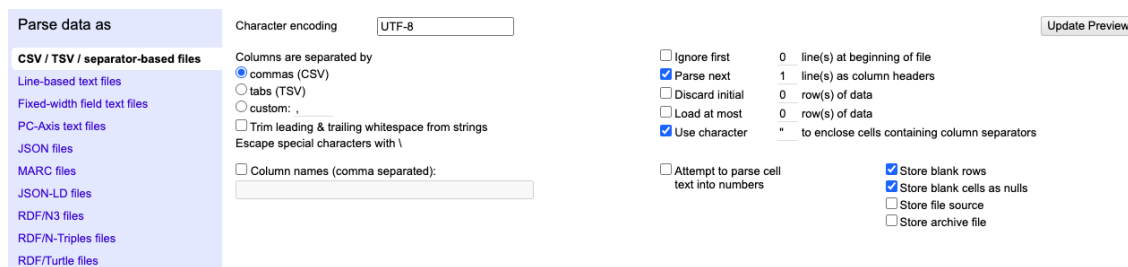


Figure 3.12: Options to Set Orientation of Data in New OpenRefine Project



Figure 3.13: Naming the New OpenRefine Project



OpenRefine provides support for following tasks:

## 1. Exploring Data:

Large data sets can be explored with ease using OpenRefine. The “Facet” option allows users to explore values of particular type by offering options like “Text facet”, “Numeric facet”, “Timeline facet”, “Scatterplot facet”, and other custom facet. Figure 3.14 shows the facet options offered by OpenRefine for a field.

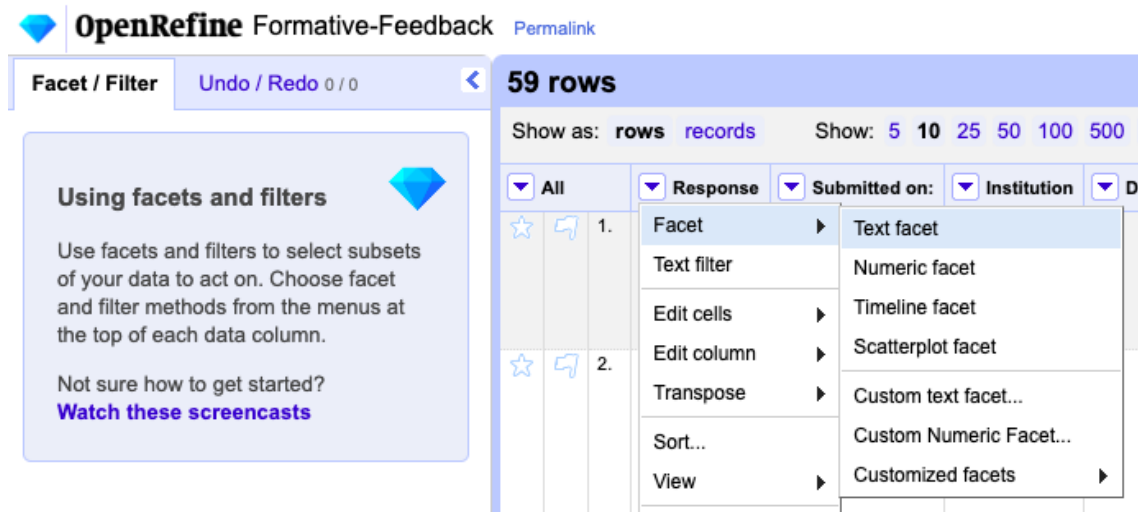


Figure 3.14: Exploring Data in OpenRefine - 1 of 3

The left side of the screen in Figure 3.15 shows the result of using “Text facet” for “Response” column. It also offers an option to “edit” and “include” the results of the facet. Figure 3.16 shows the result of using “include” for the record corresponding to the response “26480”.

## 2. Cleaning and Transforming Data:

- Cleaning Data:

While dealing with messy data, OpenRefine can be used to clean the data using the “Text filter” option. Figure 3.17 shows the “Text filter” option offered by OpenRefine for a field.

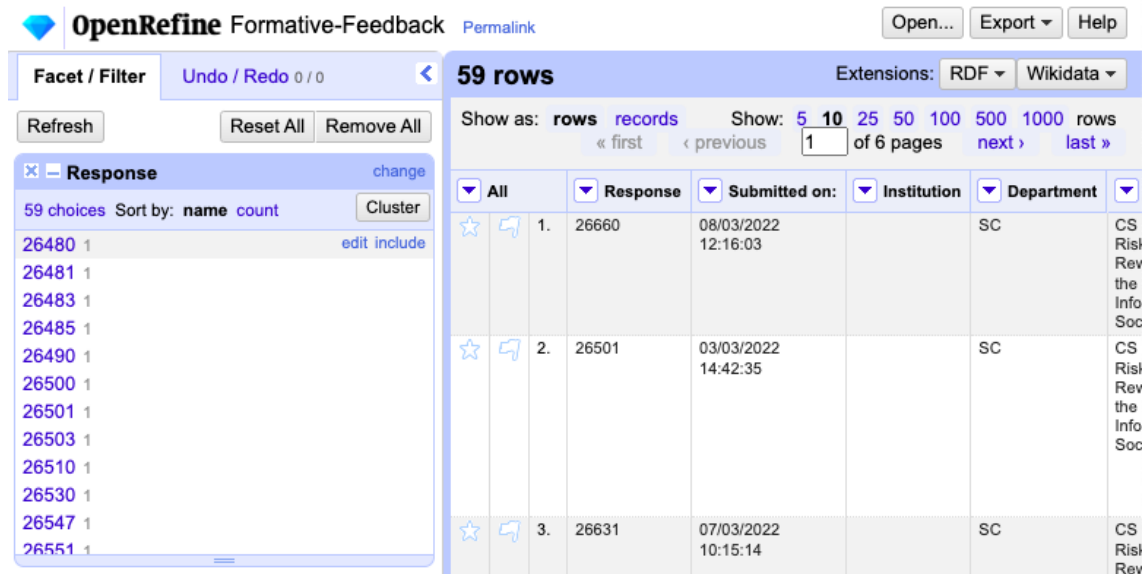


Figure 3.15: Exploring Data in OpenRefine - 2 of 3

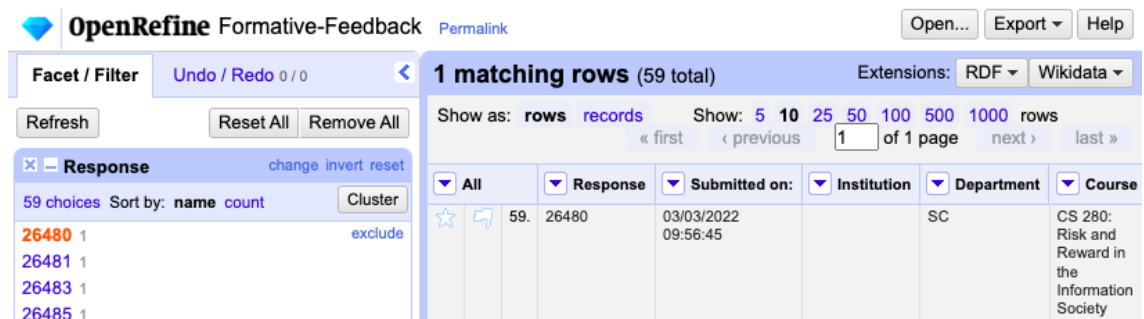


Figure 3.16: Exploring Data in OpenRefine - 3 of 3

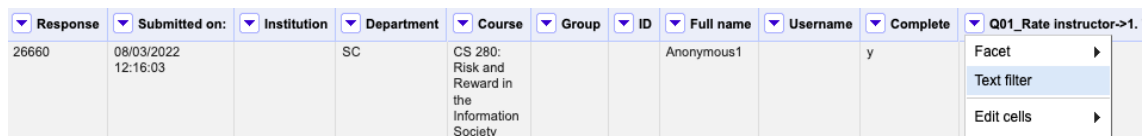


Figure 3.17: Cleaning Data in OpenRefine - 1 of 2

Figure 3.18 shows the result of applying the “Text filter” option for the “Q01\_Rate instructor->1.” field and using “-999” as argument.

| Response | Submitted on:          | Institution | Department | Course                                                            | Group | ID | Full name   | Username | Complete | Q01_Rate instructor->1. |
|----------|------------------------|-------------|------------|-------------------------------------------------------------------|-------|----|-------------|----------|----------|-------------------------|
| 26593    | 04/03/2022<br>23:03:10 |             | SC         | CS 280:<br>Risk and<br>Reward in<br>the<br>Information<br>Society |       |    | Anonymous55 |          | y        | -999                    |

Figure 3.18: Cleaning Data in OpenRefine - 2 of 2

- Transforming Data:

OpenRefine allows transforming data from one format to another using “Edit cells” option under which “Transform...” and “Common transform” offers different options for transforming data. Figure 3.19 shows all the options offered by OpenRefine for transforming data.

Figure 3.20 shows the result of selecting “Transform...” option for “Response” field and modifying the Expression to “Response:” + value. It also offers preview of the result of the GREL expression.

As a result of using the “Custom text transform on column Response” in OpenRefine, the text of all the records for “Response” field would be transformed from one format to another. For instance, the value of “Response” for the first record is transformed from “26660” to “Response:26660” as shown in Figure 3.21.

### 3. Reconciling and Matching Data:

OpenRefine can be used to link and extend dataset with various web services. It also supports services (using extensions and plugins) that can be used to upload the cleaned data to central databases like Wikidata. The data can be converted to linked data (as in this research) which can be then uploaded to central databases.

| ▼ Response  | ▼ Submitted on:     | ▼ Institution | ▼ Department | ▼ Course                                           | ▼ Group | ▼ ID |
|-------------|---------------------|---------------|--------------|----------------------------------------------------|---------|------|
| 26660       | 08/03/2022          |               | SC           | CS 280: Risk and Reward in the Information Society |         |      |
| Facet       | 3                   |               |              |                                                    |         |      |
| Text filter |                     |               |              |                                                    |         |      |
| Edit cells  |                     |               |              |                                                    |         |      |
| Edit column |                     |               |              |                                                    |         |      |
| Transpose   |                     |               |              |                                                    |         |      |
| Sort...     |                     |               |              |                                                    |         |      |
| View        |                     |               |              |                                                    |         |      |
| Reconcile   |                     |               |              |                                                    |         |      |
|             | 10:15:1             |               |              |                                                    |         |      |
| 26772       | 11/03/2022 23:31:21 |               | SC           |                                                    |         |      |

Transform...
Common transforms
Fill down
Blank down
Split multi-valued cells...
Join multi-valued cells...
Cluster and edit...
Replace

Trim leading and trailing whitespace
Collapse consecutive whitespace
Unescape HTML entities
Replace Smart quotes with ascii
To titlecase
To uppercase
To lowercase
To number
To date
To text
To null
To empty string

Figure 3.19: Transforming Data in OpenRefine - 1 of 3

### Custom text transform on column Response

Expression Language General Refine Expression Language (GREL) ▾

"Response:" + value No syntax error.

Preview
History
Starred
Help

| row | value | "Response:" + value |
|-----|-------|---------------------|
| 1.  | 26660 | Response:26660      |
| 2.  | 26501 | Response:26501      |

On error ☒ keep original ☐ Re-transform up to  times until no change

☐ set to blank

☐ store error

OK Cancel

Figure 3.20: Transforming Data in OpenRefine - 2 of 3

**OpenRefine** Formative-Feedback [Permalink](#) Text transform on 59 cells in column ?Response: **grel:"Response:" + value** [Undo](#) Open...

**59 rows** Extensions:

Show as: **rows** records Show: **5** 10 25 50 100 500 1000 rows « first previous 1 of 6 pages

|   |    | <b>Response</b> | <b>Submitted on:</b> | <b>Institution</b> | <b>Department</b> | <b>Course</b>                                      | <b>Group</b> | <b>ID</b> | <b>Full name</b> | <b>Username</b> | <b>Complete</b> | <b>Q01_Rate instructor-&gt;1.</b> |
|---|----|-----------------|----------------------|--------------------|-------------------|----------------------------------------------------|--------------|-----------|------------------|-----------------|-----------------|-----------------------------------|
| ☆ | 1. | Response:26660  | 08/03/2022 12:16:03  |                    | SC                | CS 280: Risk and Reward in the Information Society |              |           | Anonymous1       |                 | y               | 2                                 |
| ☆ | 2. | Response:26501  | 03/03/2022           |                    | SC                | CS 280:                                            |              |           | Anonymous2       |                 | y               | 4                                 |

Figure 3.21: Transforming Data in OpenRefine - 3 of 3

## 3.4 Announcing Linked Open Data

After the data is converted into linked data, it can be made available on the web in two steps, licensing the data and publishing on the web, which are discussed in this section.

### 3.4.1 Licensing Linked Data

W3C [32] advises that it's critical to identify the owner of any data published on the web and to explicitly link the licence to the data itself. It is simpler to attach a licence that goes with the data itself when publishing linked open data. When data has a clear, agreeable licence attached to it, people are more likely to reuse it.

The Creative Commons<sup>17</sup> website is a useful resource for open data providers. The legal and technical framework for publishing digital content is developed, supported, and maintained by Creative Commons. There are different licenses available like Attribution-ShareAlike 1.0 Generic<sup>18</sup>, Attribution-ShareAlike 2.0 Generic<sup>19</sup>, Attribution-ShareAlike 2.5 Generic<sup>20</sup>, Attribution-ShareAlike 3.0 Unported<sup>21</sup>, and Attribution-ShareAlike 4.0 International<sup>22</sup>

### 3.4.2 Publishing Linked “Open” Data

According to Petrou et al. [40], the linked data principles state that dereferencable URIs are the preferred method of accessing linked data and that the data should be openly available. When accessed, these URIs offer accurate descriptions of the concepts they stand for in a number of formats. RDF dumps and SPARQL endpoints are hence

---

<sup>17</sup><https://creativecommons.org/>

<sup>18</sup><https://creativecommons.org/licenses/by-sa/1.0/>

<sup>19</sup><https://creativecommons.org/licenses/by-sa/2.0/>

<sup>20</sup><https://creativecommons.org/licenses/by-sa/2.5/>

<sup>21</sup><https://creativecommons.org/licenses/by-sa/3.0/>

<sup>22</sup><https://creativecommons.org/licenses/by-sa/4.0/>

two ways that users can access the data. Dereferencing of the data is accomplished using the specialised RDF store, and all the data are accessible via a SPARQL endpoint service or through the faceted browsing feature, which allows users to search resources and move between them.

Publishing datasets to international or national open data portals (e.g. Licence-Canada<sup>23</sup>) might further “announce” them to the public and make them discoverable.

### 3.4.3 5-star Rating System

Tim Berners-Lee, the creator of the web and the linked data project’s founder, proposed a five-star deployment strategy for linked data. The system of 5-star<sup>24</sup> linked data is cumulative. In this system, the authors of the online data link their data to the already linked data to serve as a reference and make it searchable using the linked data principles. For the 5-star system to accept the linked data on the web as 5-star the data should be:

- structured (machine-readable)
- open-licensed for access
- described and linked to other data using URIs

Each successive star implies that the data satisfies the requirements of the preceding phase(s) as explained in Table 3.1.

## 3.5 Visualizing Linked Data

The modelled ontology can be visualized using various visualization tools. Protégé supports plug-ins for some visualization tools like OntoGraf and OWLViz whereas

---

<sup>23</sup><https://open.canada.ca/en/open-government-licence-canada>

<sup>24</sup>[https://www.w3.org/2011/gld/wiki/5\\_Star\\_Linked\\_Data](https://www.w3.org/2011/gld/wiki/5_Star_Linked_Data)

| Stars     | Explanation                                                                                                                                                                           |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ☆         | The data is accessible on the web with open license, regardless of the format.                                                                                                        |
| ☆ ☆       | AND the open data is accessible on the web as structured data that can be read by machines. For example, using Microsoft Excel instead of a screenshot of a Microsoft Excel workbook. |
| ☆ ☆ ☆     | AND the data is accessible in a non-proprietary format with open-license. For instance, storing data in CSV instead of Microsoft Excel.                                               |
| ☆ ☆ ☆ ☆   | AND W3C open standards were used for publication of the linked open data on the web. For example, RDF, URIs, and SPARQL.                                                              |
| ☆ ☆ ☆ ☆ ☆ | AND the open data is linked to other web-based data for context.                                                                                                                      |

Table 3.1: 5-star Rating System for Linked Data Implementation

tools like WebVOWL, RelFinder and OWLGrEd are available for use as web-based tools. This section focuses on the two tools, OntoGraf and WebVOWL, used for the visualization of ontology in this research.

### 3.5.1 OntoGraf

Falconer [25] introduced OntoGraf as a protégé plug-in for the visualization of the OWL ontologies. This tool helps the users to represent the ontologies, built using protégé, by repetitively allowing and restricting the desired classes. OntoGraf offers various graph layout options for visualization like Grid Layout<sup>25</sup>, Spring Layout, and Tree Layout<sup>26</sup>. Antoniazzi and Viola [3] stated that the “individuals of a class can be visualized in its tooltip, but this is uncomfortable when dealing with a high number of assertional statements”. The graphs generated using OntoGraf can be exported as image files of various formats such as Portable Network Graphics (PNG), Joint Photographic Experts Group (JPEG), Graphics Interchange Format (GIF) and as a dot file<sup>27</sup>.

<sup>25</sup>classes are arranged in a grid alphabetically

<sup>26</sup>both horizontal and vertical

<sup>27</sup>a Microsoft Word Template with the details of default settings



### 3.5.2 WebVOWL

WebVOWL [35], the Web-based Visual Web Ontology Language (VOWL), one of the variety of forms in which the VOWL visualization tool is available, represents the “ontologies graphically using a force-directed graph layout” [3]. VOWL follows some ground rules for the representation of OWL ontologies which are:

1. Circles are used to denote classes. Also, different types are assigned different colors. For instance, OWL classes are denoted using “light blue circles”.
2. Black solid lines are used to represent OWL object and datatype properties. The object properties use light blue labels where as the datatype properties are labelled in green.
3. The relationships between the classes and their subclasses are represented using dashed lines.

# Chapter 4

## Proof of Concept

This chapter provides the proof of concept for the methodology (see chapter 3) followed to describe and publish linked open data for survey.

### 4.1 Modeling Ontology for Survey Using Protégé

Figure 4.1 shows the student feedback form for which the new vocabularies are described.

#### 4.1.1 Classes for Survey Ontology

All the classes can be created and described using the steps described in section 3.2.1. The resultant class hierarchy for the survey ontology would be as shown in Figure 4.2. A survey can have “Survey Response”, “Respondent”, “Response Date”, “Type of Survey”, “Survey Questions”, and “Survey Answers”, which are considered for this ontology as well.

Here, the type of survey used is feedback survey (“FeedbackSurvey” class). The “SurveyCollection” class corresponds to a collection of survey responses (“SurveyResponse” class) that were collected for a particular course (“CourseID” class) in a particular semester (“SemesterID” class) with a specific collection ID (“CollectionID” class).

### Student Feedback Form

(adapted from <http://cft.vanderbilt.edu/teaching-guides/reflecting/student-feedback/#inclass>)

**Course:** \_\_\_\_\_ **Instructor:** Daryl Hepting **Date:** \_\_\_\_\_

1 = Never; 5 = Always

- |   |                                                                                                 |   |   |   |   |   |
|---|-------------------------------------------------------------------------------------------------|---|---|---|---|---|
| 1 | The instructor is well-prepared for class.                                                      | 1 | 2 | 3 | 4 | 5 |
| 2 | The instructor clearly communicates his expectations for student preparation and participation. | 1 | 2 | 3 | 4 | 5 |
| 3 | The instructor uses class time effectively.                                                     | 1 | 2 | 3 | 4 | 5 |
| 4 | The instructor has clear expectations for assigned work.                                        | 1 | 2 | 3 | 4 | 5 |
| 5 | The instructor encourages student participation.                                                | 1 | 2 | 3 | 4 | 5 |
| 6 | The instructor clearly answers questions.                                                       | 1 | 2 | 3 | 4 | 5 |
| 7 | The instructor treats students with respect.                                                    | 1 | 2 | 3 | 4 | 5 |
| 8 | The instructor effectively directs and stimulates discussion.                                   | 1 | 2 | 3 | 4 | 5 |
| 9 | The instructor effectively encourages students to ask questions and give answers.               | 1 | 2 | 3 | 4 | 5 |

What do you like best about this course?

What would you like to change about this course?

What do you think the instructor's greatest strengths are?

Figure 4.1: The Student Feedback Form, from Hepting [30]

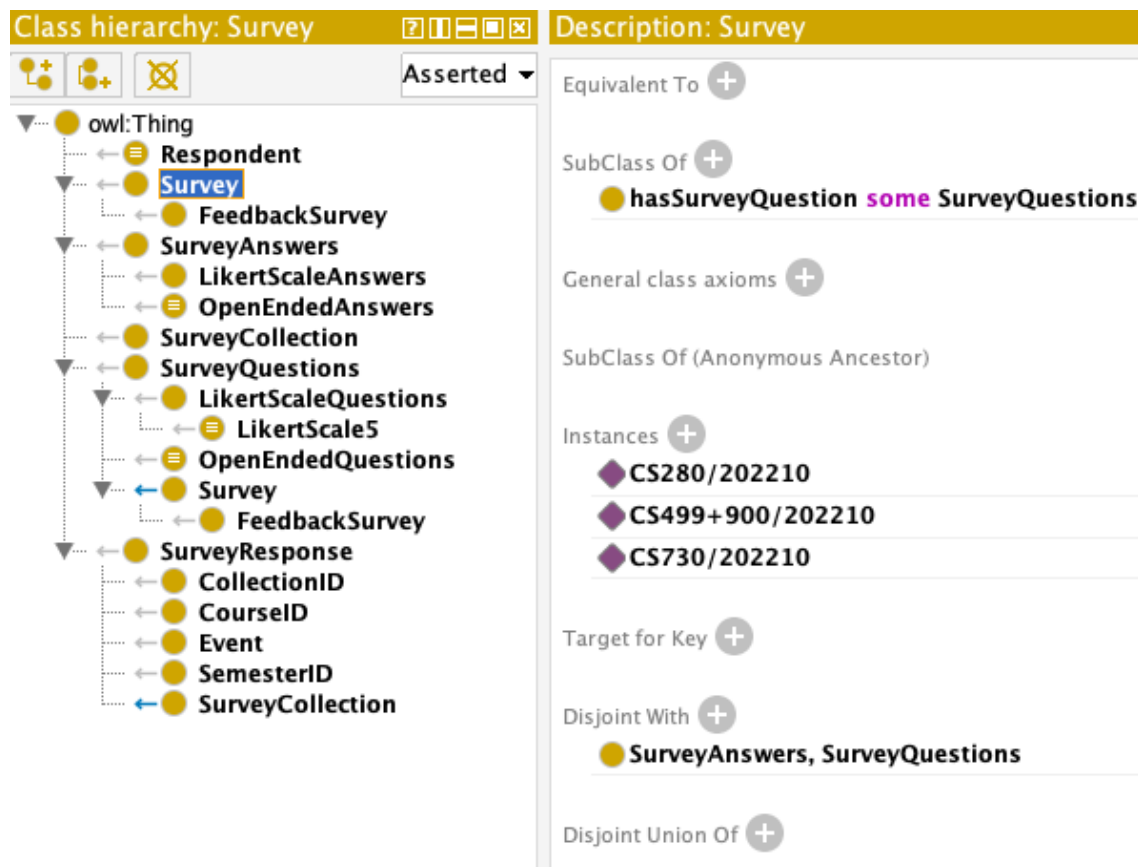


Figure 4.2: Class Hierarchy in Survey Ontology

Furthermore, the survey questions and survey answers have classes corresponding to various forms of question-answer. Generally, feedback surveys consist of two types of questions, namely, “Likert Questions” and “Open-ended Questions”. The type of questions might differ depending on the designer of the survey, some of which, as stated on the *SurveyMonkey*<sup>1</sup> website, are listed below.

- Multiple Choice Questions
- Rating Scale Questions
- Likert Scale Questions
- Matrix Questions
- Dropdown Questions
- Open-ended Questions
- Demographic Questions
- Ranking Questions
- Image Choice Questions
- Click Map Questions
- File Upload Questions
- Slider Questions
- Benchmarkable Questions

The feedback survey in this research has Likert and Open-ended questions. The classes described for the questions and answers are “LikertScaleQuestions” and “OpenEndedQuestions” as sub-classes of “SurveyQuestions” and “LikertScaleAnswers” and “OpenEndedAnswers” as sub-classes of “SurveyAnswers”. For all the survey questions, there is a question and an answer, where both of them are considered as distinct classes. Open-ended questions have unpredictable answers.

#### 4.1.1.1 The “LikertScaleQuestions” Class

Likert questions are the questions for which the answers are from the preset list of answers. For the Likert questions, the questions can be either of type “Never-Always-4”

---

<sup>1</sup><https://www.surveymonkey.com/mp/survey-question-types/>

or “Never-Always-5” or “Never-Always-7” or “Never-Always-\*”, of which Never-Always-5 has been used by Hepting [30]. The survey ontology consists of “LikertScaleQuestions” class for likert questions.

In a Never-Always-5 type of survey, 5 degrees of agreement can be used. It is challenging to decide whether the range for the degrees would be 0 to 4, 1 to 5, 10 to 50, or something else. The degree of agreements used here are as shown in Table 4.1. In addition to these degrees, this ontology also considers the instances where the question wouldn’t be answered. In this case, the field corresponding to the answer is left blank.

| Number | Agreement   |
|--------|-------------|
| 1      | Never       |
| 2      | [Rarely]    |
| 3      | [Sometimes] |
| 4      | [Often]     |
| 5      | Always      |

Table 4.1: Degrees of Agreement for Likert-scale Questions

The “LikertScaleQuestions” class of survey ontology has a sub-class, “LikertScale5”, which represents the likert scale with the degrees of agreement from Table 4.1. The “Equivalent To” (from the description view of the class tab) can be used to describe the “LikertScale5” class in terms of a range containing degrees of agreement as shown in Figure 4.3. Each of these degrees are treated as an individual (section 4.1.4) of the class.

### 4.1.2 Object Properties for Survey Ontology

Using the method of naming and building object properties described in section 3.2.2, some of the primary object properties are described for the survey ontology as shown in Figure 4.4 where as Table 4.2 shows the list of the object properties along with their domain and range classes. Table 4.3 consists of the parent nodes and inverse properties

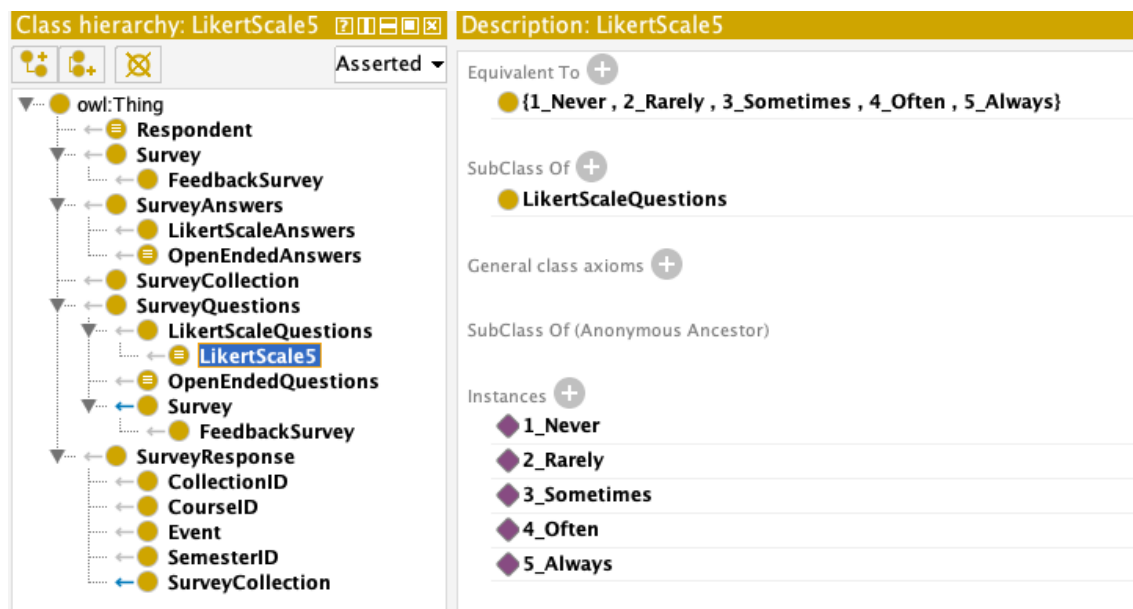


Figure 4.3: “LikertScale5” class in Survey Ontology

of the object properties. The three parent nodes involved in object property hierarchy are “owl:TopObjectProperty”, “hasContent”, and “isContentOf”.

| Object Property       | Domain               | Range            |
|-----------------------|----------------------|------------------|
| hasSurveyQuestion     | Survey               | SurveyQuestions  |
| hasSurveyAnswer       | Survey               | SurveyAnswers    |
| hasOEAnswer_Change    | OpenEndedQuestions   | OpenEndedAnswers |
| hasOEAnswer_LikeBest  | OpenEndedQuestions   | OpenEndedAnswers |
| hasOEAnswer_Strengths | OpenEndedQuestions   | OpenEndedAnswers |
| hasLikertScaleAnswer  | LikertScaleQuestions | LikertScale5     |
| hasEvent              | SurveyResponse       | Event            |
| hasCourseID           | SurveyResponse       | CourseID         |
| hasSemesterID         | SurveyResponse       | SemesterID       |
| hasCollectionID       | SurveyResponse       | CollectionID     |
| isCollectionOf        | SurveyCollection     | SurveyResponse   |
| respondedToSurvey     | Respondent           | Survey           |
| isTypeOf              | FeedbackSurvey       | Survey           |

Table 4.2: Object Properties and Their Domain and Range

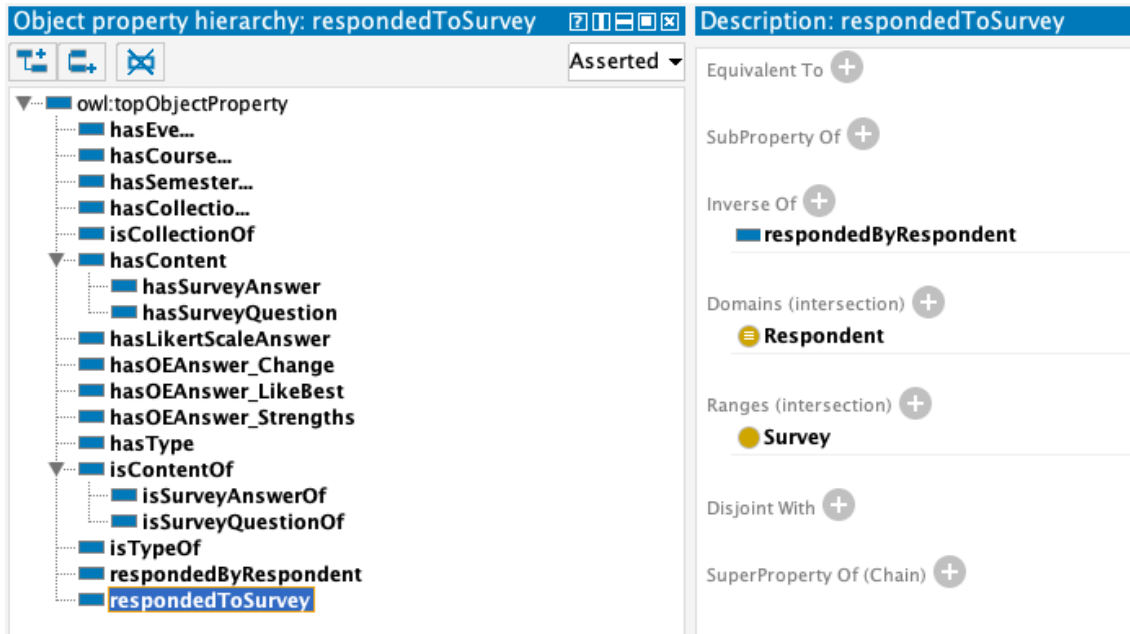


Figure 4.4: Object Property Hierarchies, Domain and Range for Classes

| Object Property       | Parent Node           | Inverse Property      |
|-----------------------|-----------------------|-----------------------|
| hasContent            | owl:TopObjectProperty | isContentOf           |
| isContentOf           | owl:TopObjectProperty | hasContent            |
| hasType               | owl:TopObjectProperty | isTypeOf              |
| isTypeOf              | owl:TopObjectProperty | hasType               |
| hasLikertScaleAnswer  | owl:TopObjectProperty |                       |
| hasOEAnswer_Change    | owl:TopObjectProperty |                       |
| hasOEAnswer_LikeBest  | owl:TopObjectProperty |                       |
| hasOEAnswer_Strengths | owl:TopObjectProperty |                       |
| hasEvent              | owl:TopObjectProperty |                       |
| hasCourseID           | owl:TopObjectProperty |                       |
| hasSemesterID         | owl:TopObjectProperty |                       |
| hasCollectionID       | owl:TopObjectProperty |                       |
| isCollectionOf        | owl:TopObjectProperty |                       |
| respondedByRespondent | owl:TopObjectProperty | respondedToSurvey     |
| respondedToSurvey     | owl:TopObjectProperty | respondedByRespondent |
| hasSurveyQuestion     | hasContent            | isSurveyQuestionOf    |
| hasSurveyAnswer       | hasContent            | isSurveyAnswerOf      |
| isSurveyQuestionOf    | isContentOf           | hasSurveyQuestion     |
| isSurveyAnswerOf      | isContentOf           | hasSurveyAnswer       |

Table 4.3: Object Properties with Their Parent Nodes and Inverse Properties



### 4.1.3 Data Properties for Survey Ontology

Data properties for survey ontology have been described following the method described in section 3.2.3 which are as shown in Figure 4.5.

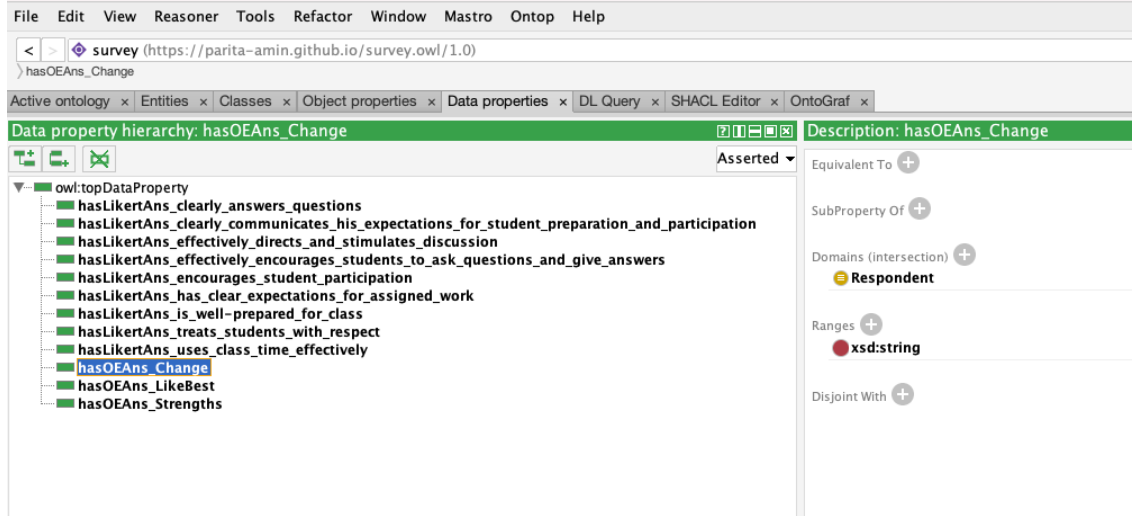


Figure 4.5: Data Property Hierarchies, Domain and Range for Classes

The parent node of all the data properties is “owl:topDataProperty” and the domain and range for all the data properties are listed in Table 4.4. The properties for likert answers restrict the datatype to positive integer and to string for open-ended answers.

### 4.1.4 Individuals

While dealing with ontologies, an instance of class is termed as an “Individual”. In protégé, an individual can be described as an instance of class using the Description view of the Class tab. For example, Figure 4.6 shows instances of “Survey” class.

A new individual can be described using the Individuals view of the Entities tab where as the property assertions view can be used to describe the property restrictions. Table 4.5 shows a list of classes and individuals described in survey ontology.

| Data Property                                                                                | Domain     | Range               |
|----------------------------------------------------------------------------------------------|------------|---------------------|
| hasLikertAns_is_well-prepared_for_class                                                      | Respondent | xsd:positiveInteger |
| hasLikertAns_clearly_communicates_his_expectations_for_student_preparation_and_participation | Respondent | xsd:positiveInteger |
| hasLikertAns_uses_class_time_effectively                                                     | Respondent | xsd:positiveInteger |
| hasLikertAns_has_clear_expectations_for_assigned_work                                        | Respondent | xsd:positiveInteger |
| hasLikertAns_encourages_student_participation                                                | Respondent | xsd:positiveInteger |
| hasLikertAns_clearly_answers_questions                                                       | Respondent | xsd:positiveInteger |
| hasLikertAns_treats_students_with_respect                                                    | Respondent | xsd:positiveInteger |
| hasLikertAns_effectively_directs_and_stimulates_discussion                                   | Respondent | xsd:positiveInteger |
| hasLikertAns_effectively_encourages_students_to_ask_questions_and_give_answers               | Respondent | xsd:positiveInteger |
| hasOEAnswer_Change                                                                           | Respondent | xsd:string          |
| hasOEAnswer_LikeBest                                                                         | Respondent | xsd:string          |
| hasOEAnswer_Strengths                                                                        | Respondent | xsd:string          |

Table 4.4: Data Properties and Their Domain and Range

| Class              | Individuals                                                  |
|--------------------|--------------------------------------------------------------|
| Respondent         | 1, 2, 3, ... , 59                                            |
| Survey             | CS280/202210, CS499+900/202210, CS730/202210                 |
| SurveyCollection   | Collection1, Collection2                                     |
| Event              | FinalExam, Midterm                                           |
| CollectionID       | CS280/202210/Collection1                                     |
| SemesterID         | 202210, 202220, 202230                                       |
| CourseID           | CS280, CS499+900, CS730                                      |
| OpenEndedQuestions | OEQuestion_LikeBest, OEQuestion_Change, OEQuestion_Strengths |
| OpenEndedAnswers   | OEAns_LikeBest, OEAns_Change, OEAns_Strengths                |
| LikertScale5       | 1_Never, 2_Rarely, 3_Sometimes, 4_Often, 5_Always            |

Table 4.5: Classes and their Individuals

#### 4.1.5 Final Class Hierarchy for Survey Ontology

The final class hierarchy in the OWL ontology for feedback survey using protégé, after using the HermiT 1.4.3.456 reasoner, would be as shown in Figure 4.7.

The blue back arrow (“Survey” and “SurveyCollection” class) in front of the yellow

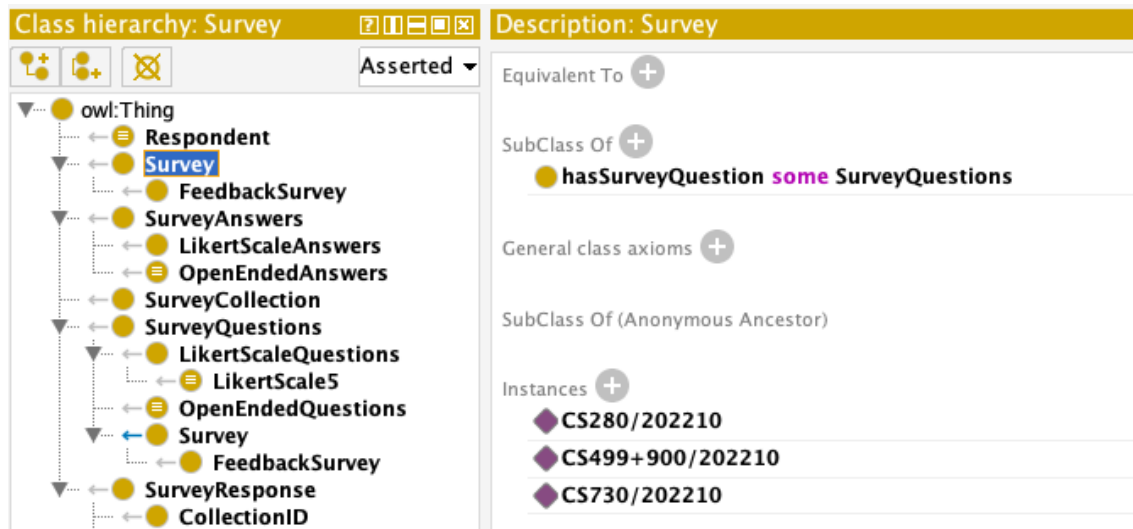


Figure 4.6: Individuals for Survey Class

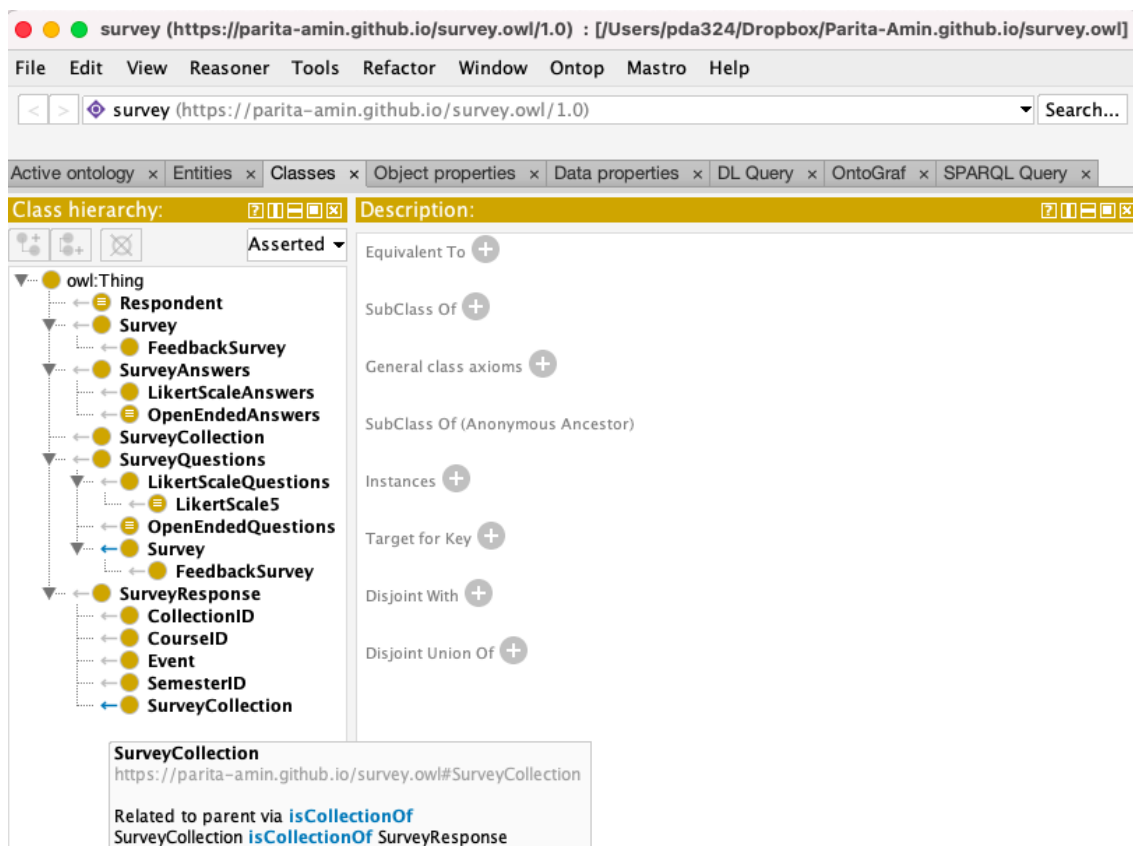


Figure 4.7: Class Hierarchy for the Final Version of Survey Ontology

solid dot, which indicates class, show parent/child relationship other than that of Sub-ClassOf. This feature can be enabled and disabled by selecting “Display relationship in class hierarchy” option from the “View” menu of protégé. Figure 4.7 shows the relation indicated by the blue back arrow.

#### 4.1.6 Data Validation Using SHACL

SHACL4P is a protégé plugin for SHACL, which uses “shapes” to describe constraints. SHACL can be used to validate the manually entered data which are stored in spreadsheets. For feedback survey, the likert answers can only have values 1, 2, 3, 4, 5, or No Answer (blank cell). To restrict the values of data properties corresponding to likert questions in Figure 4.5, SHACL4P has been used.

Protégé offers a view for SHACL editor as well as SHACL constraint violations. For successful working of SHACL4P, a reasoner should be enabled. The SHACL editor provides three buttons, namely, “Open”, “Save” , and “Validate”. After opening the shapes file (Open button), changes can be made and saved (Save button). Where as the Validate button allows users to validate the data. Figure 4.8 shows a sample “SurveyShapes.txt” file opened in SHACL editor of protégé.

On clicking the Validate button, the summary of violated constraints is displayed on the SHACL constraint violations view in protégé. It contains the details like “Severity”, “SourceShape”, “Message”, “FocusNode”, “Path”, and “Value” as shown in Figure 4.9.

## 4.2 Querying Survey Ontology in Protégé

The ontology vocabularies can be queried using query languages like DL query<sup>2</sup> and SPARQL. Protégé offers a plugin for DL as well as SPARQL queries which are discussed

---

<sup>2</sup>[https://protegewiki.stanford.edu/wiki/DL\\_Query](https://protegewiki.stanford.edu/wiki/DL_Query)

SHACL editor:

OpenSaveValidate

```

@prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
@prefix sh: <http://www.w3.org/ns/shacl#> .
@prefix xsd: <http://www.w3.org/2001/XMLSchema#> .
@prefix rdfs: <http://www.w3.org/2000/01/rdf-schema#> .
@prefix survey: <https://parita-amin.github.io/survey.owl#> .
@prefix owl: <http://www.w3.org/2002/07/owl#> .

survey:RespondentShape
  a sh:NodeShape ;
  sh:targetClass survey:Respondent ; # Applies to all Respondents

  sh:property [
    sh:path survey:hasLikertAns_clearly_answers_questions ; # constrains the values of survey:hasLikertAns_clearly_answers_questions
    sh:datatype xsd:positiveInteger ;
    sh:minInclusive 1 ;
    sh:maxInclusive 5 ;
    sh:severity sh:Warning ;
  ] ;

  sh:closed false ;
  sh:ignoredProperties ( rdf:type owl:topDataProperty owl:topObjectProperty ) ;
  .
##### add SHACL vocabulary #####

```

Figure 4.8: Data Validation using SHACL Editor

SHACL constraint violations: 1593

| Severity | SourceShape                        | Message                                                            | FocusNode                                                                                                 | Path | Value |
|----------|------------------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------|-------|
| Warning  | http://www.w3.org/ns/shacl#Warning | bb5a1ac8f... Cannot compare with 1                                 | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_questions      | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | bb5a1ac8f... Cannot compare with 5                                 | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_questions      | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | bb5a1ac8f... Value must be a valid literal of type positiveInteger | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_questions      | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 22f8124d... Cannot compare with 1                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_his...    | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 22f8124d... Cannot compare with 5                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_his...    | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 22f8124d... Value must be a valid literal of type positiveInteger  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_his...    | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | c1818e90... Cannot compare with 1                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_sti... | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | c1818e90... Cannot compare with 5                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_sti... | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | c1818e90... Value must be a valid literal of type positiveInteger  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_sti... | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 92359815... Cannot compare with 1                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_stu...  | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 92359815... Cannot compare with 5                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_stu...  | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 92359815... Value must be a valid literal of type positiveInteger  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_stu...  | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 127be816... Cannot compare with 1                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_partic...   | 3    | 3     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 127be816... Cannot compare with 5                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_partic...   | 3    | 3     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 127be816... Value must be a valid literal of type positiveInteger  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_partic...   | 3    | 3     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 088f2ba8... Cannot compare with 1                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_fo...   | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 088f2ba8... Cannot compare with 5                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_fo...   | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 088f2ba8... Value must be a valid literal of type positiveInteger  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_fo...   | 1    | 1     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 51c5d0d3... Cannot compare with 1                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_for_class     | 2    | 2     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 51c5d0d3... Cannot compare with 5                                  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_for_class     | 2    | 2     |
| Warning  | http://www.w3.org/ns/shacl#Warning | 51c5d0d3... Value must be a valid literal of type positiveInteger  | http://127.0.0.1:5984/survey/parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_for_class     | 2    | 2     |

Figure 4.9: SHACL Constraint Violations

in this section.

### 4.2.1 DL Query

Vasilevsky<sup>3</sup> defines DL query as a class expression that is constructed using constructs such as ‘and’ (corresponding to set intersection) and ‘some’. Users can rapidly check that class definitions encompass the right subclasses by running them via the DL Query tab. Alternately, one can examine arbitrary descriptions for class membership without having to build placeholders for specified classes. The DL Query tab can be opened using Tabs option under Windows menu. It is important to configure a reasoner to successfully express a DL query. Figure 4.10 shows expression of a sample DL query on the survey ontology in protégé.

### 4.2.2 SPARQL Query

According to W3C [26], SPARQL queries use conjunctions, disjunctions, aggregation, subqueries, negation, and other operations to define queries and optional graph patterns. Protégé offers plugins for “SPARQL Query” and “Snap SPARQL Query”.

#### 4.2.2.1 Using SPARQL Query Plugin

SPARQL plugin in protégé is used to express simple queries on ontologies like displaying classes and subclasses. For instance, consider the following query:

```
SELECT ?subject ?object
WHERE { ?subject rdfs:subClassOf ?object }
```

---

<sup>3</sup>[https://ontology101tutorial.readthedocs.io/en/latest/EXERCISE\\_BasicDL\\_Queries.html](https://ontology101tutorial.readthedocs.io/en/latest/EXERCISE_BasicDL_Queries.html)

DL query:

### Query (class expression)

Respondent and (respondedToSurvey some Survey)

Execute Add to ontology

### Query results

Equivalent classes (1 of 1)

|                        |   |
|------------------------|---|
| <div></div> Respondent | ? |
|------------------------|---|

Subclasses (1 of 2)

|                              |   |
|------------------------------|---|
| <div></div> OpenEndedAnswers | ? |
|------------------------------|---|

Instances (6 of 6)

|                             |   |
|-----------------------------|---|
| <div></div> 1               | ? |
| <div></div> 2               | ? |
| <div></div> 3               | ? |
| <div></div> OEAns_Change    | ? |
| <div></div> OEAns_LikeBest  | ? |
| <div></div> OEAns_Strengths | ? |

Figure 4.10: DL Query on Survey Ontology

Figure 4.11 shows the result of expression of SPARQL query on survey ontology. Here, the query is used to display “Class” and “subClassOf” with column titles subject and object respectively.

| SPARQL query:                                                                                                                                                                                                                                                                                                             |                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| <pre> PREFIX rdf: &lt;http://www.w3.org/1999/02/22-rdf-syntax-ns#&gt; PREFIX owl: &lt;http://www.w3.org/2002/07/owl#&gt; PREFIX rdfs: &lt;http://www.w3.org/2000/01/rdf-schema#&gt; PREFIX xsd: &lt;http://www.w3.org/2001/XMLSchema#&gt; SELECT ?subject ?object       WHERE { ?subject rdfs:subClassOf ?object } </pre> |                                          |
| subject                                                                                                                                                                                                                                                                                                                   | object                                   |
| CollectionID                                                                                                                                                                                                                                                                                                              | SurveyResponse                           |
| Survey                                                                                                                                                                                                                                                                                                                    | ● hasSurveyQuestion some SurveyQuestions |
| LikertScaleAnswers                                                                                                                                                                                                                                                                                                        | SurveyAnswers                            |
| OpenEndedAnswers                                                                                                                                                                                                                                                                                                          | SurveyAnswers                            |
| LikertScale5                                                                                                                                                                                                                                                                                                              | LikertScaleQuestions                     |
| SemesterID                                                                                                                                                                                                                                                                                                                | SurveyResponse                           |
| CourseID                                                                                                                                                                                                                                                                                                                  | SurveyResponse                           |
| OpenEndedQuestions                                                                                                                                                                                                                                                                                                        | SurveyQuestions                          |
| Event                                                                                                                                                                                                                                                                                                                     | SurveyResponse                           |
| LikertScaleQuestions                                                                                                                                                                                                                                                                                                      | SurveyQuestions                          |
| FeedbackSurvey                                                                                                                                                                                                                                                                                                            | Survey                                   |
| SurveyCollection                                                                                                                                                                                                                                                                                                          | ● isCollectionOf some SurveyResponse     |

Figure 4.11: SPARQL Query on Survey Ontology

#### 4.2.2.2 Using Snap SPARQL Query Plugin

The Snap SPARQL plugin in protégé is generally used to express comparatively complex queries on ontologies like displaying description of individuals. For instance, consider the following query:



```

SELECT (STR(?lab) AS ?Class) ?Individuals WHERE {
    ?Individuals rdf:type owl:NamedIndividual .
    OPTIONAL {?Individuals rdf:type ?lab}
}
ORDER BY ?Class

```

Figure 4.12 shows the result of expression of Snap SPARQL query on survey ontology. It is necessary to enable a reasoner for successful working of Snap SPARQL query. Here, the query is used to display “Class” and “Individual” with column titles ?Class and ?Individuals respectively.

**Snap SPARQL Query:**
⏏ ⏏ ⏏

```

PREFIX owl: <http://www.w3.org/2002/07/owl#>
PREFIX rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#>
PREFIX rdfs: <http://www.w3.org/2000/01/rdf-schema#>

SELECT (STR(?lab) AS ?Class) ?Individuals WHERE {
    ?Individuals rdf:type owl:NamedIndividual .
    OPTIONAL { ?Individuals rdf:type ?lab }
}
ORDER BY ?Class

```

Execute

| ?Class                                                                                                                    | ?Individuals                                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <a href="https://parita-amin.github.io/survey.owl#CourseID">https://parita-amin.github.io/survey.owl#CourseID</a>         | <a href="https://parita-amin.github.io/survey.owl#CS499+900">&lt;https://parita-amin.github.io/survey.owl#CS499+900&gt;</a>     |
| <a href="https://parita-amin.github.io/survey.owl#Event">https://parita-amin.github.io/survey.owl#Event</a>               | <a href="https://parita-amin.github.io/survey.owl#FinalExam">&lt;https://parita-amin.github.io/survey.owl#FinalExam&gt;</a>     |
| <a href="https://parita-amin.github.io/survey.owl#Event">https://parita-amin.github.io/survey.owl#Event</a>               | <a href="https://parita-amin.github.io/survey.owl#Midterm">&lt;https://parita-amin.github.io/survey.owl#Midterm&gt;</a>         |
| <a href="https://parita-amin.github.io/survey.owl#LikertScale5">https://parita-amin.github.io/survey.owl#LikertScale5</a> | <a href="https://parita-amin.github.io/survey.owl#1_Never">&lt;https://parita-amin.github.io/survey.owl#1_Never&gt;</a>         |
| <a href="https://parita-amin.github.io/survey.owl#LikertScale5">https://parita-amin.github.io/survey.owl#LikertScale5</a> | <a href="https://parita-amin.github.io/survey.owl#2_Rarely">&lt;https://parita-amin.github.io/survey.owl#2_Rarely&gt;</a>       |
| <a href="https://parita-amin.github.io/survey.owl#LikertScale5">https://parita-amin.github.io/survey.owl#LikertScale5</a> | <a href="https://parita-amin.github.io/survey.owl#3_Sometimes">&lt;https://parita-amin.github.io/survey.owl#3_Sometimes&gt;</a> |
| <a href="https://parita-amin.github.io/survey.owl#LikertScale5">https://parita-amin.github.io/survey.owl#LikertScale5</a> | <a href="https://parita-amin.github.io/survey.owl#4_Often">&lt;https://parita-amin.github.io/survey.owl#4_Often&gt;</a>         |
| <a href="https://parita-amin.github.io/survey.owl#LikertScale5">https://parita-amin.github.io/survey.owl#LikertScale5</a> | <a href="https://parita-amin.github.io/survey.owl#5_Always">&lt;https://parita-amin.github.io/survey.owl#5_Always&gt;</a>       |

84 results

Figure 4.12: Snap SPARQL Query on Survey Ontology

## 4.3 Conversion from Spreadsheets to Linked Data For Survey using OpenRefine

Primarily, OpenRefine<sup>4</sup> has been used to convert the data stored in spreadsheets to Turtle and RDF files using the methodology described in section 3.3. Using survey ontology in OpenRefine, the CSV file consisting of survey responses is converted into Turtle and RDF/XML files.

After importing the CSV and creating a new project, the next step is to manage RDF Schema alignment to describe the data stored in CSV in terms of linked data vocabulary. On selecting “Edit RDF Skeleton” from the menu of RDF Extension, an “RDF Schema alignment” dialog box appears which offers two options: RDF Skeleton and RDF Preview. The base URI for the RDF schema alignment has been set to:

Base URI: `https://parita-amin.github.io/survey.owl#`

### 4.3.1 RDF Skeleton

Figure 4.13 shows RDF skeleton for CSV using survey ontology. It consists of a list of prefixes along with options for adding and managing prefixes; URI for index count; and the fields in the project with an option of using linked data vocabularies to describe them.

#### 4.3.1.1 Prefixes

- OpenRefine offers some default prefixes, namely, “rdf”, “owl”, “rdfs”, and “foaf”, which can be used and managed as necessary.
- It also allows adding other prefixes which can be done by clicking on “+Add”

---

<sup>4</sup><https://openrefine.org/>

### RDF Schema alignment

The RDF schema alignment skeleton below specifies how the RDF data that will get generated from your grid-shaped data. The cells in each record of your data will get placed into nodes within the skeleton. Configure the skeleton by specifying which column to substitute into which node.

Base URI: <https://parita-amin.github.io/survey.owl#> [Edit](#)

RDF skeleton

RDF Preview

Available prefixes:

rdf

owl

rdfs

foaf

survey

+ Add

⚙ Manage

ID URI

Add type

✕

>

survey:hasLikertAns\_is\_well-prep...

→

Q01\_Rate instructor->1. The instructor is well-prepared for class Cell

✕

>

survey:hasLikertAns\_clearly\_comm...

→

Q01\_Rate instructor->2. The instructor clearly communicates his expectations for student preparation and participation Cell

✕

>

survey:hasLikertAns\_uses\_class\_t...

→

Q01\_Rate instructor->3. The instructor uses class time effectively Cell

✕

>

survey:hasLikertAns\_has\_clear\_ex...

→

Q01\_Rate instructor->4. The instructor has clear expectations for assigned work Cell

✕

>

survey:hasLikertAns\_encourages\_s...

→

Q01\_Rate instructor->5. The instructor encourages student

✕

>

survey:hasLikertAns\_clearly\_answ...

→

Q01\_Rate instructor->6. The instructor clearly answers questions Cell

✕

>

survey:hasLikertAns\_treats\_stude...

→

Q01\_Rate instructor->7. The instructor treats students with respect Cell

✕

>

survey:hasLikertAns\_effectively\_...

→

Q01\_Rate instructor->8. The instructor effectively directs and stimulates discussion Cell

✕

>

survey:hasLikertAns\_effectively\_...

→

Q01\_Rate instructor->9. The instructor effectively encourages students to ask questions and give answers Cell

✕

>

survey:hasOEAnswer\_LikeBest→

Q02\_Like best Cell

✕

>

survey:hasOEAnswer\_Change→

Q03\_Change Cell

✕

>

survey:hasOEAnswer\_Strengths→

Q04\_Strengths Cell

Add property

Add another root node

Save

OK

Cancel

Figure 4.13: RDF Skeleton for CSV using Survey Ontology

option as shown in Figure 4.14. The prefix “survey” has been added to the list with URI `https://parita-amin.github.io/survey.owl#`.

### Add new prefix

Prefix:

URI:

Figure 4.14: Add New Prefix for Survey Ontology in OpenRefine

- The prefixes can be deleted and/or refreshed using “Manage” option as shown in Figure 4.15.

### List of defined prefixes

| Prefix | URI                                                      | Delete | Refresh |
|--------|----------------------------------------------------------|--------|---------|
| rdf    | <code>http://www.w3.org/1999/02/22-rdf-syntax-ns#</code> | Delete | Refresh |
| owl    | <code>http://www.w3.org/2002/07/owl#</code>              | Delete | Refresh |
| rdfs   | <code>http://www.w3.org/2000/01/rdf-schema#</code>       | Delete | Refresh |
| foaf   | <code>http://xmlns.com/foaf/0.1/</code>                  | Delete | Refresh |
| survey | <code>https://parita-amin.github.io/survey.owl#</code>   | Delete | Refresh |

Figure 4.15: Manage Prefixes in OpenRefine

#### 4.3.1.2 RDF Node for Index

Index is a unique identifier for the number of records in the table. Figure 4.16 shows options available for the settings of the RDF Node for index. It offers options for “Use content...”, “Content used...”, and “Use expression...”. For survey data, URI for “ID” has been set as unique index. On clicking “Preview edit”, format of expression to display “ID” can be modified.

**RDF node**

**Use content...**

- ☐ (Row index)
- ☐ Response
- ☐ Submitted on:
- ☐ Institution
- ☐ Department
- ☐ Course
- ☐ Group
- ☒ ID
- ☐ Full name
- ☐ Username
- ☐ Complete
- ☐ Q01\_Rate instructor->1. The instructor is well-prepared for class
- ☐ Q01\_Rate instructor->2. The instructor clearly communicates his expectations for student preparation and participation

**Content used ...**

- ☒ URI
- ☐ Text
- ☐ Language
- ☐ Integer
- ☐ Non-integer
- ☐ Date (YYYY-MM-DD)
- ☐ Date/time (YYYY-MM-DD HH:MM:SS)
- ☐ Boolean
- ☐ Custom (specify type URI)
- ☐ Blank

**Use expression...**

value

[Preview edit](#)

OK

Cancel

Figure 4.16: RDF Node Settings for Index ID of Records in CSV in OpenRefine

#### 4.3.1.3 Describing Fields in terms of Linked Data

The next step is describing the CSV data in terms of linked open vocabularies. “Available prefixes” allows using vocabularies described in the list of ontologies. Figure 4.17 shows the list of classes and properties along with the ontology prefix that

match the input string. The vocabulary can be selected for each field of the CSV to represent the data.

For instance, “survey:hasLikertAns\_is\_well\_prepared\_for\_class” property can be assigned to the data corresponding to the field, “Q01\_Rate instructor->1. The instructor is well-prepared for class” of the CSV.

### RDF Schema alignment

The RDF schema alignment skeleton below specifies how the RDF data that will get generated from your grid-shaped data. The cells in each record of your data will get placed into nodes within the skeleton. Configure the skeleton by specifying which column to substitute into which node.

Base URI: <https://parita-amin.github.io/survey.owl#> [Edit](#)

RDF skeleton

RDF Preview

Available prefixes: `rdf owl rdfs foaf survey` [+ Add](#) [⚙ Manage](#)

ID URI

Add type

☐ [X](#) [>](#) [property?](#) [→](#)

[X](#) [>](#) [property?](#) [→](#)

[X](#) [>](#) [property?](#) [→](#)

[X](#) [>](#) [property?](#) [→](#)

Search for property:

Select an item from the list:

- `survey:hasLikertScaleAnswer` <https://parita-amin.github.io>
- `survey:hasLikertAns_clearly_an` <https://parita-amin.github.io>
- `survey:hasLikertAns_clearly_co` <https://parita-amin.github.io>
- `survey:hasLikertAns_effectively` <https://parita-amin.github.io>
- `survey:hasLikertAns_effectively` <https://parita-amin.github.io>
- `survey:hasLikertAns_encourage` <https://parita-amin.github.io>
- `survey:hasLikertAns_has_clear` <https://parita-amin.github.io>
- `survey:hasLikertAns_is_well-pre` <https://parita-amin.github.io>
- `survey:hasLikertAns_treats_stu` <https://parita-amin.github.io>
- `survey:hasLikertAns_uses_clas` <https://parita-amin.github.io>

Your item not in the list?

[Add it](#) (Shift+Enter)

`https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_for_class`

label:

description:

[Add another root node](#)

OK

Cancel

Figure 4.17: Using Linked Data to Describe the Fields in CSV for Feedback Responses

### 4.3.2 RDF Preview

Once the RDF skeleton is set, “RDF Preview” can be used to view the description of CSV data. The fields of data that were not described in RDF skeleton, do not appear in RDF Preview. It consists of a Turtle representation of the first 10 rows of the resultant linked data.

Figure 4.18 depicts an RDF Preview of using survey vocabulary to describe the data stored in CSV. It includes all the prefixes for vocabularies from “Available prefixes” along with their URIs; a URI for the “ID” for each record; the vocabulary and value for the fields corresponding to the responses to all the likert-scale as well as open-ended questions for each record.

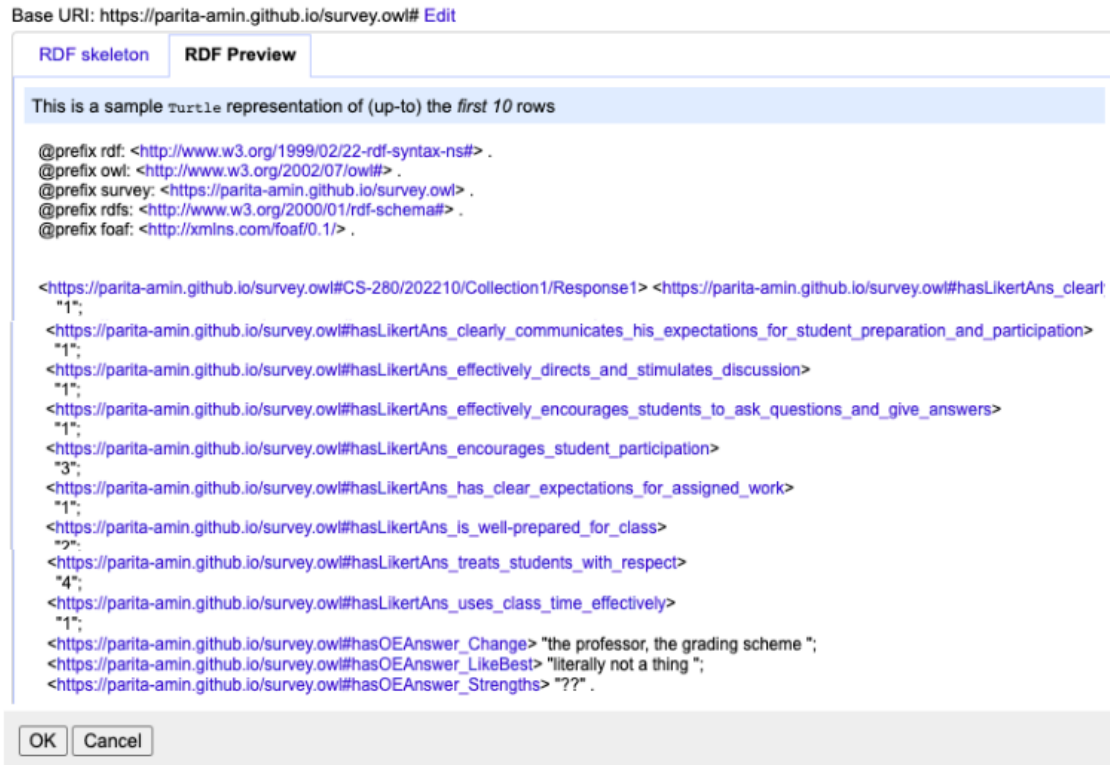


Figure 4.18: RDF Preview for CSV using Survey Ontology

Any modifications in RDF skeleton will reflect on the RDF preview. Once the data in CSV has been converted to linked data, it can be stored as RDF/XML and Turtle.

## 4.4 Publishing Survey Vocabulary with License

As mentioned in section 3.4, it is necessary to specify an appropriate license for linked open data. When there is a clear declaration regarding the source, ownership,

and conditions associated to the use of the public data, data reuse is more likely to happen.

- Publishing Survey Vocabulary:

The linked open vocabulary for feedback survey that Dr. Hepting solicits from his students in the classes he teaches. The dataset can be accessed as Turtle file from my website<sup>5</sup> or can be viewed by visiting the link to the Turtle file<sup>6</sup> on my website (see Figure 4.19).

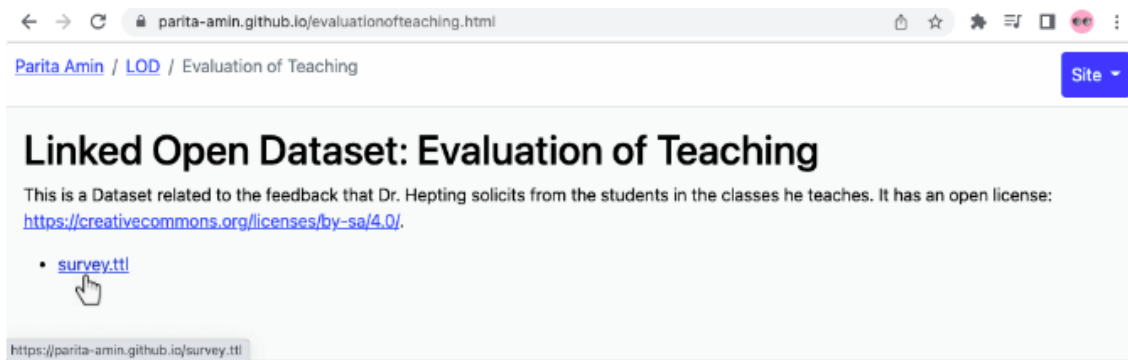


Figure 4.19: Link to Turtle File containing Survey Vocabulary

- License:

The linked open dataset discussed in this research has an open license: “Attribution-ShareAlike 4.0 International”<sup>7</sup>. The degree of transparency increases as more data become available under an open license. This makes it possible for the user to investigate the relationships in the data and use it effectively.

---

<sup>5</sup><https://parita-amin.github.io/sample.ttl>

<sup>6</sup><https://parita-amin.github.io/evaluationofteaching.html>

<sup>7</sup><https://creativecommons.org/licenses/by-sa/4.0/>



## 4.5 Visualizing Survey Ontology

This section consists of the results of using two ontology visualizations tools for survey vocabulary, namely, OntoGraf and WebVOWL.

### 4.5.1 Representation of Survey Ontology in OntoGraf

To start with the graph formation, the classes “owl:Thing”, “Survey”, “SurveyResponse”, “SurveyQuestions”, “SurveyAnswers”, “Respondent”, and “SurveyCollection” were selected followed by their expansion by double-clicking them. This expansion adds all the classes that are connected to the classes. The classes connected includes both the subclasses as well as the ones linked through the object properties and individuals.

Figure 4.20 shows the graph generated using OntoGraf for survey ontology. Solid blue lines in the graph are used to denote the relationships between the classes and their subclasses whereas dashed lines are used to represent the object properties. “Arc Types” represent symbols for different object properties. The classes are denoted by yellow solid dot followed by the class name where as individuals are denoted by purple solid diamond followed by the instance name.

### 4.5.2 Representation of Survey Ontology in WebVOWL

Figure 4.21 shows the graphical representation of the survey ontology using WebVOWL. The figure focuses on only some of the class-subclass relationships and some of the object properties. The metadata and the statistics of the node (circle) or the edge (line) can be retrieved by clicking on them. The entities (classes) and their relationships (object and datatype properties) can be presented or restricted using filters. The VOWL graph can be exported as an Scalable Vector Graphics (SVG) image file or a JSON code file.

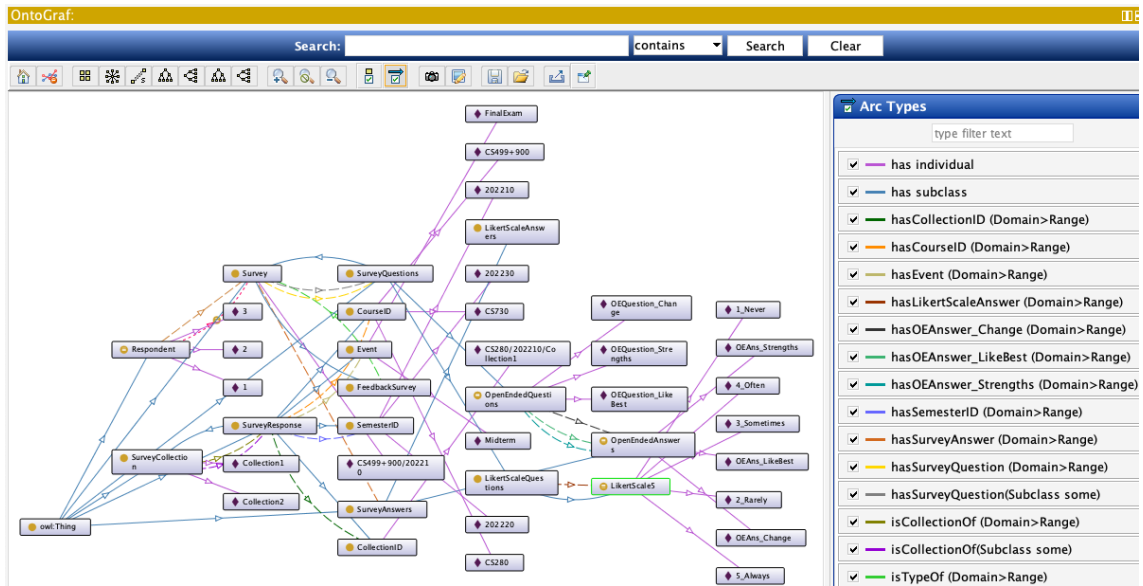


Figure 4.20: OntoGraf for Survey Ontology

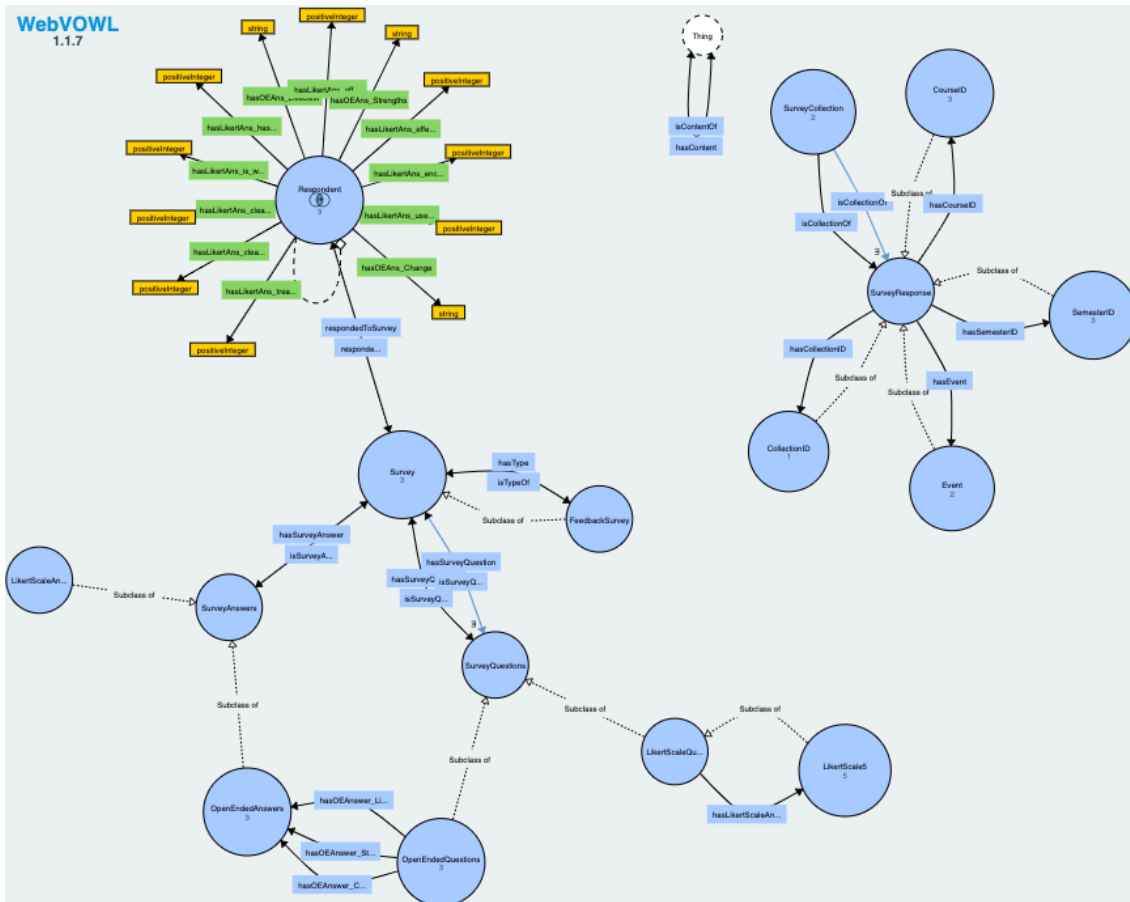


Figure 4.21: WebVOWL for Survey Ontology

# Chapter 5

## Conclusion and Future Work

This Chapter focuses on the prime offerings of this research work where one of the sections includes the conclusions drawn from the work done and the other discusses future work that can be done to succeed in this research.

### 5.1 Conclusion

This thesis work describes a new attempt on developing a linked open data instrument for feedback surveys. It focuses on the issues encountered and the user experience of various tools and references used for the modelling of the instrument and for data visualization. The thesis revolves around some fundamental topics like Semantic Web, Linked Open Data, RDF, and OWL ontologies. It also describes how and why Protégé has been used over other ontology development tools to describe survey vocabularies. The thesis can be considered as a guide for the researchers who are interested in exploring this lesser known aspect of semantic web.

The thesis includes a detailed background study on the fundamental topics, the usability of protégé, and discussion on some tools for linked open data visualizations. Chapter 3 describes the methodology followed to describe, convert, visualize, and publish linked open data for survey in Chapter 4 using protégé, OpenRefine, and the visual

representation of the ontology toward the end.

## 5.2 Future Work

This thesis also offers a number of future development options like building a real-time linked open data application for feedback surveys that follows the linked data life cycle.

Web Scraping (or Web Extraction) is a method of extracting desired data from the resources on the WWW into a separate file for data retrieval and data analysis. Data Extraction is one of the steps in the linked data life cycle that can be explored in future research to facilitate use of data that has already been published to the web with HTML tables.

Versioning of the survey ontology is a topic of interest. The ontology vocabularies can be reused for appropriate applications but they may need to be updated over time. Hence, ontology versioning and version management of the survey instrument for this feedback survey, as well as for other types of surveys is an aspect of this research that can be explored.

Developing a data entry form for the feedback survey instrument that can be defined, in part, directly from the survey ontology would facilitate recording of survey responses collected offline.

# Appendix A

## OWL Vocabulary for Survey: survey.owl

```
1 <?xml version="1.0" ?>
2 <rdf:RDF
  xmlns="http://www.semanticweb.org/pda324/ontologies/untitled-ontology-153#"
3
  xml:base="http://www.semanticweb.org/pda324/ontologies/untitled-ontology-153"
4   xmlns:owl="http://www.w3.org/2002/07/owl#"
5   xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
6   xmlns:xml="http://www.w3.org/XML/1998/namespace"
7   xmlns:xsd="http://www.w3.org/2001/XMLSchema#"
8   xmlns:rdfs="http://www.w3.org/2000/01/rdf-schema#"
9   xmlns:survey="https://parita-amin.github.io/survey.owl#">
10  <owl:Ontology rdf:about="https://parita-amin.github.io/survey.owl">
11    <owl:versionIRI
12      rdf:resource="https://parita-amin.github.io/survey.owl/1.0" />
13    </owl:Ontology>
14
15    <!--
16      //////////////////////////////////////
17      // Object Properties
18      //////////////////////////////////////
19      -->
20
21    <!-- https://parita-amin.github.io/survey.owl#hasCollectionID -->
22
23    <owl:ObjectProperty
24      rdf:about="https://parita-amin.github.io/survey.owl#hasCollectionID">
25      <rdfs:domain
26        rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse" />
27      <rdfs:range
28        rdf:resource="https://parita-amin.github.io/survey.owl#CollectionID" />
29    </owl:ObjectProperty>
30
31    <!-- https://parita-amin.github.io/survey.owl#hasContent -->
```

```

28
29   <owl:ObjectProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasContent">
30     <owl:inverseOf
rdf:resource="https://parita-amin.github.io/survey.owl#isContentOf"/>
31   </owl:ObjectProperty>
32
33   <!-- https://parita-amin.github.io/survey.owl#hasCourseID -->
34
35   <owl:ObjectProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasCourseID">
36     <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse"/>
37     <rdfs:range
rdf:resource="https://parita-amin.github.io/survey.owl#CourseID"/>
38   </owl:ObjectProperty>
39
40   <!-- https://parita-amin.github.io/survey.owl#hasEvent -->
41
42   <owl:ObjectProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasEvent">
43     <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse"/>
44     <rdfs:range
rdf:resource="https://parita-amin.github.io/survey.owl#Event"/>
45   </owl:ObjectProperty>
46
47   <!-- https://parita-amin.github.io/survey.owl#hasLikertScaleAnswer
-->
48
49   <owl:ObjectProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasLikertScaleAnswer">
50     <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#LikertScaleQuestions"/>
51     <rdfs:range
rdf:resource="https://parita-amin.github.io/survey.owl#LikertScale5"/>
52   </owl:ObjectProperty>
53
54   <!-- https://parita-amin.github.io/survey.owl#hasOEAnswer_Change -->
55
56   <owl:ObjectProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasOEAnswer_Change">
57     <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedQuestions"/>
58     <rdfs:range
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedAnswers"/>
59   </owl:ObjectProperty>
60
61   <!-- https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest
-->
62
63   <owl:ObjectProperty

```

```

64   rdf:about="https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest">
    <rdfs:domain
65   rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedQuestions"/>
    <rdfs:range
66   rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedAnswers"/>
    </owl:ObjectProperty>
67
68   <!-- https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths
    -->
69
70   <owl:ObjectProperty
    rdf:about="https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths">
71   <rdfs:domain
    rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedQuestions"/>
72   <rdfs:range
    rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedAnswers"/>
73   </owl:ObjectProperty>
74
75   <!-- https://parita-amin.github.io/survey.owl#hasSemesterID -->
76
77   <owl:ObjectProperty
    rdf:about="https://parita-amin.github.io/survey.owl#hasSemesterID">
78   <rdfs:domain
    rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse"/>
79   <rdfs:range
    rdf:resource="https://parita-amin.github.io/survey.owl#SemesterID"/>
80   </owl:ObjectProperty>
81
82   <!-- https://parita-amin.github.io/survey.owl#hasSurveyAnswer -->
83
84   <owl:ObjectProperty
    rdf:about="https://parita-amin.github.io/survey.owl#hasSurveyAnswer">
85   <rdfs:subPropertyOf
    rdf:resource="https://parita-amin.github.io/survey.owl#hasContent"/>
86   <owl:inverseOf
    rdf:resource="https://parita-amin.github.io/survey.owl#isSurveyAnswerOf"/>
87   <rdfs:domain
    rdf:resource="https://parita-amin.github.io/survey.owl#Survey"/>
88   <rdfs:range
    rdf:resource="https://parita-amin.github.io/survey.owl#SurveyAnswers"/>
89   </owl:ObjectProperty>
90
91   <!-- https://parita-amin.github.io/survey.owl#hasSurveyQuestion -->
92
93   <owl:ObjectProperty
    rdf:about="https://parita-amin.github.io/survey.owl#hasSurveyQuestion">
94   <rdfs:subPropertyOf
    rdf:resource="https://parita-amin.github.io/survey.owl#hasContent"/>
95   <owl:inverseOf
    rdf:resource="https://parita-amin.github.io/survey.owl#isSurveyQuestionOf"/>
96   <rdfs:domain
    rdf:resource="https://parita-amin.github.io/survey.owl#Survey"/>

```

```

97     <rdfs:range
98     rdf:resource="https://parita-amin.github.io/survey.owl#SurveyQuestions" />
99     </owl:ObjectProperty>
100
101     <!-- https://parita-amin.github.io/survey.owl#hasType -->
102
103     <owl:ObjectProperty
104     rdf:about="https://parita-amin.github.io/survey.owl#hasType">
105         <rdfs:inverseOf
106         rdf:resource="https://parita-amin.github.io/survey.owl#isTypeOf" />
107     </owl:ObjectProperty>
108
109     <!-- https://parita-amin.github.io/survey.owl#isCollectionOf -->
110
111     <owl:ObjectProperty
112     rdf:about="https://parita-amin.github.io/survey.owl#isCollectionOf">
113         <rdfs:domain
114         rdf:resource="https://parita-amin.github.io/survey.owl#SurveyCollection" />
115         <rdfs:range
116         rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse" />
117     </owl:ObjectProperty>
118
119     <!-- https://parita-amin.github.io/survey.owl#isContentOf -->
120
121     <owl:ObjectProperty
122     rdf:about="https://parita-amin.github.io/survey.owl#isContentOf">
123         <rdfs:subPropertyOf
124         rdf:resource="https://parita-amin.github.io/survey.owl#isContentOf" />
125     </owl:ObjectProperty>
126
127     <!-- https://parita-amin.github.io/survey.owl#isSurveyQuestionOf -->
128
129     <owl:ObjectProperty
130     rdf:about="https://parita-amin.github.io/survey.owl#isSurveyQuestionOf">
131         <rdfs:subPropertyOf
132         rdf:resource="https://parita-amin.github.io/survey.owl#isContentOf" />
133     </owl:ObjectProperty>
134
135     <!-- https://parita-amin.github.io/survey.owl#isTypeOf -->
136
137     <owl:ObjectProperty
138     rdf:about="https://parita-amin.github.io/survey.owl#isTypeOf">
139         <rdfs:domain
140         rdf:resource="https://parita-amin.github.io/survey.owl#FeedbackSurvey" />
141         <rdfs:range
142         rdf:resource="https://parita-amin.github.io/survey.owl#Survey" />
143     </owl:ObjectProperty>

```



```

135
136   <!-- https://parita-amin.github.io/survey.owl#respondedByRespondent
    -->
137
138   <owl:ObjectProperty
139     rdf:about="https://parita-amin.github.io/survey.owl#respondedByRespondent">
140     <owl:inverseOf
141       rdf:resource="https://parita-amin.github.io/survey.owl#respondedToSurvey"/>
142     </owl:ObjectProperty>
143
144   <!-- https://parita-amin.github.io/survey.owl#respondedToSurvey -->
145
146   <owl:ObjectProperty
147     rdf:about="https://parita-amin.github.io/survey.owl#respondedToSurvey">
148     <rdfs:domain
149       rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
150     <rdfs:range
151       rdf:resource="https://parita-amin.github.io/survey.owl#Survey"/>
152     </owl:ObjectProperty>
153
154   <!--
155     //////////////////////////////////////
156     // Data properties
157     //////////////////////////////////////
158     -->
159
160   <!--
161     https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_questions
162     -->
163
164   <owl:DatatypeProperty
165     rdf:about="https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_que
166     <rdfs:domain
167       rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
168     <rdfs:range
169       rdf:resource="http://www.w3.org/2001/XMLSchema#positiveInteger"/>
170     </owl:DatatypeProperty>
171
172   <!--
173     https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_his_expec
174     -->
175
176   <owl:DatatypeProperty
177     rdf:about="https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates
178     <rdfs:domain
179       rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
180     <rdfs:range
181       rdf:resource="http://www.w3.org/2001/XMLSchema#positiveInteger"/>
182     </owl:DatatypeProperty>
183
184   <!--
185     https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_stimula

```

```

170   →
171   <owl:DatatypeProperty
172     rdf:about="https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_"
173     <rdfs:domain
174       rdf:resource="https://parita-amin.github.io/survey.owl#Respondent" />
175     <rdfs:range
176       rdf:resource="http://www.w3.org/2001/XMLSchema#positiveInteger" />
177   </owl:DatatypeProperty>
178   <!--
179     https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_students_
180   →
181   <owl:DatatypeProperty
182     rdf:about="https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourage
183     <rdfs:domain
184       rdf:resource="https://parita-amin.github.io/survey.owl#Respondent" />
185     <rdfs:range
186       rdf:resource="http://www.w3.org/2001/XMLSchema#positiveInteger" />
187   </owl:DatatypeProperty>
188   <!--
189     https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_participatio
190   →
191   <owl:DatatypeProperty
192     rdf:about="https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
193     <rdfs:domain
194       rdf:resource="https://parita-amin.github.io/survey.owl#Respondent" />
195     <rdfs:range
196       rdf:resource="http://www.w3.org/2001/XMLSchema#positiveInteger" />
197   </owl:DatatypeProperty>
198   <!--
199     https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_for_assi
200   →
201   <owl:DatatypeProperty
202     rdf:about="https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectation
203     <rdfs:domain
204       rdf:resource="https://parita-amin.github.io/survey.owl#Respondent" />
205     <rdfs:range
206       rdf:resource="http://www.w3.org/2001/XMLSchema#positiveInteger" />
207   </owl:DatatypeProperty>
208   <!--
209     https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_for_class
210   →
211   <owl:DatatypeProperty
212     rdf:about="https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_for_

```

```

200     <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
201     <rdfs:range
rdf:resource="http://www.w3.org/2001/XMLSchema#positiveInteger"/>
202 </owl:DatatypeProperty>
203
204 <!--
https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_with_respect
-->
205
206 <owl:DatatypeProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_with
207     <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
208     <rdfs:range
rdf:resource="http://www.w3.org/2001/XMLSchema#positiveInteger"/>
209 </owl:DatatypeProperty>
210
211 <!--
https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_effectively
-->
212
213 <owl:DatatypeProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_eff
214     <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
215     <rdfs:range
rdf:resource="http://www.w3.org/2001/XMLSchema#positiveInteger"/>
216 </owl:DatatypeProperty>
217
218 <!-- https://parita-amin.github.io/survey.owl#hasOEAns_Change -->
219
220 <owl:DatatypeProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasOEAns_Change">
221     <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
222     <rdfs:range
rdf:resource="http://www.w3.org/2001/XMLSchema#string"/>
223 </owl:DatatypeProperty>
224
225 <!-- https://parita-amin.github.io/survey.owl#hasOEAns_LikeBest -->
226
227 <owl:DatatypeProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasOEAns_LikeBest">
228     <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
229     <rdfs:range
rdf:resource="http://www.w3.org/2001/XMLSchema#string"/>
230 </owl:DatatypeProperty>
231
232 <!-- https://parita-amin.github.io/survey.owl#hasOEAns_Strengths -->
233

```

```

234   <owl:DatatypeProperty
rdf:about="https://parita-amin.github.io/survey.owl#hasOEAns_Strengths">
235       <rdfs:domain
rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
236       <rdfs:range
rdf:resource="http://www.w3.org/2001/XMLSchema#string"/>
237   </owl:DatatypeProperty>
238
239   <!--
240   //////////////////////////////////////
241   //  Classes
242   //////////////////////////////////////
243   -->
244
245   <!-- https://parita-amin.github.io/survey.owl#CollectionID -->
246
247   <owl:Class
rdf:about="https://parita-amin.github.io/survey.owl#CollectionID">
248       <rdfs:subClassOf
rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse"/>
249   </owl:Class>
250
251   <!-- https://parita-amin.github.io/survey.owl#CourseID -->
252
253   <owl:Class
rdf:about="https://parita-amin.github.io/survey.owl#CourseID">
254       <rdfs:subClassOf
rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse"/>
255   </owl:Class>
256
257   <!-- https://parita-amin.github.io/survey.owl#Event -->
258
259   <owl:Class
rdf:about="https://parita-amin.github.io/survey.owl#Event">
260       <rdfs:subClassOf
rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse"/>
261   </owl:Class>
262
263   <!-- https://parita-amin.github.io/survey.owl#FeedbackSurvey -->
264
265   <owl:Class
rdf:about="https://parita-amin.github.io/survey.owl#FeedbackSurvey">
266       <rdfs:subClassOf
rdf:resource="https://parita-amin.github.io/survey.owl#Survey"/>
267   </owl:Class>
268
269   <!-- https://parita-amin.github.io/survey.owl#LikertScale5 -->
270
271   <owl:Class
rdf:about="https://parita-amin.github.io/survey.owl#LikertScale5">
272       <owl:equivalentClass>
273       <owl:Class>

```

```

274         <owl:oneOf rdf:parseType="Collection">
275             <rdf:Description
rdf:about="https://parita-amin.github.io/survey.owl#1_Never"/>
276             <rdf:Description
rdf:about="https://parita-amin.github.io/survey.owl#2_Rarely"/>
277             <rdf:Description
rdf:about="https://parita-amin.github.io/survey.owl#3_Sometimes"/>
278             <rdf:Description
rdf:about="https://parita-amin.github.io/survey.owl#4_Often"/>
279             <rdf:Description
rdf:about="https://parita-amin.github.io/survey.owl#5_Always"/>
280         </owl:oneOf>
281     </owl:Class>
282     </owl:equivalentClass>
283     <rdfs:subClassOf
rdf:resource="https://parita-amin.github.io/survey.owl#LikertScaleQuestions"/>
284 </owl:Class>
285
286 <!-- https://parita-amin.github.io/survey.owl#LikertScaleAnswers -->
287
288 <owl:Class
rdf:about="https://parita-amin.github.io/survey.owl#LikertScaleAnswers">
289     <rdfs:subClassOf
rdf:resource="https://parita-amin.github.io/survey.owl#SurveyAnswers"/>
290     <owl:disjointWith
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedAnswers"/>
291 </owl:Class>
292
293 <!-- https://parita-amin.github.io/survey.owl#LikertScaleQuestions
-->
294
295 <owl:Class
rdf:about="https://parita-amin.github.io/survey.owl#LikertScaleQuestions">
296     <rdfs:subClassOf
rdf:resource="https://parita-amin.github.io/survey.owl#SurveyQuestions"/>
297     <owl:disjointWith
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedQuestions"/>
298 </owl:Class>
299
300 <!-- https://parita-amin.github.io/survey.owl#OpenEndedAnswers -->
301
302 <owl:Class
rdf:about="https://parita-amin.github.io/survey.owl#OpenEndedAnswers">
303     <owl:equivalentClass>
304         <owl:Class>
305             <owl:oneOf rdf:parseType="Collection">
306                 <rdf:Description
rdf:about="https://parita-amin.github.io/survey.owl#OEAns_Change"/>
307                 <rdf:Description
rdf:about="https://parita-amin.github.io/survey.owl#OEAns_LikeBest"/>
308                 <rdf:Description
rdf:about="https://parita-amin.github.io/survey.owl#OEAns_Strengths"/>

```

```

309         </owl:oneOf>
310     </owl:Class>
311 </owl:equivalentClass>
312 <rdfs:subClassOf
313     rdf:resource="https://parita-amin.github.io/survey.owl#SurveyAnswers" />
314 </owl:Class>
315 <!-- https://parita-amin.github.io/survey.owl#OpenEndedQuestions -->
316
317 <owl:Class
318     rdf:about="https://parita-amin.github.io/survey.owl#OpenEndedQuestions">
319     <owl:equivalentClass>
320         <owl:Class>
321             <owl:oneOf rdf:parseType="Collection">
322                 <rdf:Description
323                     rdf:about="https://parita-amin.github.io/survey.owl#OEQuestion_Change" />
324                     <rdf:Description
325                         rdf:about="https://parita-amin.github.io/survey.owl#OEQuestion_LikeBest" />
326                         <rdf:Description
327                             rdf:about="https://parita-amin.github.io/survey.owl#OEQuestion_Strengths" />
328                             </owl:oneOf>
329                             </owl:Class>
330                             </owl:equivalentClass>
331                             <rdfs:subClassOf
332                                 rdf:resource="https://parita-amin.github.io/survey.owl#SurveyQuestions" />
333                                 </owl:Class>
334                             <!-- https://parita-amin.github.io/survey.owl#Respondent -->
335
336                             <owl:Class
337                                 rdf:about="https://parita-amin.github.io/survey.owl#Respondent">
338                                 <owl:equivalentClass>
339                                 <owl:Class>
340                                     <owl:intersectionOf rdf:parseType="Collection">
341                                         <rdf:Description
342                                             rdf:about="https://parita-amin.github.io/survey.owl#Respondent" />
343                                             <owl:Restriction>
344                                                 <owl:onProperty
345                                                     rdf:resource="https://parita-amin.github.io/survey.owl#respondedToSurvey" />
346                                                     <owl:someValuesFrom
347                                                         rdf:resource="https://parita-amin.github.io/survey.owl#Survey" />
348                                                         </owl:Restriction>
349                                                         </owl:intersectionOf>
350                                                         </owl:Class>
351                                                         </owl:equivalentClass>
352                                                         </owl:Class>
353                                 <!-- https://parita-amin.github.io/survey.owl#SemesterID -->
354
355                                 <owl:Class
356                                     rdf:about="https://parita-amin.github.io/survey.owl#SemesterID">
357                                     <rdfs:subClassOf

```

```

350   rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse" />
351   </owl:Class>
352   <!-- https://parita-amin.github.io/survey.owl#Survey -->
353
354   <owl:Class
355     rdf:about="https://parita-amin.github.io/survey.owl#Survey">
356     <rdfs:subClassOf>
357       <owl:Restriction>
358         <owl:onProperty
359           rdf:resource="https://parita-amin.github.io/survey.owl#hasSurveyQuestion" />
360         <owl:someValuesFrom
361           rdf:resource="https://parita-amin.github.io/survey.owl#SurveyQuestions" />
362         </owl:Restriction>
363       </rdfs:subClassOf>
364     </owl:Class>
365
366   <!-- https://parita-amin.github.io/survey.owl#SurveyAnswers -->
367
368   <owl:Class
369     rdf:about="https://parita-amin.github.io/survey.owl#SurveyAnswers">
370
371   <!-- https://parita-amin.github.io/survey.owl#SurveyCollection -->
372
373   <owl:Class
374     rdf:about="https://parita-amin.github.io/survey.owl#SurveyCollection">
375     <rdfs:subClassOf>
376       <owl:Restriction>
377         <owl:onProperty
378           rdf:resource="https://parita-amin.github.io/survey.owl#isCollectionOf" />
379         <owl:someValuesFrom
380           rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse" />
381         </owl:Restriction>
382       </rdfs:subClassOf>
383       <owl:disjointWith
384         rdf:resource="https://parita-amin.github.io/survey.owl#SurveyResponse" />
385       </owl:Class>
386
387   <!-- https://parita-amin.github.io/survey.owl#SurveyQuestions -->
388
389   <owl:Class
390     rdf:about="https://parita-amin.github.io/survey.owl#SurveyQuestions">
391
392   <!-- https://parita-amin.github.io/survey.owl#SurveyResponse -->
393
394   <owl:Class
395     rdf:about="https://parita-amin.github.io/survey.owl#SurveyResponse">
396
397   <!--
398   //////////////////////////////////////
399   // Individuals
400   //////////////////////////////////////

```

```

391     —>
392
393     <!-- https://parita-amin.github.io/survey.owl#CS280 —>
394
395     <owl:NamedIndividual
396     rdf:about="https://parita-amin.github.io/survey.owl#CS280">
397         <rdf:type
398         rdf:resource="https://parita-amin.github.io/survey.owl#CourseID" />
399     </owl:NamedIndividual>
400
401     <!-- https://parita-amin.github.io/survey.owl#CS730 —>
402
403     <owl:NamedIndividual
404     rdf:about="https://parita-amin.github.io/survey.owl#CS730">
405         <rdf:type
406         rdf:resource="https://parita-amin.github.io/survey.owl#CourseID" />
407     </owl:NamedIndividual>
408
409     <!-- https://parita-amin.github.io/survey.owl#Collection1 —>
410
411     <owl:NamedIndividual
412     rdf:about="https://parita-amin.github.io/survey.owl#Collection1">
413         <rdf:type
414         rdf:resource="https://parita-amin.github.io/survey.owl#SurveyCollection" />
415     </owl:NamedIndividual>
416
417     <!-- https://parita-amin.github.io/survey.owl#Collection2 —>
418
419     <owl:NamedIndividual
420     rdf:about="https://parita-amin.github.io/survey.owl#Collection2">
421         <rdf:type
422         rdf:resource="https://parita-amin.github.io/survey.owl#SurveyCollection" />
423     </owl:NamedIndividual>
424
425     <!-- https://parita-amin.github.io/survey.owl#FinalExam —>
426
427     <owl:NamedIndividual
428     rdf:about="https://parita-amin.github.io/survey.owl#FinalExam">
429         <rdf:type
430         rdf:resource="https://parita-amin.github.io/survey.owl#Event" />
431     </owl:NamedIndividual>
432
433     <!-- https://parita-amin.github.io/survey.owl#Midterm —>
434
435     <owl:NamedIndividual
436     rdf:about="https://parita-amin.github.io/survey.owl#Midterm">
437         <rdf:type
438         rdf:resource="https://parita-amin.github.io/survey.owl#Event" />
439     </owl:NamedIndividual>
440
441     <!-- https://parita-amin.github.io/survey.owl#OEAns_Change —>
442

```



```

431   <owl:NamedIndividual
rdf:about="https://parita-amin.github.io/survey.owl#OEAns_Change">
432     <rdf:type
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedAnswers"/>
433     <survey:hasOEAns_Change
rdf:datatype="http://www.w3.org/2001/XMLSchema#string"></survey:hasOEAns_Change>
434   </owl:NamedIndividual>
435
436   <!-- https://parita-amin.github.io/survey.owl#OEAns_LikeBest -->
437
438   <owl:NamedIndividual
rdf:about="https://parita-amin.github.io/survey.owl#OEAns_LikeBest">
439     <rdf:type
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedAnswers"/>
440     <survey:hasOEAns_LikeBest
rdf:datatype="http://www.w3.org/2001/XMLSchema#string"></survey:hasOEAns_LikeBest>
441   </owl:NamedIndividual>
442
443   <!-- https://parita-amin.github.io/survey.owl#OEAns_Strengths -->
444
445   <owl:NamedIndividual
rdf:about="https://parita-amin.github.io/survey.owl#OEAns_Strengths">
446     <rdf:type
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedAnswers"/>
447     <survey:hasOEAns_Strengths
rdf:datatype="http://www.w3.org/2001/XMLSchema#string"></survey:hasOEAns_Strengths>
448   </owl:NamedIndividual>
449
450   <!-- https://parita-amin.github.io/survey.owl#OEQuestion_Change -->
451
452   <owl:NamedIndividual
rdf:about="https://parita-amin.github.io/survey.owl#OEQuestion_Change">
453     <rdf:type
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedQuestions"/>
454   </owl:NamedIndividual>
455
456   <!-- https://parita-amin.github.io/survey.owl#OEQuestion_LikeBest -->
457
458   <owl:NamedIndividual
rdf:about="https://parita-amin.github.io/survey.owl#OEQuestion_LikeBest">
459     <rdf:type
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedQuestions"/>
460   </owl:NamedIndividual>
461
462   <!-- https://parita-amin.github.io/survey.owl#OEQuestion_Strengths
-->
463
464   <owl:NamedIndividual
rdf:about="https://parita-amin.github.io/survey.owl#OEQuestion_Strengths">
465     <rdf:type
rdf:resource="https://parita-amin.github.io/survey.owl#OpenEndedQuestions"/>
466   </owl:NamedIndividual>

```

```

467
468 <!-- https://parita-amin.github.io/survey.owl#1 -->
469
470 <owl:NamedIndividual
471   rdf:about="https://parita-amin.github.io/survey.owl#1">
472     <rdf:type
473       rdf:resource="https://parita-amin.github.io/survey.owl#Respondent" />
474     </owl:NamedIndividual>
475
476 <!-- https://parita-amin.github.io/survey.owl#1_Never -->
477
478 <owl:NamedIndividual
479   rdf:about="https://parita-amin.github.io/survey.owl#1_Never">
480     <rdf:type
481       rdf:resource="https://parita-amin.github.io/survey.owl#LikertScale5" />
482     </owl:NamedIndividual>
483
484 <!-- https://parita-amin.github.io/survey.owl#2 -->
485
486 <owl:NamedIndividual
487   rdf:about="https://parita-amin.github.io/survey.owl#2">
488     <rdf:type
489       rdf:resource="https://parita-amin.github.io/survey.owl#Respondent" />
490     </owl:NamedIndividual>
491
492 <!-- https://parita-amin.github.io/survey.owl#2_Rarely -->
493
494 <owl:NamedIndividual
495   rdf:about="https://parita-amin.github.io/survey.owl#2_Rarely">
496     <rdf:type
497       rdf:resource="https://parita-amin.github.io/survey.owl#LikertScale5" />
498     </owl:NamedIndividual>
499
500 <!-- https://parita-amin.github.io/survey.owl#202210 -->
501
502 <owl:NamedIndividual
503   rdf:about="https://parita-amin.github.io/survey.owl#202210">
504     <rdf:type
505       rdf:resource="https://parita-amin.github.io/survey.owl#SemesterID" />
506     </owl:NamedIndividual>

```

```

507   rdf:about="https://parita-amin.github.io/survey.owl#202230">
      <rdf:type
508   rdf:resource="https://parita-amin.github.io/survey.owl#SemesterID"/>
      </owl:NamedIndividual>
509
510   <!-- https://parita-amin.github.io/survey.owl#3 -->
511
512   <owl:NamedIndividual
      rdf:about="https://parita-amin.github.io/survey.owl#3">
513       <rdf:type
      rdf:resource="https://parita-amin.github.io/survey.owl#Respondent"/>
514       </owl:NamedIndividual>
515
516   <!-- https://parita-amin.github.io/survey.owl#3_Sometimes -->
517
518   <owl:NamedIndividual
      rdf:about="https://parita-amin.github.io/survey.owl#3_Sometimes">
519       <rdf:type
      rdf:resource="https://parita-amin.github.io/survey.owl#LikertScale5"/>
520       </owl:NamedIndividual>
521
522   <!-- https://parita-amin.github.io/survey.owl#4_Often -->
523
524   <owl:NamedIndividual
      rdf:about="https://parita-amin.github.io/survey.owl#4_Often">
525       <rdf:type
      rdf:resource="https://parita-amin.github.io/survey.owl#LikertScale5"/>
526       </owl:NamedIndividual>
527
528   <!-- https://parita-amin.github.io/survey.owl#5_Always -->
529
530   <owl:NamedIndividual
      rdf:about="https://parita-amin.github.io/survey.owl#5_Always">
531       <rdf:type
      rdf:resource="https://parita-amin.github.io/survey.owl#LikertScale5"/>
532       </owl:NamedIndividual>
533
534   <!-- https://parita-amin.github.io/survey.owl#CS280/202210 -->
535
536   <owl:NamedIndividual
      rdf:about="https://parita-amin.github.io/survey.owl#CS280/202210">
537       <rdf:type
      rdf:resource="https://parita-amin.github.io/survey.owl#Survey"/>
538       </owl:NamedIndividual>
539
540   <!--
      https://parita-amin.github.io/survey.owl#CS280/202210/Collection1 -->
541
542   <owl:NamedIndividual
      rdf:about="https://parita-amin.github.io/survey.owl#CS280/202210/Collection1">
543       <rdf:type
      rdf:resource="https://parita-amin.github.io/survey.owl#CollectionID"/>

```

```

544     </owl:NamedIndividual>
545
546     <!-- https://parita-amin.github.io/survey.owl#CS499+900 -->
547
548     <owl:NamedIndividual
549     rdf:about="https://parita-amin.github.io/survey.owl#CS499+900">
550         <rdf:type
551         rdf:resource="https://parita-amin.github.io/survey.owl#CourseID" />
552     </owl:NamedIndividual>
553
554     <!-- https://parita-amin.github.io/survey.owl#CS499+900/202210 -->
555
556     <owl:NamedIndividual
557     rdf:about="https://parita-amin.github.io/survey.owl#CS499+900/202210">
558         <rdf:type
559         rdf:resource="https://parita-amin.github.io/survey.owl#Survey" />
560     </owl:NamedIndividual>
561
562     <!-- https://parita-amin.github.io/survey.owl#CS730/202210 -->
563
564     <owl:NamedIndividual
565     rdf:about="https://parita-amin.github.io/survey.owl#CS730/202210">
566         <rdf:type
567         rdf:resource="https://parita-amin.github.io/survey.owl#Survey" />
568     </owl:NamedIndividual>
569
570     <!--
571     //////////////////////////////////////
572     // General axioms
573     //////////////////////////////////////
574     -->
575
576     <rdf:Description>
577         <rdf:type
578         rdf:resource="http://www.w3.org/2002/07/owl#AllDisjointClasses" />
579         <owl:members rdf:parseType="Collection">
580             <rdf:Description
581             rdf:about="https://parita-amin.github.io/survey.owl#CollectionID" />
582             <rdf:Description
583             rdf:about="https://parita-amin.github.io/survey.owl#CourseID" />
584             <rdf:Description
585             rdf:about="https://parita-amin.github.io/survey.owl#Event" />
586             <rdf:Description
587             rdf:about="https://parita-amin.github.io/survey.owl#SemesterID" />
588         </owl:members>
589     </rdf:Description>
590
591     <rdf:Description>
592         <rdf:type
593         rdf:resource="http://www.w3.org/2002/07/owl#AllDisjointClasses" />
594         <owl:members rdf:parseType="Collection">
595             <rdf:Description

```

```

584     rdf:about="https://parita-amin.github.io/survey.owl#Survey" />
        <rdf:Description
585     rdf:about="https://parita-amin.github.io/survey.owl#SurveyAnswers" />
        <rdf:Description
586     rdf:about="https://parita-amin.github.io/survey.owl#SurveyQuestions" />
        </owl:members>
587     </rdf:Description>
588
589     <rdf:Description>
590     <rdf:type
    rdf:resource="http://www.w3.org/2002/07/owl#AllDisjointProperties" />
591     <owl:members rdf:parseType="Collection">
592     <rdf:Description
    rdf:about="https://parita-amin.github.io/survey.owl#hasOEAnswer_Change" />
593     <rdf:Description
    rdf:about="https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest" />
594     <rdf:Description
    rdf:about="https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths" />
595     </owl:members>
596     </rdf:Description>
597 </rdf:RDF>
598
599 <!-- Generated by the OWL API (version 4.5.9.2019-02-01T07:24:44Z)
        https://github.com/owlcs/owlapi -->

```

# Appendix B

## SHACL Shapes for Data Validation: SurveyShapes.txt

```
1 @prefix rdf:    <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
2 @prefix sh:     <http://www.w3.org/ns/shacl#> .
3 @prefix xsd:    <http://www.w3.org/2001/XMLSchema#> .
4 @prefix rdfs:   <http://www.w3.org/2000/01/rdf-schema#> .
5 @prefix survey: <https://parita-amin.github.io/survey.owl#> .
6 @prefix owl:  <http://www.w3.org/2002/07/owl#> .
7
8 survey:RespondentShape
9   a sh:NodeShape ;
10   sh:targetClass survey:Respondent ; # Applies to all Respondents
11
12   sh:property [
13     sh:path survey:hasLikertAns_clearly_answers_questions ;
14     sh:datatype xsd:positiveInteger ;
15     sh:minInclusive 1 ;
16     sh:maxInclusive 5 ;
17     sh:severity sh:Warning ;
18   ] ;
19   sh:property [
20     sh:path survey:hasLikertAns_clearly_communicates_his
21     _expectations_for_student_preparation_and_participation ;
22     sh:datatype xsd:positiveInteger ;
23     sh:minInclusive 1 ;
24     sh:maxInclusive 5 ;
25     sh:severity sh:Warning ;
26   ] ;
27   sh:property [
28     sh:path survey:hasLikertAns_effectively_directs_and
29     _stimulates_discussion ;
30     sh:datatype xsd:positiveInteger ;
31     sh:minInclusive 1 ;
32     sh:maxInclusive 5 ;
33     sh:severity sh:Warning ;
```

```

32 ] ;
33 sh:property [
34     sh:path survey:hasLikertAns_effectively_encourages_students
    _to_ask_questions_and_give_answers ;
35     sh:datatype xsd:positiveInteger ;
36     sh:minInclusive 1 ;
37     sh:maxInclusive 5 ;
38     sh:severity sh:Warning ;
39 ] ;
40 sh:property [
41     sh:path survey:hasLikertAns_encourages_student_participation ;
42     sh:datatype xsd:positiveInteger ;
43     sh:minInclusive 1 ;
44     sh:maxInclusive 5 ;
45     sh:severity sh:Warning ;
46 ] ;
47 sh:property [
48     sh:path survey:hasLikertAns_has_clear_expectations_for
    _assigned_work ;
49     sh:datatype xsd:positiveInteger ;
50     sh:minInclusive 1 ;
51     sh:maxInclusive 5 ;
52     sh:severity sh:Warning ;
53 ] ;
54 sh:property [
55     sh:path survey:hasLikertAns_is_well-prepared_for_class ;
56     sh:datatype xsd:positiveInteger ;
57     sh:minInclusive 1 ;
58     sh:maxInclusive 5 ;
59     sh:severity sh:Warning ;
60 ] ;
61 sh:property [
62     sh:path survey:hasLikertAns_treats_students_with_respect ;
63     sh:datatype xsd:positiveInteger ;
64     sh:minInclusive 1 ;
65     sh:maxInclusive 5 ;
66     sh:severity sh:Warning ;
67 ] ;
68 sh:property [
69     sh:path survey:hasLikertAns_uses_class_time_effectively ;
70     sh:datatype xsd:positiveInteger ;
71     sh:minInclusive 1 ;
72     sh:maxInclusive 5 ;
73     sh:severity sh:Warning ;
74 ] ;
75 sh:closed false ;
76 sh:ignoredProperties ( rdf:type owl:topDataProperty
    owl:topObjectProperty ) ;

```

# Appendix C

## CSV to Linked Data: sample.ttl

```
1 @prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
2 @prefix owl: <http://www.w3.org/2002/07/owl#> .
3 @prefix survey: <https://parita-amin.github.io/survey.owl> .
4 @prefix rdfs: <http://www.w3.org/2000/01/rdf-schema#> .
5 @prefix foaf: <http://xmlns.com/foaf/0.1/> .
6
7
8 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response1>
  <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
  questions>
9   "1";
10
11   <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
  his_expectations_for_student_preparation_and_participation>
12   "1";
13
14   <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
  stimulates_discussion>
15   "1";
16
17   <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
  students_to_ask_questions_and_give_answers>
18   "1";
19
20   <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
  participation>
21   "3";
22
23   <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
  for_assigned_work>
24   "1";
25
26   <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
  for_class>
27   "2";
```



```

23     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
24     with_respect>
25     "4";
26     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
27     effectively>
28     "1";
29     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "the
30     professor , the grading schemeÃ";
31     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest>
32     "literally not a thingÃ";
33     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "??".
34     <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response2>
35     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
36     questions>
37     "5";
38     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
39     his_expectations_for_student_preparation_and_participation>
40     "5";
41     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
42     stimulates_discussion>
43     "4";
44     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
45     students_to_ask_questions_and_give_answers>
46     "4";
47     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
48     participation>
49     "5";
50     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
51     for_assigned_work>
52     "5";
53     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
54     for_class>
55     "4";
56     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
57     with_respect>
58     "5";
59     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
60     effectively>
61     "2";
62     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I feel
63     like if we had some more information about debate topics we would be

```

```

    able to debate more effectively.Ä";
49 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "I
    like how quick the teacher is to answer any question about a
    assignment or a project and clarify any detail.ÄÄ";
50 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "The
    teacher always answers questions about assignments and projects when
    ever he is asked about them so I always feel prepared for the next
    assignment." .
51
52 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response3>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
53     "4";
54
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
    his_expectations_for_student_preparation_and_participation>
55     "4";
56
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
    stimulates_discussion>
57     "4";
58
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
    students_to_ask_questions_and_give_answers>
59     "4";
60
    <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
    participation>
61     "4";
62
    <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
    for_assigned_work>
63     "4";
64
    <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
    for_class>
65     "4";
66
    <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
    with_respect>
67     "4";
68
    <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
    effectively>
69     "4" .
70
71 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response4>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
72     "3";
73

```

```

74 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
75 his_expectations_for_student_preparation_and_participation>
    "4";
76 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
77 stimulates_discussion>
    "4";
78 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
79 students_to_ask_questions_and_give_answers>
    "5";
80 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
81 participation>
    "5";
82 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
83 for_assigned_work>
    "2";
84 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
85 for_class>
    "3";
86 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
87 with_respect>
    "5";
88 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
89 effectively>
    "3";
90 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I am
    confused on what the topics of this course even are. Every class it's
    students asking questions about the assignments and projects and then
    we have about 15 minutes at the end of every class to try and have a
    discussion.Â€";
91 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
92 "Having open communication with the students. No one is afraid to
    turn their microphones on and talk or share an opinion. It is a very
    welcoming environment.Â€" .
93 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response5>
94 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
    "5";
95 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
96 his_expectations_for_student_preparation_and_participation>
    "5";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_

```

```

stimulates_discussion>
97   "5";
98
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
99   "5";
100
<https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
101   "5";
102
<https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
103   "5";
104
<https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
105   "5";
106
<https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
107   "5";
108
<https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
109   "4";
110 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "This
class is different from all the other classes I have taken. The
discussions are open-ended and sometimes I feel I am not sure how
well I am doing in this class or what I am learning. I would like to
see more concrete implementation for achieving the desired learning
outcomes. I do not what would be there on the final exam and what
should I need to do to pass the final exam.";
111 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
course effectively encourages me to ask questions and give answers. I
like the class discussions on current topics in the world, helps me
keep myself aware of what is happening in the world.Ã";
112 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "Dr.
Daryl Hepting is a great mentor with a lot of knowledge and
experience teaching this course. He is always well-prepared for the
class and communicates his expectations for students clearly. His
teaching style encourages student participation. He is very
respectful of his students and always willing to go above and beyond
for helping his students. I would definitely take another class with
Dr. Hepting." .
113
114 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response6>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
115   "3";
116

```

```

117 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
118 his_expectations_for_student_preparation_and_participation>
    "2";
119 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
120 stimulates_discussion>
    "4";
121 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
122 students_to_ask_questions_and_give_answers>
    "5";
123 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
124 participation>
    "5";
125 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
126 for_assigned_work>
    "2";
127 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
128 for_class>
    "2";
129 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
130 with_respect>
    "5";
131 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
132 effectively>
    "1";
133 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "The
134 clarity on what is expected of us on assignments.";
135 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
136 discussion section of each lecture.";
137 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
138 "discussions" .
139 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response7>
140 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
141 "1";
142 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
    his_expectations_for_student_preparation_and_participation>
    "1";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
    stimulates_discussion>
    "2";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_

```

```

143     students_to_ask_questions_and_give_answers>
144     "2";
145     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
146     participation>
147     "3";
148     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
149     for_assigned_work>
150     "2";
151     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
152     for_class>
153     "1";
154     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
155     with_respect>
156     "3";
157     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
158     effectively>
159     "1" .
160 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response8>
161 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
162     questions>
163     "3";
164     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
165     his_expectations_for_student_preparation_and_participation>
166     "3";
167     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
168     stimulates_discussion>
169     "3";
170     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
171     students_to_ask_questions_and_give_answers>
172     "3";
173     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
174     participation>
175     "3";
176     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
177     for_assigned_work>
178     "3";
179     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
180     for_class>
181     "3";

```

```

170     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
171     with_respect>
172     "3";
173     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
174     effectively>
175     "3";
176     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change>
177     "Nothing";
178     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
179     content";
180     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "His
181     communication skills" .
182 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response9>
183 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
184 questions>
185     "4";
186     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
187     his_expectations_for_student_preparation_and_participation>
188     "3";
189     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
190     stimulates_discussion>
191     "5";
192     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
193     students_to_ask_questions_and_give_answers>
194     "5";
195     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
196     participation>
197     "5";
198     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
199     for_assigned_work>
200     "4";
201     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
202     for_class>
203     "3";
204     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
205     with_respect>
206     "5";
207     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
208     effectively>
209     "4" .
210 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response10>

```

```

197 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
198 questions>
    "5";
199 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
200 his_expectations_for_student_preparation_and_participation>
    "5";
201 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
202 stimulates_discussion>
    "5";
203 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
204 students_to_ask_questions_and_give_answers>
    "5";
205 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
206 participation>
    "5";
207 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
208 for_assigned_work>
    "5";
209 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
210 for_class>
    "5";
211 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
212 with_respect>
    "5";
213 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
214 effectively>
    "5";
215 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "NO";
    <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
        teacher's lessons are very informative, and then you need to reply
        every day so that people can discuss the content of the daily
        lessons.";
216 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "NO" .
217
218 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response11>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
        questions>
219     "5";
220
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
        his_expectations_for_student_preparation_and_participation>
221     "4";
222
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_

```



```

stimulates_discussion>
223   "4";
224
225   <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
226   "5";
227
228   <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
229   "4";
230
231   <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
232   "5";
233
234   <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
235   "5";
236
237   <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
238   "5";
239
240   <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
241   "4";
242
243   <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "Not
much honestly , I don't see a need to change something that works.";
244   <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "I
enjoy how the instructor is very knowledgeable and always available
when questions need to be answered.ÃÃ";
245   <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "His
knowledge.Ã" .
246
247   <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response12>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
248   "3";
249
250   <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
251   "3";
252
253   <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
254   "2";
255
256   <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
257   "2";
258

```

```

249 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
250 participation>
    "3";
251 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
252 for_assigned_work>
    "3";
253 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
254 for_class>
    "3";
255 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
256 with_respect>
    "4";
257 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
258 effectively>
    "1";
259 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I'd
like more focus and discussion on the course material and more focus
overall. Too much time is spent talking about assignment submissions
and not enough about topics relating to the course
material.Discussions more suited for office hours routinely dominate
class time and obstruct relevant discussion.";
259 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "N/A";
260 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "N/A"
    .
261
262 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response13>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
263     "3";
264
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
    his_expectations_for_student_preparation_and_participation>
265     "4";
266
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
    stimulates_discussion>
267     "5";
268
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
    students_to_ask_questions_and_give_answers>
269     "5";
270
    <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
    participation>
271     "5";
272
    <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
    for_assigned_work>

```

```

273     "5";
274     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
        for_class>
275     "4";
276     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
        with_respect>
277     "5";
278     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
        effectively>
279     "4";
280     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "Nothing
        I can think of";
281     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
        discussions";
282     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
        "Creative" .
283
284 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response14>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
        questions>
285     "2";
286
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
        his_expectations_for_student_preparation_and_participation>
287     "3";
288
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
        stimulates_discussion>
289     "3";
290
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
        students_to_ask_questions_and_give_answers>
291     "3";
292
    <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
        participation>
293     "3";
294
    <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
        for_assigned_work>
295     "4";
296
    <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
        for_class>
297     "3";
298
    <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
        with_respect>

```

```

299     "5";
300
301     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
302     effectively>
303     "3";
304     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I would
305     probably change how to teach things having more of a concrete
306     definition of different topics.";
307     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "I
308     like the say we are able to give about assignment due dates.";
309     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
310     "Greatest strengths are being able to communicate with students about
311     assignment topics as well as the freedom he is able to give students
312     in his class." .
313
314     <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response15>
315     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
316     questions>
317     "5";
318
319     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
320     his_expectations_for_student_preparation_and_participation>
321     "5";
322
323     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
324     stimulates_discussion>
325     "5";
326
327     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
328     students_to_ask_questions_and_give_answers>
329     "5";
330
331     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
332     participation>
333     "5";
334
335     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
336     for_assigned_work>
337     "5";
338
339     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
340     for_class>
341     "5";
342
343     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
344     with_respect>
345     "5";
346
347     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
348     effectively>
349     "5" .

```

```

325 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response16>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
326     questions>
327     "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
    his_expectations_for_student_preparation_and_participation>
328     "4";
329

    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
    stimulates_discussion>
330     "5";
331

    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
    students_to_ask_questions_and_give_answers>
332     "4";
333

    <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
    participation>
334     "5";
335

    <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
    for_assigned_work>
336     "5";
337

    <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
    for_class>
338     "4";
339

    <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
    with_respect>
340     "5";
341

    <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
    effectively>
342     "4" .
343
344 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response17>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
345     "5";
346

    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
    his_expectations_for_student_preparation_and_participation>
347     "5";
348

    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
    stimulates_discussion>
349     "5";
350

    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
    students_to_ask_questions_and_give_answers>

```

```

351     "4";
352     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
353     "5";
354     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
355     "5";
356     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
357     "5";
358     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
359     "5";
360     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
361     "4";
362     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I don't
think there are any changed requirements.";
363     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "This
course is best to study with Dr Hepting as he includes most of the
stuff practical based.";
364     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
"Knowledge, Teaching skills." .
365
366 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response18>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
367     "5";
368     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
369     "5";
370     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
371     "5";
372     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
373     "5";
374     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
375     "5";
376     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>

```

```

377     "5";
378     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
379     "4";
380     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
381     "5";
382     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
383     "4";
384     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "The
only thing I would like to change about this course would be to
have the course content a little bit more organized and fast-paced
and focused on the final exam since it is 25% of our final grade and
also explain what would the final exam entail.";
385     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "I
really like how the professor encourages open student discussion on
current world events and topics related to the course. The lively
exchange of ideas during the class makes for the majority of the
course content and it is an innovative way of learning and
encouraging student participation.";
386     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "The
instructor's greatest strengths are: Encourage student
participation and make every student feel welcomed to join any
on-going discussion. Engaging students by related current world
events to our course content Patience and enthusiasm during the
class Clarity about assignments" .
387
388     <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response19>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
389     "5";
390     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
391     "5";
392     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
393     "5";
394     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
395     "5";
396     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
397     "5";

```

```

398 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
399 for_assigned_work>
400 "4";
401
402 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
403 for_class>
404 "3";
405
406 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
407 with_respect>
408 "5";
409
410 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
411 effectively>
412 "4";
413
414 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I wish
415 that the expectations for assignments were explained more thoroughly
416 further in advance rather than a week before";
417
418 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "I
419 like the wide variety of topics discussed";
420
421 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
422 "Interacting with students and encouraging discussion" .
423
424 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response20>
425 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
426 questions>
427 "3";
428
429 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
430 his_expectations_for_student_preparation_and_participation>
431 "4";
432
433 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
434 stimulates_discussion>
435 "5";
436
437 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
438 students_to_ask_questions_and_give_answers>
439 "5";
440
441 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
442 participation>
443 "5";
444
445 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
446 for_assigned_work>
447 "4";
448
449 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
450 for_class>

```



```

423     "3";
424     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
425     "5";
426     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
427     "3";
428     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "To have
a more structured lesson plan and teaching , we don't always have
textbook readings and we don't do any note-taking in class , so I'm a
little lost on what will be on the exam. we tend to go in circles a
little bit.";
429     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
class discussions and his understanding of the student's being
confused";
430     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
"relating content to the real world and making us see and compare it ,
not to made-up examples, but things we interact with daily." .
431
432 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response21>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
433     "4";
434     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
435     "4";
436     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
437     "4";
438     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
439     "4";
440     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
441     "4";
442     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
443     "3";
444     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
445     "4";
446     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>

```

```

447     "5";
448     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
449     "3";
450     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I would
like to talk more about stuff we are told to watch or read before
class in actual class time.";
451     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "I
like the course material and that discussion is encouraged.";
452     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "Very
kind and willing to answer questions." .
453
454 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response22>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
455     "5";
456
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
457     "5";
458
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
459     "5";
460
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
461     "5";
462
<https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
463     "5";
464
<https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
465     "5";
466
<https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
467     "4";
468
<https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
469     "5";
470
<https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
471     "5";
472 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
best thing I like about this course is that I hear my peers' points
of view and I can build my aspect upon their points of view." .

```

```

473
474 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response23>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
475 questions>
    "4";
476
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
    his_expectations_for_student_preparation_and_participation>
477 "4";
478
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
    stimulates_discussion>
479 "5";
480
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
    students_to_ask_questions_and_give_answers>
481 "5";
482
    <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
    participation>
483 "5";
484
    <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
    for_assigned_work>
485 "3";
486
    <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
    for_class>
487 "4";
488
    <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
    with_respect>
489 "5";
490
    <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
    effectively>
491 "3";
492 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "More
    clearly laid out assignment details and expectations; Sometimes feels
    like there's a lot of dead space in class where time could be used
    more effectively.Ä";
493 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
    interesting discussions about online activity and information.Ä";
494 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "The
    ability to foster and encourage interesting in class discussion.Ä" .
495
496 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response24>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
497 "5";
498

```

```

499 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
500 his_expectations_for_student_preparation_and_participation>
    "2";

501 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
502 stimulates_discussion>
    "3";

503 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
504 students_to_ask_questions_and_give_answers>
    "5";

505 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
506 participation>
    "5";

507 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
508 for_assigned_work>
    "5";

509 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
510 for_class>
    "4";

511 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
512 with_respect>
    "5";

513 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
514 effectively>
    "2";
515 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I would
    like to get rid of the response to meeting part. It's just
    frustrating that we have to do it every lecture";
516 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
    writing part, I am not good at it, this course is a chance for me to
    practice my writing skills.The topic we discussed is very interesting
    tho.";
517 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "His
    preparation skills. I believe that Dr Hepting knew his weakness, so
    he created so many tools, so many notes that the students can use.
    And for a \"geek\" like me, they are amazing!" .
518 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response25>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
519     "4";
520
521 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
522 his_expectations_for_student_preparation_and_participation>
    "4";

```

```

523 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
524 stimulates_discussion>
    "5";

525 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
526 students_to_ask_questions_and_give_answers>
    "5";

527 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
528 participation>
    "5";

529 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
530 for_assigned_work>
    "4";

531 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
532 for_class>
    "4";

533 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
534 with_respect>
    "5";

535 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
536 effectively>
    "4";
537 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "Nothing
    so far.";
538 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
    professor is very considerate of the students. He always encourages
    lively discussions.";
539 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
    "Instructor is very considerate of students. Does not give work
    during holidays or immediately after. Gives students time and second
    chances.Ã" .
540 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response26>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
541     "5";
542
543 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
544 his_expectations_for_student_preparation_and_participation>
    "5";

545 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
546 stimulates_discussion>
    "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_

```

```

students_to_ask_questions_and_give_answers>
547 "5";
548
<https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
549 "5";
550
<https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
551 "5";
552
<https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
553 "5";
554
<https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
555 "5";
556
<https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
557 "5";
558 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "Nothing
from my point of view.Â";
559 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest>
"Professor Hepting I guess, he is well prepared and has answers to
our questions promptly.Â";
560 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "Not
going to a different topic unless things are clear for all the
students." .
561
562 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response27>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
563 "5";
564
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
565 "5";
566
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
567 "5";
568
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
569 "5";
570
<https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
571 "5";

```

```

572 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
    for_assigned_work>
573 "5";
574
575 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
    for_class>
576 "5";
577
578 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
    with_respect>
579 "5";
580
581 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response28>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
        questions>
582 "4";
583
584 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
    his_expectations_for_student_preparation_and_participation>
585 "4";
586
587 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
    stimulates_discussion>
588 "5";
589
590 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
    participation>
591 "5";
592
593 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
    for_assigned_work>
594 "4";
595
596 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
    for_class>
597 "4";
598
599 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
    with_respect>
600 "5";
601
602 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
    effectively>

```

```

598     "3" .
599
600 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response29>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
        questions>
601     "3";
602
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
        his_expectations_for_student_preparation_and_participation>
603     "3";
604
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
        stimulates_discussion>
605     "3";
606
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
        students_to_ask_questions_and_give_answers>
607     "4";
608
    <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
        participation>
609     "4";
610
    <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
        for_assigned_work>
611     "3";
612
    <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
        for_class>
613     "2";
614
    <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
        with_respect>
615     "5";
616
    <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
        effectively>
617     "2";
618 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "i wish
    there was better organization and better use of class time.";
619 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest>
    "everything seems relatively easy.";
620 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "he
    has good topics to talk about." .
621
622 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response30>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
        questions>
623     "4";
624
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
        his_expectations_for_student_preparation_and_participation>

```



```

625     "4";
626     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
627     "4";
628     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
629     "5";
630     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
631     "5";
632     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
633     "4";
634     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
635     "4";
636     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
637     "4";
638     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
639     "4";
640     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "Better
ways of communication during class for all our classmates so breakout
rooms go more smoothly.";
641     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
fact that most of the topics are relevant to today's world and not
outdated.";
642     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "His
compassion towards the students and understanding our own struggles
as well." .
643
644 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response31>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
645     "5";
646     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
647     "5";
648     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
649     "5";
650

```

```

651 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
652 students_to_ask_questions_and_give_answers>
    "5";
653 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
654 participation>
    "5";
655 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
656 for_assigned_work>
    "5";
657 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
658 for_class>
    "5";
659 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
660 with_respect>
    "5";
661 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
662 effectively>
    "5";
663 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "Nothing
    ! Itâ€™s all good and perfect.";
664 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest>
    "Itâ€™s interesting and non complicated course which is based on our
    daily lives. The main thing is that it does not require mental
    attention and itâ€™s a free learning and fun course.";
665 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "He
666 is soft spoken, always keeps patience, answers questions and explains
    things thoroughly." .
667 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response32>
668 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
    questions>
    "5";
669 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
670 his_expectations_for_student_preparation_and_participation>
    "5";
671 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
672 stimulates_discussion>
    "5";
673 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
674 students_to_ask_questions_and_give_answers>
    "5";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_

```

```

participation>
675 "5";
676
<https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
677 "5";
678
<https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
679 "5";
680
<https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
681 "5";
682
<https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
683 "5";
684 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "Nothing
in particular.Ää";
685 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
topics which are covered in this course.Ää";
686 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "The
greatest strength of the instructor of this course is that he ready
to help even if you ask question in middle of discussion he is ready
to answer. Also to make students more interactive he arranges class
discussion as well which also with the participation.ÄäÄä" .
687
688 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response33>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
689 "5";
690
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
691 "5";
692
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
693 "5";
694
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
695 "5";
696
<https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
697 "5";
698
<https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>

```

```

699     "5";
700     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
        for_class>
701     "5";
702     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
        with_respect>
703     "5";
704     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
        effectively>
705     "5";
706     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change>
        "nothing";
707     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
        best part is how the instructor teaches and explains the stuff";
708     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
        "Explaining the course" .
709
710 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response34>
        <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
        questions>
711     "4";
712     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
        his_expectations_for_student_preparation_and_participation>
713     "3";
714     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
        stimulates_discussion>
715     "4";
716     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
        students_to_ask_questions_and_give_answers>
717     "5";
718     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
        participation>
719     "5";
720     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
        for_assigned_work>
721     "5";
722     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
        for_class>
723     "4";
724     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
        with_respect>
725     "5";

```

726 <https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_ effectively>  
727 "4";  
728 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change>  
"Lecture's are little boring and need some entertainment. He is  
a great teacher but students need some motivation thats is what is  
missing and a big smile is missing of professor";  
729 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "The  
thing i like most about this course is it very based on research and  
that is what is making me research more about the topics discussed.  
Since then i have started to research more and more about the class";  
730 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "He  
is really good with the topics and knows everything he teaches he  
helps us with some research strategies thats what is the greatest  
strength." .  
731  
732 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response35>  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_ questions>  
733 "5";  
734  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_ his\_expectations\_for\_student\_preparation\_and\_participation>  
735 "4";  
736  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and stimulates\_discussion>  
737 "5";  
738  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_ students\_to\_ask\_questions\_and\_give\_answers>  
739 "4";  
740  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_ participation>  
741 "5";  
742  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_ for\_assigned\_work>  
743 "4";  
744  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_ for\_class>  
745 "3";  
746  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_ with\_respect>  
747 "5";  
748  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_

```

effectively>
749   "3";
750 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I'd
change how the course is presented. Whether or not it is a teaching
style preference, I tend to prefer classes that have a bit more
structure to them, and less group activities as I prefer to rely
solely on myself for my grade.";
751 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "I
like the idea of the course the best. The idea of weighing risks vs
rewards of giving companies your information.";
752 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "I
think the instructor's greatest strength is his personal interest in
the class. He seems to care deeply about the subject, enough to let
it bleed into the class work, lectures, etc." .
753
754 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response36>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
755   "4";
756
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
757   "5";
758
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
759   "5";
760
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
761   "5";
762
<https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
763   "5";
764
<https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
765   "4";
766
<https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
767   "4";
768
<https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
769   "5";
770
<https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
771   "3";
772 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "Less

```

group work, especially for a class delivered remotely.";

773 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "The  
topics discussed and the way assignments are delivered.";

774 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "The  
instructor is a very smart individual who is very passionate about  
the topics." .

775

776 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response37>  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_  
questions>  
777 "2";  
778

<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_  
his\_expectations\_for\_student\_preparation\_and\_participation>  
779 "2";  
780

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_  
stimulates\_discussion>  
781 "3";  
782

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
students\_to\_ask\_questions\_and\_give\_answers>  
783 "3";  
784

<https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
participation>  
785 "3";  
786

<https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_  
for\_assigned\_work>  
787 "2";  
788

<https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_  
for\_class>  
789 "3";  
790

<https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
with\_respect>  
791 "4";  
792

<https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
effectively>  
793 "3";  
794 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change>  
"Nothing";

795 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "My  
classmates and I continuously communicate with each other to help  
understand what's happening, ask questions about homework, and such.  
The topics can be quite interesting and with each discussion, I learn  
something new.";

796 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "He  
is knowledgable and well updated with tech news." .

```

797
798 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response38>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
799     questions>
800     "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
801     his_expectations_for_student_preparation_and_participation>
802     "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
803     stimulates_discussion>
804     "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
805     students_to_ask_questions_and_give_answers>
806     "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
807     participation>
808     "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
809     for_assigned_work>
810     "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
811     for_class>
812     "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
813     with_respect>
814     "5";

    <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
815     effectively>
816     "5";

    <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change>
    "Honestly, getting up early is hard probably would like to change the
817     class timing by a hour maybe";

    <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "The
    fact that our professor encourages more class participation by
    effective methods like group projects and always relate topics with
    current affairs is the best part of this course to me.";
818 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "Our
    instructors greatest strength his ability to relate the topic with
    current affairs." .

819
820 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response39>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
821     questions>
    "4";

```



822 <https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_  
823 his\_expectations\_for\_student\_preparation\_and\_participation>  
824 "4";

825 <https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_  
826 stimulates\_discussion>  
827 "4";

828 <https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
829 students\_to\_ask\_questions\_and\_give\_answers>  
830 "4";

831 <https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
832 participation>  
833 "5";

834 <https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_  
835 for\_assigned\_work>  
836 "4";

837 <https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_  
838 for\_class>  
839 "3";

840 <https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
841 with\_respect>  
842 "5";

843 <https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
844 effectively>  
845 "2";

846 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "I would  
like to see more content in class. I feel we don't really get  
anything done in class till the end.";

<https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "I  
really like the content of this course. It is very interesting and  
changes my perspective of technology";

<https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "The  
instructor's greatest strengths are that he is very knowledgeable and  
genuinely cares for his students." .

<https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response40>  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_  
questions>  
"5";

<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_  
his\_expectations\_for\_student\_preparation\_and\_participation>  
"1";

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_

```

stimulates_discussion>
847 "5";
848
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
849 "5";
850
<https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
851 "5";
852
<https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
853 "5";
854
<https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
855 "4";
856
<https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
857 "5";
858
<https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
859 "5";
860 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I dont
like how we are supposed to work in different groups for each
assessment which makes it confusing and unfair for the student with
no connections or friends at all.";
861 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest>
"Professor give equal opportunity to every student in the class and
explain every single detail of our works we need to submit. Even
present some examples of our submission to make it even more clear.";
862 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths>
"Professor is a good listener and believes in team work." .
863
864 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response41>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
865 "2";
866
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
867 "3";
868
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
869 "3";
870
<https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>

```

```

871     "5";
872     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
873     "4";
874     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
875     "2";
876     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
877     "2";
878     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
879     "5";
880     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
881     "2";
882     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "To be
honest, I didn't find anything best yet, because we didn't get proper
knowledge in this class as we have given the name of a textbook but
in class, we didn't get any information regarding our course. Every
day I have found that Professor is busy changing the due dates and
editing on URCourses.ÂœOne of my friends suggested CS280 and also
told me that I will gain more knowledge as well as I will really
enjoy this course. But, somehow I'm feeling completely opposite. I'm
completely disappointed with this course.Hope I'll get at least some
knowledge of this course and suggest others for this course.";
883     <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "As
this course is running remotely as well as in-person which is the
only one best thing I have found. Also, The way the professor treats
us with very polite behavior.";
884     <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "I
have found that the professor is more knowledgeable but his teaching
style does not fit particularly in my mind." .
885
886 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response42>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
887     "5";
888     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
889     "5";
890     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
891     "5";

```

892 <https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
 893 students\_to\_ask\_questions\_and\_give\_answers>  
 894 "5";

895 <https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
 896 participation>  
 897 "5";

898 <https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_  
 899 for\_assigned\_work>  
 900 "5";

901 <https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_  
 902 for\_class>  
 903 "5";

904 <https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
 905 with\_respect>  
 906 "5";

907 <https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
 908 effectively>  
 909 "5";

910 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "I would  
 911 like to change the group studies portion to individual, so we don't  
 912 have to be dependent on others.";

913 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "The  
 914 delivery of the course is excellent";

915 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "The  
 916 explanation skills and most importantly the period of giving time to  
 students." .

917 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response43>  
 918 <https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_  
 919 questions>  
 920 "4";

921 <https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_  
 922 his\_expectations\_for\_student\_preparation\_and\_participation>  
 923 "4";

924 <https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_  
 925 stimulates\_discussion>  
 926 "4";

927 <https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
 928 students\_to\_ask\_questions\_and\_give\_answers>  
 929 "4";

930 <https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
 931 participation>

```

917     "4";
918     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
919     "4";
920     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
921     "4";
922     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
923     "4";
924     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
effectively>
925     "4" .
926
927 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response44>
<https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
questions>
928     "4";
929     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
his_expectations_for_student_preparation_and_participation>
930     "5";
931     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
stimulates_discussion>
932     "5";
933     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
students_to_ask_questions_and_give_answers>
934     "4";
935     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
participation>
936     "5";
937     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
for_assigned_work>
938     "4";
939     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
for_class>
940     "4";
941     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
with_respect>
942     "5";
943     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_

```

```

effectively>
944     "4";
945 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change>
     "Nothing.";
946 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest>
     "Flexible assignment due dates. Different projects with a different
     perspective can make a lot of difference in group projects.Ã";
947 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "The
     way he conducts the class and how he organizes his website like
     detailed assignment requirements and the syllabus also how and when
     the assignment and exams are due.Ã" .
948
949 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response45>
     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
     questions>
950     "3";
951
     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
     his_expectations_for_student_preparation_and_participation>
952     "4";
953
     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
     stimulates_discussion>
954     "3";
955
     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
     students_to_ask_questions_and_give_answers>
956     "4";
957
     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
     participation>
958     "4";
959
     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
     for_assigned_work>
960     "4";
961
     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
     for_class>
962     "3";
963
     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
     with_respect>
964     "4";
965
     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
     effectively>
966     "3";
967 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "I would
     like to change how much down time there is in class, I think we spend
     too much time in between topics or discussions, and if we didn't do

```

that I think everyone would be able to learn a lot more.";

968 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "I  
like that we can tie in class material with current events, because I  
think talking about relevant news is more interesting than just  
reading a textbook.";

969 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "I  
think that the professor's greatest strengths are his knowledge on  
the subject matter being taught, whatever we talk about he for the  
most part has a good idea on the concepts, but he can sometime  
struggle to explain it better for other students who didn't  
understand." .

970

971 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response46>  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_  
questions>  
972 "5";  
973

<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_  
his\_expectations\_for\_student\_preparation\_and\_participation>  
974 "5";  
975

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_  
stimulates\_discussion>  
976 "4";  
977

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
students\_to\_ask\_questions\_and\_give\_answers>  
978 "5";  
979

<https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
participation>  
980 "5";  
981

<https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_  
for\_assigned\_work>  
982 "5";  
983

<https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_  
for\_class>  
984 "5";  
985

<https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
with\_respect>  
986 "5";  
987

<https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
effectively>  
988 "1";  
989 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "While I  
like the idea of learning about risks and rewards in computer  
science it seems like we never actually learn anything in class.  
Instead we just go over what's expected on assignments and answer

and re-answer the same questions. I wish we could actually learn something new for a change.";

990 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "I like how Dr. Hepting encourages conversation in class and encourages student participation.";

991 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "Listening to students and accommodating are needs." .

992

993 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response47>  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_questions>  
994 "4";  
995

<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_his\_expectations\_for\_student\_preparation\_and\_participation>  
996 "4";  
997

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_stimulates\_discussion>  
998 "4";  
999

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_students\_to\_ask\_questions\_and\_give\_answers>  
1000 "4";  
1001

<https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_participation>  
1002 "4";  
1003

<https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_for\_assigned\_work>  
1004 "3";  
1005

<https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_for\_class>  
1006 "3";  
1007

<https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_with\_respect>  
1008 "4";  
1009

<https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_effectively>  
1010 "4";  
1011 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "I wish it was more constructed and had notes or readings for us to do";

1012 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "The in class discussions are interesting" .

1013

1014 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response48>  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_questions>



```

1015     questions>
1016     "5";
1017     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
1018     his_expectations_for_student_preparation_and_participation>
1019     "5";
1020     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
1021     stimulates_discussion>
1022     "5";
1023     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
1024     students_to_ask_questions_and_give_answers>
1025     "5";
1026     <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
1027     participation>
1028     "5";
1029     <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
1030     for_assigned_work>
1031     "5";
1032     <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
1033     for_class>
1034     "5";
1035     <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
1036     with_respect>
1037     "5";
1038     <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
1039     effectively>
1040     "5" .
1041     <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response49>
1042     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
1043     questions>
1044     "5";
1045     <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
1046     his_expectations_for_student_preparation_and_participation>
1047     "4";
1048     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
1049     stimulates_discussion>
1050     "4";
1051     <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
1052     students_to_ask_questions_and_give_answers>
1053     "5";

```

```

1042 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
1043 participation>
      "5";
1044 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
1045 for_assigned_work>
      "5";
1046 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
1047 for_class>
      "5";
1048 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
1049 with_respect>
      "4";
1050 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
1051 effectively>
      "5";
1052 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "big
      writing assignments.";
1053 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "the
      ability to teach." .
1054 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response50>
1055 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
1056 questions>
      "4";
1057 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
1058 his_expectations_for_student_preparation_and_participation>
      "4";
1059 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
1060 stimulates_discussion>
      "4";
1061 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
1062 students_to_ask_questions_and_give_answers>
      "4";
1063 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
1064 participation>
      "4";
1065 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
1066 for_assigned_work>
      "4";
1067 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
      for_class>
      "4";

```

1068 <https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
 1069 with\_respect>  
 1070 "4";

1071 <https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
 1072 effectively>  
 1073 "4";

1072 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "More  
 assignments.";

1073 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "The  
 topics are really interesting.";

1074 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths>  
 "Content knowledge and experience." .

1075

1076 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response51>  
 <https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_  
 1077 questions>  
 1078 "5";

1079 <https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_  
 1080 his\_expectations\_for\_student\_preparation\_and\_participation>  
 "5";

1081 <https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_  
 1082 stimulates\_discussion>  
 "5";

1083 <https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
 1084 students\_to\_ask\_questions\_and\_give\_answers>  
 "5";

1085 <https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
 1086 participation>  
 "5";

1087 <https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_  
 1088 for\_assigned\_work>  
 "5";

1089 <https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_  
 1090 for\_class>  
 "4";

1091 <https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
 1092 with\_respect>  
 "5";

1093 <https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
 1094 effectively>  
 "3";

1094 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "I'd

like to spend more time exploring topics and learning new ideas than just administration stuff. I think it's only like this because of online learning and Covid, though, so I understand if there's a lot of difficulties we have to work through. I just wish it wasn't so often. It'll probably get better once everything is in person.Ã";

1095 <[https://parita-amin.github.io/survey.owl#hasOEAnswer\\_LikeBest](https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest)> "The discussion on various topics; gaining new insight and ideas from my peersVery low-intensityÃLots of critical thinking and researchI also really like the post-lecture feedback from each student regarding that day's topic. It's interesting to see other people's posts because I can learn new ideas from them.";

1096 <[https://parita-amin.github.io/survey.owl#hasOEAnswer\\_Strengths](https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths)> "Really engages class discussion. It's nice because you get to hear other viewsProvides some really good resources (all of which are free!). The Ted talks, articles, and book are pretty relevant and insightful. I appreciate that everything is gathered together in the website because I might miss something.I also appreciate the class notes summary that students post. I can look at them in case I miss a class." .

1097

1098 <<https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response52>>  
<[https://parita-amin.github.io/survey.owl#hasLikertAns\\_clearly\\_answers\\_questions](https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_questions)>

1099 "5";

1100

<[https://parita-amin.github.io/survey.owl#hasLikertAns\\_clearly\\_communicates\\_his\\_expectations\\_for\\_student\\_preparation\\_and\\_participation](https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_his_expectations_for_student_preparation_and_participation)>

1101 "5";

1102

<[https://parita-amin.github.io/survey.owl#hasLikertAns\\_effectively\\_directs\\_and\\_stimulates\\_discussion](https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_stimulates_discussion)>

1103 "4";

1104

<[https://parita-amin.github.io/survey.owl#hasLikertAns\\_effectively\\_encourages\\_students\\_to\\_ask\\_questions\\_and\\_give\\_answers](https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_students_to_ask_questions_and_give_answers)>

1105 "5";

1106

<[https://parita-amin.github.io/survey.owl#hasLikertAns\\_encourages\\_student\\_participation](https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_participation)>

1107 "4";

1108

<[https://parita-amin.github.io/survey.owl#hasLikertAns\\_has\\_clear\\_expectations\\_for\\_assigned\\_work](https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_for_assigned_work)>

1109 "4";

1110

<[https://parita-amin.github.io/survey.owl#hasLikertAns\\_is\\_well-prepared\\_for\\_class](https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_for_class)>

1111 "4";

1112

<[https://parita-amin.github.io/survey.owl#hasLikertAns\\_treats\\_students\\_with\\_respect](https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_with_respect)>

1113 "5";  
1114 <https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_effectively>  
1115 "4";  
1116 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "I think  
there is nothing that needs to be changed except giving lot of  
assignments...Ää";  
1117 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest>  
"Taking this course I got to know many things like how information is  
important and what is privacy and so on... So it is an interesting  
class I guess...Ää";  
1118 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "I  
think Dr Daryl Hepting has good nature and he is friendly with  
everyone and so I think this is his greatest strength...Ää" .  
1119  
1120 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response53>  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_  
questions>  
1121 "4";  
1122  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_  
his\_expectations\_for\_student\_preparation\_and\_participation>  
1123 "2";  
1124  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_  
stimulates\_discussion>  
1125 "4";  
1126  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
students\_to\_ask\_questions\_and\_give\_answers>  
1127 "3";  
1128  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
participation>  
1129 "5";  
1130  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_  
for\_assigned\_work>  
1131 "5";  
1132  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_  
for\_class>  
1133 "3";  
1134  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
with\_respect>  
1135 "5";  
1136  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
effectively>

1137 "3";

1138 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "I would  
make the expectations and how to approach and succeed in this course  
clear at the beginning of the course.";

1139 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "I  
like how there's no coding in this computer science course.";

1140 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "The  
instructor greatest strength is his ability to start a discussion  
among students" .

1141

1142 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response54>  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_  
questions>

1143 "4";

1144

<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_  
his\_expectations\_for\_student\_preparation\_and\_participation>

1145 "4";

1146

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_  
stimulates\_discussion>

1147 "4";

1148

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
students\_to\_ask\_questions\_and\_give\_answers>

1149 "5";

1150

<https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
participation>

1151 "4";

1152

<https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_  
for\_assigned\_work>

1153 "4";

1154

<https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_  
for\_class>

1155 "3";

1156

<https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
with\_respect>

1157 "5";

1158

<https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
effectively>

1159 "3";

1160 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "If we  
could be more on topic in most lectures , that'd be great. We spend so  
much time talking about assignments that the actual lectures and  
discussions feel few and far between compared to the course admin  
days.";

1161 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "I

enjoy the discussions the most honestly, hearing everyone's opinions on web safety topics (tracking, articles and truth) is probably one of my favorite things about this course.";

1162 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "The website used for documentation about meeting documentation (transcripts, responses) and assignments is very nice, and I'm glad effort has gone into making it a good website. While stuttering a lot makes it a bit hard to understand what he's saying, it's not like it makes what he's saying any less interesting. I usually end up thinking about the discussion topics or the lecture topic far after the class because they're that interesting." .

1163

1164 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response55>

<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_questions>

1165 "-999";

1166

<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_his\_expectations\_for\_student\_preparation\_and\_participation>

1167 "-999";

1168

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_stimulates\_discussion>

1169 "-999";

1170

<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_students\_to\_ask\_questions\_and\_give\_answers>

1171 "-999";

1172

<https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_participation>

1173 "-999";

1174

<https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_for\_assigned\_work>

1175 "-999";

1176

<https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_for\_class>

1177 "-999";

1178

<https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_with\_respect>

1179 "-999";

1180

<https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_effectively>

1181 "-999";

1182 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "more clarity";

1183 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "variety of topics" .

1184  
1185 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response56>  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_answers\_  
questions>  
1186 "5";  
1187  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_clearly\_communicates\_  
his\_expectations\_for\_student\_preparation\_and\_participation>  
1188 "5";  
1189  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_  
stimulates\_discussion>  
1190 "5";  
1191  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
students\_to\_ask\_questions\_and\_give\_answers>  
1192 "5";  
1193  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
participation>  
1194 "5";  
1195  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_  
for\_assigned\_work>  
1196 "5";  
1197  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_  
for\_class>  
1198 "5";  
1199  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
with\_respect>  
1200 "5";  
1201  
<https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
effectively>  
1202 "4";  
1203 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change> "This  
course is good. The only thing is sometimes Dr Daryl don't reply to  
emails.";  
1204 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "The  
freedom to speak what you think and believe in. The freedom and  
encouragement of expressing your thoughts and opinions about various  
topics. I like the professor. Dr Daryl always keeps his calm. I have  
never seen him angry; I like his patience. He listens to the  
students, for example when we asked for extending the deadlines for  
blog entry assignment, he listened to us and extended it.Ã";  
1205 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "His  
calm, patience, knowledge, enthusiasm about participation.Ã" .  
1206  
1207 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response57>



```

1208 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
1209 questions>
      "5";
1210 <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
1211 his_expectations_for_student_preparation_and_participation>
      "4";
1212 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
1213 stimulates_discussion>
      "4";
1214 <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
1215 students_to_ask_questions_and_give_answers>
      "5";
1216 <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
1217 participation>
      "5";
1218 <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
1219 for_assigned_work>
      "5";
1220 <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
1221 for_class>
      "5";
1222 <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
1223 with_respect>
      "5";
1224 <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
1225 effectively>
      "5";
1226 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Change> "If I
      want to change something in this course would be the appropriate
      syllabus for the final exam. And the other thing would be that I
      would be glad if this course would be in person because, for me,
      offline learning is more efficient than online learning. :)";
1227 <https://parita-amin.github.io/survey.owl#hasOEAnswer_LikeBest> "We
      get to know about a lot of things from this course. That, in this
      information society there are both risks and rewards. It depends on
      us how we use this. Using the internet and other software with full
      knowledge is quite important to earn maximum rewards. But, if we
      don't use it securely then it can be harmful to us and can disturb
      our private life. The professor is awesome as he enforces more
      participation from students and listens to their points and views
      carefully and corrects them where ever possible. Thanks for this
      wonderful course and a great professor. :)";
1228 <https://parita-amin.github.io/survey.owl#hasOEAnswer_Strengths> "The
      instructor's greater strength is that he does not only speak and

```

teach, he also expects students to come up and discuss with him their views and he listens to us very carefully and always comes up with a better idea to make us understand more properly. Other than that he is a great tutor and I love attending his class. Thank you, professor. :) " .

```

1228
1229 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response58>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
1230 questions>
1231     "2";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
1232 his_expectations_for_student_preparation_and_participation>
1233     "3";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_directs_and_
1234 stimulates_discussion>
1235     "3";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_effectively_encourages_
1236 students_to_ask_questions_and_give_answers>
1237     "4";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_encourages_student_
1238 participation>
1239     "3";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_has_clear_expectations_
1240 for_assigned_work>
1241     "3";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_is_well-prepared_
1242 for_class>
1243     "3";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_treats_students_
1244 with_respect>
1245     "5";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_uses_class_time_
1246 effectively>
1247     "3" .
1248 <https://parita-amin.github.io/survey.owl#CS-280/202210/Collection1/Response59>
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_answers_
1249 questions>
1250     "2";
    <https://parita-amin.github.io/survey.owl#hasLikertAns_clearly_communicates_
1251 his_expectations_for_student_preparation_and_participation>
1252     "1";

```

1253 <https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_directs\_and\_  
1254 stimulates\_discussion>  
"3";

1255 <https://parita-amin.github.io/survey.owl#hasLikertAns\_effectively\_encourages\_  
1256 students\_to\_ask\_questions\_and\_give\_answers>  
"3";

1257 <https://parita-amin.github.io/survey.owl#hasLikertAns\_encourages\_student\_  
1258 participation>  
"4";

1259 <https://parita-amin.github.io/survey.owl#hasLikertAns\_has\_clear\_expectations\_  
1260 for\_assigned\_work>  
"3";

1261 <https://parita-amin.github.io/survey.owl#hasLikertAns\_is\_well-prepared\_  
1262 for\_class>  
"3";

1263 <https://parita-amin.github.io/survey.owl#hasLikertAns\_treats\_students\_  
1264 with\_respect>  
"5";

1265 <https://parita-amin.github.io/survey.owl#hasLikertAns\_uses\_class\_time\_  
1266 effectively>  
"1";

1267 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Change>  
"1.ÂĀÂĀÂĀÂĀÂĀÂ IâĀŹd like a roadmap to final exam prep âĀŹ With the  
final coming up it is important to have a clear understanding of how  
we should be preparing for it.ÂĀ Would it be fair to say that the  
majority of the test will be on the textbook?ÂĀ Because as of right  
now I would be able to answer none of the practice exam questions  
because we havenâĀŹt covered the relevant events âĀŹ which has me  
concerned that the final âĀŹ which I have to pass to pass the class  
âĀŹ may be the same since practice exams are supposed to help you  
practice for the final. 2.ÂĀÂĀÂĀÂĀÂĀÂĀÂ Pacing/speaking  
skills/preparation could improve âĀŹ I was surprised when I joined  
this class.ÂĀ Your speech was very slow and you seemed to be  
struggling to communicate.ÂĀ Since that day, every day you have  
gotten slightly better at speaking.ÂĀ I just wanted to acknowledge  
that this is a thing and many people were concerned about it.ÂĀ  
Several people I know dropped your class because of it both this year  
and previous years.ÂĀ IâĀŹm not sure what was causing this, but I  
thought you ought to know.ÂĀ I will also add that today your speech  
seemed totally normal and you were prepared and had good pacing.";

1268 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_LikeBest> "It  
opened my eyes to the act of analyzing algorithms to ensure they are  
ethical.";

1268 <https://parita-amin.github.io/survey.owl#hasOEAnswer\_Strengths> "You

listen to people's feedback during class and seem to actually care about people. "That goes a long way."

# Bibliography

- [1] Sareh Aghaei, Mohammad Ali Nematbakhsh, and Hadi Khosravi Farsani. Evolution of the World Wide Web: From WEB 1.0 TO WEB 4.0. *International Journal of Web and Semantic Technology*, 3(1):1–10, 2012.
- [2] Emhimed Alatrish. Comparison Some of Ontology Editors. *Management Information Systems*, 8(2):18–24, 2013.
- [3] Francesco Antoniazzi and Fabio Viola. RDF Graph Visualization Tools: A Survey. In *Proceedings of the 23rd Conference of Open Innovations Association (FRUCT)*, pages 25–36, 2018.
- [4] Sören Auer, Christian Bizer, Georgi Kobilarov, Jens Lehmann, Richard Cyganiak, and Zachary Ives. DBpedia: A Nucleus for a Web of Open Data. In *Proceedings of the 6th International Conference on the Semantic Web and 2nd Asian Conference on Asian Semantic Web Conference*, pages 722–735. Springer-Verlag, Berlin, Heidelberg, 2007.
- [5] Florian Bauer and Martin Kaltenböck. Linked Open Data: The Essentials - A Quick Start Guide for Decision Makers. *Edition Mono/Monochrom*, Vienna, 2011.
- [6] Dave Beckett and Brian McBride. RDF/XML Syntax Specification (Revised). *W3C Recommendation*, 2004. <https://www.w3.org/TR/REC-rdf-syntax/> , accessed August 14, 2019.
- [7] David Beckett. RDF 1.1 N-Triples. *W3C Recommendation*, 2014. <https://www.w3.org/TR/2014/REC-n-triples-20140225/> , accessed October 29, 2019.
- [8] Tim Berners-Lee. Linked Data. *W3C Recommendation*, 1996. <https://www.w3.org/DesignIssues/LinkedData> , accessed January 23, 2019.
- [9] Tim Berners-Lee. Universal Resource Identifiers in WWW: A Unifying Syntax for the Expression of Names and Addresses of Objects on the Network as used in the World-Wide Web. *RFC 1630*, June 1998. <https://www.rfc-editor.org/info/rfc1630> , accessed September 24, 2020.

- [10] Tim Berners-Lee, Robert Cailliau, Ari Luotonen, Henrik Frystyk Nielsen, and Arthur Secret. The World Wide Web. *Communications of the ACM*, 37(8):76–83, 1994.
- [11] Tim Berners-Lee, Roy Fielding, and Larry Masinter. Uniform Resource Identifiers (URI): Generic Syntax. *Internet Engineering Task Force, RFC 2396*, August 1998. <https://www.rfc-editor.org/info/rfc2396> , accessed October 01, 2020.
- [12] Tim Berners-Lee, Roy Fielding, and Larry Masinter. Uniform Resource Identifiers (URI): Generic Syntax. *RFC 3986*, January 2005. <https://www.rfc-editor.org/info/rfc3986> , accessed October 02, 2020.
- [13] Tim Berners-Lee and Mark Fischetti. *Weaving the Web: The Original Design and Ultimate Destiny of the World Wide Web by Its Inventor*. Harper San Francisco, 1999.
- [14] Christian Bizer. The Emerging Web of Linked Data. *IEEE Intelligent Systems*, 24(5):87–92, 2009.
- [15] Christian Bizer, Tom Heath, and Tim Berners-Lee. Linked Data - The Story So Far. *International Journal of Semantic Web Information Systems*, 5:1–22, 2009.
- [16] Christian Bizer, Tom Heath, and Tim Berners-Lee. Linked Data: The Story So Far. In *Semantic Services, Interoperability and Web Applications: Emerging Concepts*, pages 205–227. IGI global, USA, 2011.
- [17] Christian Bizer, Tom Heath, Kingsley Idehen, and Tim Berners-Lee. Linked Data on the Web (LDOW2008). In *Proceedings of the 17th International Conference on World Wide Web*, pages 1265–1266. ACM, 2008.
- [18] Christian Bizer, Jens Lehmann, Georgi Kobilarov, Sören Auer, Christian Becker, Richard Cyganiak, and Sebastian Hellmann. DBpedia-A Crystallization Point for the Web of Data. *Web Semantics: Science, Services and Agents on the World Wide Web*, 7(3):154–165, 2009.
- [19] Nupur Choudhury. World Wide Web and Its Journey from Web 1.0 to Web 4.0. *International Journal of Computer Science and Information Technologies*, 5(6):8096–8100, 2014.
- [20] Richard Cyganiak, Andreas Harth, and Aidan Hogan. N-Quads: Extending N-Triples with Context. *W3C Recommendation*, pages 1–41, 2008.
- [21] Richard Cyganiak, David Wood, Markus Lanthaler, Graham Klyne, Jeremy J Carroll, and Brian McBride. RDF 1.1 Concepts and Abstract Syntax. *W3C Recommendation*, 25(02):1–22, January 2014. <http://hdl.handle.net/10421/2427> , accessed January 05, 2020.

- [22] Fajar J. Ekaputra and Xiashuo Lin. SHACL4P: SHACL constraints validation within Protégé ontology editor. In *2016 International Conference on Data and Software Engineering (ICoDSE)*, pages 1–6, Oct 2016.
- [23] Ivan Ermilov, Sören Auer, and Claus Stadler. CSV2RDF: User-Driven CSV to RDF Mass Conversion Framework. In *Proceedings of the International Symposium on Applied Electromagnetics and Mechanics*, volume 13, pages 4–6. ACM, 2013.
- [24] Fredo Erxleben, Michael Günther, Markus Krötzsch, Julian Mendez, and Denny Vrandečić. Introducing Wikidata to the Linked Data Web. In *Proceedings of the International Semantic Web Conference*, pages 50–65. Springer, 2014.
- [25] Sean Falconer. Ontograf Protégé Plugin. Available at: <http://protegewiki.stanford.edu/wiki/OntoGraf>, 2010.
- [26] Steve Harris Garlik and Andy Seaborne. SPARQL 1.1 Query Language. *W3C Recommendation*, March 2013. <https://www.w3.org/TR/sparql11-query/> , accessed November 15, 2021.
- [27] Thomas R Gruber. Toward Principles for the Design of Ontologies used for Knowledge Sharing? *International Journal of Human-Computer Studies*, 43(5):907–928, 1995.
- [28] Lushan Han, Tim Finin, Cynthia Parr, Joel Sachs, and Anupam Joshi. RDF123: From Spreadsheets to RDF. In *Proceedings of the International Semantic Web Conference*, pages 451–466. Springer, 2008.
- [29] Tom Heath and Christian Bizer. Linked Data: Evolving the Web into a Global Data Space. *Synthesis Lectures on the Semantic Web: Theory and Technology*, 1(1):1–136, 2011.
- [30] Daryl Hepting. Student Feedback Instrument. Available at: <http://www2.cs.uregina.ca/~hepting/assets/teaching/pdf/feedback-instrument.pdf>, 2020.
- [31] Matthew Horridge, Simon Jupp, Georgina Moulton, Alan Rector, Robert Stevens, and Chris Wroe. A Practical Guide to Building OWL Ontologies using Protégé 4 and CO-ODE Tools Edition 1.3. *The University of Manchester*, March 2011.
- [32] Bernadette Hyland, Ghislain Atemezing, and Boris Villazón-Terrazas. Best Practices for Publishing Linked Data. *W3C Recommendation*, January 2014. <http://www.w3.org/TR/ld-bp/> , accessed February 23, 2022.
- [33] Elin K Jacob. Ontologies and the Semantic Web. *Bulletin of the American Society for Information Science and Technology*, 29(4):19–19, 2003.

- [34] Andreas Langeegger and Wolfram Wob. XLWrap—Querying and Integrating Arbitrary Spreadsheets with SPARQL. In *Proceedings of the International Semantic Web Conference*, pages 359–374. Springer, 2009.
- [35] Steffen Lohmann, Vincent Link, Eduard Marbach, and Stefan Negru. WebVOWL: Web-based Visualization of Ontologies. In *International Conference on Knowledge Engineering and Knowledge Management*, pages 154–158. Springer, 2014.
- [36] Frank Manola, Eric Miller, and Brian McBride. RDF Primer. *W3C Recommendation*, 10(1):1–6, 2004. <https://www.w3.org/TR/2004/REC-rdf-primer-20040210/>, accessed December 2017.
- [37] Brian McBride. The Resource Description Framework (RDF) and Its Vocabulary Description Language RDFS. In *Handbook on Ontologies*, pages 51–65. Springer, Berlin, 2004.
- [38] Axel-Cyrille Ngonga Ngomo, Sören Auer, Jens Lehmann, and Amrapali Zaveri. Introduction to Linked Data and Its Life Cycle on the Web. In *Proceedings of Reasoning Web 2014: Reasoning on the Web in the Big Data Era*, pages 1–99, Cham. Springer International, September 2014.
- [39] Jakob Nielsen. Usability Engineering. *Morgan Kaufmann Publishers Inc., San Francisco, USA*, pages 23–48, 1994.
- [40] Irene Petrou, Marios Meimaris, and George Papastefanatos. Towards a Methodology for Publishing Linked Open Statistical Data. *JeDEM - eJournal of eDemocracy and Open Government*, 6(1):97–105, Nov 2014.
- [41] Whitney Quesenbery and Whitney Interactive Design. Dimensions of Usability: Defining the Conversation, Driving the Process. In *UPA 2003 Conference*, pages 23–27, 2003.
- [42] Denny Vrandečić and Markus Krötzsch. Wikidata: A Free Collaborative Knowledgebase. *Communications of the ACM*, 57(10):78–85, 2014.