

## Programming Assignment II (Parser)

Released: Sunday, 16/08/1400

Due: Friday, 12/09/1400 at 11:59pm

### 1 Introduction

In programming assignment I, you implemented a scanner. In this assignment you will write a **Predictive Top-Down** parser for C-minus, using the **transition diagrams method** on pages 21-31 in lecture note 5. Using codes from text books, with a reference to the used book in your program is accepted. In this assignment, you can also use an online toolkit for computing the **First** and **Follow** sets of the non-terminals of the given C-minus grammar at <https://mikedevice.github.io/first-follow/>, plus a very useful piece of information called **Predict sets** for producing the Parsing Table. However, using codes from the internet and/or other groups/students in this course are **strictly forbidden** and may result in a **fail** grade in the course. Besides, even if you have not implemented the scanner in the previous assignment, you are not permitted to use scanners of other groups. In such a case, you need to implement both scanner and parser for this assignment. If you've announced and worked on previous programming assignment as a pair, you may continue to work on this assignment as **the same pair**, too.

### 2 Parser Specification

The parser that you implement in this assignment must have the following characteristics:

- The parsing algorithm **must be** the **transition diagrams method** on pages 21-31 in lecture note 5). **Please note that using any other parsing algorithm will not be acceptable and results a zero mark for this assignment.**
- Parsing is **predictive**, which means the parser never needs to do backtracking.
- Parser works in **parallel** (i.e., pipeline) with the scanner and other forthcoming modules. In other words, your compiler must perform all tasks in a **single pass**.
- **Parser calls get\_next\_token** function every time it needs a token, until it receives the last token ('\$'). Note that you need to **modify your scanner** in such way that it would return the token \$, as the **last token**, when it reaches to the end-of-file of the input.
- Every time that parser calls function get\_next\_token, the current token is replaced by a new token returned by this function. In other words, there is only **one token** accessible to the parser **at any stage** of parsing.
- Parser recovers from the syntax errors using the **Panic Mode** method discussed on pages 29-31 of Lecture Note 5 (and by using the **follow set** of each non-terminal as its **synchronizing set**).

In this assignment, similar to the previous assignment, the input file is a text file (i.e., named **'input.txt'**), which includes a C-minus program that is to be scanned and parsed. The parser's outputs include two text files, namely **'parse\_tree.txt'** and **'syntax\_errors.txt'**, which respectively contain the parse tree and possible syntax errors of the input C-minus program. There is no need to print outputs of the scanner in this assignment.

### 3. C-minus Grammar

The following grammar is a modified version of the C-minus grammar in [1], in which the required conditions to have a **Predictive** parser (i.e., the two conditions mentioned on page 91 of Lecture Note 4) hold. **Terminal** symbols have a **bold** typeface in this grammar. **Please note that you must not change or simplify the following grammar in any ways.** **Neither should** you **simplify** the **transition diagrams**

you build based on this grammar. In other words, **DO NOT** use the technique mentioned on pages 22-28 of Lecture note 5 to simplify the transition diagrams of the given grammar. Finally, note that you need to **modify the scanner** you implemented for PA1 so that it can also recognize the keyword **'endif'** that has been used on line 18 of the given grammar. Other tokens are exactly those that were defined in PA1.

1. Program -> Declaration-list \$
2. Declaration-list -> Declaration Declaration-list | EPSILON
3. Declaration -> Declaration-initial Declaration-prime
4. Declaration-initial -> Type-specifier **ID**
5. Declaration-prime -> Fun-declaration-prime | Var-declaration-prime
6. Var-declaration-prime -> ; | [ **NUM** ] ;
7. Fun-declaration-prime -> ( Params ) Compound-stmt
8. Type-specifier -> **int** | **void**
9. Params -> **int ID** Param-prime Param-list | **void**
10. Param-list -> , Param Param-list | EPSILON
11. Param -> Declaration-initial Param-prime
12. Param-prime -> [ ] | EPSILON
13. Compound-stmt -> { Declaration-list Statement-list }
14. Statement-list -> Statement Statement-list | EPSILON
15. Statement -> Expression-stmt | Compound-stmt | Selection-stmt | Iteration-stmt | Return-stmt
16. Expression-stmt -> Expression ; | **break** ; | ;
17. Selection-stmt -> **if** ( Expression ) Statement Else-stmt
18. Else-stmt -> **endif** | **else** Statement **endif**
19. Iteration-stmt -> **repeat** Statement **until** ( Expression )
20. Return-stmt -> **return** Return-stmt-prime
21. Return-stmt-prime -> ; | Expression ;
22. Expression -> Simple-expression-zegond | **ID B**
23. B -> = Expression | [ Expression ] H | Simple-expression-prime
24. H -> = Expression | G D C
25. Simple-expression-zegond -> Additive-expression-zegond C
26. Simple-expression-prime -> Additive-expression-prime C
27. C -> Relop Additive-expression | EPSILON
28. Relop -> < | ==
29. Additive-expression -> Term D
30. Additive-expression-prime -> Term-prime D
31. Additive-expression-zegond -> Term-zegond D
32. D -> Addop Term D | EPSILON
33. Addop -> + | -
34. Term -> Factor G
35. Term-prime -> Factor-prime G
36. Term-zegond -> Factor-zegond G
37. G -> \* Factor G | EPSILON
38. Factor -> ( Expression ) | **ID** Var-call-prime | **NUM**
39. Var-call-prime -> ( Args ) | Var-prime
40. Var-prime -> [ Expression ] | EPSILON
41. Factor-prime -> ( Args ) | EPSILON
42. Factor-zegond -> ( Expression ) | **NUM**
43. Args -> Arg-list | EPSILON
44. Arg-list -> Expression Arg-list-prime
45. Arg-list-prime -> , Expression Arg-list-prime | EPSILON


## 4. Parser Output

As it was mentioned above, your parser receives a text file named '**input.txt**' including a C-minus program and outputs the parse tree of the input program in a file named '**parse\_tree.txt**'. Parser also produce a text file called '**syntax\_errors.txt**', which includes error message regarding possible syntax errors. If there is no syntax error in the input program, a sentence '**There is no syntax error.**' should be written in '**syntax\_errors.txt**'. Therefore, this output file should be created by the parser regardless of whether or not there exists any syntax error.


The parse tree inside '**parse\_tree.txt**' should have the following format:

- Every line includes a node of the parse tree.
- The first line includes the root node, which is the start symbol of the grammar.
- In each line, the depth of the node in that line is shown by a number of tabs before the node's name.
- The successors of each node from left to right are respectively placed in the subsequent lines.

The following figures show an example a parse tree and the desired format of the output.

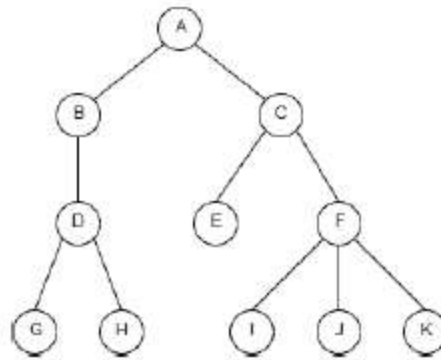

Sample parse tree

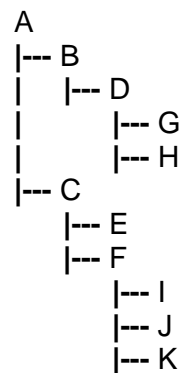

Sample output

## 5 What to Turn In

Before submitting, please ensure you have done the following:

- It is your responsibility to ensure that the final version you submit does not have any debug print statements.
- You should submit a file named '**compiler.py**', which at this stage includes the Python code of your scanner and your **Predictive Transition Diagrams based parser**. Please write your **full**

**name(s) and student number(s)**, and any reference that you may have used, as a comment at the beginning of '**compiler.py**'.

- Your parser should be the main module of the compiler so that by calling the parser, the compilation process starts, and the **parser invokes other modules** such as scanner when it is needed.
- The responsibility of showing that you have understood the course topics is on you. Obtuse code will have a negative effect on your grade, so take the extra time to make your code readable.
- If you work in an **announced pair**, please submit **only one copy** of your assignment (i.e., one copy by one of the two members who has submitted PA1).
- Your parser will be tested by running the command line '**python3 compiler.py**' in Ubuntu operating system using Python interpreter version **3.8**. It is a default installation of the interpreter without any added libraries except for '**anytree**', which may be needed for creating the parse trees. No other additional Python's library function may be used for this or subsequent programming assignments. Please do make sure that your program is correctly compiled in the mentioned environment and by the given command before submitting your code. It is your responsibility to make sure that your code works properly using mentioned OS and Python interpreter.
- Submitted codes will be tested and graded using several different test cases (i.e., several '**input.txt**' files) with and without syntax errors. Your program should read '**input.txt**' from the same working directory as your programs are placed. Please note that in the case of getting a compile or run-time error for a test case, a grade of zero will be assigned to your parser for that test case (Make sure your code does not return a non-zero exit code in case of success, so that it is not mistaken with an exception or error). Similarly, if the parser cannot produce the expected outputs (i.e., '**parse\_tree.txt**' and '**syntax\_errors.txt**') for a test case, a grade of zero will be assigned to it for that test case. Therefore, it is recommended that you test your scanner on several different random test cases before submitting your code.
- A few days after release of this this description, you will receive a number of sample input-output files. Seventy percent of the test cases for evaluating your program will be picked up from the released sample inputs. Therefore, if your parser can generate the expected outputs for all the released samples, you can be sure that your mark for this assignment will be equal to or more than 70 out of 100.
- The decision about whether the scanner and parser functions to be included in the '**compiler.py**' or as separate files such as, say '**scanner.py**' and '**parser.py**', is yours. However, **all the required files should be reside in the same directory as 'compiler.py'**. In other words, I will place all your submitted files in the same plain directory including a test case and execute the '**python3 compiler.py**' command. You should upload your program files ('**compiler.py**' and any other text files that your programs may need) to the course page in Quera (<https://quera.ir/course/9134/>) **before 11:59 PM, Friday, 12/09/1400**.
- Submissions with more than 100 hours delay will not be graded. Submissions with less than 100 hours delay will be penalized by the following rule:

$$\text{Penalized mark} = M * (100 - D) / 100$$

Where M = the initial mark of the assignment and D is number of hours passed the deadline.

Submissions with  $50 < X \leq 100$  hours delay will be penalized by P.M. =  $M * 0.5$ .

Good Luck!

Gholamreza Ghassem-Sani,

16/08/1400

Reference of C-minus