

Article

Applying the Simulated Annealing Algorithm to the Set Orienteering Problem with Mandatory Visits

Shih-Wei Lin ^{1,2,3,*} , Sirui Guo ¹ and Wen-Jie Wu ¹ ¹ Department of Information Management, Chang Gung University, Taoyuan 33302, Taiwan; m1044021@cgu.edu.tw (S.G.); wjwu@mail.cgu.edu.tw (W.-J.W.)² Department of Industrial Engineering and Management, Ming Chi University of Technology, New Taipei 24303, Taiwan³ Department of Emergency Medicine, Keelung Chang Gung Memorial Hospital, Keelung 20401, Taiwan

* Correspondence: swlin@mail.cgu.edu.tw

Abstract: This study addresses the set orienteering problem with mandatory visits (SOPMV), a variant of the team orienteering problem (SOP). In SOPMV, certain critical sets must be visited. The study began by formulating the mathematical model for SOPMV. To tackle the challenge of obtaining a feasible route within time constraints using the original MILP approach, a two-stage mixed-integer linear programming (MILP) model is proposed. Subsequently, a simulated annealing (SA) algorithm and a dynamic programming method were employed to identify the optimal route. The proposed SA algorithm was used to solve the SOP and was compared to other algorithms, demonstrating its effectiveness. The SA was then applied to solve the SOPMV problem. The results indicate that the solutions obtained using SA are superior and more efficient compared to those derived from the original MILP and the two-stage MILP. Additionally, the results reveal that the solution quality deteriorates as the ratio of the set of mandatory visits increases or the maximum allowable travel time decreases. This study represents the first attempt to integrate mandatory visits into SOP, thereby establishing a new research direction in this area. The potential impact of this research is significant, as it introduces new possibilities for addressing complex combinatorial optimization problems.

Keywords: set orienteering problem; mandatory visits; dynamic programming; simulated annealing algorithm

MSC: 90C27

Citation: Lin, S.-W.; Guo, S.; Wu, W.-J. Applying the Simulated Annealing Algorithm to the Set Orienteering Problem with Mandatory Visits.

Mathematics **2024**, *12*, 3089. <https://doi.org/10.3390/math12193089>

Academic Editor: Andrea Scozzari

Received: 3 September 2024

Revised: 27 September 2024

Accepted: 28 September 2024

Published: 2 October 2024



Copyright: © 2024 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

The Orienteering Problem (OP) is a complex NP-hard combinatorial optimization problem [1]. OP combines elements of the knapsack problem (KP) and the traveling salesman problem (TSP) [2]. The Team Orienteering Problem (TOP) is a variant of OP inspired by the popular outdoor sport of score orienteering. In this sport, participants use a compass and a map to visit marked points in an orderly manner, with the objective being to visit all points in the shortest time. Score orienteering requires participants to locate some or all points within a specified period, and the winner is the one with the highest score achieved in the least amount of time. Accordingly, OP can be described as finding a path that adheres to constraints, such as time and resources, while maximizing objectives, such as profit and satisfaction.

The goal of the OP is to maximize profit. To achieve this, the solution must include some, or at least one, of the points in the model graph. This necessitates selecting more “valuable” points and arranging them into paths that meet the specific constraints of the problem. Therefore, OP is a path problem focused on single-vehicle profitability. In this context, each customer point has an associated profit. The objective is to determine a single-

vehicle route that maximizes the total profit from visited customers without exceeding the maximum time limit.

OP has diverse real-life applications, including courier delivery, ride-hailing services, urban tourism, bicycle sharing, communication network construction, industrial waste collection, salesman travel with time or distance constraints, school shuttle bus route planning, and civil aviation planning. Due to resource limitations, costs, and the high number of customer points, visiting all points is not always feasible. Therefore, the OP is extended to the Set Orienteering Problem (SOP).

Similar to SOP, the Clustered Orienteering Problem (COP) is another profitable path problem. COP requires visiting not just one point from each cluster, but all points within each cluster. The cluster's profit is collected only when all the cluster customers are visited. This approach can reduce time and costs compared to OP's application [3]. As a variation of OP, SOP retains OP's goal but introduces additional considerations by grouping points into collections. To obtain the profit from a collection, at least one customer from each set must be visited. The problem entails finding a path within a subset of these collections such that: (i) the collected profit is maximized; (ii) the path length is within a specified range; and (iii) the travel time is within a given limit. For instance, when encountering multiple museums or theme parks of similar nature, one can select a few to visit, prioritizing those within the time constraints.

Previous literature has extensively discussed OP, including various articles and survey papers covering different OP variations [2,4]. SOP is a variant of OP that involves classifying points into similar groups. This problem can be likened to traveling to a new location and aiming to visit as many different types of tourist attractions as possible within a limited timeframe. Among attractions of the same type, the goal is to select the most convenient one to visit first and then proceed to the next most convenient different type of attraction. For example, starting from a hotel, one might visit the nearest attraction, followed by a temple. The nearest museum, and finally, maximize the visit to special attractions (i.e., maximize profit) within the allowable time while ensuring a timely return to the hotel. In some cases, certain sets must be visited in SOP, resulting in the Set Orienteering Problem with Mandatory Visits (SOPMV). Applications of SOPMV include planning road maintenance activities and designing tourist itineraries. To our knowledge, this problem has not been previously studied. Therefore, this study formulated a mixed integer linear programming (MILP) model for SOPMV and developed a simulated annealing algorithm to address it.

The main contributions of this study are as follows:

- (1) Development of a MILP model for SOPMV by modifying the existing SOP model;
- (2) Generation of benchmark problems for SOPMV based on the SOP problem set;
- (3) Application of a two-phase MILP approach to solving the SOPMV;
- (4) Utilization of a simulated annealing algorithm to solve the SOPMV;
- (5) Analysis of the effects of different ratios of mandatory visit sets.

The remainder of this paper is structured as follows. The next section reviews the literature on OP. Section 3 defines the problem and formulates its MILP model. Section 4 describes the two-phase MILP and the proposed SA algorithm. In Section 5, the effectiveness and efficiency of the proposed simulated annealing algorithm are empirically assessed using an existing benchmark problem set, and its performance is compared with that of state-of-the-art algorithms. Finally, Section 6 presents conclusions and recommendations for future research.

2. Literature Review

OP was first introduced by Tsiligirides [5], who described it as a variant of orienteering. The author defined orienteering as an outdoor sport where athletes compete to accumulate the most points. In this sport, athletes must navigate a field with designated start and finish points, where different access points are assigned varying point values. The objective is to visit as many points as possible within a specified time and maximize the total points accumulated. This cross-country sport challenges the athletes' physical endurance and

cognitive skills, such as planning ability and sense of direction. Golden [1] characterized OP as a complex NP-hard problem, noting that developing an exact solution algorithm is highly time-consuming and that heuristic algorithms are essential for solving practical problems. However, Gendreau and Laporte [6] argued that designing effective heuristic algorithms for OP is challenging. They argued that the vertex score and the time required to reach a vertex are often independent and contradictory and that simple design and refinement of heuristics may not effectively address the problem. Conversely, Gavalas and Konstantopoulos [7] maintained that OP is a specialized path optimization problem aimed at finding the optimal path under specific constraints to maximize benefits. Unlike other path problems, such as the traveling salesman problem or vehicle route planning, which focuses on minimizing total distance or cost, OP specifically targets profit maximization from selected paths. In OP, only some objective points need to be visited, while in traveling salesman problems and vehicle routing problems, all objective points must be included, and a general mathematical model has been derived.

The extensive research conducted by numerous scholars has significantly broadened the scope of OP studies, integrating various applications and algorithmic solutions [1,2,5,8–11]. Vansteenwegen and Souffriau [2] provided a comprehensive summary of relevant OP research, standardizing and unifying the mathematical descriptions of various OP variants. They reviewed several OP-related problems, including Team Orienteering Problem (TOP), Orienteering Problem with Time Windows (OPTW), and Team Orienteering Problem with Time Windows (TOPTW). Their analysis highlighted the use of heuristic algorithms to address these problems, emphasizing that many real-world issues can be effectively modeled as OP or its variants. In this way, problems can be solved very quickly and efficiently. They anticipate that the OP will increasingly influence tourism planning and other fields.

Researchers have organized and summarized studies on various OP variants, distinguishing between classical and nonclassical OPs [4]. Classical OPs, such as TOP, OPTW, and TOPTW, have been addressed using algorithms including Strengthened Particle Swarm Optimization (StPSO), Discrete Strengthened Particle Swarm Optimization (DSPSO), Approximation Algorithm (APA), and Approximation Algorithm (AA), such as Multilevel Variable Neighborhood Search (MLVNS), Greedy Randomized Adaptive Search Procedure, and Path Relinking Algorithms. Search Procedure and Path Relinking (GRASPPR), Memetic-Greedy Randomized Adaptive Search Procedure (MGRASP), Robust Branch-Cut-Price Algorithm (Robust Branch-Cut-Price Algorithm (RBCP), Genetic Algorithm (GA), and Memetic Algorithm (MA), which combines some local search techniques, Discrete Particle Swarm Optimization (DPSO), Branch-Cut-Price Algorithm for subset-inequalities, and Pareto Mimic Algorithm (PMA). In contrast, nonclassical OPs include variants such as the (1) Stochastic Orienteering Problem, (2) Generalized Orienteering Problem, (3) Arc Orienteering Problem, (4) Capacitated Team Orienteering Problem, (5) Orienteering Problem with Variable Profits, (6) Clustered Orienteering Problem, (7) Correlated Orienteering Problem, (8) Cooperative Orienteering Problem, (9) Multiagent Orienteering Problem, (10) Multi-period OP with Multiple Time Windows, and (11) Multiconstraint TOP with Multiple Time Windows.

Gunawan and Lau [4] summarized these nonclassical OPs and their associated algorithms. They highlighted that solutions for these variants can be approached using methods such as the Branch-Cut-Price Algorithm, Branch-Cut Algorithm, and Tabu Search, Hybrid Greedy Randomized Adaptive Search Procedure, Iterative Operational Search Procedure, Algorithm, Branch-and-Cut Algorithm and Tabu Search, Hybrid Greedy Randomized Adaptive Search Procedure and Iterated Local Search, and Adaptive Large Neighborhood Search. Gunawan and Lau [4] concluded that further research should focus on cross-country search problem variants involving time-dependent travel times, multiple constraints, and multiple objectives. Developing effective solution algorithms for these challenging variants, combining exact algorithms and heuristic approaches, will be valuable for addressing similar problems in the future.

In a broader sense, different types of OPs vary in how profits are earned. In the classic OP, the profit associated with each point is specific to that point. However, in SOP, the profit can be obtained by reaching any point within a set or by visiting the set as a whole. Thus, SOP aims to maximize profit by covering as many sets as possible within the allowable time. Archetti and Carrabs [12] argued that SOPs are well-suited for scenarios where products are distributed in bulk, customers belong to different supply chains, and the carrier engages with the supply chain. In SOP, the carrier serves only one customer in each chain, implicitly serving the required quantity. This differs from the COP, where the carriers must serve all retailers within each chain as the contract specifies. Consequently, the SOP allows carriers to offer more competitive prices, as internal distribution among retailers in the chain is managed internally. Thus, SOP provides an alternative distribution strategy compared to COP, benefiting both the operators and the supply chain. Archetti and Carrabs [12] developed an exact algorithm for SOP, known as the MAtheuristic for the SOP, MASOP, which integrates the mathematical formulations of Tabu Search (TS) and Mixed-Integer Programming (MIP) with mathematical algorithms. Pěnička and Faigl [13] highlighted that SOP can be more profitable than OP by serving the entire set by visiting just one point within it. Therefore, they [13] applied a variable neighborhood search algorithm, VNS-SOP to SOP, demonstrating improved performance. Carrabs [14] proposed a genetic algorithm for solving SOPs using three local search processes to enhance biased random keying for solving chromosome fitness. This algorithm achieved results significantly faster than the algorithms proposed by Archetti, Carrabs [12], and Pěnička, Faigl [13] and obtained values very close to those of the other algorithms. Dontas and Sideris [15] introduced a mathematical algorithm based on local search to solve SOPs, which, through extensive experiments, yielded better results than the leading open-source SOP algorithms of its time. Yu, Salsabila [16] proposed the Set Team Orienteering Problem with Time Windows (STOPTW), a new variant of the well-known Team Orienteering Problem with Time Windows and Set Orienteering Problem. In the STOPTW, customers are grouped into sets. Each set is associated with a profit when any customer in the sets is visited within the customer's time window. Dutta and Barma [17] formulated a multiobjective set-orienteering problem that provides a more realistic representation of real-world scenarios compared to existing models. In this problem, they incorporate two key features: (i) a predefined profit associated with each set of customers and (ii) a preset maximum service time associated with each customer within all the sets.

Palomo-Martínez and Salazar-Aguilar [18] introduced the orienteering problem with mandatory visits (OP-MV) as a variant of OP. They extend the classical problem by considering mandatory visit points and incorporating constraints related to the exclusion between nodes. Specifically, the OP-MV requires finding a route that visits all mandatory nodes and some optional nodes while ensuring that the total duration does not exceed a pre-specified time limit. The goal is to maximize the total number of points collected. For each optional node, an associated non-negative score is awarded only if that node is visited. Palomo-Martínez and Salazar-Aguilar solved OP-MV using a hybrid variable neighborhood search approach. Using a memetic algorithm, Lu and Benlic [19] solved the OP with mandatory visits and exclusionary constraints. Lin and Yu [20] addressed the TOPTW with mandatory visits by employing multistart simulated annealing (MSA).

3. The Problem Definition

The SOPMV can be defined on a directed network $G = (N, A)$, where $N = \{1, 2, \dots, n\}$ represents the set of nodes, and $A = \{(i, j): i \neq j \in N\}$ represents the set of arcs connecting nodes. Nodes in N are grouped into set S_k with $k = 1, \dots, ns$ such that $\bigcup_{k=1}^{ns} S_k = S$ and $S_h \cap S_k = \emptyset, \forall S_h, S_k \in S$, where $S = \{S_1, S_2, S_3, \dots, S_{ns}\}$ is the set of sets. A profit P_k is associated with each set and is collected if and only if at least a node $i \in S_k$ is visited in the tour. The profit of each set can be collected at most once. As in the MILP of SOP [12], the objective is to find the tour that maximizes the collected profit. The traveling time t_{ij}

required to travel from node i to j is known for each pair of nodes i and j . The total travel time of a tour should not exceed the given time budget T_{max} .

The following defines the parameters and decision variables:

Parameter:

n	Number of nodes
ns	Number of sets
m	Number of sets with mandatory visits
M	The set of sets with mandatory visits
S	Set of all sets
S_k	Set k
i, j	Node indices
k	Set index
p_k	Profit of set k
T_{max}	Time limitation of the tour

Decision Variable:

$x_{ij} = 1$	If a visit to node i is followed by a visit to node j ; 0 otherwise
$y_i = 1$	If node i is visited; 0 otherwise
$z_k = 1$	If set k is visited; 0 otherwise
u_{ij}	Auxiliary variables used to avoid subtours

The MILP of SOPMV can be formulated by extending the MILP of SOP [12] as follows:

Objective Function:

$$P = \max \sum_{k=1}^{ns} p_k z_k \quad (1)$$

Constraint:

$$\sum_{j=1}^n x_{ij} = y_i \quad i = 1, 2, \dots, n \quad (2)$$

$$\sum_{i=1}^n x_{ji} = y_j \quad j = 1, 2, \dots, n \quad (3)$$

$$z_k = 1 \quad k \in M \quad (4)$$

$$z_k \leq \sum_{i \in S_k} y_i \quad S_k \in S \quad (5)$$

$$\sum_{i=1}^n \sum_{j=1; i \neq j}^n t_{ij} x_{ij} \leq T_{max} \quad (6)$$

$$\sum_{j \in V} u_{ji} - \sum_{j \in V} u_{ij} = y_i \quad i \in V \setminus \{1\} \quad (7)$$

$$u_{ij} \leq (n-1)x_{ij} \quad (i, j) \in A \quad (8)$$

The objective function (1) maximizes the total score collected from all paths. Constraint (2) ensures that if the vehicle travels from node i to node j , then node i must be visited. Constraint (3) ensures that if the vehicle travels from node j to node i , then node i must be visited. Constraint (4) mandates that all sets with mandatory visits must be included in the tour. Constraint (5) specifies that a set is considered visited if at least one vertex within that set is visited. Constraint (6) ensures that the duration of each tour does not exceed the specified time limit. Constraints (7) and (8) prevent the formation of subtours. The performance of this formulation of subtour elimination constraints for the Traveling Salesman Problem (TSP) had been evaluated by Öncan, Altinel [21].

4. The Proposed Algorithms

This study introduces a two-stage MILP and develops a simulated annealing heuristic to address the SOPMV. The following subsections provide a detailed discussion of the two-stage MILP for solving the SOPMV in detail and the proposed SA algorithm. Initially, the presentation of the solution, dynamic programming aspects, initial solutions, and neighborhood solutions for the proposed SA algorithm are described. Subsequently, the related parameters and implementation procedure of the proposed SA algorithm are outlined.

4.1. Two-Phase MILP for Solving SOPMV

The MILP formulation for SOVMV can effectively find the optimal solution for small-scale problems. However, as the problem size increases, finding the optimal solution within a finite time becomes challenging. In some cases, it is even difficult to generate a feasible solution.

This study proposes a two-stage MILP, denoted as MILP*, to solve the SOPMV and address this issue. In the first stage, the MILP only considers sets with mandatory visits. Due to the reduced problem size compared to the original formulation, obtaining an optimal or feasible solution is more manageable. In the second stage, the solution from the first stage is used as an initial solution for the MILP of the full SOPMV. Consequently, the second stage at least guarantees a feasible solution, and it has the potential to yield a better or optimal solution based on the initial solution provided by the first stage.

4.2. Solution Representation of SA

A solution π is represented as a string of n numbers that denotes the permutation of sets. The sequence of these numbers indicates the preferred order in which the sets are to be served. The first number in the solution corresponds to the first set to be served, and subsequent sets are added to the tour in the order they appear from left to right, ensuring that the time limit is not exceeded. The specific node to be visited within each served set is determined using dynamic programming, as discussed later.

Table 1 presents a small example of a problem with SOPMV with 11 sets (44 nodes). In this example, Set 0 includes Node 1, which is referred to as the deposit. A sample solution for this problem is $\Pi = (7, 9, 4, 3, 10, 5, 2, 11, 8, 6, 1)$.

Table 1. A small SOPMV example problem.

Set	Profit	Nodes in the Set	Mandatory Visit
0	0	1	-
1	3	11, 12, 46	No
2	3	2, 5, 36	No
3	5	6, 7, 8, 17, 35	No
4	13	4, 13, 14, 20, 22, 29, 31, 33, 34, 38, 40, 42, 43	No
5	1	30	No
6	1	41	No
7	4	3, 15, 16, 28	Yes
8	2	9, 45	No
9	6	18, 19, 21, 26, 27, 44	Yes
10	2	37, 39	Yes
11	4	10, 23, 24, 25	No

Given the sequence of set visits, determining which node within each set should be served to achieve the shortest distance path is known as the stagecoach problem, which can be addressed using dynamic programming [13,22]. For the given sequence $\Pi = (7, 9, 4, 3, 10, 5, 2, 11, 8, 6, 1)$, dynamic programming first solves the set visited sequence: 0-7-0. It then solves 0-7-9-0, 0-7-9-4-0, 0-7-9-4-3-0, and 0-7-9-4-3-10-0. While dynamic programming can calculate the traveling distance and identify the visiting node for each served set, it cannot provide a feasible solution for the sequence 0-7-9-4-3-10-5-0; no set can be

served following set 10. Figure 1 illustrates the dynamic programming process for the SOPMV solution example (served set sequence: 0-7-9-4-3-10-0). Table 2 lists the visiting nodes for each served set. A visual representation of this solution example is provided in Figure 2.

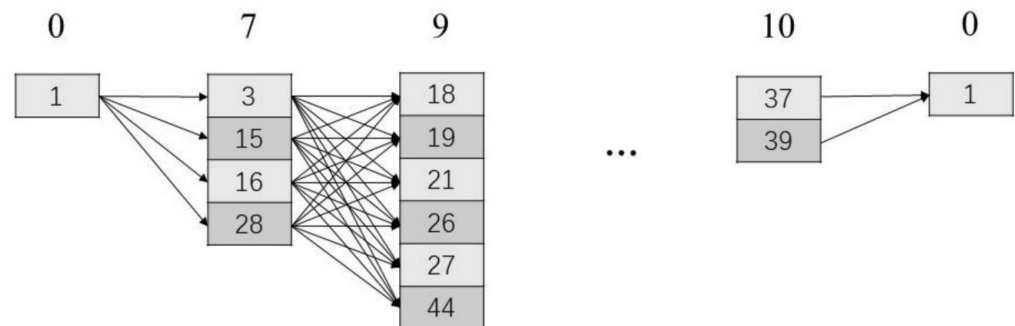


Figure 1. The visual illustration of the dynamic programming.

Table 2. The nodes visited by the served sets (0-7-9-4-3-10-0).

Set No	0	7	9	4	3	10	0
Node No	1	28	21	20	17	39	1

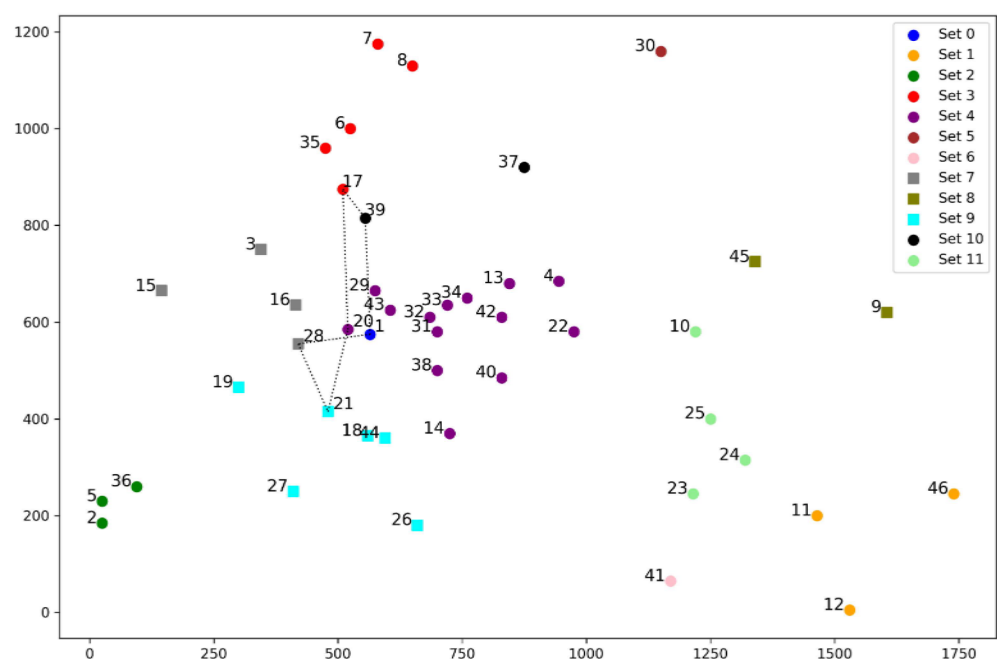


Figure 2. The visual solution of the sample example.

4.3. Initial Solution of SA

To obtain a feasible initial solution, all sets with mandatory visits need to be served as much as possible. The initial solution is generated by the following steps.

- (1) First, add all sets with mandatory visits to the part of the initial solution (Π_{part}) in order of set number;
- (2) Then, add all other sets (sets without nonmandatory visits) to the Π_{part} in the order of set number, then a full initial solution Π_{init} can be obtained;

- (3) Exchange two sets with mandatory visits in Π_{init} one by one. If exchanging two sets with mandatory visits will improve the objective function, perform this exchange to obtain new Π_{init} and perform another exchange. This step is performed until the Π_{init} can be improved.
- (4) Finally, the Π_{init} is output as the initial solution. If any mandatory visit set remains unserved, a penalty of -999 is added to the objective function value of Π_{init} for each unserved mandatory set.

4.4. Neighborhood Solutions of SA

To generate a neighborhood solution from the current solution Π_{cur} , three types of random moves are employed: insertion, swapping, and reversal. Each iteration produces a new solution Π_{new} . The insertion move involves randomly selecting an element from Π_{cur} and placing it immediately before another randomly chosen element. The swap moves entail randomly selecting two sets and exchanging their positions. The inversion move involves selecting a random subsequence of Π_{cur} is selected and reversing its order. Each type of move—insertion, swap, and inversion—is chosen with an equal probability of $1/3$. Because the codes for the set with mandatory visits are initially placed at the beginning of the solution representation, the neighborhood solution initially focuses only on changing the order of sets with mandatory visits in the current solution to generate a temporary solution. Once a feasible solution is found, the order of all sets can be adjusted.

4.5. Parameters Used and Procedure of the Proposed SA

The proposed simulated annealing heuristic involves four parameters: T_0 , the initial temperature; $Iter_{temp}$, the number of iterations at a given temperature; α , the coefficient that controls the cooling schedule; and Max_{time} , the maximal computational time. The algorithm is described in detail as follows.

At the beginning of the proposed SA heuristic, the current temperature (T) is set to the initial temperature T_0 . After generating a feasible solution Π_{init} , both the incumbent solution (Π_{cur}) and the best solution (Π_{best}) are initialized to Π_{init} . The objective function value of Π_{cur} is calculated as $OF(\Pi_{cur})$. If any set with mandatory visits is not served, a penalty of -999 is added to the objective function value. The following loop is executed until the computational time exceeds Max_{time} . At each temperature iteration, a new neighborhood solution Π_{new} is generated according to the neighborhood search mechanism described in Section 4.4. Let Δ represent the difference in objective function values between the new neighborhood solution Π_{new} and the incumbent solution Π_{cur} , i.e., $\Delta = OF(\Pi_{cur}) - OF(\Pi_{new})$. If $\Delta > 0$, then the new neighborhood solution Π_{new} will replace the incumbent solution Π_{cur} ; otherwise, the new neighborhood solution Π_{new} will replace the incumbent solution Π_{cur} if a random number $rand$ (between 0 and 1) is less than $e^{(\frac{\Delta}{T})}$. If the new solution Π_{new} in the neighborhood meets these conditions, Π_{new} is replaced as the incumbent solution Π_{cur} . The current temperature drops to αT , $0 < \alpha < 1$, after $Iter_{temp}$ iterations at the current temperature T . The best solution (Π_{best}) and its objective function value (OFV_{best}) are updated whenever a better feasible solution is found. The final best solution is derived from Π_{best} when the algorithm terminates. Algorithm 1 presents the pseudocode of the proposed SA heuristic for SOPMV, denoted as SA-SOPMV.

Algorithm 1: The pseudocode of SA-SOPMV

Input: $T_0, \alpha, I_{iter}, Max_{time}$

```

1   $T \leftarrow T_0$ 
2   $\Pi_{init} \leftarrow$  Generate an initial solution
3   $\Pi_{cur} \leftarrow \Pi_{init}$ 
4   $\Pi_{best} \leftarrow \Pi_{init}$ 
5  While ( $RunningTime < Max_{time}$ )
6      For  $i = 1$  to  $I_{iter}$  do
7           $\Pi_{new} \leftarrow$  Neighborhood solution of  $\Pi_{cur}$ ;
8           $\Delta = OF(\Pi_{cur}) - OF(\Pi_{new})$ ;
9          If ( $\Delta \geq 0$ ) then
10              $\Pi_{cur} \leftarrow \Pi_{new}$ ;
11             If  $OF(\Pi_{new}) \geq OF(\Pi_{best})$  then
12                  $\Pi_{best} \leftarrow \Pi_{new}$ ;
13             Else
14                 Random rand  $\in [0, 1]$ ;
15                 If  $exp^{(\Delta/T)} > rand$  then
16                      $\Pi_{cur} \leftarrow \Pi_{new}$ ;
17              $i \leftarrow i + 1$ 
18          $T \leftarrow T * \alpha$ 
19     Return  $\Pi_{best}$ 

```

5. Computational Result

The proposed SA algorithm was implemented in C++. The experiments were conducted on a computer equipped with an Intel Core 3.40 GHz CPU. The mathematical programming model for SOPMV was solved using a Gurobi solver (Version 10.3) on the same machine.

5.1. Problem Set Used

The SOPMV problem set used in this study was derived from the SOP problem sets presented by Archetti and Carrabs [12] and Pěnička and Faigl [13]. Two problem sets were utilized. The first set comprised 20 problem instances (referred to as the small GTSP dataset instances in the original studies), while the second set contained 47×2 problem instances (referred to as the large GTSP dataset instances of SOP with $\omega = 1$, where ω is used to compute the tour's time limit). In these problems, the number of nodes ranged from 52 to 1084. The number of sets in each problem equals 20% of the total number of customers. The distance between nodes was calculated using the Euclidean distance between nodes' coordinates, with the result rounded up to the nearest integer. A parameter Pg determines the profit generation rule. Specifically, Pg = g1 if the profit of each set Sg is equal to |Sg|. If Pg = g2, the profit of node j is calculated as $(1 + (7141j + 73) \bmod 100)$ to generate pseudo-random profits. The profit of a set is then obtained by summing the profits of all its constituent nodes. For detailed descriptions of the SOP problem sets, refer to Archetti and Carrabs [12] and Pěnička and Faigl [13].

The SOPMV problem set was generated as follows: First, any unused metadata from the original problem file was discarded. A binary value was appended to each set in the file, where 1 indicates a mandatory visit and 0 indicates otherwise. After specifying the number of sets with mandatory visits, a unique set of the required number was randomly selected as mandatory.

Given the challenges in generating problems with feasible solutions when the ratios of sets with mandatory visits are too high for the first problem set, three ratios were used: 10%, 20%, and 30% (denoted as 10%MV, 20%MV, and 30%MV) with W values kept unchanged from the original SOP problems. Consequently, there are $20 \times 3 \times 1 = 60$ problems in the first problem set of SOPMV. For the second problem set, three ratios % of MV values (10%, 20%, and 30%) and three ω values (0.4, 0.6, and 0.8) were utilized, resulting in $94 \times 3 \times 3 = 846$ problems in SOPMV.

5.2. Parameter Calibration

The proposed SA algorithm is governed by four key parameters: ST , I_{iter} , CR , and Max_{time} . Here, ST denotes the starting temperature; I_{iter} denotes the number of iterations at a specific temperature; CR is the cooling rate, and Max_{time} is the maximum allowable computational time measured in seconds. Given the significant impact of these parameters on the quality of computational results, careful selection of their values is essential. Table 3 outlines the four levels of each parameter, and the 16 parameter combinations used in the SA algorithm. Taguchi's L16 orthogonal experimental design was employed to optimize these parameters, and each of the four randomly selected problem instances was executed ten times.

Table 3. Orthogonal array and the obtained ARPDs.

No	ST	CR	I_{iter}	Max_{time}	APRD
1	7	0.99	70,000	0.5* $NSet$	0.5299%
2	7	0.97	80,000	1.0* $NSet$	0.2734%
3	7	0.95	90,000	1.5* $NSet$	0.2409%
4	7	0.93	100,000	2.0* $NSet$	0.1575%
5	10	0.99	80,000	1.5* $NSet$	0.1734%
6	10	0.97	70,000	2.0* $NSet$	0.2197%
7	10	0.95	100,000	0.5* $NSet$	0.4225%
8	10	0.93	90,000	1.0* $NSet$	0.3619%
9	13	0.97	90,000	2.0* $NSet$	0.2291%
10	13	0.95	100,000	1.5* $NSet$	0.2490%
11	13	0.93	70,000	1.0* $NSet$	0.2386%
12	13	0.99	80,000	0.5* $NSet$	0.3127%
13	16	0.99	100,000	1.0* $NSet$	0.2426%
14	16	0.97	90,000	0.5* $NSet$	0.3723%
15	16	0.95	80,000	2.0* $NSet$	0.2160%
16	16	0.93	70,000	1.5* $NSet$	0.1030%

*: $NSet$ denotes the number of sets.

The average relative percentage deviation (ARPD) from the best objective function value (total collected profit) for each instance is presented in Tables 3 and 4. The relative percentage deviation (RPD) was calculated using the following formula:

$$ARPD = \left(\sum_{r=1}^4 \frac{P_{r_{best}} - P_r}{P_{r_{best}}} \times 100\% \right) \div 4 \quad (9)$$

where P_r denotes the average objective function value (total collected profit) of a specific problem instance i ($i = 1, \dots, 4$) obtained from 10 runs using the proposed SA algorithm with a given parameter combination, and $P_{r_{best}}$ is the best total collected profit obtained for that problem instance from $4 \times 16 = 160$ runs using all parameter combinations of the proposed SA algorithm.

Table 4. ARPDs obtained by different levels of each parameter.

Setting	ST	CR	TI	Max_{time}
1	0.3004%	0.2153%	0.2728%	0.4093%
2	0.2944%	0.2821%	0.2439%	0.2791%
3	0.2573%	0.2736%	0.3010%	0.1916%
4	0.2335%	0.3146%	0.2679%	0.2056%
Range	0.0670%	0.0994%	0.0572%	0.2178%
Rank	3	2	4	1

The ARPDs obtained using different parameter settings are shown in Table 4. These results indicate that Max_{time} is the most influential parameter. Longer execution times generally lead to better objective function values. Assessing the effects of ST , CR , and I_{iter} separately proved challenging. Typically, a high ST requires more computational time to achieve better solutions, while a low ST may lead to premature convergence due to the low acceptance probability. A high CR results in a slower temperature reduction, while a low CR leads to a rapid temperature decrease. Additionally, the number of iterations at the same temperature affects the computational time at that specific temperature. The final parameter values are set to 16, 0.93, 80,000, and $1.5 \times N_{set}$ (seconds) to balance quality and computational time. These values represent the starting temperature, cooling rate, number of iterations at the same temperature, and the maximum allowable computational time in seconds.

5.3. Solving the SOP

Since MASOP [12] and VNS-SOP [13] have addressed the SOP problem instances utilized in this study, the performance of the SA-SOPMV algorithm can be directly compared with MASOP and VNS-SOP. In scenarios where the SOPMV problem instance lacks any sets with mandatory visits, it effectively reduces to an SOP problem, which the SA-SOPMV algorithm can still solve efficiently.

5.3.1. Solving the First SOP Problem Set

The results of solving the 20 instances in the first SOP problem set are summarized in Table 5. All the MASOP, VNS-SOP, SA-SOPMV, and MILP can obtain the best solutions. Although the proposed SA algorithm requires more computing time than VSN-SOP, it successfully identifies all optimal solutions. The maximum allowable computational time for MILP is set to 14,400 s.

Table 5. The result of solving the first SOP problem set.

Instance	P_g	W	T_{max}	MILP		MASOP		VNS-SOP		SA-SOPMV		
				P	T	P	T	P	T	P	AVE P	T
11berlin52	g_1	0.4	1616	37	47.07	37	1.75	37	0.11	37	37	2.2
11berlin52	g_2	0.4	1616	1829	65.96	1829	1.70	1829	0.11	1829	1829	2.2
11berlin52	g_1	0.6	2424	43	777.88	43	2.40	43	0.16	43	43	2.2
11berlin52	g_2	0.6	2424	2190	1532.91	2190	2.64	2190	0.15	2190	2190	2.2
11berlin52	g_1	0.8	3232	47	2648.04	47	7.17	47	0.19	47	47	2.2
11berlin52	g_2	0.8	3232	2384	3833.50	2384	6.61	2384	0.19	2384	2384	2.2
11eil51	g_1	0.4	69	24	39.72	24	1.85	24	0.09	24	24	2.2
11eil51	g_2	0.4	69	1279	40.13	1279	1.97	1279	0.09	1279	1279	2.2
11eil51	g_1	0.6	104	39	34.64	39	5.13	39	0.14	39	39	2.2
11eil51	g_2	0.6	104	1911	204.65	1911	4.74	1911	0.14	1911	1911	2.2
11eil51	g_1	0.8	139	43	1586.67	43	2.3	43	0.18	43	43	2.2
11eil51	g_2	0.8	139	2114	1520.67	2114	1.93	2114	0.20	2114	2114	2.2
14st70	g_1	0.4	126	33	9666.29	33	4.43	33	0.14	33	33	2.8
14st70	g_2	0.4	126	1672	4396.77	1672	4.35	1672	0.15	1672	1672	2.8
14st70	g_1	0.8	252	65	14,400.00	65	8.8	65	0.31	65	65	2.8
14st70	g_2	0.8	252	3355	14,400.00	3355	7.89	3355	0.33	3355	3355	2.8
16eil76	g_1	0.4	83	40	4987.09	40	3.88	40	0.19	40	40	3.2
16eil76	g_2	0.4	83	2223	4939.08	2223	4.73	2223	0.20	2223	2223	3.2
16eil76	g_1	0.6	125	59	14,400.00	59	2.40	59	0.31	59	59	3.2
16eil76	g_2	0.6	125	3119	14,400.00	3119	6.28	3119	0.32	3119	3119	3.2

5.3.2. Solving the Second SOP Problem Set

Table 6 presents the results for the 94 instances in the second SOP problem set. Despite requiring more computational time than VSN-SOP, the SA-SOP algorithm achieves

solutions that are either equal to or very close to those obtained by VSN-SOP. The range of ARPD for each individual instance is from -1.946% to 2.568% .

5.4. Solving the SOPMV

5.4.1. Solving the First SOPMV Problem Set

The maximum computing time for MILP was set to 14,400 s. Tables 7–9 present the results for different ratios of mandatory visits in the first SOPMV problem set, obtained using the original MILP, the two-phase MILP, and the SA-SOPMV, respectively. Table 7 reports the total collected profit (P), the lower bound (LB), and the computational time used (T). Table 8 includes P1 (total collected profit in Phase I), T1 (computational time in Phase I), P2 (total collected profit in Phase II), LB (lower bound of Phase II), and T2 (computational time in Phase II). As shown in Table 7, the original MILP is computationally intensive and unable to find solutions for some small-scale problems, with many instances yielding no feasible solutions. Table 8 illustrates that the two-phase MILP successfully solves many problems optimally. Even when optimal solutions are not found, the two-phase MILP still provides solutions that are equal to or better than those from the original MILP.

As shown in Table 7, the original MILP fails to obtain feasible solutions for 2, 1, and 4 out of 20 problems with mandatory visit ratios of 10%, 20%, and 30%, respectively. In contrast, the two-phase MILP successfully finds feasible solutions (including optimal ones) for all small problems, as demonstrated in Table 8.

To evaluate the performance of the SA, MILP, and two-phase MILP algorithms for the first problem set, the relative percentage deviation (RPD) was used as the performance metric, calculated using the following equation:

$$RPD_{alg} = \frac{P_{max}^{Best} - P_{max}^{alg}}{P_{max}^{Best}} \times 100\% \quad (10)$$

where P_{max}^{alg} denotes the best objective function value (total collected profit) obtained by a specific algorithm for a given instance over five trials and P_{max}^{Best} represents the best total collected profit attained among the SA-SOPMV, original MILP, and two-phase MILP algorithms for the same instance. If an algorithm cannot obtain a feasible solution for a problem instance, RPD_{alg} is set to 100% for that instance. The average RPD_{alg} for mandatory visit ratios of 10%, 20%, and 30% is 0.000%, 0.000%, and 0.000% for SA-SOPMV, respectively; 11.053%, 6.686%, and 20.270% for the original MILP; and 0.984%, 2.698%, and 4.775% for the two-phase MILP algorithms. These results show that the two-phase MILP provides better solutions than the original MILP. Moreover, the proposed SA-SOPMV outperforms both the original MILP and the two-phase MILP for small problem instances.

5.4.2. Solving the Second SOPMV Problem Set

Appendix A Tables A1–A3 present the computational results for the SOPMV with W values of 0.4, 0.6, and 0.8, and %MV values of 10%, 20%, and 30%. These data are compiled and visualized in Figures 3 and 4.

The W value determines the maximum travel time for each problem. As illustrated in Figure 3, a smaller W value reduces the likelihood of finding a feasible solution. Specifically, if the maximum travel time is too short to accommodate all mandatory visits, the problem will likely be infeasible. Conversely, if the maximum travel time is adequate, the probability of serving all mandatory visits significantly increases. The %MV determines the number of sets with mandatory visits for each problem instance. As shown in Figure 3, a higher %MV value also decreases the likelihood of easily finding a feasible solution. This is because if a large number of sets have mandatory visits and cannot all be served, the problem is likely to be infeasible. Conversely, if the number of sets with mandatory visits is smaller, the probability of serving all mandatory visits significantly increases.

Table 6. The result of solving the second SOP problem set.

Instance	g1						g2					
	MSAOP			VNS-SOP			MSAOP			VNS-SOP		
	P	T	P	P _{avg}	T	P	P	T	P	P _{avg}	T	P
16pr76	74	8.6	74	74.0	0.6	74	3765	10.6	3765	3765.0	0.6	3765
20kroA100	96	10.5	96	96.0	0.8	96	4868	11.5	4868	4868.0	0.8	4868
20kroB100	98	13.4	98	98.0	0.8	98	4916	10.7	4916	4916.0	0.9	4916
20kroC100	97	10.8	97	96.1	0.9	97	4882	11.2	4882	4869.2	1.1	4882
20kroD100	96	10.3	96	96.0	1.0	96	4838	8.9	4838	4838.0	1.1	4838
20kroE100	96	9.1	96	96.0	0.9	96	4887	9.9	4887	4887.0	1.1	4887
20rat99	93	7.6	93	92.9	1.2	93	4721	8.1	4721	4721.0	1.0	4721
20rd100	97	10.4	97	97.0	1.3	97	4929	9.6	4929	4929.0	1.3	4929
21eil101	97	8.8	98	97.8	1.2	98	4953	20.1	4993	4957.0	1.1	4948
21lin105	102	8.1	102	102.0	1.1	102	5157	8.4	5157	5157.0	1.1	5157
22pr107	101	8.6	101	101.0	0.6	101	5109	8.3	5109	5105.4	0.7	5101
25pr124	121	11.3	121	121.0	1.3	121	6173	11.9	6173	6170.2	1.5	6173
26bier127	125	16.0	125	125.0	1.8	125	6314	16.2	6314	6314.0	1.8	6314
26ch130	127	10.2	127	126.7	1.9	127	6412	9.7	6412	6382.3	2.2	6412
28pr136	134	10.2	134	134.0	2.1	134	6841	12.2	6841	6831.4	1.8	6841
29pr144	141	17.4	141	141.0	1.7	141	7195	22	7195	7157.3	1.6	7137
30ch150	144	9.6	147	146.7	2.1	147	7315	12.3	7394	7378.2	1.9	7394
30kroA150	145	11.3	145	144.7	2.2	145	7361	13.8	7361	7356.6	2.3	7361
30kroB150	148	15.2	148	148.0	2.5	148	7445	15.1	7445	7445.0	2.6	7445
31pr152	147	18.2	147	145.6	1.7	147	7422	17.8	7422	7355.6	1.9	7422
32u159	157	15.5	157	155.1	2.2	157	7991	22.9	8011	7965.2	2.8	8011
39rat195	189	13.0	189	188.9	5.2	189	9558	11.0	9558	9546.3	4.7	9558
40d198	196	36.8	196	195.2	5.7	196	9934	25.7	9938	9926.3	6.7	9934
40kroa200	198	22.8	198	198.0	3.7	198	10,010	24.5	10,010	9976.0	3.6	9970
40krob200	198	19.9	198	198.0	5.0	198	9990	28.6	9990	9982.7	5.8	9980
45ts225	221	34.7	221	220.8	7.3	221	11,187	26.2	11,225	11,158.4	7.8	11,225
45isp225	219	16.7	220	219.1	6.1	220	11,103	16.4	11,124	11,063.9	7.1	11,085
46pr226	224	26.9	224	224.0	3.6	224	11,368	26.4	11,368	11,358.1	4.6	11,368
53gil262	258	27.2	258	254.2	8.3	258	13,050	25.9	13,050	13,003.6	7.8	13,050
53pr264	262	34.0	262	262.0	7.1	262	13,277	36.9	13,277	13,277.0	7.4	13,277
56a280	273	33.5	273	270.8	10.4	272	13,971	37.0	13,971	13,834.9	9.9	13,971

Table 6. Cont.

Instance	g1										g2																			
	MSAOP					VNS-SOP					SA-SOP					MSAOP					VNS-SOP					SA-SOP				
	P	T	P	P	T	P	P _{avg}	T	P	P	P _{avg}	T	P	P	T	P	P _{avg}	T	P	P	P _{avg}	T	P	P	P _{avg}	T				
60pr299	296	31.3	296	296	12.0	296	295.8	90.0	15,005	36.8	15,005	14,974.4	12.1	14,973	14,904.4	90.0														
64lin318	315	43.4	316	315	10.6	315	315.0	96.0	16,013	77.3	16,013	15,948.0	11.2	15,937	15,800.0	96.0														
80rd400	397	76.7	398	396	28.2	396	394.6	120.0	20,055	48.1	20,140	19,942.2	29.4	19,897	19,777.6	120.0														
84fl417	415	103.5	415	413	18.0	413	412.0	126.0	21,030	114.7	21,030	20,956.0	18.1	20,916	20,838.2	126.0														
88pr439	437	158.0	437	424	33.9	424	423.6	132.0	22,110	132.8	22,110	22,032.2	33.1	21,792	21,497.0	132.0														
89pcb442	440	129.5	440	440	38.6	440	438.6	133.5	22,300	95.0	22,300	22,116.3	36.2	22,300	22,176.6	133.5														
99d493	490	120.8	490	490	67.3	490	489.0	147.0	24,827	153.1	24,840	24,708.3	66.3	24,840	24,780.0	147.0														
115rat575	562	91.2	563	562	76.5	562	556.8	172.5	28,497	65.9	28,361	28,043.5	75.6	28,257	27,913.4	172.5														
115u574	571	204.5	571	569	80.3	569	564.8	172.5	28,888	212.7	28,888	28,866.5	72.2	28,576	28,407.2	172.5														
131p654	652	356.0	652	649	45.9	649	644.4	195.0	32,991	360.1	32,950	32,894.9	44.2	32,887	32,844.0	195.0														
132d657	649	126.1	649	647	108.9	647	645.4	196.5	32,974	155.9	33,022	32,901.6	100.3	32,762	32,611.2	196.5														
145u724	716	99.6	717	710	176.6	710	706.2	216.0	36,288	116.7	36,316	35,964.8	171.4	36,196	35,837.2	216.0														
157rat783	767	279.2	760	765	225.7	765	758.2	235.5	38,953	145.5	38,487	37,999.8	233.1	38,769	37,949.0	235.5														
201pr1002	994	304.9	994	988	480.4	988	986.2	300.0	50,453	992.7	50,172	49,760.9	534.7	49,934	49,778.2	300.0														
212u1060	1057	873.5	1057	1057	679.9	1057	1053.0	318.0	53,450	798.5	53,437	53,391.8	641.8	53,271	53,214.2	318.0														
217vm1084	1078	489.5	1070	1064	832.0	1064	1061.8	325.5	54,642	655.5	54,363	53,744.2	733.7	53,862	53,448.6	325.5														

Table 7. Results obtained by the original MILP for different ratios of mandatory visits in the first SOPMV problem set.

Instance	Pg	W	Tmax	MILP (10%)					MILP (20%)					MILP (30%)				
				P		T			P		T			P		T		
				P	LB	T	P	LB	P	LB	T	P	LB	P	LB	T	P	LB
11berlin52	g1	0.4	1616	37	37	96.9	35	35	35	35	74.5	35	35	35	35	35.8		
11berlin52	g2	0.4	1616	1829	1829	172.6	1751	1751	1751	1751	34.1	1751	1751	1751	1751	33.1		
11berlin52	g1	0.6	2424	43	43	267.6	40	40	40	40	115.3	40	40	40	40	76.1		
11berlin52	g2	0.6	2424	2190	2190	465.9	2023	2023	2023	2023	220.7	2023	2023	2023	2023	339.9		
11berlin52	g1	0.8	3232	47	47	416.1	46	46	46	46	741.3	46	46	46	46	1129.9		
11berlin52	g2	0.8	3232	2384	2384	656.7	2384	2384	2384	2384	349.8	2384	2384	2384	2384	610.3		
11eil51	g1	0.4	69	22	22	55.00	20	20	20	20	30.3	10	10	10	10	27.4		
11eil51	g2	0.4	69	1279	1279	43.7	1015	1015	1015	1015	40.6	571	571	571	571	29.3		
11eil51	g1	0.6	104	39	39	94.8	39	39	39	39	68.9	39	39	39	39	113.8		
11eil51	g2	0.6	104	1911	1911	188.8	1911	1911	1911	1911	198.4	1911	1911	1911	1911	172.7		

Table 7. Cont.

Instance	Pg	W	Tmax	MILP (10%)			MILP (20%)			MILP (30%)		
				P	LB	T	P	LB	T	P	LB	T
11eil51	g1	0.8	139	43	43	6654.7	43	43	6096.1	43	43	4152.5
11eil51	g2	0.8	139	2114	2114	550.3	2085	2085	1141.6	2085	2085	2412.8
14st70	g1	0.4	126	22	22	2156.2	22	22	14,320.2	22	22	4555.8
14st70	g2	0.4	126	1672	1672	3515.7	1098	1098	11,422.0	954	954	5017.9
14st70	g1	0.8	252	-	-	14,400.3	-	-	14,400.3	-	-	14,400.7
14st70	g2	0.8	252	-	-	14,400.3	3229	3513	14,400.3	-	-	14,400.3
16eil76	g1	0.4	83	40	40	4652.4	40	40	293.9	40	40	853.5
16eil76	g2	0.4	83	2223	2223	4608.2	2223	2223	2096.1	2223	2223	356.6
16eil76	g1	0.6	125	45	62	14,400.5	41	59	14,400.4	-	-	14,400.3
16eil76	g2	0.6	125	3068	3068	8828.9	2186	3018	14,400.5	-	-	14,400.4

Table 8. Results obtained by the two-phase MILP for different ratios of mandatory visits in the first SOPMV problem set.

Instance	Pg	W	Tmax	MILP* (10%)				MILP* (20%)				MILP* (30%)						
				P ₁	T ₁	P ₂	LB	T ₂	P ₁	T ₁	P ₂	LB	T ₂	P ₁	T ₁	P ₂	LB	T ₂
11berlin52	g ₁	0.4	1616	6	0.09	37	37	82.8	9	0.08	35	35	53.6	11	0.08	35	35	40.6
11berlin52	g ₂	0.4	1616	299	0.09	1829	1829	112.6	493	0.08	1751	1751	69.0	603	0.08	1751	1751	24.4
11berlin52	g ₁	0.6	2424	6	0.09	43	43	518.9	9	0.08	40	40	361.6	11	0.08	40	40	102.7
11berlin52	g ₂	0.6	2424	299	0.09	2190	2190	574.5	493	0.08	2023	2023	255.4	603	0.08	2023	2023	168.1
11berlin52	g ₁	0.8	3232	6	0.09	47	47	410.1	9	0.08	46	46	1021.3	11	0.08	46	46	5314.0
11berlin52	g ₂	0.8	3232	299	0.09	2384	2384	576.4	493	0.08	2384	2384	631.1	603	0.08	2384	2384	3103.6
11eil51	g ₁	0.4	69	4	0.09	22	22	31.4	8	0.08	20	20	28.9	10	0.08	10	10	9.8
11eil51	g ₂	0.4	69	248	0.09	1279	1279	52.7	422	0.07	1015	1015	37.4	571	0.08	571	571	9.5
11eil51	g ₁	0.6	104	6	0.09	39	39	126.1	12	0.08	39	39	92.7	16	0.08	39	39	75.7
11eil51	g ₂	0.6	104	187	0.09	1911	1911	143.4	625	0.08	1911	1911	165.7	799	0.08	1911	1911	116.3
11eil51	g ₁	0.8	139	7	0.09	43	43	640.0	11	0.08	43	43	1215.4	15	0.08	43	43	881.1
11eil51	g ₂	0.8	139	271	0.09	2114	2114	818.2	429	0.08	2085	2085	12,693.9	677	0.08	2085	2085	400.7
14st70	g ₁	0.4	126	6	0.14	22	22	2344.5	11	0.14	22	22	6739.8	22	0.30	33	33	4816.4
14st70	g ₂	0.4	126	173	0.13	1672	1672	2750.5	459	0.13	1098	1098	7479.8	954	0.13	954	954	5231.2
14st70	g ₁	0.8	252	5	0.13	64	69	14,400.5	11	0.13	48	69	14,400.5	22	0.12	26	69	14,400.1
14st70	g ₂	0.8	252	173	0.13	3096	3513	14,400.5	459	0.13	2801	3513	14,400.5	918	0.12	2907	3513	14,400.3
16eil76	g ₁	0.4	83	5	0.14	40	40	1431.3	20	0.17	40	40	471.1	28	0.15	40	40	391.7
16eil76	g ₂	0.4	83	399	0.14	2223	2223	2466.7	1327	0.17	2223	2223	300.0	1679	0.14	2223	2223	389.5
16eil76	g ₁	0.6	125	3	0.14	54	59	14,400.6	14	0.16	47	52	14,400.8	26	0.14	42	57	14,400.4
16eil76	g ₂	0.6	125	223	0.14	2910	3262	14,400.7	748	0.16	2433	3113	14,400.7	1524	0.15	2427	3090	14,400.3

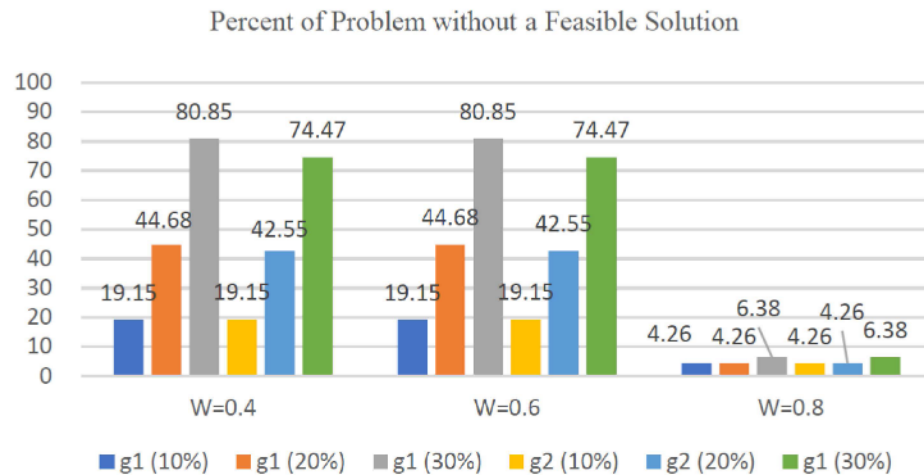


Figure 3. The ratios of problems without obtaining feasible solutions under different W , P_g , and $\%MV$ values.

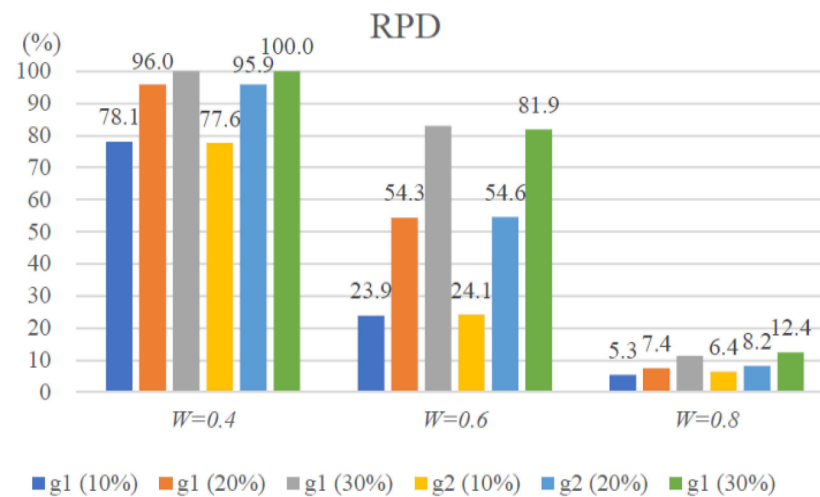


Figure 4. The RPD values under different W , P_g , and $\%MV$ values.

To assess the impact on the objective function value under different W and $\%MV$ values, the relative percentage deviation (RPD) is used as the performance metric, calculated using the following equation:

$$RPD_{\%MV} = \frac{P_{max}^0 - P_{max}^{\%MV}}{P_{max}^0} \times 100\% \quad (11)$$

where $P_{max}^{\%MV}$ denotes the best objective function value obtained for a ratio of mandatory visits over five trials and P_{max}^0 represents the objective function value obtained without any mandatory visits over five trials.

Figure 4 illustrates that a higher $\%MV$ value corresponds to a larger RPD value. This is because sets with mandatory visits may not generate higher profits or may be located farther from other visited sets, requiring more travel distance. Consequently, the total profit achieved is suboptimal. Conversely, if the number of sets with mandatory visits is small, the RPD value is lower. The W value significantly influences the RPD. If the W value is too small, finding a feasible solution becomes challenging, making achieving a desirable RPD value difficult. Based on the W and $\%MV$ values, the P_g value appears to have a minimal impact on the RPD values.

6. Conclusions and Future Research

The study introduces a new SOP variant, SOPMV, which incorporates sets with mandatory visits. A mathematical model and an SA algorithm are proposed to address this problem. To evaluate the efficacy of the proposed SA algorithm, a set of SOPMV instances was generated, as this variant has not been previously addressed in the literature.

The performance of the proposed SA was analyzed by solving both SOP and SOPMV benchmark instances. Although the computing time required for the proposed SA algorithm is longer than that of VSN-SOP, it successfully obtains all optimal solutions for small-sized problems. For larger problems, while the computing time of the proposed SA is also greater than VNS-SOP, the solutions it provides are either equal to or very close to those obtained by VNS-SOP. The two-phase MILP was also employed to find an optimal or feasible solution for small-scale SOPMV problems. For these small instances, the proposed SA outperforms the two-phase MILP approach, which is solved by the Gurobi solver, with an average RPD of 0.984%, 2.698%, and 4.775% for mandatory visit ratios of 10%, 20%, and 30%, respectively. These results demonstrate that the proposed SA delivers high-quality solutions for SOPMV instances. Furthermore, the findings indicate that the quality of solutions deteriorates as the proportion of mandatory visits increases in large-scale problem instances.

Several avenues for future research are suggested. This study introduces a new problem variant and presents a mathematical model and a SA algorithm to address it. Future work may involve developing new metaheuristic approaches, such as Giant Trevally Optimizer (GTO) [23] and Artificial Rabbits Optimization (ARO) [24], for solving the SOPMV or enhancing the quality of solutions by refining the initial solution provided to the SA. Additionally, incorporating time windows into the SOPMV could be explored. Furthermore, future research could address the team-set orienteering problem with mandatory visits (TSOPMV).

Author Contributions: Conceptualization, S.-W.L. and S.G.; methodology, S.-W.L. and S.G.; validation, S.G.; formal analysis, W.-J.W. and S.G.; investigation, S.-W.L. and S.G.; data curation, S.-W.L. and S.G.; writing—original draft preparation, S.G. and W.-J.W.; writing—review and editing, S.-W.L. and W.-J.W.; visualization, S.-W.L.; supervision, S.-W.L.; project administration, S.-W.L.; funding acquisition, S.-W.L. All authors have read and agreed to the published version of the manuscript.

Funding: The work of the first author was partially supported by the National Science and Technology Council of the Republic of China (Taiwan) under Grant NSTC112-2410-H-182-002-MY3.

Data Availability Statement: The raw data supporting the conclusions of this article will be made available by the authors on request.

Conflicts of Interest: The authors declare no conflicts of interest.

Appendix A

Table A1. Computational results of SA-SOPMV for different ratios of sets with mandatory visits ($W = 0.4$).

Instances	g ₁				g ₂			
	0%	10%	20%	30%	0%	10%	20%	30%
16pr76	47	47			2449	2449		
20kroA100	42	28			2151	1411		
20kroB100	49				2431			
20kroC100	42	40			2174	2174		
20kroD100	39				1740			
20kroE100	52	52	52		2415	2415	2415	
20rat99	37				1905			
20rd100	45				2228			
21eil101	67	38			3365	2066		
21lin105	50				2489			
22pr107	41				2123			
25pr124	46				2302			
26bier127	110	103	99		5420	5136	4899	
26ch130	70	70			3423	3423		
28pr136	53				2699			
29pr144	60				3055			
30ch150	61	43			3131	2268		
30kroA150	58	55			3039	3039		
30kroB150	66				3172			
31pr152	57				2915			
32u159	76				4002			
39rat195	71				3656			
40d198	70				3595			
40kroa200	92				4550			
40krob200	87				4348			
45ts225	101				5037			
45tsp225	80	80			4297	4297		
46pr226	86				4403			
53gil262	105				5330			
53pr264	127				6397			
56a280	107				5630			
60pr299	131				6600			
64lin318	169				8600			
80rd400	208				10,727			
84fl417	201	130			10,021	6756		
88pr439	332				16,875			
89pcb442	222				11,535			
99d493	278				13,992			
115rat575	261				13,070			
115u574	277	245			13,576	12,345		
131p654	308				15,579			
132d657	300				14,847			
145u724	314				16,099			
157rat783	347				18,216			
201pr1002	496				25,009			
212u1060	512				26,085			
217vm1084	662				30,300			

Table A2. Computational results of SA-SOPMV for different ratios of set with mandatory visits ($W = 0.6$).

Instances	g1				g2			
	0%	10%	20%	30%	0%	10%	20%	30%
16pr76	65	65	65	60	3275	3275	3275	2901
20kroA100	65	58	58	58	3192	2922	2922	2922
20kroB100	66	61	61		3203	3025	2858	
20kroC100	62	59	54	54	3110	3110	2610	2610
20kroD100	64				3133			
20kroE100	63	63	63	58	2950	2950	2950	2599
20rat99	52				2643			
20rd100	72	69			3591	3465		
21eil101	82	77	62		4187	4022	3285	
21lin105	78	78	78	78	3955	3955	3955	3955
22pr107	53				2697			
25pr124	75				3763			
26bier127	118	117	117	117	5882	5862	5862	5862
26ch130	99	99	97	88	5123	5123	4947	4473
28pr136	89				4579			
29pr144	98	93	70		4947	4685	3314	
30ch150	96	96			4825	4795		
30kroA150	90	86	86		4542	4421	4421	
30kroB150	105				5123			
31pr152	105	105	102		5235	5235	5095	
32u159	114				5906			
39rat195	118				5846			
40d198	160				8102			
40kroa200	142	135			7067	6829		
40krob200	138	132	130		6943	6575	6488	
45ts225	152	151	139	139	7948	7829	7321	7225
45tsp225	149	149			7603	7332		
46pr226	162	107			8280	5375		
53gil262	176	163			8862	7877		
53pr264	161	126			8404	6343		
56a280	164	159			8122	8256		
60pr299	187	168			9531	8633		
64lin318	255	255	163		13,185	13,188	7693	
80rd400	292	285	204		14,902	14,558	10,757	1493
84fl417	286	260	108		14,849	12,537	5467	
88pr439	385	340	244		19,530	17,086	11,562	
89pcb442	321	298	221		16,084	14,720	11,432	
99d493	405	385			20,117	18,906		
115rat575	394	383			18,561	19,078	552	
115u574	445	433	389	269	21,625	20,343	19,490	15,156
131p654	528	470			23,140	23,604		
132d657	474	416	302		24,022	21,059	16,306	
145u724	509	464	398		25,626	21,846	18,851	
157rat783	504	499	472		25,404	23,473	22,039	
201pr1002	757	701	569		36,617	35,957	28,530	
212u1060	800	725	576		38,384	34,485	30,548	9152
217vm1084	865	848	699		43,087	38,163	30,627	7037

Table A3. Computational results of SA-SOPMV for different ratios of set with mandatory visits ($W = 0.8$).

Instances	g1				g2			
	0%	10%	20%	30%	0%	10%	20%	30%
16pr76	72	72	72	72	3611	3611	3611	3611
20kroA100	79	79	79	79	4115	4115	4115	4115
20kroB100	86	86	86	86	4188	4188	4188	4188
20kroC100	83	83	83	83	3999	3999	3999	3999
20kroD100	85	80	79	79	4267	3978	3952	3952
20kroE100	80	80	80	80	4002	3957	3894	3894
20rat99	79	79	79	79	3992	3992	3992	3992
20rd100	91	91	91	90	4640	4640	4640	4531
21eil101	91	91	89	86	4717	4717	4548	4471
21lin105	90	90	90	90	4561	4561	4561	4561
22pr107	65				3275			
25pr124	99	99	99	99	4947	4947	4947	4947
26bier127	123	123	123	123	6218	6218	6218	6218
26ch130	117	117	117	117	5967	5967	5967	5967
28pr136	123	123	116	116	6330	6330	6104	6104
29pr144	125	122	119	98	6356	6227	5960	4858
30ch150	127	127	123	123	6382	6382	6170	6096
30kroA150	120	118	118	111	6081	6051	6051	5734
30kroB150	138	128	125	118	6880	6351	6197	5881
31pr152	115	118	115	106	5800	5928	5800	5267
32u159	140	137	132	120	7164	7030	6739	6178
39rat195	167	146	146	98	8522	7389	7389	5147
40d198	171				8628			
40kroa200	184	184	182	172	9338	9338	9151	8832
40krob200	179	179	179	179	9077	9077	9037	8992
45ts225	190	190	190	189	9780	9888	9862	9862
45tsp225	198	198	184	184	10,030	10,030	9481	9481
46pr226	213	208	208	208	10,755	10,540	10,540	10,540
53gil262	225	223	215	213	11,606	11,294	10,721	10,573
53pr264	233	233	232	232	11,817	11,817	11,628	11,741
56a280	232	232	228	220	11,852	11,825	11,348	11,032
60pr299	268	265	254	246	13,618	13,417	11,372	12,273
64lin318	294	295	290	288	15,103	15,030	14,631	13,427
80rd400	362	356	347	348	18,337	17,918	17,760	17,499
84fl417	397	396	345		20,250	16,959	16,275	
88pr439	414	411	395	392	21,002	20,513	19,620	18,949
89pcb442	400	391	389	386	19,802	18,992	19,419	19,034
99d493	468	461	466	460	23,464	23,412	23,463	22,886
115rat575	495	495	477	464	24,839	24,571	23,048	22,816
115u574	539	535	520	513	27,135	26,761	26,286	24,556
131p654	632	633	506	596	31,968	25,784	25,263	29,890
132d657	584	570	574	555	29,183	29,383	27,974	28,626
145u724	643	635	619	612	31,365	30,537	30,975	29,788
157rat783	653	655	638	647	32,633	32,333	31,090	31,261
201pr1002	906	899	878	848	45,012	44,545	43,795	42,609
212u1060	973	947	937	865	48,598	44,423	45,310	41,783
217vm1084	996	991	959	963	49,985	49,672	49,410	38,952

References

1. Golden, B.L.; Levy, L.; Vohra, R. The orienteering problem. *Nav. Res. Logist.* **1987**, *34*, 307–318. [\[CrossRef\]](#)
2. Vansteenwegen, P.; Souffriau, W.; Van Oudheusden, D. The orienteering problem: A survey. *Eur. J. Oper. Res.* **2011**, *209*, 1–10. [\[CrossRef\]](#)
3. Angelelli, E.; Archetti, C.; Vindigni, M. The clustered orienteering problem. *Eur. J. Oper. Res.* **2014**, *238*, 404–414. [\[CrossRef\]](#)
4. Gunawan, A.; Lau, H.C.; Vansteenwegen, P. Orienteering problem: A survey of recent variants, solution approaches and applications. *Eur. J. Oper. Res.* **2016**, *255*, 315–332. [\[CrossRef\]](#)

5. Tsiligirides, T. Heuristic methods applied to orienteering. *J. Oper. Res. Soc.* **1984**, *35*, 797–809. [[CrossRef](#)]
6. Gendreau, M.; Laporte, G.; Semet, F. A branch-and-cut algorithm for the undirected selective traveling salesman problem. *Netw. Int. J.* **1998**, *32*, 263–273. [[CrossRef](#)]
7. Gavalas, D.; Konstantopoulos, C.; Mastakas, K.; Pantziou, G. A survey on algorithmic approaches for solving tourist trip design problems. *J. Heuristics* **2014**, *20*, 291–328. [[CrossRef](#)]
8. Keller, C.P. Algorithms to solve the orienteering problem: A comparison. *Eur. J. Oper. Res.* **1989**, *41*, 224–231. [[CrossRef](#)]
9. Chao, I.-M.; Golden, B.L.; Wasil, E.A. A fast and effective heuristic for the orienteering problem. *Eur. J. Oper. Res.* **1996**, *88*, 475–489. [[CrossRef](#)]
10. Feillet, D.; Dejax, P.; Gendreau, M. Traveling salesman problems with profits. *Transp. Sci.* **2005**, *39*, 188–205. [[CrossRef](#)]
11. Archetti, C.; Feillet, D.; Hertz, A.; Speranza, M.G. The undirected capacitated arc routing problem with profits. *Comput. Oper. Res.* **2010**, *37*, 1860–1869. [[CrossRef](#)]
12. Archetti, C.; Carrabs, F.; Cerulli, R. The set orienteering problem. *Eur. J. Oper. Res.* **2018**, *267*, 264–272. [[CrossRef](#)]
13. Pěnička, R.; Faigl, J.; Saska, M. Variable neighborhood search for the set orienteering problem and its application to other orienteering problem variants. *Eur. J. Oper. Res.* **2019**, *276*, 816–825. [[CrossRef](#)]
14. Carrabs, F. A biased random-key genetic algorithm for the set orienteering problem. *Eur. J. Oper. Res.* **2021**, *292*, 830–854. [[CrossRef](#)]
15. Dontas, M.; Sideris, G.; Manousakis, E.G.; Zachariadis, E.E. An adaptive memory matheuristic for the set orienteering problem. *Eur. J. Oper. Res.* **2023**, *309*, 1010–1023. [[CrossRef](#)]
16. Yu, V.F.; Salsabila, N.Y.; Lin, S.-W.; Gunawan, A. Simulated annealing with reinforcement learning for the set team orienteering problem with time windows. *Expert Syst. Appl.* **2024**, *238*, 121996. [[CrossRef](#)]
17. Dutta, J.; Barma, P.S.; Mukherjee, A.; Kar, S.; De, T. A multi-objective open set orienteering problem. *Neural Comput. Appl.* **2020**, *32*, 13953–13969. [[CrossRef](#)]
18. Palomo-Martínez, P.J.; Salazar-Aguilar, M.A.; Laporte, G.; Langevin, A. A hybrid variable neighborhood search for the orienteering problem with mandatory visits and exclusionary constraints. *Comput. Oper. Res.* **2017**, *78*, 408–419. [[CrossRef](#)]
19. Lu, Y.; Benlic, U.; Wu, Q. A memetic algorithm for the orienteering problem with mandatory visits and exclusionary constraints. *Eur. J. Oper. Res.* **2018**, *268*, 54–69. [[CrossRef](#)]
20. Lin, S.-W.; Yu, V.F. Solving the team orienteering problem with time windows and mandatory visits by multi-start simulated annealing. *Comput. Ind. Eng.* **2017**, *114*, 195–205. [[CrossRef](#)]
21. Öncan, T.; Altınel, İ.K.; Laporte, G. A comparative analysis of several asymmetric traveling salesman problem formulations. *Comput. Oper. Res.* **2009**, *36*, 637–654. [[CrossRef](#)]
22. Ekoko, P. Analysing Stagecoach Network Problem Using Dynamic Programming Algorithm. *Glob. J. Math. Sci.* **2008**, *7*, 15–20. [[CrossRef](#)]
23. Sadeeq, H.T.; Abdulazeez, A.M. Giant Trevally Optimizer (GTO): A Novel Metaheuristic Algorithm for Global Optimization and Challenging Engineering Problems. *IEEE Access* **2022**, *10*, 121615–121640. [[CrossRef](#)]
24. Wang, L.; Cao, Q.; Zhang, Z.; Mirjalili, S.; Zhao, W. Artificial rabbits optimization: A new bio-inspired meta-heuristic algorithm for solving engineering optimization problems. *Eng. Appl. Artif. Intell.* **2022**, *114*, 105082. [[CrossRef](#)]

Disclaimer/Publisher’s Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.