
- 21) When implementing linear regression of some dependent variable y on the set of independent variables $\mathbf{x} = (x_1, ..., x_r)$, where r is the number of predictors, which of the following statements will be true?
 - a) $\beta_0, \beta_1, ..., \beta_r$ are the **regression coefficients**.
 - b) Linear regression is about determining the **best predicted weights** by using the **method of ordinary least squares**.
 - **C)** E is the random interval
 - d) Both and b

Answer: d

- 22) What indicates that you have a **perfect fit** in linear regression?
 - a) The value $R^2 < 1$, which corresponds to SSR = 0
 - b) The value $R^2 = 0$, which corresponds to SSR = 1
 - c) The value $R^2 > 0$, which corresponds to SSR = 1
 - d) The value $R^2 = 1$, which corresponds to SSR = 0

Answer: d

- 23) In simple linear regression, the value of **what** shows the point where the estimated regression line crosses the *y* axis?
 - a) Y
 - b) B0
 - c) B1
 - d) F
- 24) Check out these four linear regression plots:

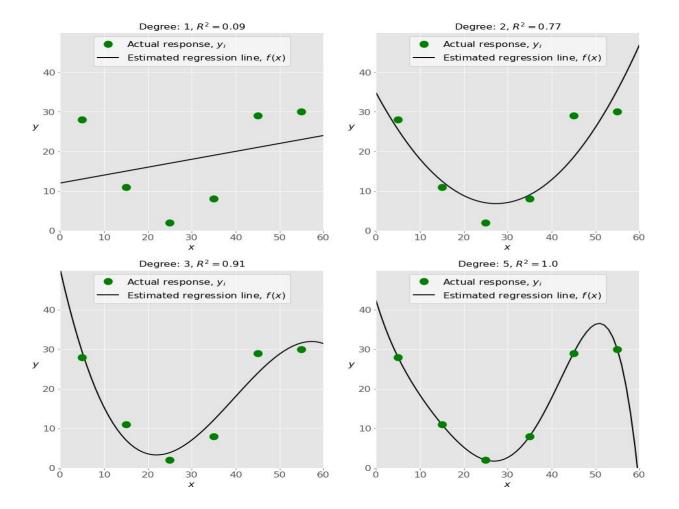

Which one represents an underfitted model?

- a) The bottom-left plot
- b) The top-right plot
- c) The bottom-right plot
- d) The top-left plot

- 25) There are five basic steps when you're implementing linear regression:
 - **a.** Check the results of model fitting to know whether the model is satisfactory.
 - **b.** Provide data to work with, and eventually do appropriate transformations.
 - **c.** Apply the model for predictions.
 - d. Import the packages and classes that you need.
 - e. Create a regression model and fit it with existing data.

However, those steps are currently listed in the wrong order. What is the correct order?

- a) e, c, a, b, d
- b) e, d, b, a, c
- c) d, e, c, b, a
- d) d, b, e, a, c

Answer: d

- 26) Which of the following are optional parameters to LinearRegression in scikit-learn?
 - a) Fit
 - b) fit_intercept
 - c) normalize
 - d) copy_X
 - e) n_jobs
 - f) reshape

Answer: f

- 27) While working with scikit-learn, in which type of regression do you need to transform the array of inputs to include nonlinear terms such as x^2 ?
- a) Multiple linear regression
- b) Simple linear regression
- c) Polynomial regression

Answer: C

| 28) You should choose statsmodels over scikit-learn when: |
|---|
| a) You want graphical representations of your data. |
| b) You're working with nonlinear terms. |
| c) You need more detailed results. |
| d) You need to include optional parameters. |
| Answer: b |
| 29)Is a fundamental package for scientific computing with Python. It offers comprehensive mathematical functions, random number generators, linear algebra routines, Fourier transforms, and more. It provides a high-level syntax that makes it accessible and productive. |
| a) Pandas |
| b) Numpy |
| c) Statsmodel |
| d) Scipy |
| Answer: d |
| is a Python data visualization library based on Matplotlib. It provides a high-level interface for drawing attractive and informative statistical graphics that allow you to explore and understand your data. It integrates closely with pandas data structures. |
| a) Bokeh b) Seaborn c) Matplotlib d) Dash Answer: b) |