


1. Write a Dart function `checkDiscountEligibility` that takes a user's age as input and prints 'Eligible for student discount' if the age is less than 22, otherwise prints 'No discount available'.

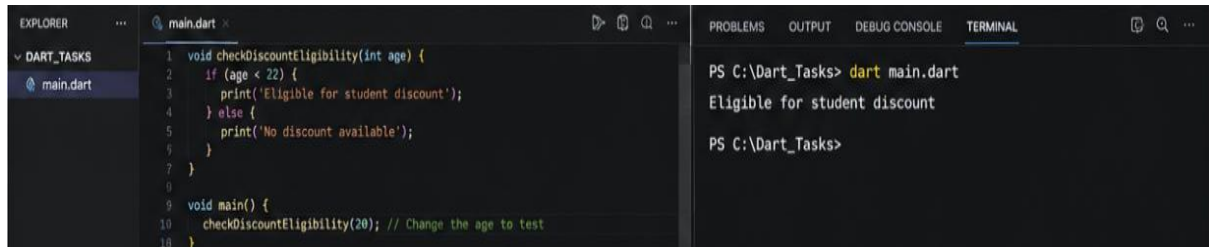


The screenshot shows the VS Code interface with the Explorer, main.dart, and Terminal panels. The main.dart file contains the following code:

```
1 void checkDiscountEligibility(int age) {  
2   if (age < 22) {  
3     print('Eligible for student discount');  
4   } else {  
5     print('No discount available');  
6   }  
7 }  
8  
9 void main() {  
10  checkDiscountEligibility(20); // Change the age to test  
11 }
```

The Terminal panel shows the command `PS C:\Dart_Tasks> dart main.dart` and the output `Eligible for student discount`.

2. Build a Dart function called `getDeliveryCharge` that takes the order value as input and uses if-else to apply a delivery charge: if the order is below 200, charge 50; if between 200 and 500, charge 20; if above 500, delivery is free. Print the final delivery charge.

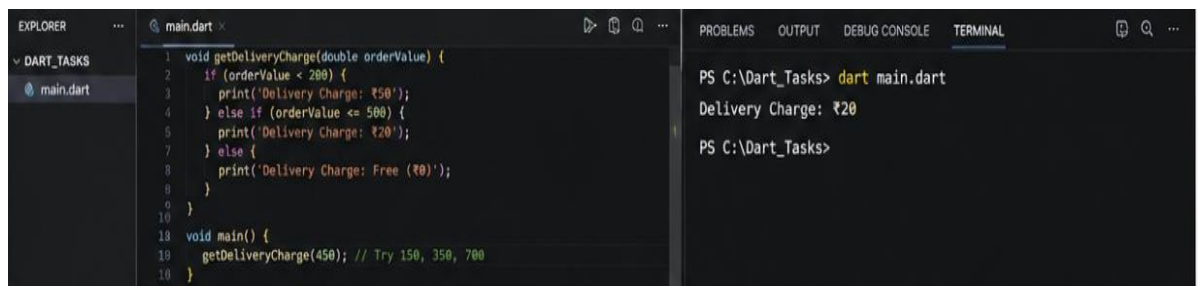


The screenshot shows the VS Code interface with the Explorer, main.dart, and Terminal panels. The main.dart file contains the following code:

```
1 void getDeliveryCharge(double orderValue) {  
2   if (orderValue < 200) {  
3     print('Delivery Charge: ₹50');  
4   } else if (orderValue <= 500) {  
5     print('Delivery Charge: ₹20');  
6   } else {  
7     print('Delivery Charge: Free (₹0)');  
8   }  
9 }  
10  
11 void main() {  
12  getDeliveryCharge(450); // Try 150, 350, 700  
13 }
```

The Terminal panel shows the command `PS C:\Dart_Tasks> dart main.dart` and the output `Delivery Charge: ₹20`.

3. Create a Dart function `loginStatus` that takes two strings: username and password. If both match 'user123' and 'pass123', print 'Login Successful'; if the username matches but password doesn't, print 'Incorrect password'; otherwise, print 'User not found'.
Hint: Use nested if-else statements to check each condition.

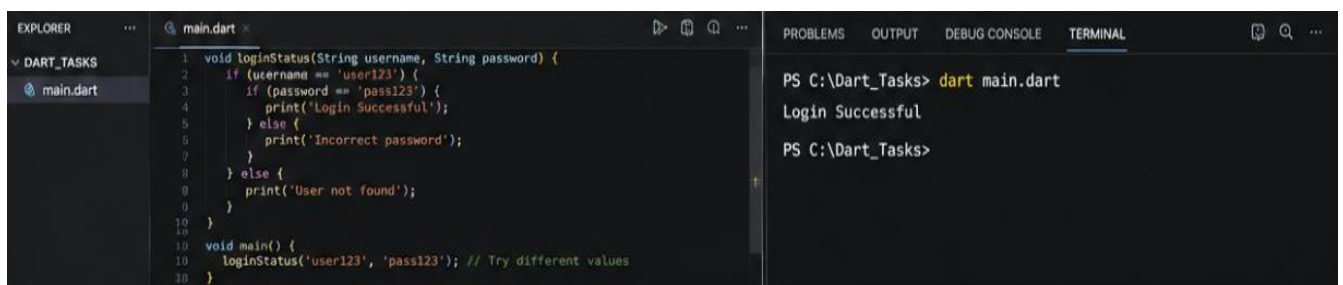


The screenshot shows the VS Code interface with the Explorer, main.dart, and Terminal panels. The main.dart file contains the following code:

```
1 void loginStatus(String username, String password) {  
2   if (username == 'user123') {  
3     if (password == 'pass123') {  
4       print('Login Successful');  
5     } else {  
6       print('Incorrect password');  
7     }  
8   } else {  
9     print('User not found');  
10  }  
11 }  
12  
13 void main() {  
14  loginStatus('user123', 'pass123'); // Try different values  
15 }
```

The Terminal panel shows the command `PS C:\Dart_Tasks> dart main.dart` and the output `Login Successful`.

4. Write a Dart function called `showRoleFeatures` that takes a user role as input ('admin', 'seller', or 'buyer') and uses a switch statement to print a different message for each role, like 'Admin: Access to all features', 'Seller: Can add products', 'Buyer: Can browse and purchase'.

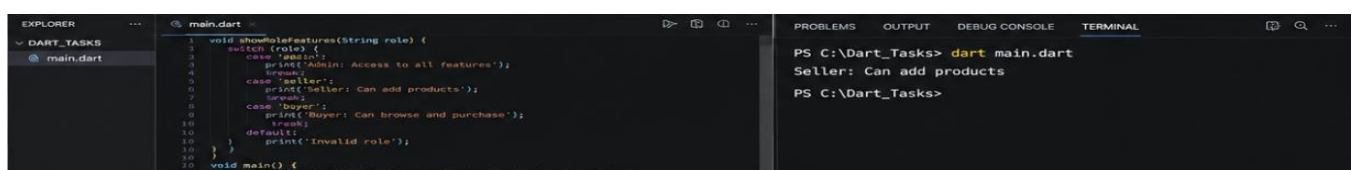


The screenshot shows the VS Code interface with the Explorer, main.dart, and Terminal panels. The main.dart file contains the following code:

```
1 void showRoleFeatures(String role) {  
2   switch (role) {  
3     case 'admin':  
4       print('Admin: Access to all features');  
5       break;  
6     case 'seller':  
7       print('Seller: Can add products');  
8       break;  
9     case 'buyer':  
10      print('Buyer: Can browse and purchase');  
11      break;  
12     default:  
13      print('Invalid role');  
14   }  
15 }  
16  
17 void main() {  
18  showRoleFeatures('seller'); // Try 'admin', 'buyer', 'other'  
19 }
```

The Terminal panel shows the command `PS C:\Dart_Tasks> dart main.dart` and the output `Seller: Can add products`.

5. Use ChatGPT to generate a Dart code snippet that asks the user for their favorite food from a list ('Pizza', 'Burger', 'Dosa', 'Biryani'), then uses a switch-case to print a unique message for each food. Paste the generated code into your Dart file and test it.
- Hint:** Prompt ChatGPT with: 'Write a Dart function that takes a food name as input and prints a special message for each using switch-case.'

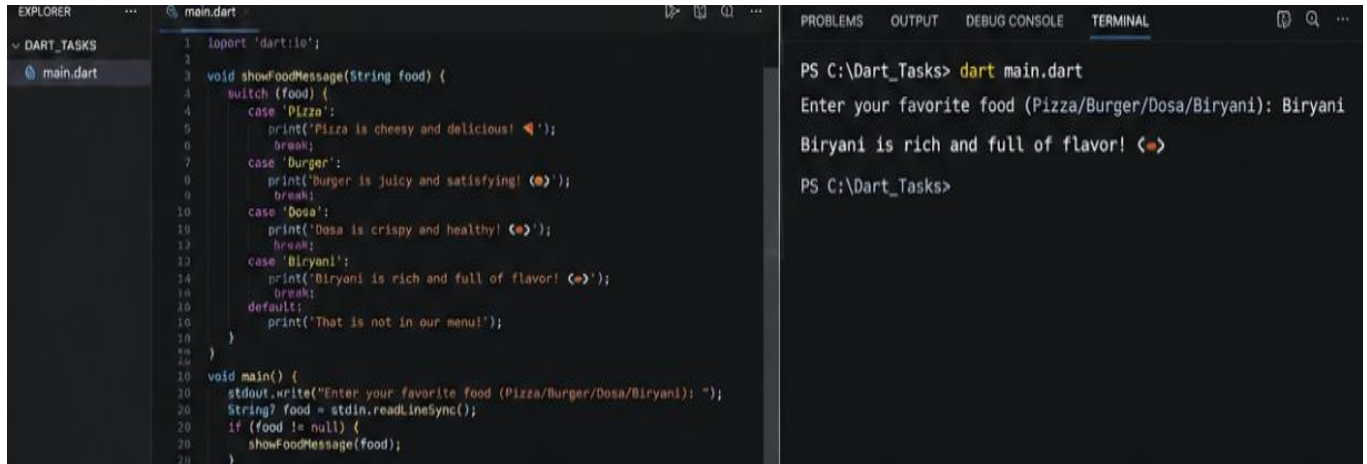

The screenshot shows an IDE with two main panels. The left panel, titled 'EXPLORER', shows a file named 'main.dart' under a folder 'DART_TASKS'. The right panel, titled 'TERMINAL', shows the execution of the Dart code.

```
1 import 'dart:io';
2
3 void showFoodMessage(String food) {
4   switch (food) {
5     case 'Pizza':
6       print('Pizza is cheesy and delicious! 🍕');
7       break;
8     case 'Burger':
9       print('Burger is juicy and satisfying! 🍔');
10      break;
11     case 'Dosa':
12       print('Dosa is crispy and healthy! 🍲');
13       break;
14     case 'Biryani':
15       print('Biryani is rich and full of flavor! 🍛');
16       break;
17     default:
18       print('That is not in our menu!');
19   }
20 }
21
22 void main() {
23   stdout.write('Enter your favorite food (Pizza/Burger/Dosa/Biryani): ');
24   String? food = stdin.readLineSync();
25   if (food != null) {
26     showFoodMessage(food);
27   }
28 }
```

The terminal output shows the following sequence of events:

```
PS C:\Dart_Tasks> dart main.dart
Enter your favorite food (Pizza/Burger/Dosa/Biryani): Biryani
Biryani is rich and full of flavor! 🍛
PS C:\Dart_Tasks>
```