


1. Create a Dart list named `foodItems` with 5 of your favorite Zomato dishes (as strings), then use a for loop to print each dish with its index (e.g., '1. Biryani').

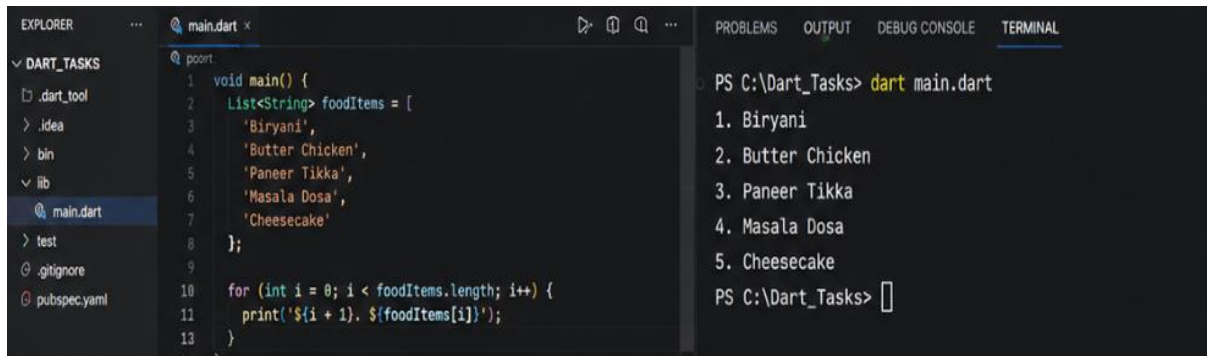


The screenshot shows an IDE with a file explorer on the left containing a project named 'DART_TASKS' with files like '.dart_tool', '.idea', 'bin', 'lib', 'main.dart', 'test', '.gitignore', and 'pubspec.yaml'. The 'main.dart' file is open, showing the following code:

```
1 void main() {  
2   List<String> foodItems = [  
3     'Biryani',  
4     'Butter Chicken',  
5     'Paneer Tikka',  
6     'Masala Dosa',  
7     'Cheesecake'  
8   ];  
9  
10  for (int i = 0; i < foodItems.length; i++) {  
11    print('${i + 1}. ${foodItems[i]}');  
12  }  
13 }
```

The terminal on the right shows the command `PS C:\Dart_Tasks> dart main.dart` and its output:

```
1. Biryani  
2. Butter Chicken  
3. Paneer Tikka  
4. Masala Dosa  
5. Cheesecake  
PS C:\Dart_Tasks>
```

2. Use a while loop in Dart to simulate a Flipkart-style shopping cart: starting with a list of 4 product names, print each product and remove it from the list one by one until the cart is empty.
Hint: Use the `removeAt(0)` method to remove the first item in each iteration.

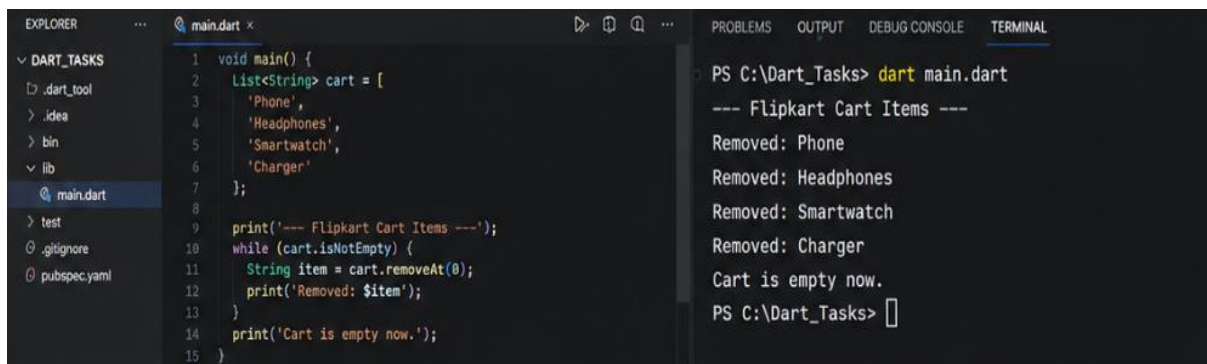


The screenshot shows the same IDE with the 'main.dart' file containing the following code:

```
1 void main() {  
2   List<String> cart = [  
3     'Phone',  
4     'Headphones',  
5     'Smartwatch',  
6     'Charger'  
7   ];  
8  
9   print('--- Flipkart Cart Items ---');  
10  while (cart.isNotEmpty) {  
11    String item = cart.removeAt(0);  
12    print('Removed: $item');  
13  }  
14  print('Cart is empty now.');
```

The terminal output shows the command `PS C:\Dart_Tasks> dart main.dart` and the following output:

```
--- Flipkart Cart Items ---  
Removed: Phone  
Removed: Headphones  
Removed: Smartwatch  
Removed: Charger  
Cart is empty now.  
PS C:\Dart_Tasks>
```

3. Given a Dart map called `movieRatings` with 5 movie titles as keys and their ratings (out of 10) as values, use a for-in loop to print each movie and its rating in the format 'Jawan: 8/10'.

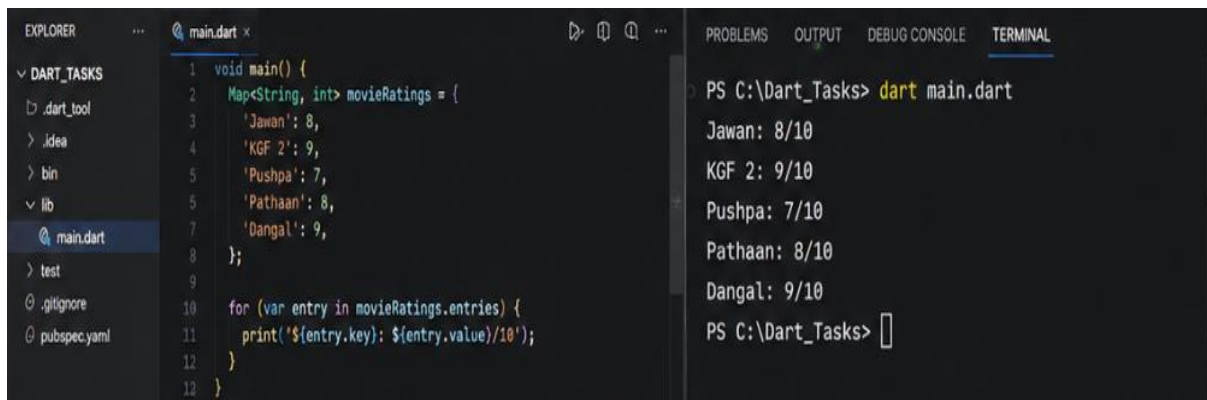


The screenshot shows the same IDE with the 'main.dart' file containing the following code:

```
1 void main() {  
2   Map<String, int> movieRatings = {  
3     'Jawan': 8,  
4     'KGF 2': 9,  
5     'Pushpa': 7,  
6     'Pathaan': 8,  
7     'Dangal': 9,  
8   };  
9  
10  for (var entry in movieRatings.entries) {  
11    print('${entry.key}: ${entry.value}/10');  
12  }  
13 }
```

The terminal output shows the command `PS C:\Dart_Tasks> dart main.dart` and the following output:

```
Jawan: 8/10  
KGF 2: 9/10  
Pushpa: 7/10  
Pathaan: 8/10  
Dangal: 9/10  
PS C:\Dart_Tasks>
```

- Write a Dart program that takes a list of cricket scores (e.g., [45, 100, 78, 23, 56]) and uses a loop to count how many scores are above 50, then print the total number of 'half-centuries' like an IPL scoreboard.

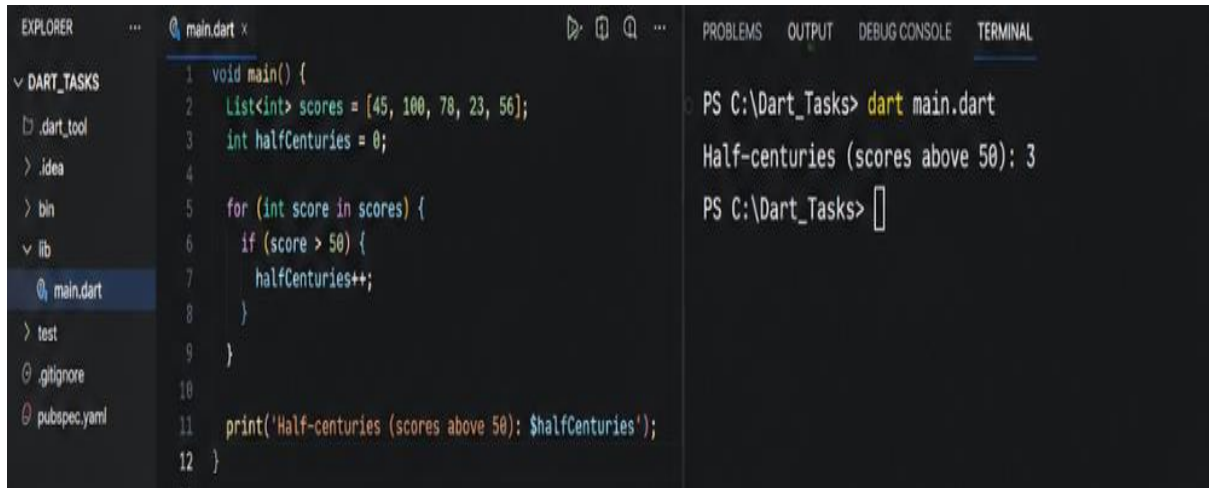

The screenshot shows an IDE with a file explorer on the left, a code editor in the center, and a terminal on the right. The file explorer shows a project named 'DART_TASKS' with subfolders '.dart_tool', '.idea', 'bin', 'lib', and 'test'. The 'lib' folder is expanded, showing 'main.dart'. The code editor displays the following Dart code:

```
1 void main() {  
2   List<int> scores = [45, 100, 78, 23, 56];  
3   int halfCenturies = 0;  
4  
5   for (int score in scores) {  
6     if (score > 50) {  
7       halfCenturies++;  
8     }  
9   }  
10  
11   print('Half-centuries (scores above 50): $halfCenturies');  
12 }
```

The terminal on the right shows the command 'dart main.dart' being executed, resulting in the output 'Half-centuries (scores above 50): 3'.