

LINUX COMMANDS

1.mkdir- Create a new directory with given name(cmd-mkdir new directory name).

2.ls – List the content of directory (the contents are color of blue its has a directory).

3.cd – change to directory(cmd-cd directory name).

4.touch- is used to create an empty files(cmd-touch file1.txt).

5.cat>- create new file and writes the content and ctrl+D to save the content into file(cmd-cat>filename).

6.cat-Display the content of files(cmd-cat filename).

7.cat file1 file2 > file3- create an new file and content of both files will be copied to new file(cmd- cat file1.txt file2.txt>merge_file.txt).

8.ls *.txt – the ls display the all type of file.if we want only text files so use this command(cmd-ls *.txt).

9.pwd- it will display current working directory(cmd-pwd).

10.cp-means copy a file or else directory(cmd-cp file3.txt file4.txt).

11.mv- move a file(cmd-mv file3.txt /home/linux_commands).

12.head- it will display the first 10lines of content(cmd-head filename).

13.tail - it will display the last 10lines of content(cmd-tail filename).

14.tac-display file content lines in reverse eg.lastline will be in first(cmd-tac filename).

15.more-similar to cat and here we can display large content by using ENTER,SPACEBAR(cmd-more filename).

16.id- display id of user/groups.

17.clear- clear the screen.

18.vi-text editor to write programs of text.

19.grep-filter to search given pattern in the file content(cmd-grep linux file1.txt). We want particular word in the file.

20.diff-it compares the content of two different files(cmd-diff file2.txt file3.txt).

21.ping- check the connectivity status of server(cmd-ping google.com).

22.history-review all the commands which you have entered.

23.hostname-display the hostname.

24.hostname -i-display the host IP.

25.chmod-change the user/group permissions.

26.nl-display the line numbers.

27.wc-given numbers of lines,words and characters available in the file content.(lines,words and characters).

28.uniq-remove duplicates of file content/it can remove only continuous duplicates.

29.rmdir- Remove the specified directory(directory should be empty).

30.rm-remove the file.

31.unzip-this command unzip the zip file eg.this zip file have three text files like a1.txt,a2.txt and a3.txt.(cmd- unzip filename).

32. zip -d – we want to delete particular file in that zip file(cmd- file.zip filename).

33.zip -u – we want to add new file in that zip file(cmd-zip -u file.zip filename).

34. zip -m – we want to move files to zip files(cmd- myfile.zip *.c).

35.zip -r – we want to move zip files to different directory(cmd- zip -r file.zip directory_name).

36. zip -r myfile.zip . -x a.txt- we want to move files except one file(cmd- zip -r file.zip . -x thatonefile.txt).

37. zip -v -want to know about all the files with extensions “.c”(cmd- zip -v myfile.zip *.c).

How do I create a zip file in Linux?

38. cmd-zip filename.zip first.txt second.txt.(create a zip file).

How to unzip file?

39 unzip filename.zip – unzip file.

Given a password to protect a zip file.

40. `zip -e -P [password] file.zip first.txt second.txt`-to protect the file.

TAR

41.`tar -cvf test.tar file1.txt file2.txt file3.txt`-create a tar file

DATE 08/11/2024

42.`tar -tvf test.tar` – view the tar file.

43.`tar -xvf test.tar`-extract the tar file.

44.`tar -xvf test.tar file3.txt` -extracting a single file from the tar file.

Gzip format

45.`tar -czvf test.tar.gz file1.txt file2.txt`-compress the file
its size will be reduced.

46.`tar -tvf test.tar.gz` – view the gz tar file.

47.`tar -xzvf test.tar.gz`- extract the file.

Bzip2 format

48.`tar -cjvf test.tar.bz2 file1.txt file2.txt`-create a bzip file

49.`tar -tvf test.tar.bz2`-view the file.

50.`tar -xjvf test.tar.bz2`-extract the file.

SSH(secure shell)

51.ssh username.ip-enter,asking a password -this cmd is accessing a another user with your own machine(like-rebooting,shutdown.) and cmd- exit will be returning your previous user.

Hostname edit

52.hostnamectl set-hostname name-enter

DF-Diskfree

df is used to show information about free disk space on filesystems.

Syndax

df -h -view df size on gb

df -ht-with type

DU-DISK USAGE

53. du foldername/

du -h foldername/-human readable.

54.ps- view the process status.

55.top – upto date.

56.kill <pid>-kill the process of mentioned process id.

57.kill -9 <pid>-if abouve cmd may not be kill we want to forcely kill use this cmd.

58.netstat- the network statistics is used for troubleshooting and configuration

59.uptime-how long your system has been running cmd-uptime -p-shows hours and minutes

60.uname-get information about the os,hardware,kernel,and processor.

FILE PERMISSIONS

61. 0 - - no access.

1 -x-execute only .

2-w-write only.

3-w x-write and execute.

4-r-read only.

5-r x-read and execute.

6-r w-read and write.

7-r w x – read,write and execute.

62.SS Command-display the network connections,routing

Cmd-sudo ss -tuln

63.nslookup Command-information about domain names, IP addresses, and other DNS records.

Cmd-nslookup google.com

64.WALL Command-most important command for admin which is used to broadcast important notifications or announcements to all users currently logged into the system.

Eg: wall "we will be going down for maintenance for one hour sharply at 03:30 pm".

65.mesg Command: The mesg command is used to control whether other system users can send messages to your terminal. Cmd- mesg y.

66.Write Command-The write command is used to send messages to another user who is logged into the same system.

VI Shortcuts Commands:

67.cw-----Change the current word. Deletes from the cursor position to the end of the current word and switches to insert mode.

68.dd---delete the current word.

69.r---delete the character under the cursor.

70.u---undo the last change.

Learning about integrity in html

1.integrity

- when you link a file(css or js file) from internet I mean from cdn(cloud flare) there is a possible someone changed the file with bad intentions.

-this integrity help to make sure the file has not been changed using checksum concepts and tells your browser “hey this file match exactly with the unique code.

-if the file is changed the browser did not use.

2.crossorigin

-sends a request to server

-crossorigin=”anonymous” means without sending our personal information such as login details.

Rename command

71.rename 's/\.txt\$/\.pdf/' *.txt-but it won't work

72.su Command

-This command allows administrative access to another user.

73.tr command

-this command is to use convert the file content lowercase to uppercase. Cmd-cat file.txt|tr 'own' 'OWN'

74.od command

-this command to display the file content in octal,hexadecimal and ascii characters.

-od -b filename -- Octal format

-od -t x1 filename -- Hexa decimal format

-od -c filename -- ASCII character format.

75.Sort command

-the sort command is used to sort files in alphabetical order.

-cmd---sort filename.

76.zcat command

-The zcat command is used to display the compressed files.

-cmd---zcat filename.

User1 – sample123

Download extensions

Click the remote explorer-> below the extension icon

Search la ssh ec2-user@IPaddress-enter

DATE:09/11/2024

77.Wheel Group Command:

- it means a user add on wheel group which means they user access the administrative tasks such as installing software, changing the system settings.
- using the sudo command to access.
- cmd:(" sudo usermod -aG wheel username").

78.mount & unmount:

- mount means attaching a filesystem like usb drive and making accessible to system
- unmount means safely ejecting a drive.
- cmd(sudo mount /dev/sdb1 /mnt/mydrive).
- cmd(sudo umount /mnt/mydrive).

79.fsck(file system consistency check)

- fsck checks and repair filesystems for errors.
- cmd(sudo fsck /dev/sda1).

80.mkfs-(make filesystem)

- mkfs create new filesystem on specific partitions.

-cmd(sudo mkfs.ext4 /dev/sdb1).

81.fdisk(formet disk)

-fdisk manages disk partitions. It can create, delete, or view partitions on a disk.

-cmd-(sudo fdisk /dev/sda).

-n for new partition,d for delete partition and p for view partition table.

82.lsblk(list blocked devices)

-list information about all blocked devices.

-cmd(lsblk).

83.blkid(block id)

-shows attributes of blocked devices such as UUIDs means unique identifiers.


-cmd(sudo blkid /dev/sda1).

84.parted(partition editor)

-parted is an advanced disk partitioning tool for larger disks (above 2 TB), providing more features than fdisk.

YUM command learn

85cron / crontab - Schedule recurring tasks.

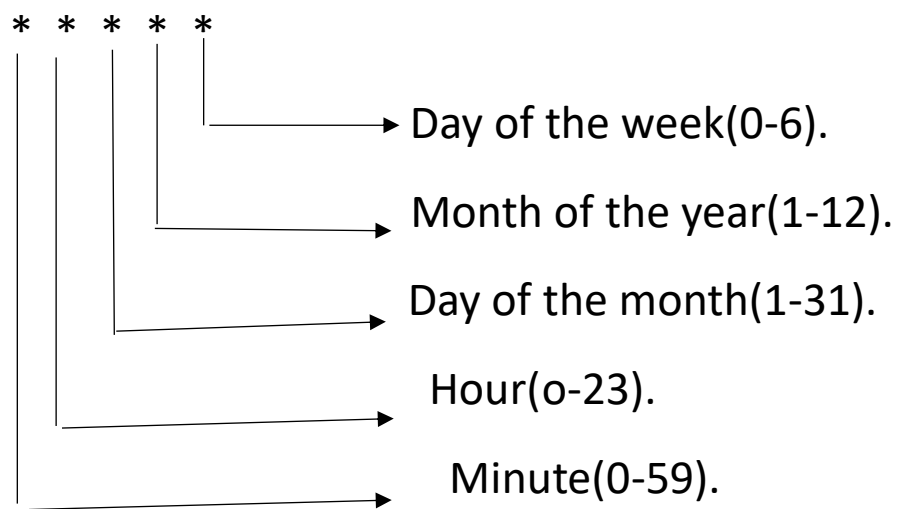

86.dig command

-dig command is to get information about DNS(domain name system) and ip address.

-cmd(dig [server] [name] [type]).

SCREENSHOTS

