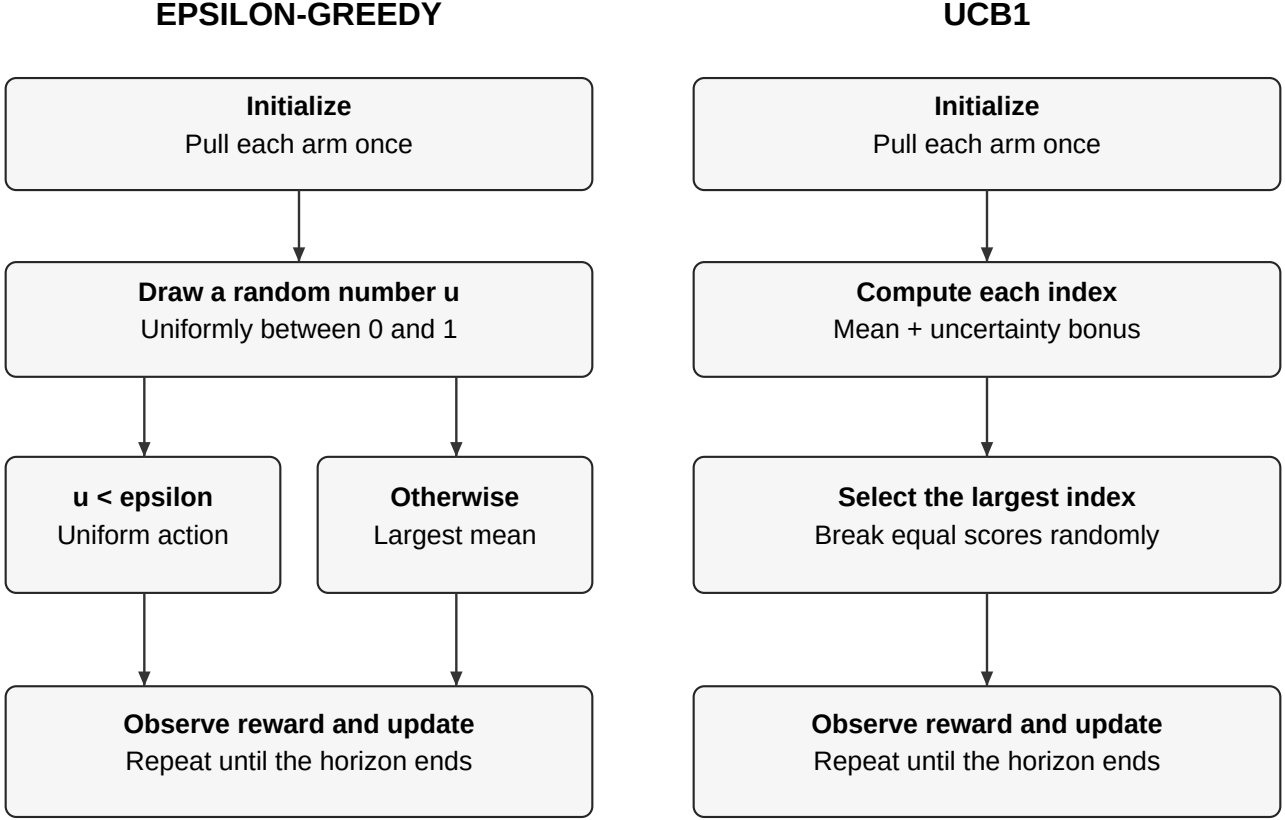

Both methods use identical initialization and sample-mean updates.