

Distinguishable and Exchangeable Dyads: Bayesian Multilevel Modelling

Cross-Sectional and Intensive Longitudinal APIM and DIM

Pascal M. Küng

2026-09-25

This tutorial presents applied Bayesian multilevel modelling for dyadic data, covering both distinguishable and exchangeable dyads. We develop cross-sectional and intensive longitudinal variants of the Actor–Partner Interdependence Model (APIM) and the Dyad–Individual Model (DIM), demonstrate their algebraic equivalence, and discuss implications for interpretation. Using simulated data, we provide fully reproducible code to rebuild the models and assess parameter recovery. The tutorial offers comprehensive {brms} implementations, including random-effects structures, heterogeneous residual variances, and compound-symmetry residuals. We illustrate diagnostics and model comparison and show how to extract dyad-level variance–covariance components.

Interactive HTML version (recommended): The tutorial is best viewed as [interactive slides](#). This PDF is a static archival version for indexing, citation, and long-term reference.

DOI: [10.5281/zenodo.17400655](https://doi.org/10.5281/zenodo.17400655)

Suggested citation: Küng, P. M. (2026). *Distinguishable and Exchangeable Dyads: Bayesian Multilevel Modelling* (Version 2.0.13) [Report]. Zenodo. <https://doi.org/10.5281/zenodo.17400655>

The [GitHub repository](#) contains the source, helpers, model code, and quick guides.

0.1 Overview

- Distinguishable Dyads
 - Cross-Sectional APIM
 - Longitudinal APIM
- Exchangeable Dyads
 - Cross-Sectional APIM
 - Cross-Sectional DIM
 - Equivalence between APIM and DIM
 - Longitudinal DIM
 - Longitudinal APIM

0.2 Quick Access

For readers who want the model code and reporting tables without the full tutorial:

- [Distinguishable dyads quick guide](#)
- [Exchangeable dyads quick guide](#)

0.3 Preparing Dyadic Data with dyadMLM

[dyadMLM](#) prepares dyadic data for multilevel models (Küng, 2026). It:

- validates long-format dyadic data
- supports cross-sectional and intensive longitudinal designs
- creates model-ready variables for APIM, DIM, and DSM specifications
- handles distinguishable, exchangeable, and mixed dyad compositions

Install the current [R-universe version](#), using CRAN for dependencies:

```
install.packages("dyadMLM", repos = c(
  "https://pascal-kueng.r-universe.dev",
  "https://cloud.r-project.org"
))
```

[Getting started](#) · [Function reference](#) · [Source code](#)

0.4 Loading Libraries and setting CmdStan Backend

Some functions used in this presentation are sourced from the files available in the folder 00_R_Functions.

```
library(tidyverse)
library(dyadMLM)
library(brms)
library(glmTMB)
library(easystats)
library(DiagrammeR)
library(DHARma)
library(MASS)
library(purrr)
source(file.path('00_R_Functions', 'ReportModels.R'))
source(file.path('00_R_Functions', 'PrettyTables.R'))

print_apim_preview <- function(df) {
  preview_cols <- c(
    "userID", "coupleID", "gender", ".is_male", ".is_female",
    ".member_contrast_arbitrary", "satisfaction",
    ".communication_gmc_actor", ".communication_gmc_partner"
  )
  df <- df |>
    dplyr::select(dplyr::any_of(preview_cols))
  print_df(head(df))
}

options(
  brms.backend = 'cmdstanr',
  brms.file_refit = 'on_change'
)
```

1 Distinguishable Dyads

2 Distinguishable Dyads - Cross-Sectional APIM

2.1 Distinguishable Dyads - Data: Simulated Dyads

```
print_df(head(df))
```


Attaching package: 'kableExtra'

The following object is masked from 'package:dplyr':

group_rows

userID	coupleID	gender	comm	satisfaction
1 1	1	female	4.851107	4.841332
1 2	1	male	6.004533	5.577165
2 1	2	female	5.881321	7.248741
2 2	2	male	6.433723	6.960293
3 1	3	female	4.283971	6.928699
3 2	3	male	5.516060	6.077688

2.2 Distinguishable Dyads - Cross-Sectional APIM

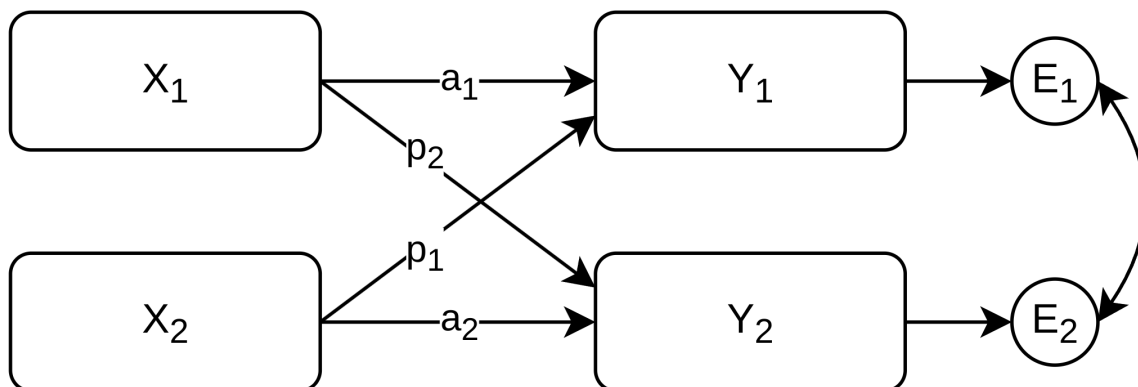

(e.g., Kenny et al., 2006; Kenny & Cook, 1999; Kenny & Kashy, 2011)

2.3 Distinguishable Dyads - Preparing Data

```
df_apim <- prepare_dyad_data(  
  data = df,  
  dyad = coupleID,  
  member = userID,  
  role = gender,  
  predictors = communication,  
)
```

```

model_types = "apim",
keep_compositions = "female-male",
include_arbitrary_member_contrast = TRUE,
add_apim_gmc_predictors = TRUE,
seed = 123
)

print_apim_preview(df_apim)

```

2.4 Distinguishable Dyads - Preparing Data

userID	coupleID	gender	.is male	.is female	.member contrast arbitrary	satisfaction	.comm actor	.comm partner
1 1	1	female	0	1	-1	4.841332	-0.1553604	0.9980657
1 2	1	male	1	0	1	5.577165	0.9980657	-0.1553604
2 1	2	female	0	1	-1	7.248741	0.8748537	1.4272563
2 2	2	male	1	0	1	6.960293	1.4272563	0.8748537
3 1	3	female	0	1	-1	6.928699	-0.7224960	0.5095933
3 2	3	male	1	0	1	6.077688	0.5095933	-0.7224960

For the likelihood-based constraint comparison, the glmmTMB models below use `.communication_gmc_actor` and `.communication_gmc_partner`. The Bayesian models retain the raw actor and partner scores, so their intercepts refer to a communication score of 0 rather than the sample mean.

2.5 Distinguishable Dyads - Fitting the Model in glmmTMB

- glmmTMB models residual variance/dispersion via `dispformula`, but residual covariance is handled through random-effect covariance structures.
- For Gaussian mixed models, `dispformula = ~ 0` fixes the residual variance to a tiny value. This pushes the Gaussian residual variance into the random-effect block.
- In this Gaussian dyadic model, the `us(0 + .is_male + .is_female | coupleID)` block therefore represents the 2x2 residual variance-covariance structure between partners.
- For non-Gaussian models, this is not an ordinary residual covariance on the response scale. The same random-effect trick adds latent Gaussian heterogeneity/correlation on the linear predictor scale.
- Do **not** use `dispformula = ~ 0` as a general non-Gaussian residual-covariance trick. For families with an estimable dispersion parameter, `dispformula` models that family-specific parameter via a log link; for families without one, such as Poisson or binomial, it is ignored. Partner-specific dispersion, e.g. `dispformula = ~ 0 + .is_male + .is_female`, is only appropriate when the family has a dispersion parameter and this is substantively intended.

2.6 Distinguishable Dyads - Fitting the Model in glmmTMB

```

1 model_dist_apim_glmmTMB <- glmmTMB(
2   satisfaction ~
3
4   # Remove global intercept, introduce male and female intercepts.
5   0 + .is_male + .is_female +
6
7   # Actor effect for male and female
8   .communication_gmc_actor:.is_male +
9   .communication_gmc_actor:.is_female +

```

```

10
11 # Partner effect for male and female
12 .communication_gmc_partner:.is_male +
13 .communication_gmc_partner:.is_female +
14
15 # Modelling residual non-independence with an unstructured 2x2 covariance.
16 us(0 + .is_male + .is_female | coupleID)
17
18 # Gaussian response:
19 # dispformula = ~ 0 fixes residual variance to a tiny value,
20 # pushing the Gaussian residual variance into this random-effect block.
21 , dispformula = ~ 0
22
23 # Non-Gaussian responses:
24 # dispformula is family-specific dispersion, or ignored for families
25 # without a dispersion parameter. Do not use ~0 as a residual trick.
26 # If dispersion exists and should differ by partner, use e.g.:
27 # dispformula = ~ 0 + .is_male + .is_female
28
29 , data = df_apim
30 , family = gaussian
31 )

```

2.7 Distinguishable Dyads - Fitting the Model in glmmTMB

Note that ‘unstructured’ is the default in glmmTMB, so instead of

```
us(0 + .is_male + .is_female | coupleID)
```

we could also remove `us` and simply write

```
(0 + .is_male + .is_female | coupleID).
```

An unstructured covariance matrix gives `.is_male` and `.is_female` their own variance and freely estimates their correlation. With more than two members (e.g., triads), it would estimate a separate correlation for every pair.

For two partners, the covariance matrix is:

$$\Sigma = \begin{pmatrix} \sigma_{female}^2 & \rho \sigma_{female} \sigma_{male} \\ \rho \sigma_{female} \sigma_{male} & \sigma_{male}^2 \end{pmatrix}.$$

2.8 Distinguishable Dyads - Fitting the Model in glmmTMB

```

Family: gaussian ( identity )
Formula: satisfaction ~ 0 + .is_male + .is_female + .communication_gmc_actor:.is_male +
        .communication_gmc_actor:.is_female + .communication_gmc_partner:.is_male +
        .communication_gmc_partner:.is_female + us(0 + .is_male + .is_female | coupleID)
Dispersion: ~0
Data: df_apim

      AIC      BIC    logLik -2*log(L)  df.resid
3776.7   3821.7   -1879.3   3758.7     1091

Random effects:

Conditional model:
  Groups   Name      Variance Std.Dev. Corr
coupleID .is_male    2.559    1.600
        .is_female  1.682    1.297    0.51
Number of obs: 1100, groups: coupleID, 550

Conditional model:

```

	Estimate	Std. Error	z value	Pr(> z)
.is_male	4.60635	0.06821	67.54	< 2e-16 ***
.is_female	5.61086	0.05530	101.47	< 2e-16 ***
.is_male:.communication_gmc_actor	1.84363	0.04931	37.39	< 2e-16 ***
.is_female:.communication_gmc_actor	1.59247	0.04112	38.72	< 2e-16 ***
.is_male:.communication_gmc_partner	0.16765	0.05072	3.31	0.000949 ***
.is_female:.communication_gmc_partner	0.31084	0.03997	7.78	7.49e-15 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

2.9 glmmTMB: Diagnostics with Near-Zero Gaussian Sigma

With `dispformula = ~ 0`, `glmmTMB` fixes the Gaussian observation-level residual SD near zero because the dyadic variance and covariance are represented by the random-effect block (Brooks et al., 2017). DHARMA's default conditional simulation therefore contains almost no observation-level variation. For a marginal check, resimulate the random effects and interpret the result for that target (Hartig, 2026):

```
dharma_glmmTMB <- DHARMA::simulateResiduals(
  model_dist_apim_glmmTMB,
  n = 1000,
  simulateREs = "unconditional"
)
```

2.10 Distinguishable Dyads - Fitting the Model in brms

In `brms`, we can use `brms`-provided residual covariance structures directly. We do not have to set residuals internally to zero.

```
1 formula_dist_apim_b <- bf(
2   satisfaction ~
3
4   # Remove global intercept, introduce male and female intercepts.
5   0 + .is_male + .is_female +
6
7   # Actor effect for male and female
8   .communication_actor:.is_male +
9   .communication_actor:.is_female +
10
11  # Partner effect for male and female
12  .communication_partner:.is_male +
13  .communication_partner:.is_female +
14
15  # Gender indexes the two within-couple residual positions.
16  unstr(time = gender, gr = coupleID),
17
18  # Allowing two distinct residual variances for males vs females:
19  sigma = ~ 0 + .is_male + .is_female
20
21 )
22
23 priors_dist_apim_b <- c(
24   prior(normal(0, 5), class = "b"),
25   prior(student.t(3, 0, 1.5), class = "b", dpar = "sigma"),
26   prior(lkj(2), class = "cortime")
27 )
28
29 model_dist_apim_b <- brm(
30   formula = formula_dist_apim_b,
31   data = df_apim,
32   family = gaussian(link = identity),
33   prior = priors_dist_apim_b,
34   chains = 4,
35   cores = 4,
```

```

36   iter = 2000,
37   warmup = 1000,
38   seed = 123,
39   file = file.path('brms_cache', 'example1_dist_apim_b') # Cache the model
40 )

```

2.11 Distinguishable Dyads - Fitting the Model in brms

Loading required namespace: rstan

```

Family: gaussian
Links: mu = identity; sigma = log
Formula: satisfaction ~ 0 + .is_male + .is_female + .communication_actor:.is_male +
↪ .communication_actor:.is_female + .communication_partner:.is_male + .communication_partner:.is_female
↪ + unstr(time = gender, gr = coupleID)
      sigma ~ 0 + .is_male + .is_female
Data: df_apim (Number of observations: 1100)
Draws: 4 chains, each with iter = 2000; warmup = 1000; thin = 1;
      total post-warmup draws = 4000

Correlation Structures:
              Estimate Est.Error 1-95% CI u-95% CI Rhat Bulk_ESS Tail_ESS
cortime(female,male)    0.51     0.03    0.44    0.57 1.00    2895    2470

Regression Coefficients:
              Estimate Est.Error 1-95% CI u-95% CI Rhat Bulk_ESS Tail_ESS
.is_male      -5.44     0.28    -5.99    -4.88 1.00    2458    2617
.is_female    -3.90     0.23    -4.37    -3.47 1.00    2401    2641
.is_male:.communication_actor  1.84     0.05     1.75     1.94 1.00    2678    2997
.is_female:.communication_actor  1.59     0.04     1.51     1.67 1.00    2371    2549
.is_male:.communication_partner  0.17     0.05     0.07     0.26 1.00    2555    2726
.is_female:.communication_partner  0.31     0.04     0.23     0.39 1.00    2398    2724
sigma_.is_male  0.47     0.03     0.42     0.53 1.00    3555    2827
sigma_.is_female 0.26     0.03     0.21     0.33 1.00    3317    2788

Draws were sampled using sample(hmc). For each parameter, Bulk_ESS
and Tail_ESS are effective sample size measures, and Rhat is the potential
scale reduction factor on split chains (at convergence, Rhat = 1).

```

2.12 Distinguishable Dyads - Poisson Covariance in brms

Poisson has no separately estimated observation-level residual SD. For distinguishable dyads, we therefore use correlated role-specific dyad effects. The non-Gaussian `unstr()` formulation instead has one common latent SD and would impose equal role variances (Bürkner, 2025). We simulate an actual count outcome rather than discretize continuous `satisfaction`.

2.13 Distinguishable Dyads - Fitting the Poisson Model in brms

```

1 formula_dist_apim_c <- bf(
2   satisfaction_count ~
3
4   # Remove global intercept, introduce male and female intercepts.
5   0 + .is_male + .is_female +
6
7   # Actor effect for male and female
8   .communication_actor:.is_male +
9   .communication_actor:.is_female +
10
11  # Partner effect for male and female
12  .communication_partner:.is_male +
13  .communication_partner:.is_female +

```

```

14
15 # Model within-dyad dependence with correlated Gaussian random effects.
16 # Poisson has no separately estimated residual-dispersion parameter.
17
18 (0 + .is_male + .is_female | coupleID)
19 )
20
21 priors_dist_apim_c <- c(
22   prior(normal(0, 5), class = "b"),
23   prior(student_t(3, 0, 1.5), class = "sd"),
24   prior(lkj(2), class = "cor")
25 )
26
27 model_dist_apim_c <- brm(
28   formula = formula_dist_apim_c,
29   data = df_apim_count,
30   family = poisson(),
31   prior = priors_dist_apim_c,
32   chains = 4,
33   cores = 4,
34   iter = 2000,
35   warmup = 1000,
36   seed = 123,
37   file = file.path('brms_cache', 'example1_dist_apim_c') # Cache the model
38 )

```

2.14 Poisson Model in brms: Results

```

Family: poisson
Links: mu = log
Formula: satisfaction_count ~ 0 + .is_male + .is_female + .communication_actor:.is_male +
↪ .communication_actor:.is_female + .communication_partner:.is_male + .communication_partner:.is_female
↪ + (0 + .is_male + .is_female | coupleID)
Data: df_apim_count (Number of observations: 1100)
Draws: 4 chains, each with iter = 2000; warmup = 1000; thin = 1;
       total post-warmup draws = 4000

Multilevel Hyperparameters:
~coupleID (Number of levels: 550)

```

	Estimate	Est.Error	l-95% CI	u-95% CI	Rhat	Bulk_ESS	Tail_ESS
sd(.is_male)	0.38	0.03	0.33	0.43	1.00	1771	2547
sd(.is_female)	0.27	0.03	0.22	0.32	1.00	1868	2480
cor(.is_male,.is_female)	0.30	0.11	0.08	0.52	1.00	1107	2003

```

Regression Coefficients:

```

	Estimate	Est.Error	l-95% CI	u-95% CI	Rhat	Bulk_ESS	Tail_ESS
.is_male	0.47	0.11	0.27	0.68	1.00	2639	2753
.is_female	0.64	0.09	0.46	0.81	1.00	3087	2953
.is_male:.communication_actor	0.21	0.02	0.17	0.25	1.00	2587	3041
.is_female:.communication_actor	0.17	0.02	0.14	0.20	1.00	2933	2656
.is_male:.communication_partner	0.01	0.02	-0.03	0.04	1.00	2519	2720
.is_female:.communication_partner	0.06	0.01	0.03	0.09	1.00	3308	2926

Draws were sampled using sample(hmc). For each parameter, Bulk_ESS and Tail_ESS are effective sample size measures, and Rhat is the potential scale reduction factor on split chains (at convergence, Rhat = 1).

2.15 Distinguishable Dyads - Fitting the Model in glmmTMB

```

model_glmmTMB_dist_apim_c <- glmmTMB(
  satisfaction_count ~

  # Remove global intercept, introduce male and female intercepts.
  0 + .is_male + .is_female +

```

```

# Actor effect for male and female
.communication_actor:.is_male +
.communication_actor:.is_female +

# Partner effect for male and female
.communication_partner:.is_male +
.communication_partner:.is_female +

# Model within-dyad dependence with correlated Gaussian random effects.
# Poisson has no separately estimated residual-dispersion parameter.

(0 + .is_male + .is_female | coupleID)
, data = df_apim_count
, family = poisson()
)

```

2.16 Poisson Model in glmmTMB: Results

```

Family: poisson ( log )
Formula:      satisfaction_count ~ 0 + .is_male + .is_female + .communication_actor:.is_male +
      .communication_actor:.is_female + .communication_partner:.is_male +
      .communication_partner:.is_female + (0 + .is_male + .is_female |      coupleID)
Data: df_apim_count

      AIC      BIC    logLik -2*log(L)  df.resid
5434    5479    -2708     5416    1091

Random effects:

Conditional model:
Groups   Name      Variance Std.Dev. Corr
coupleID .is_male    0.14072  0.3751
        .is_female 0.07157  0.2675  0.30
Number of obs: 1100, groups: coupleID, 550

Conditional model:
              Estimate Std. Error z value Pr(>|z|)
.is_male      0.47400    0.10744   4.412 1.02e-05 ***
.is_female    0.63559    0.08969   7.087 1.37e-12 ***
.is_male:.communication_actor 0.20833    0.01815  11.476 < 2e-16 ***
.is_female:.communication_actor 0.17450    0.01541  11.322 < 2e-16 ***
.is_male:.communication_partner 0.00901    0.01854   0.486 0.626980
.is_female:.communication_partner 0.05710    0.01481   3.856 0.000115 ***
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

2.17 Distinguishable Dyads - Check Model Convergence and Fit

Check Rhats and Effective Sample Sizes (ESS_tail and ESS_bulk) directly from the brms summary: Rhat should be below 1.01 and both ESS above 400. Some longitudinal example fits below fall short of this (Rhat up to 1.05); for real analyses, run more iterations. Additionally you can (using Model B as an example):

```

# In brms 2.23, draws from either Stan backend are stored as a stanfit here.
rstan::check_hmc_diagnostics(model_dist_apim_b$fit)

```

Divergences:

0 of 4000 iterations ended with a divergence.

Tree depth:

0 of 4000 iterations saturated the maximum tree depth of 10.


Energy:

E-BFMI indicated no pathological behavior.

2.18 Distinguishable Dyads - Check Model Convergence and Fit

```
plot(model_dist_apim_b, ask = FALSE)
```


Loading required namespace: rstan

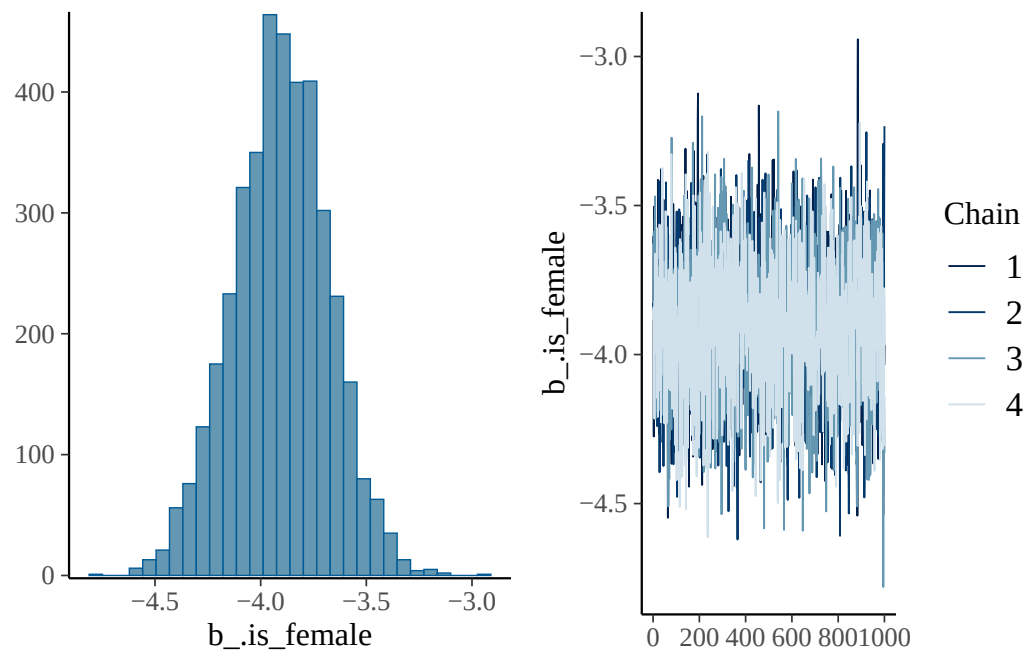

2.19 Distinguishable Dyads - Check Model Convergence and Fit

```
pp_check(model_dist_apim_b, 'dens_overlay_grouped', group = '.is_male')
```


Using 10 posterior draws for ppc type 'dens_overlay_grouped' by default.

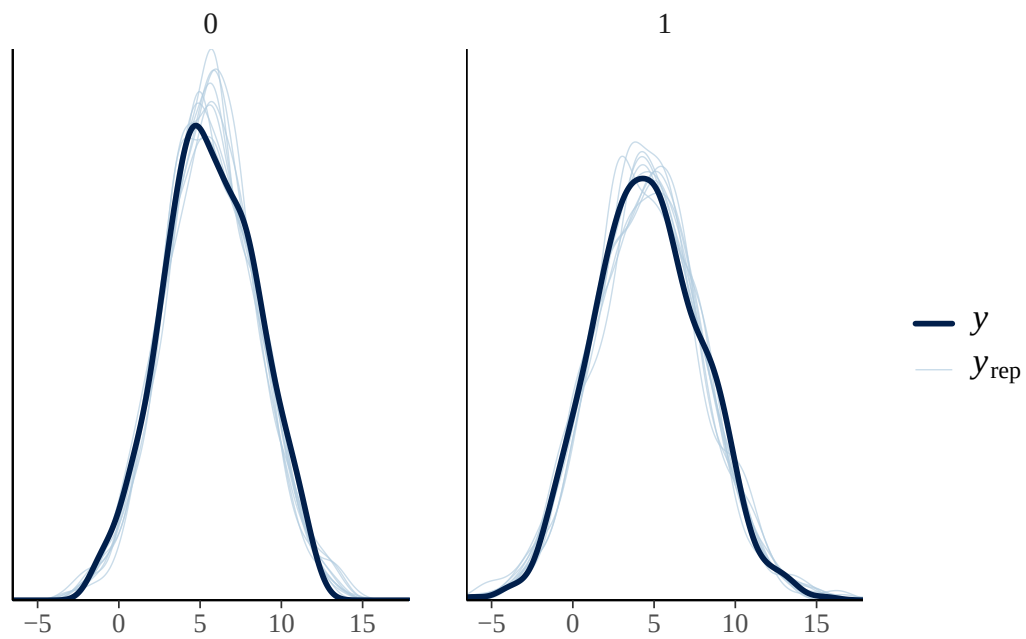

2.20 Distinguishable Dyads - Check Model Convergence and Fit

```
pp_check(model_dist_apim_b, 'ecdf_overlay_grouped', group = '.is_male')
```


Using 10 posterior draws for ppc type 'ecdf_overlay_grouped' by default.

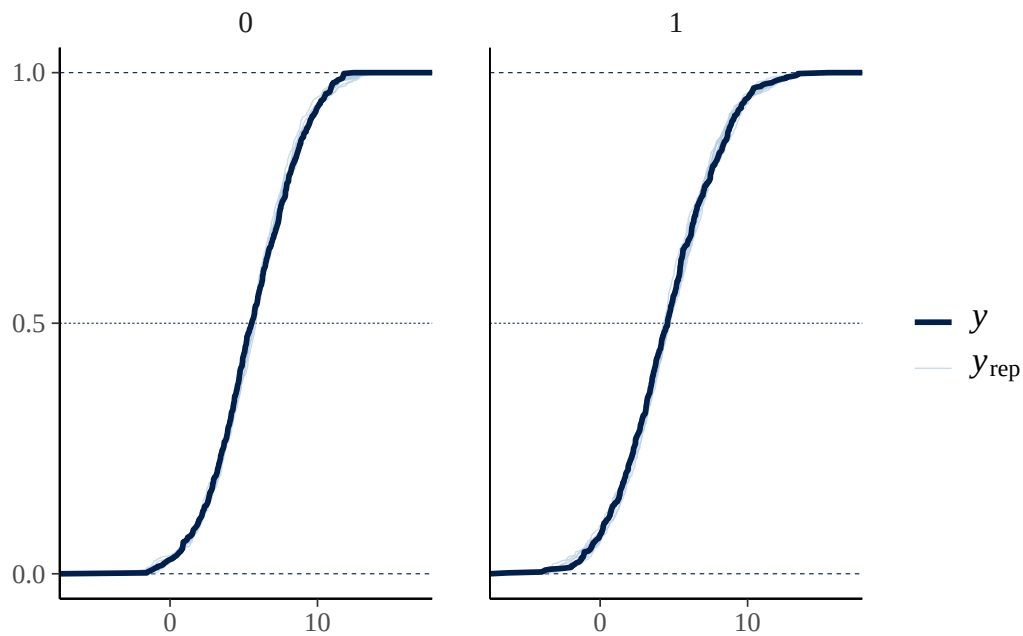

2.21 Distinguishable Dyads - Check Model Convergence and Fit

```
# Custom function to make DHARMA work with brms (see file 'Functions')
DHARMA.check_brms(model_dist_apim_b)
```

DHARMA residual

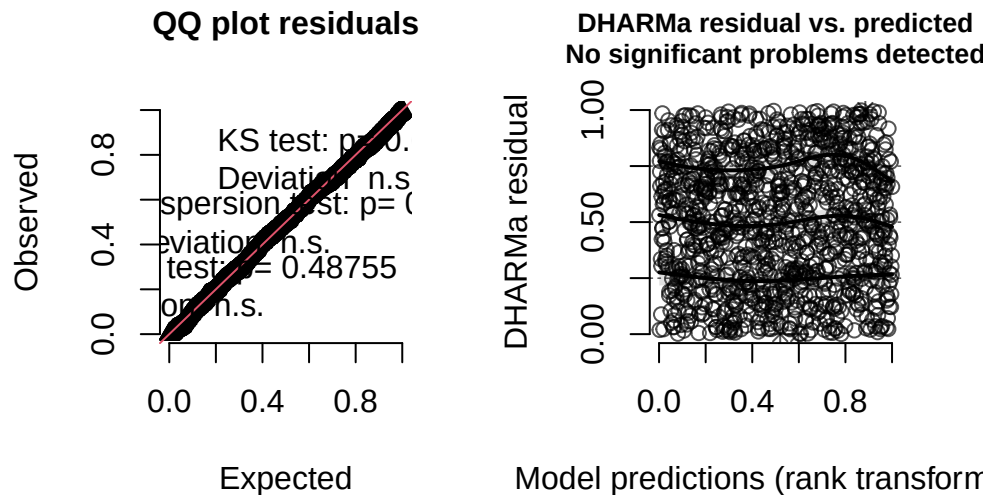

2.22 Distinguishable Dyads - Check Model Convergence and Fit

- Diagnose convergence, residual fit, and predictive accuracy separately; check coding, scaling, priors, and identifiability before changing the model.
- Choose the family and link from the outcome and substantive assumptions—for example, `cumulative()` for ordered outcomes or `bernoulli()` for binary data.
- If chains are healthy, more post-warmup draws can raise ESS. More warmup helps adaptation, while higher `adapt_delta` specifically targets divergences (Bürkner, 2025).

2.23 Excursion: Generalized Dyadic Models

For Gaussian outcomes, residual covariance has a direct response-scale interpretation:

- partner-specific residual variances
- partner residual correlations
- same-day residual covariance in ILD data

For non-Gaussian outcomes, the same syntax usually does **not** estimate an ordinary residual covariance.

Instead, random-effect covariance terms represent latent Gaussian heterogeneity on the link scale.

2.24 Excursion: Count vs Binary Outcomes

For count outcomes, latent partner covariance is often useful and can be estimable:

- Poisson or negative-binomial models can include dyad-level latent covariance terms
- estimates live on the log-link scale
- covariance parameters need diagnostics and sensitivity checks

For dichotomous outcomes, the same idea is much harder:

- each partner contributes only 0 or 1 per occasion
- many latent variance-correlation combinations can imply similar pair probabilities
- same-day binary covariance is especially weakly identified

2.25 Excursion: Practical Warning

Binary dyadic covariance models can converge mechanically while still being unreliable.

Watch for:

- variance estimates near zero or extremely large
- correlations near -1 or 1
- low ESS, divergent transitions, or strong prior sensitivity
- different software giving very different covariance estimates

2.26 Excursion: Practical Strategy

Practical default:

- estimate simpler structures first
- use informative priors if fitting latent binary covariance in brms
- treat same-day binary partner covariance as a specialized model, not a routine extension
- if the main goal is fixed effects, consider simpler random effects or robust/clustered inference

2.27 Distinguishable Dyads - Results

	Est.	95% CI	Rhat	Bulk ESS	Tail ESS
Fixed Effects					
.is male	-5.44	[-5.99, -4.88]	1.003	2458	2617
.is female	-3.90	[-4.37, -3.47]	1.001	2401	2641
.is male: .comm actor	1.84	[1.75, 1.94]	1.000	2678	2997
.is female: .comm actor	1.59	[1.51, 1.67]	1.001	2371	2549
.is male: .comm partner	0.17	[0.07, 0.26]	1.001	2555	2726
.is female: .comm partner	0.31	[0.23, 0.39]	1.000	2398	2724
Residual Structure					
cortime(female, male)	0.51	[0.44, 0.57]	1.000	2895	2470
sigma .is male	1.60	[1.51, 1.71]	1.000	3555	2827
sigma .is female	1.30	[1.23, 1.39]	1.001	3317	2788

NOTE: brms estimates sigma on the log scale. In the tables, sigmas are exponentiated to show residual SDs on the response scale, like glmmTMB output.

3 Distinguishable Dyads

4 Distinguishable Dyads - Intensive Longitudinal APIM (L-APIM)

4.1 Distinguishable Dyads - L-APIM - Raw Data

```
print_df(head(df_long))
```

userID	coupleID	day	gender	closeness	support
1 1	1	0	female	5.659395	4.733482
1 1	1	1	female	7.249842	5.019950
1 1	1	2	female	6.040587	5.365179
1 1	1	3	female	6.898253	5.148704
1 1	1	4	female	5.350049	3.702039
1 1	1	5	female	6.191282	4.844602

4.2 Distinguishable Dyads - L-APIM - Data Preparation

```
df_long_apim <- prepare_dyad_data(  
  data = df_long,  
  dyad = coupleID,  
  member = userID,  
  role = gender,  
  time = diaryday,  
  predictors = provided_support,  
  model_types = "apim"  
) %>%  
  mutate(  
    diaryday_c = diaryday - mean(diaryday)  
  )
```

4.3 Distinguishable Dyads - L-APIM - Prepared Data

userID	day	day c	.is male	.is female	closeness	.support WP actor	.support WP partner
31 1	0	-27	0	1	5.47	0.41	1.54
31 1	1	-26	0	1	7.69	0.51	1.4
31 1	2	-25	0	1	5.83	0.49	0.79
31 1	3	-24	0	1	6.55	1.38	-0.15
...	...	...	...	...	...	...	...
31 2	0	-27	1	0	5.19	1.54	0.41
31 2	1	-26	1	0	6.96	1.4	0.51
31 2	2	-25	1	0	6.9	0.79	0.49
31 2	3	-24	1	0	7.59	-0.15	1.38

4.4 Distinguishable Dyads - L-APIM - Centering

With repeated measures we need to center variables in order to not conflate levels of analysis (Bolger & Laurenceau, 2013):

- Between-Person: The person-mean in relation to the grand mean
- Within-Person: Daily fluctuations of an individual from their person-mean

Although the data contain couple, person, and day structure, the APIM is written at the person-day level after decomposing predictors into between-person and within-person components. Dyad-level dependence is still modelled explicitly through partner-specific random effects and residual covariance structures.

4.5 Distinguishable Dyads - L-APIM - Centering

`prepare_dyad_data()` performs this predictor decomposition before creating the actor and partner columns. The centered `diaryday_c` variable above is a separate time transformation for the models, not part of the dyadic predictor construction.

4.6 Distinguishable Dyads - L-APIM - Model nlme

`nlme` model of this data for reference (simplified random effects structure to achieve convergence).

This package is old, but still often used and cited. So here, we briefly show it to demonstrate that we can achieve the same model with much more modern and powerful methods.

```
library(nlme)

modell1 <- lme(
  fixed =
    # Intercepts
    closeness ~ 0 + .is_male + .is_female +

    # Time Slopes
    .is_male:diaryday_c +
    .is_female:diaryday_c +

    # Between-Person APIM
    .is_male:.provided_support_cbp_actor +
    .is_male:.provided_support_cbp_partner +

    .is_female:.provided_support_cbp_actor +
    .is_female:.provided_support_cbp_partner +

    # Within-Person APIM
    .is_male:.provided_support_cwp_actor +
    .is_male:.provided_support_cwp_partner +

    .is_female:.provided_support_cwp_actor +
    .is_female:.provided_support_cwp_partner,

  random =
    ~ 0 + .is_male + .is_female

    + .is_male:diaryday_c + .is_female:diaryday_c

  # in nlme we need to remove many random slopes to achieve convergence
  # alternatively, we could try to remove correlations between the slopes.
  #+ .is_male:.provided_support_cwp_actor
  #+ .is_male:.provided_support_cwp_partner
  #+ .is_female:.provided_support_cwp_actor
```

```

  #+ .is_female:.provided_support_cwp_partner
  | coupleID,

weights = varIdent(form = ~ 1 | gender), # heterogeneous residual variances
corr = corCompSymm(form = ~ 1 | coupleID/diaryday), # compound symmetry (partner's values on each day)

data = df_long_apim,
control = list(maxIter=1000)
)

summary(model1)

```

4.7 Distinguishable Dyads - L-APIM - Model glmmTMB

```

1 model_dist_apim_long_glmmTMB <- glmmTMB(
2   closeness ~ 0 + .is_male + .is_female +
3
4   # Time Slopes
5   .is_male:diaryday_c +
6   .is_female:diaryday_c +
7
8   # Between-Person APIM
9   .is_male:.provided_support_cbp_actor +
10  .is_male:.provided_support_cbp_partner +
11
12  .is_female:.provided_support_cbp_actor +
13  .is_female:.provided_support_cbp_partner +
14
15  # Within-Person APIM
16  .is_male:.provided_support_cwp_actor +
17  .is_male:.provided_support_cwp_partner +
18
19  .is_female:.provided_support_cwp_actor +
20  .is_female:.provided_support_cwp_partner +
21
22  # Accounting for non-independence between partners' means and trajectories
23  # via random effects:
24  (0 + .is_male + .is_female
25   + .is_male:diaryday_c + .is_female:diaryday_c
26   | coupleID) +
27
28  # Accounting for daily non-independence
29  us(0 + .is_male + .is_female | coupleID:diaryday)
30
31  # no separate residual term: the us() block above models the residuals
32  , dispformula = ~ 0
33  , data = df_long_apim
34 )

```

4.8 Distinguishable Dyads - L-APIM - Model glmmTMB

```

Family: gaussian ( identity )
Formula: closeness ~ 0 + .is_male + .is_female + .is_male:diaryday_c +
.is_female:diaryday_c + .is_male:.provided_support_cbp_actor +
.is_male:.provided_support_cbp_partner + .is_female:.provided_support_cbp_actor +
.is_female:.provided_support_cbp_partner + .is_male:.provided_support_cwp_actor +
.is_male:.provided_support_cwp_partner + .is_female:.provided_support_cwp_actor +
.is_female:.provided_support_cwp_partner + (0 + .is_male +
.is_female + .is_male:diaryday_c + .is_female:diaryday_c |
coupleID) + us(0 + .is_male + .is_female | coupleID:diaryday)
Dispersion: ~0
Data: df_long_apim

      AIC      BIC    logLik -2*log(L)  df.resid
30001.8  30184.4 -14975.9  29951.8    10975

```

```

Random effects:

Conditional model:
Groups          Name                Variance Std.Dev. Corr
coupleID        .is_male            0.6813649 0.82545
                .is_female          0.7929829 0.89050 0.19
                .is_male:diaryday_c 0.0002637 0.01624 0.55 0.03
                .is_female:diaryday_c 0.0002571 0.01603 0.21 0.54 -0.01
coupleID:diaryday .is_male          1.2583395 1.12176
                .is_female          0.5206603 0.72157 0.04
Number of obs: 11000, groups: coupleID, 100; coupleID:diaryday, 5500

Conditional model:
                Estimate Std. Error z value Pr(>|z|)
.is_male        4.486375   0.085960  52.19 < 2e-16 ***
.is_female      5.736720   0.091763  62.52 < 2e-16 ***
.is_male:diaryday_c -0.003258   0.001883  -1.73 0.08355 .
.is_female:diaryday_c 0.010606   0.001717   6.18 6.46e-10 ***
.is_male:.provided_support_cbp_actor 1.128018   0.101922  11.07 < 2e-16 ***
.is_male:.provided_support_cbp_partner 0.298902   0.098817   3.02 0.00249 **
.is_female:.provided_support_cbp_actor 1.380753   0.105607  13.07 < 2e-16 ***
.is_female:.provided_support_cbp_partner 0.587254   0.108927   5.39 7.00e-08 ***
.is_male:.provided_support_cwp_actor 0.184479   0.020564   8.97 < 2e-16 ***
.is_male:.provided_support_cwp_partner 0.124548   0.020571   6.05 1.41e-09 ***
.is_female:.provided_support_cwp_actor 0.419162   0.013277  31.57 < 2e-16 ***
.is_female:.provided_support_cwp_partner 0.170127   0.013270  12.82 < 2e-16 ***
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

4.9 Comparing outputs between nlme and glmmTMB

Let's compare the random effects outputs to see if the models are truly equivalent.

Residual variance in `nlme` must first be constructed from the output by taking the residual SD and multiplying it by the parameter estimate under the variance function for each partner.

nlme:

```

                StdDev      Corr
.is_male        0.83645552 is_mal is_fml is_m:_
.is_female      0.90199634 0.189
.is_male:diaryday_c 0.01634796 0.544 0.033
.is_female:diaryday_c 0.01612665 0.204 0.534 -0.012
Residual        0.72170702

Correlation Structure: Compound symmetry
Formula: ~1 | coupleID:diaryday
Parameter estimate(s):
  Rho
0.04094751
Variance function:
Structure: Different standard deviations per stratum
Formula: ~1 | gender
Parameter estimates:
  1      2
1.000000 1.554608

Manually computed by multiplying the residual SD by the multipliers:

Residual SDs by partner:
  Partner 1: 0.721707
  Partner 2: 1.121972

```

glmmTMB:

```
Random effects:
Conditional model:
Groups          Name                Variance Std.Dev. Corr
coupleID        .is_male             0.6814498 0.82550
                .is_female           0.7930407 0.89053 0.19
                .is_male:diaryday_c  0.0002637 0.01624 0.55 0.03
                .is_female:diaryday_c 0.0002571 0.01603 0.21 0.54 -0.01
coupleID:diaryday .is_male             1.2583552 1.12176
                .is_female           0.5206608 0.72157 0.04
```

4.10 Distinguishable Dyads - L-APIM - Model brms

Equivalent brms model.

In contrast to glmmTMB, brms provides native variance-covariance structures to model residuals directly. Therefore, we do NOT set the residuals to zero!

```
1 formula_dist_apim_long_simple <- bf(
2   closeness ~ 0 + .is_male + .is_female +
3
4   # Time Slopes
5   .is_male:diaryday_c +
6   .is_female:diaryday_c +
7
8   # Between-Person APIM
9   .is_male:.provided_support_cbp_actor +
10  .is_male:.provided_support_cbp_partner +
11
12  .is_female:.provided_support_cbp_actor +
13  .is_female:.provided_support_cbp_partner +
14
15  # Within-Person APIM
16  .is_male:.provided_support_cwp_actor +
17  .is_male:.provided_support_cwp_partner +
18
19  .is_female:.provided_support_cwp_actor +
20  .is_female:.provided_support_cwp_partner +
21
22  # Accounting for non-independence between partners' means and trajectories
23  # via random effects:
24  (0 + .is_male + .is_female
25   + .is_male:diaryday_c + .is_female:diaryday_c
26   | coupleID) +
27
28  # Gender indexes the two partner residual positions within each couple-day.
29  unstr(time = gender, gr = coupleID:diaryday)
30
31  # heteroscedastic residuals
32  , sigma ~ 0 + .is_male + .is_female
33 )
34
35 # brms' defaults for group-level SDs and correlations are sensible weak defaults
36 # (half Student-t priors for SDs and LKJ priors for correlation matrices). Here we
37 # set weakly regularizing priors explicitly so the modelling assumptions are visible.
38
39 priors_dist_apim_long_simple <- c(
40   prior(normal(4, 2), class = "b", coef = ".is_male"), # male intercept
41   prior(normal(4, 2), class = "b", coef = ".is_female"), # female intercept
42   prior(normal(0, 2), class = "b"), # other beta coefficients
43   prior(exponential(1), class = "sd"),
44   prior(lkj(2), class = "cor"),
45   prior(normal(0, 0.7), class = "b", dpar = "sigma"),
46   prior(lkj(2), class = "cortime")
47 )
48
49 model_dist_apim_long_simple <- brm(
50   formula = formula_dist_apim_long_simple,
```

```

51 data = df_long_apim,
52 family = gaussian(link = identity), # student() is also often a nice robust option.
53 prior = priors_dist_apim_long_simple,
54 chains = 4,
55 cores = 4,
56 iter = 2000,
57 warmup = 1000,
58 seed = 123,
59 file = file.path('brms_cache', 'example1_dist_apim_long_simpel') # Cache the model
60 )

```

4.11 Distinguishable Dyads - L-APIM - Results (scrollable)

	Est.	95% CI	Rhat	Bulk ESS	Tail ESS
Fixed Effects					
.is male	4.49	[4.32, 4.65]	1.007	324	794
.is female	5.74	[5.56, 5.91]	1.009	355	656
.is male: day c	0.00	[-0.01, 0.00]	1.007	1072	2113
.is female: day c	0.01	[0.01, 0.01]	1.002	880	1778
.is male: .support BP actor	1.14	[0.91, 1.34]	1.006	489	791
.is male: .support BP partner	0.30	[0.10, 0.51]	1.004	553	716
.is female: .support BP actor	1.38	[1.18, 1.58]	1.005	507	1077
.is female: .support BP partner	0.60	[0.36, 0.81]	1.005	440	851
.is male: .support WP actor	0.18	[0.14, 0.23]	1.000	5328	3057
.is male: .support WP partner	0.12	[0.08, 0.16]	1.003	7228	3389
.is female: .support WP actor	0.42	[0.39, 0.45]	1.002	5990	3068
.is female: .support WP partner	0.17	[0.14, 0.20]	1.001	5829	3105
Random Effects					
sd(.is male)	0.84	[0.73, 0.97]	1.010	520	1077
sd(.is female)	0.92	[0.80, 1.06]	1.006	556	998
sd(.is male: day c)	0.02	[0.01, 0.02]	1.001	1744	2637
sd(.is female: day c)	0.02	[0.01, 0.02]	1.001	1358	2043
cor(.is male, .is female)	0.18	[-0.05, 0.35]	1.010	321	688
cor(.is male, .is male: day c)	0.51	[0.32, 0.67]	1.004	1528	1804
cor(.is female, .is male: day c)	0.03	[-0.21, 0.24]	1.002	1315	2204
cor(.is male, .is female: day c)	0.19	[-0.01, 0.38]	1.003	753	1691
cor(.is female, .is female: day c)	0.51	[0.33, 0.65]	1.002	1073	1832
cor(.is male: day c, .is female: day c)	-0.02	[-0.25, 0.22]	1.008	867	1748
Residual Structure					
cortime(female, male)	0.04	[0.01, 0.07]	1.000	6904	3067
sigma .is male	1.12	[1.10, 1.14]	1.001	6996	2514
sigma .is female	0.72	[0.71, 0.74]	0.999	6880	2868

Note: Sigma rows are shown on the response scale; they were exponentiated from brms' log-sigma parameterization.

4.12 Distinguishable Dyads - L-APIM - AR(1)?

In this model, `unstr(time = gender, gr = coupleID:diaryday)` handles same-day partner interdependence. Current univariate `brms` models cannot combine this residual correlation structure with `ar()` in the same formula (Bürkner, 2025).

Standard `glmmTMB` can add a same-day dyadic block and independent person-specific AR(1) processes:

```
us(0 + gender | coupleID:diaryday) +
  ar1(0 + diaryday_factor | userID)
```

This additive model represents same-day dyadic shocks plus person-specific persistence. It splits lag-zero variance across the two blocks. These residual blocks contribute zero cross-partner covariance across different days, although dyad-level random effects can still induce cross-day covariance; this is not one separable partner-by-time residual process (Brooks et al., 2017).

4.13 Excursion: Dynamic Workaround

A dynamic MLM can account for temporal dependence by including lagged within-person centered outcomes as predictors (include both actor inertia and partner spillover).

But:

- The APIM coefficients become effects conditional on prior closeness, not total within-person associations.
- Lagged-outcome models can also suffer from dynamic-panel bias, often called Nickell bias (Nickell, 1981), because the lagged outcome is related to person/couple effects and prior residuals. This is especially problematic with short time series.
 - One solution for the Nickell bias is to use multilevel DSEM through MPLUS.

4.14 Maximal Model Specification (non-dynamic/no AR(1))

We add all random slopes and their correlations. This is neither converging in `nlme` nor `glmmTMB`.

```
1 formula_dist_apim_long_complex <- bf(
2   closeness ~
3
4   # Intercepts
5   0 + .is_male + .is_female +
6
7   # Time Slopes
8   .is_male:diaryday_c +
9   .is_female:diaryday_c +
10
11  # Between-Person APIM
12  .is_male:.provided_support_cbp_actor +
13  .is_male:.provided_support_cbp_partner +
14
15  .is_female:.provided_support_cbp_actor +
16  .is_female:.provided_support_cbp_partner +
17
18  # Within-Person APIM
19  .is_male:.provided_support_cwp_actor +
20  .is_male:.provided_support_cwp_partner +
21
22  .is_female:.provided_support_cwp_actor +
23  .is_female:.provided_support_cwp_partner +
24
25  # Accounting for non-independence between partners' means and trajectories
26  # and effect sensitivities via random effects:
27  (0 + .is_male + .is_female +
28
29    .is_male:diaryday_c + .is_female:diaryday_c +
30
31    .is_male:.provided_support_cwp_actor +
32    .is_male:.provided_support_cwp_partner +
33    .is_female:.provided_support_cwp_actor +
34    .is_female:.provided_support_cwp_partner
35    | coupleID ) +
36
37  # Accounting for daily non-independence
38  unstr(time = gender, gr = coupleID:diaryday),
39
40  sigma ~ 0 + .is_male + .is_female # heteroscedastic residuals
41 )
42
43 priors_dist_apim_long_complex <- c(
44   prior(normal(4, 2), class = "b", coef = ".is_male"),
45   prior(normal(4, 2), class = "b", coef = ".is_female"),
46   prior(normal(0, 2), class = "b"),
```

```

47 prior(exponential(1), class = "sd"),
48 prior(lkj(2), class = "cor"),
49 prior(normal(0, 0.7), class = "b", dpar = "sigma"),
50 prior(lkj(2), class = "cortime")
51 )
52
53
54 model_dist_apim_long_complex <- brm(
55   formula = formula_dist_apim_long_complex,
56   data = df_long_apim,
57   family = gaussian(link = identity),
58   prior = priors_dist_apim_long_complex,
59   chains = 4,
60   cores = 4,
61   iter = 2000,
62   warmup = 1000,
63   seed = 123,
64   file = file.path('brms_cache', 'example1_dist_apim_long_complex') # Cache the model
65 )

```

4.15 Maximal Model Specification: Results

	Est.	95% CI	Rhat	Bulk ESS	Tail ESS
Fixed Effects					
.is male	4.49	[4.31, 4.67]	1.006	334	722
.is female	5.73	[5.54, 5.92]	1.006	271	770
.is male: day c	0.00	[-0.01, 0.00]	1.002	1249	1965
.is female: day c	0.01	[0.01, 0.01]	1.005	840	2033
.is male: .support BP	1.12	[0.92, 1.32]	1.004	688	1529
actor					
.is male: .support BP	0.31	[0.10, 0.51]	1.002	656	1267
partner					
.is female: .support BP	1.37	[1.16, 1.59]	1.002	491	987
actor					
.is female: .support BP	0.60	[0.35, 0.82]	1.003	432	740
partner					
.is male: .support WP	0.18	[0.14, 0.23]	1.000	5755	3046
actor					
.is male: .support WP	0.13	[0.08, 0.18]	1.000	6028	3158
partner					
.is female: .support WP	0.42	[0.39, 0.45]	1.000	5549	3243
actor					
.is female: .support WP	0.17	[0.14, 0.20]	1.000	5548	3014
partner					
Random Effects					
sd(.is male)	0.85	[0.74, 0.98]	1.002	857	1449
sd(.is female)	0.91	[0.79, 1.05]	1.006	515	1265
sd(.is male: day c)	0.02	[0.01, 0.02]	1.000	1973	2634
sd(.is female: day c)	0.02	[0.01, 0.02]	1.001	1361	2175
sd(.is male: .support	0.09	[0.02, 0.15]	1.002	1162	1085
WP actor)					
sd(.is male: .support	0.14	[0.06, 0.20]	1.000	1012	947
WP partner)					
sd(.is female: .support	0.08	[0.02, 0.12]	1.004	923	905
WP actor)					
sd(.is female: .support	0.06	[0.01, 0.10]	1.001	1002	1720
WP partner)					
cor(.is male, .is female)	0.15	[-0.04, 0.34]	1.022	350	819
cor(.is male, .is male:	0.48	[0.28, 0.63]	1.001	2211	2867
day c)					
cor(.is female, .is male:	0.00	[-0.20, 0.22]	1.003	1801	3156
day c)					
cor(.is male, .is female:	0.17	[-0.03, 0.36]	1.005	940	2321
day c)					
cor(.is female, .is	0.49	[0.30, 0.64]	1.008	1172	2078
female: day c)					
cor(.is male: day c, .is	-0.03	[-0.26, 0.19]	1.003	1108	1730
female: day c)					
cor(.is male, .is male:	0.37	[-0.06, 0.70]	1.001	4857	2732
.support WP actor)					

(continued)

	Est.	95% CI	Rhat	Bulk ESS	Tail ESS
cor(.is female, .is male: .support WP actor)	0.19	[-0.22, 0.57]	1.003	5018	2783
cor(.is male: day c, .is male: .support WP actor)	0.33	[-0.13, 0.68]	1.001	5222	3270
cor(.is female: day c, .is male: .support WP actor)	0.27	[-0.17, 0.64]	1.000	4899	2758
cor(.is male, .is male: .support WP partner)	0.06	[-0.26, 0.38]	1.000	5278	3217
cor(.is female, .is male: .support WP partner)	0.10	[-0.22, 0.43]	1.001	4991	2571
cor(.is male: day c, .is male: .support WP partner)	0.04	[-0.31, 0.40]	1.000	4298	2455
cor(.is female: day c, .is male: .support WP partner)	0.11	[-0.22, 0.45]	1.000	4766	2466
cor(.is male: .support WP actor, .is male: .support WP partner)	0.24	[-0.27, 0.68]	1.005	1124	2137
cor(.is male, .is female: .support WP actor)	-0.06	[-0.44, 0.29]	1.001	4620	2478
cor(.is female, .is female: .support WP actor)	0.21	[-0.17, 0.55]	1.000	4730	2276
cor(.is male: day c, .is female: .support WP actor)	-0.14	[-0.51, 0.25]	1.001	4056	3026
cor(.is female: day c, .is female: .support WP actor)	-0.07	[-0.43, 0.30]	1.000	5099	3132
cor(.is male: .support WP actor, .is female: .support WP actor)	-0.17	[-0.61, 0.37]	1.002	1540	2245
cor(.is male: .support WP partner, .is female: .support WP actor)	-0.10	[-0.56, 0.40]	1.001	2566	2969
cor(.is male, .is female: .support WP partner)	0.27	[-0.21, 0.63]	1.000	5732	2872
cor(.is female, .is female: .support WP partner)	0.07	[-0.37, 0.48]	1.000	5615	2735
cor(.is male: day c, .is female: .support WP partner)	0.12	[-0.34, 0.53]	1.000	5813	3459
cor(.is female: day c, .is female: .support WP partner)	0.15	[-0.31, 0.56]	1.002	5869	2966
cor(.is male: .support WP actor, .is female: .support WP partner)	0.16	[-0.39, 0.64]	1.001	2540	3043
cor(.is male: .support WP partner, .is female: .support WP partner)	0.06	[-0.48, 0.57]	1.002	3413	3154
cor(.is female: .support WP actor, .is female: .support WP partner)	0.11	[-0.44, 0.60]	1.001	3345	3240
Residual Structure					
cortime(female, male)	0.04	[0.01, 0.07]	1.002	8477	2860
sigma .is male	1.11	[1.09, 1.14]	1.002	6681	2536
sigma .is female	0.72	[0.70, 0.73]	1.001	6554	2959

4.16 Maximal Model: Diagnostics and Prediction Target

- Check convergence and model fit before comparing predictive accuracy.
- `loo()` holds out one observation while retaining its partner and the dyad's other days. This evaluates conditional observation-level prediction, not a completely new dyad.
- For Gaussian `unstr()` models, `brms` computes the required conditional density $p(y_i \mid y_{-i}, \theta)$ for non-factorizable LOO (Bürkner et al., 2021).

- New-dyad prediction would instead require a grouped validation design (Vehtari et al., 2017).

4.17 Maximal Model: PSIS-LOO Diagnostics

```
loo1 <- loo(model_dist_apim_long_simple)
loo2 <- loo(model_dist_apim_long_complex)

loo::pareto_k_table(loo1)
loo::pareto_k_table(loo2)
```

```
All Pareto k estimates are good (k < 0.7).
```

```
All Pareto k estimates are good (k < 0.7).
```

Pareto k diagnoses the importance-sampling approximation; high values are not themselves evidence of overfitting (Vehtari et al., 2017).

4.18 Maximal Model: LOO Comparison

```
a <- loo_compare(loo1, loo2)
print(a)
```

	elpd_diff	se_diff
model_dist_apim_long_complex	0.0	0.0
model_dist_apim_long_simple	-15.4	6.7

The complex model predicts the held-out observations better by 15.4 ELPD units (SE 6.7). This supports its additional structure for this prediction target, but does not prove that every variance or correlation is necessary; ELPD differences should be interpreted with their uncertainty (Sivula et al., 2025). If performance were similar, theory, identifiability, and parsimony should guide simplification (Barr et al., 2013; del Rosario & West, 2025).

4.19 Maximal Model Specification: Comparing Estimates to Simulated Values (Ground Truth)

Group	Parameter	True (Simulated)	Estimate	95% CI	Coverage	Abs. Error	Recovery
Fixed	Intercept (male)	4.5659893	4.4890395	[4.305, 4.668]	Yes	0.077	Covered
Fixed	Intercept (female)	5.7823087	5.7316403	[5.537, 5.919]	Yes	0.051	Covered
Fixed	Time slope (male)	-0.0050000	-0.0029689	[-0.007, 0.001]	Yes	0.002	Covered
Fixed	Time slope (female)	0.0100000	0.0104637	[0.007, 0.014]	Yes	0.000	Covered
Between-person	Actor BP (male)	1.1855503	1.1204791	[0.917, 1.322]	Yes	0.065	Covered
Between-person	Partner BP (male)	0.2707719	0.3078625	[0.104, 0.511]	Yes	0.037	Covered
Between-person	Actor BP (female)	1.4298780	1.3697538	[1.156, 1.594]	Yes	0.060	Covered
Between-person	Partner BP (female)	0.5291829	0.5924361	[0.351, 0.817]	Yes	0.063	Covered
Within-person	Actor WP (male)	0.2000000	0.1812234	[0.135, 0.227]	Yes	0.019	Covered
Within-person	Partner WP (male)	0.1000000	0.1270781	[0.079, 0.176]	Yes	0.027	Covered
Within-person	Actor WP (female)	0.4000000	0.4205947	[0.390, 0.451]	Yes	0.021	Covered
Within-person	Partner WP (female)	0.2000000	0.1713545	[0.143, 0.200]	Yes	0.029	Covered
Random effects (SD)	Couple intercept SD (male)	0.7919045	0.8495693	[0.740, 0.984]	Yes	0.058	Covered
Random effects (SD)	Couple intercept SD (female)	0.8979616	0.9154796	[0.793, 1.055]	Yes	0.018	Covered
Random effects (SD)	Time slope SD (male)	0.0149848	0.0167471	[0.014, 0.020]	Yes	0.002	Covered
Random effects (SD)	Time slope SD (female)	0.0150338	0.0164231	[0.014, 0.019]	Yes	0.001	Covered
Random effects (SD)	Actor WP slope SD (male)	0.1006336	0.0899573	[0.021, 0.153]	Yes	0.011	Covered
Random effects (SD)	Partner WP slope SD (male)	0.0806085	0.1344609	[0.055, 0.201]	Yes	0.054	Covered
Random effects (SD)	Actor WP slope SD (female)	0.0955935	0.0759606	[0.019, 0.120]	Yes	0.020	Covered
Random effects (SD)	Partner WP slope SD (female)	0.0678586	0.0542037	[0.005, 0.102]	Yes	0.014	Covered
Random effects (cor)	cor(Intercept (male), Intercept (female))	0.1803231	0.1521969	[-0.042, 0.335]	Yes	0.028	Covered
Random effects (cor)	cor(Intercept (male), Time slope (male))	0.5083773	0.4708544	[0.283, 0.632]	Yes	0.038	Covered
Random effects (cor)	cor(Intercept (male), Time slope (female))	0.1921701	0.1708417	[-0.033, 0.365]	Yes	0.021	Covered
Random effects (cor)	cor(Intercept (male), Actor WP slope (male))	0.2262539	0.3543439	[-0.059, 0.696]	Yes	0.128	Covered
Random effects (cor)	cor(Intercept (male), Partner WP slope (male))	0.0953425	0.0605446	[-0.260, 0.378]	Yes	0.035	Covered
Random effects (cor)	cor(Intercept (male), Actor WP slope (female))	0.0398182	-0.0614619	[-0.436, 0.294]	Yes	0.101	Covered
Random effects (cor)	cor(Intercept (male), Partner WP slope (female))	0.3479821	0.2520320	[-0.206, 0.629]	Yes	0.096	Covered
Random effects (cor)	cor(Intercept (female), Time slope (male))	0.0526005	0.0061449	[-0.201, 0.221]	Yes	0.046	Covered
Random effects (cor)	cor(Intercept (female), Time slope (female))	0.6138595	0.4831640	[0.303, 0.636]	Yes	0.131	Covered
Random effects (cor)	cor(Intercept (female), Actor WP slope (male))	0.1319990	0.1866849	[-0.225, 0.569]	Yes	0.055	Covered
Random effects (cor)	cor(Intercept (female), Partner WP slope (male))	-0.0241164	0.1010175	[-0.221, 0.429]	Yes	0.125	Covered
Random effects (cor)	cor(Intercept (female), Actor WP slope (female))	0.1385319	0.2046311	[-0.172, 0.549]	Yes	0.066	Covered
Random effects (cor)	cor(Intercept (female), Partner WP slope (female))	-0.0263927	0.0667585	[-0.371, 0.485]	Yes	0.093	Covered
Random effects (cor)	cor(Time slope (male), Time slope (female))	0.1339757	-0.0304431	[-0.257, 0.190]	Yes	0.164	Covered
Random effects (cor)	cor(Time slope (male), Actor WP slope (male))	0.2400640	0.3130248	[-0.133, 0.682]	Yes	0.073	Covered
Random effects (cor)	cor(Time slope (male), Partner WP slope (male))	0.0918211	0.0427317	[-0.313, 0.397]	Yes	0.049	Covered
Random effects (cor)	cor(Time slope (male), Actor WP slope (female))	0.0024579	-0.1337158	[-0.512, 0.253]	Yes	0.136	Covered
Random effects (cor)	cor(Time slope (male), Partner WP slope (female))	0.2635152	0.1105994	[-0.343, 0.527]	Yes	0.153	Covered
Random effects (cor)	cor(Time slope (female), Actor WP slope (male))	0.0711586	0.2634154	[-0.166, 0.641]	Yes	0.192	Covered
Random effects (cor)	cor(Time slope (female), Partner WP slope (male))	0.0441926	0.1093859	[-0.225, 0.448]	Yes	0.065	Covered


(continued)

Group	Parameter	True (Simulated)	Estimate	95% CI	Coverage	Abs. Error	Recovery
Random effects (cor)	cor(Time slope (female), Actor WP slope (female))	0.1380171	-0.0687735	[-0.428, 0.300]	Yes	0.207	Covered
Random effects (cor)	cor(Time slope (female), Partner WP slope (female))	0.0279326	0.1470529	[-0.313, 0.558]	Yes	0.119	Covered
Random effects (cor)	cor(Actor WP slope (male), Partner WP slope (male))	0.1128802	0.2345585	[-0.266, 0.682]	Yes	0.122	Covered
Random effects (cor)	cor(Actor WP slope (male), Actor WP slope (female))	0.0478755	-0.1584750	[-0.610, 0.370]	Yes	0.206	Covered
Random effects (cor)	cor(Actor WP slope (male), Partner WP slope (female))	0.1135981	0.1524683	[-0.386, 0.639]	Yes	0.039	Covered
Random effects (cor)	cor(Partner WP slope (male), Actor WP slope (female))	-0.0107839	-0.0987572	[-0.562, 0.404]	Yes	0.088	Covered
Random effects (cor)	cor(Partner WP slope (male), Partner WP slope (female))	0.1384787	0.0602770	[-0.484, 0.573]	Yes	0.078	Covered
Random effects (cor)	cor(Actor WP slope (female), Partner WP slope (female))	0.1494376	0.1005532	[-0.442, 0.599]	Yes	0.049	Covered
Residuals	Same-day residual correlation	0.0366176	0.0413748	[0.015, 0.068]	Yes	0.005	Covered
Residuals	Residual SD (male) (exp)	1.1210517	1.1147509	[1.093, 1.136]	Yes	0.006	Covered
Residuals	Residual SD (female) (exp)	0.7173353	0.7181891	[0.705, 0.732]	Yes	0.001	Covered

5 Exchangeable Dyads


6 Exchangeable Dyads - Cross-Sectional

6.1 Exchangeable Dyads - Cross-Sectional APIM

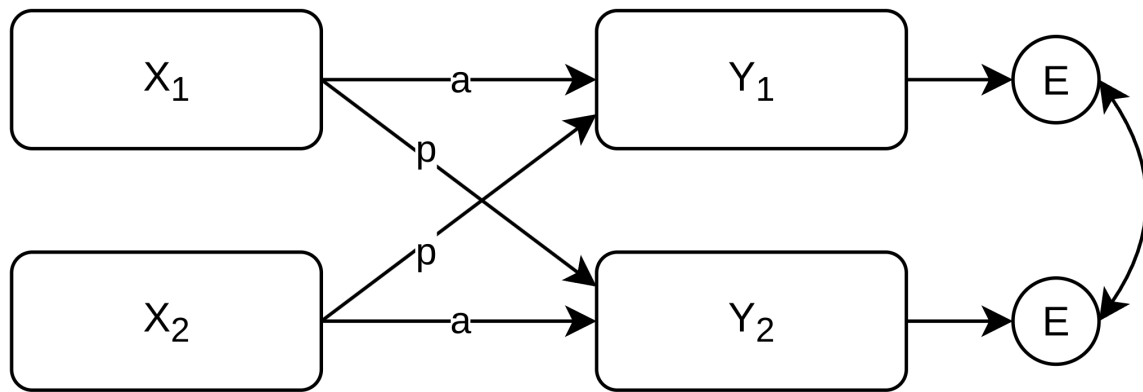

(e.g., del Rosario & West, 2025; Kenny & Ackerman, 2023)

6.2 Exchangeable Dyads - Cross-Sectional APIM

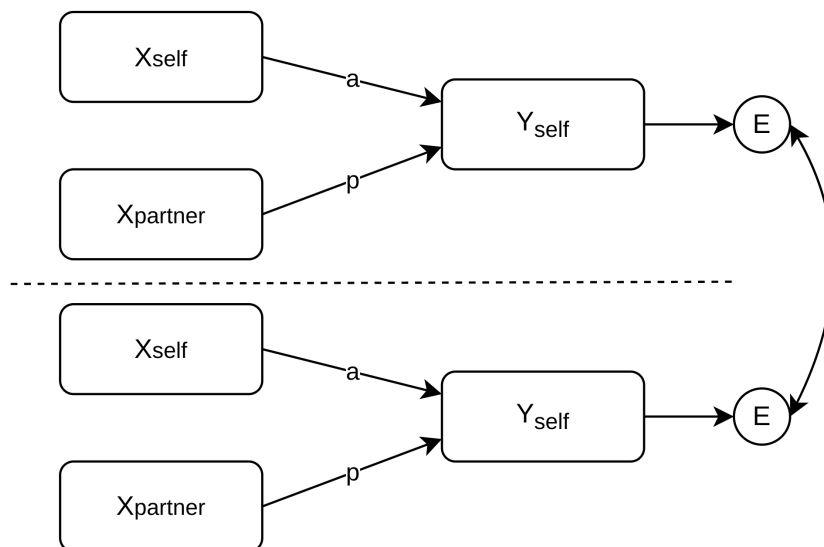

2025; Kenny & Ackerman, 2023)

(e.g., del Rosario & West,

6.3 Exchangeable Dyads - Main Assumptions

Partners are exchangeable, i.e., not *systematically* different.

- Equal actor effects
- Equal partner effects
- Equal means
- Equal residual variances

But they should still be allowed to vary within each couple, while being correlated.

(e.g., del Rosario & West, 2025; Kenny & Ackerman, 2023)

6.4 Exchangeable Dyads - Cross-Sectional APIM: Assumption

Exchangeability is a modelling constraint, not a claim that the dyads are truly exchangeable. To test that constraint, fit both models to the same prepared observations.

6.5 Exchangeable Dyads - Cross-Sectional APIM: Preparation

```
# Reuse the distinguishable preparation, including its arbitrary
# -1/+1 member contrast.
df_exchangeable_apim <- df_apim
```

6.6 Exchangeable Dyads - Cross-Sectional APIM: Prepared Data

```
print_apim_preview(df_exchangeable_apim)
```

userID	coupleID	gender	.is male	.is female	.member contrast arbitrary	satisfaction	.comm actor	.comm partner
1 1	1	female	0	1	-1	4.841332	-0.1553604	0.9980657
1 2	1	male	1	0	1	5.577165	0.9980657	-0.1553604
2 1	2	female	0	1	-1	7.248741	0.8748537	1.4272563
2 2	2	male	1	0	1	6.960293	1.4272563	0.8748537
3 1	3	female	0	1	-1	6.928699	-0.7224960	0.5095933
3 2	3	male	1	0	1	6.077688	0.5095933	-0.7224960

6.7 Exchangeable Dyads - Cross-Sectional APIM: glmmTMB

- For the fixed effects, we can pool the intercepts `.is_male` and `.is_female` by simply reintroducing a single shared intercept 1.
- For the actor and partner effects, we can remove the interactions to get a pooled estimate.
- For the residual, we want to constrain both partners' variances to be equal. Often, this is attempted via: `(1 | coupleID)`.
 - This gives both partners the same dyad-level random intercept variance.
 - With the usual Gaussian residual variance still present, the implied partner correlation is positive but not freely estimated: $\frac{\tau^2}{\tau^2 + \sigma^2}$.
 - If residual variance is removed with `dispformula = ~ 0`, the shared random intercept would imply a correlation near 1, which is too restrictive.

6.8 Exchangeable Dyads - Cross-Sectional APIM: glmmTMB

One solution in glmmTMB is the following:

```

1 model_exch_apim_glmmTMB <- glmmTMB(
2   satisfaction ~
3
4   # Pooled single intercept
5   1 +
6
7   # Pooled actor and partner effects
8   .communication_gmc_actor + .communication_gmc_partner +
9
10  # Independent common and member-deviation terms parameterize a homogeneous
11  # two-member covariance using dyadMLM's arbitrary contrast.
12  (1 | coupleID) + (0 + .member_contrast_arbitrary | coupleID)
13
14  # The dyadic covariance is represented by the two random-effect blocks, so
15  # remove the additional independent Gaussian residual variance.
16  , dispformula = ~ 0
17
18  , data = df_exchangeable_apim
19  , family = gaussian()
20 )

```

6.9 Exchangeable APIM - Covariance Recovery

`recover_exchangeable_covariance()` back-transforms the common and deviation blocks to the homogeneous member variance and partner correlation:

```

Recovered exchangeable member-level covariance

Pair `pair_1`
Shared:      us(1 | coupleID)
Difference: us(0 + .member_contrast_arbitrary | coupleID)

Variance-covariance:
      1      2
1 member1: (Intercept) 2.403 0.827
2 member2: (Intercept) 0.827 2.403

Standard deviations and correlations:
      1      2
1 member1: (Intercept) 1.550 0.344
2 member2: (Intercept) 0.344 1.550

```

6.10 Exchangeable Dyads - Cross-Sectional APIM: Interpreting the Covariance

Let τ_c^2 be the variance of the common intercept and τ_d^2 the variance of the independent member deviation. With `.member_contrast_arbitrary = -1/+1`, the back-transformation is

$$\text{Var}(e_1) = \text{Var}(e_2) = \tau_c^2 + \tau_d^2,$$

$$\text{Cov}(e_1, e_2) = \tau_c^2 - \tau_d^2, \quad \rho = \frac{\tau_c^2 - \tau_d^2}{\tau_c^2 + \tau_d^2}.$$

The model can therefore represent negative partner correlation when $\tau_d^2 > \tau_c^2$ (del Rosario & West, 2025). For repeated measures, index the same structure at the couple-day level.

6.11 Exchangeable Dyads - Cross-Sectional APIM: brms

In brms, this issue can be solved more easily with a native residual correlation structure and one pooled residual variance:

```

1 formula_exch_apim <- bf(
2   satisfaction ~ 1 +
3     .communication_actor + .communication_partner +
4
5   # To achieve a homogeneous two-partner covariance structure we use an
6   # unstructured residual correlation over the two member positions.
7   unstr(time = .member_contrast_arbitrary, gr = coupleID)
8
9   # ... but now, we do not allow individual variances anymore.
10  # We want one pooled residual variance. So we do not specify a sigma formula.
11  # This implies:
12  # , sigma = ~ 1
13 )
14
15 priors_exch_apim <- c(
16   prior(normal(2, 10), class = "Intercept"),
17   prior(normal(0, 5), class = "b"),
18   prior(student_t(3, 0, 1.5), class = "sigma"),
19   prior(lkj(2), class = "cortime")
20 )
21
22 model_exch_apim <- brm(
23   formula = formula_exch_apim,
24   data = df_exchangeable_apim,
25   family = gaussian(link = identity),
26   prior = priors_exch_apim,
27   chains = 4,
28   cores = 4,
29   iter = 2000,
30   warmup = 1000,
31   seed = 123,
32   file = file.path('brms_cache', 'example1_ind_apim') # Cache the model
33 )

```

6.12 Exchangeable Dyads - Cross-Sectional APIM: Results

	Est.	95% CI	Rhat	Bulk ESS	Tail ESS
Fixed Effects					
Intercept	-4.71	[-5.13, -4.26]	1.004	4681	2769
.comm actor	1.72	[1.66, 1.78]	1.002	4425	2895
.comm partner	0.24	[0.18, 0.30]	1.000	4971	3242
Residual Structure					
cortime(-1, 1)	0.34	[0.26, 0.42]	1.000	4665	3140
sigma	1.55	[1.49, 1.63]	1.001	4114	3191

6.13 Constraints vs Prediction

`compare_nested_models()` tests the imposed exchangeability constraints with a likelihood-ratio comparison:

```

Likelihood-ratio test for nested models fitted to equivalent data
Assumes mathematical nesting and an appropriate chi-squared reference distribution.

              Df    AIC    BIC logLik deviance Chisq Chi Df Pr(>Chisq)
model_exch_apim_glmmtmb  5 4026.6 4051.7 -2008.3  4016.6
model_dist_apim_glmmtmb  9 3776.7 3821.7 -1879.3  3758.7 257.95      4 < 2.2e-16 ***
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

Conclusion (5% level): The likelihood-ratio test provides evidence that ``model_dist_apim_glmmtnb`` fits better than ``model_exch_apim_glmmtnb`` ($p < 0.001$).

The following observation-level PSIS-LOO comparison instead evaluates conditional predictive performance (Bürkner et al., 2021). It is not a formal test of distinguishability or prediction of a new dyad.


6.14 Exchangeable Dyads - APIM: LOO Comparison

Model	elpd_diff	se_diff
distinguishable	0.0	0.0
exchangeable	-172.9	16.5

For this observation-level target, the distinguishable model predicts better. The ELPD difference is descriptive predictive evidence; `se_diff` summarizes its uncertainty (Sivula et al., 2025; Vehtari et al., 2017).

6.15 Exchangeable Dyads - Cross-Sectional DIM

Dyad-Individual Model (DIM)

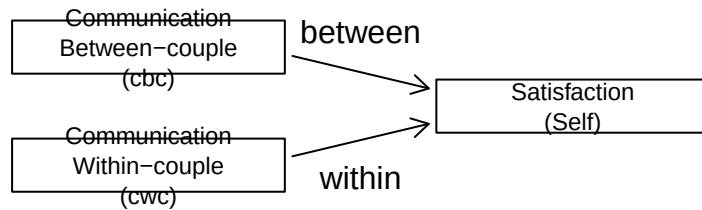

6.16 Exchangeable Dyads - Cross-Sectional DIM: Data

For the DIM parameterization, prepare the raw observations under the exchangeability assumption.

userID	coupleID	satisfaction	comm	.comm dyad mean	.comm within dyad dev	.member contrast arbitrary
1 1	1	4.841332	4.851107	0.4213527	-0.5767130	-1
1 2	1	5.577165	6.004533	0.4213527	0.5767130	1
2 1	2	7.248741	5.881321	1.1510550	-0.2762013	-1
2 2	2	6.960293	6.433723	1.1510550	0.2762013	1
3 1	3	6.928699	4.283971	-0.1064514	-0.6160447	-1
3 2	3	6.077688	5.516060	-0.1064514	0.6160447	1

6.17 Exchangeable Dyads - Cross-Sectional DIM: Centering

Decompose communication variance into:

- **Between-couple** (cbc): Couple-mean communication skills in relation to other couples
- **Within-couple** (cwc): Individuals' communication skills in relation to their couple-mean

Same assumption about exchangeability as in the APIM

6.18 Exchangeable Dyads - Cross-Sectional DIM: Centering

- `.communication_dyad_mean_gmc`: the grand-mean-centered dyad mean
- `.communication_within_dyad_dev`: each member's deviation from that dyad mean

6.19 Exchangeable Dyads - Cross-Sectional DIM: Centering

userID	coupleID	satisfaction	.comm dyad mean	.comm within dyad dev	.member contrast arbitrary
1 1	1	4.841332	0.4213527	-0.5767130	-1
1 2	1	5.577165	0.4213527	0.5767130	1
2 1	2	7.248741	1.1510550	-0.2762013	-1
2 2	2	6.960293	1.1510550	0.2762013	1
3 1	3	6.928699	-0.1064514	-0.6160447	-1
3 2	3	6.077688	-0.1064514	0.6160447	1

6.20 Exchangeable Dyads - Cross-Sectional DIM: Model

```
1 formula_exch_dim <- bf(  
2   satisfaction ~ 1 +  
3     .communication_dyad_mean_gmc + .communication_within_dyad_dev +  
4     unstr(time = .member_contrast_arbitrary, gr = coupleID)  
5  
6     # sigma ~ 1 is implied.  
7 )  
8  
9 priors_exch_dim <- c(  
10  prior(normal(2, 10), class = "Intercept"),  
11  prior(normal(0, 5), class = "b"),  
12  prior(student_t(3, 0, 1.5), class = "sigma"),  
13  prior(lkj(2), class = "cortime")  
14 )  
15  
16 model_exch_dim <- brm(  
17   formula = formula_exch_dim,  
18   data = df_exchangeable_dim,  
19   family = gaussian(link = identity),  
20   prior = priors_exch_dim,  
21   chains = 4,  
22   cores = 4,  
23   iter = 2000,  
24   warmup = 1000,  
25   seed = 123,  
26   file = file.path('brms_cache', 'example1_ind_dim') # Cache the model  
27 )
```

6.21 Exchangeable Dyads - Cross-Sectional DIM: Results

	Est.	95% CI	Rhat	Bulk ESS	Tail ESS
Fixed Effects					
Intercept	5.11	[5.00, 5.22]	1.001	4390	2769
.comm dyad mean	1.96	[1.87, 2.05]	1.003	4658	3120
.comm within dyad dev	1.48	[1.39, 1.57]	1.002	4285	2998
Residual Structure					
cortime(-1, 1)	0.34	[0.27, 0.42]	1.001	4164	2873
sigma	1.55	[1.49, 1.62]	1.000	4560	3396

6.22 Equivalence APIM and DIM

dyadMLM grand-mean centers the DIM dyad mean, whereas these APIM predictors are raw. APIM and DIM slopes require the sum/difference transformations shown later; their residual covariance is directly comparable. The printed intercepts also use different origins, so shift the APIM intercept to average communication before comparing it (Bolger et al., 2025):

$$b_{0, APIM(GMC)} = b_{0, APIM(raw)} + \bar{x}(b_{actor} + b_{partner}).$$

	Est.	95% CI
Fixed Effects		
Intercept	-4.71	[-5.13, -4.26]
.comm actor	1.72	[1.66, 1.78]
.comm partner	0.24	[0.18, 0.30]
Residual Structure		
cortime(-1, 1)	0.34	[0.26, 0.42]
sigma	1.55	[1.49, 1.63]

	Est.	95% CI
Fixed Effects		
Intercept	5.11	[5.00, 5.22]
.comm dyad mean	1.96	[1.87, 2.05]
.comm within dyad dev	1.48	[1.39, 1.57]
Residual Structure		
cortime(-1, 1)	0.34	[0.27, 0.42]
sigma	1.55	[1.49, 1.62]

6.23 Equivalence APIM and DIM

	Est.	95% CI
Fixed Effects		
Intercept	-4.71	[-5.13, -4.26]
.comm actor	1.72	[1.66, 1.78]
.comm partner	0.24	[0.18, 0.30]

	Est.	95% CI
Fixed Effects		
Intercept	5.11	[5.00, 5.22]
.comm dyad mean	1.96	[1.87, 2.05]
.comm within dyad dev	1.48	[1.39, 1.57]

6.24 Equivalence APIM and DIM

In the interactive HTML slides, this section contains sliders that demonstrate the APIM–DIM reparameterization. In this static version:

- actor and partner predictors are rewritten as a dyad-level mean and a within-dyad half-difference; and
- the DIM coefficients are a linear reparameterization of the APIM coefficients, so fitted values are unchanged.

```
x_cbc = (x_actor_gmc + x_partner_gmc) / 2  
x_cwc = (x_actor_gmc - x_partner_gmc) / 2
```

6.25 Equivalence APIM and DIM

- If the couple mean goes up by 1 and the within-couple deviation from the couple mean stays fixed, this means that both partners' predictors must go up by 1 unit. Thus, the effects are linear combinations:

$$b_{cbc} = b_{actor} + b_{partner}$$

- Similarly, if a person's deviation from their couple mean is one unit higher and the couple mean stays fixed, this means their partners' deviation must be one unit lower. Thus, the effects are a linear combination:

$$b_{cwc} = b_{actor} - b_{partner}$$

(Bolger et al., 2025)

6.26 Equivalence APIM and DIM

- Conversely, to obtain the actor and partner effects given the DIM estimates:

$$b_{actor} = \frac{b_{cbc} + b_{cwc}}{2}$$

$$b_{partner} = \frac{b_{cbc} - b_{cwc}}{2}$$

6.27 Equivalence APIM and DIM

Example: using APIM coefficients to obtain DIM coefficients and computing *Credible Intervals* of DIM coefficients.

```
a <- hypothesis(
  model_exch_apim,
  ".communication_actor + .communication_partner = 0"
)

round(a$hypothesis[,c(2,3,4,5)], 2)
```

	Estimate	Est.Error	CI.Lower	CI.Upper
1	1.96	0.04	1.87	2.04

	Est.	95% CI
Fixed Effects		
Intercept	-4.71	[-5.13, -4.26]
.comm actor	1.72	[1.66, 1.78]
.comm partner	0.24	[0.18, 0.30]

	Est.	95% CI
Fixed Effects		
Intercept	5.11	[5.00, 5.22]
.comm dyad mean	1.96	[1.87, 2.05]
.comm within dyad dev	1.48	[1.39, 1.57]

6.28 Equivalence APIM and DIM: Takeaway

- **APIM** and **DIM** are likelihood reparametrizations of the same model (aside from prior impact in Bayesian fits)
- **APIM**: intuitive actor/partner framing
- **DIM**: clean separation of between vs within components
- Estimating one model allows for directly obtaining estimates of the other
- Same random-effects structure at dyad level and same assumptions

6.28.1 Side Note:

In the **distinguishable** case, the full **Dyadic Score Model (DSM)** (e.g., Stadler et al., 2023) is equivalent to the corresponding full APIM (aside from prior impact in Bayesian fits) (Bolger et al., 2025; Iida et al., 2018).

6.29 Exchangeable Dyads - L-DIM/L-APIM: Simulated Data

We start again from the raw longitudinal data and omit `role`, which tells `dyadMLM` to treat the two members as exchangeable. Requesting both model types creates the APIM and DIM predictors in the same model-ready object.

```
df_long_dim <- prepare_dyad_data(
  data = df_long,
  dyad = coupleID,
  member = userID,
  time = diaryday,
  predictors = provided_support,
  model_types = c("apim", "dim"),
  seed = 123
) %>%
  mutate(
    diaryday_c = diaryday - mean(diaryday)
  )
```

userID	.member contrast arbitrary	day	day c	closeness	.support WP actor	.support WP partner
31 1	-1	0	-27	5.47	0.41	1.54
31 1	-1	1	-26	7.69	0.51	1.4
31 1	-1	2	-25	5.83	0.49	0.79
...	...	...	...	...	...	...
31 2	1	0	-27	5.19	1.54	0.41
31 2	1	1	-26	6.96	1.4	0.51
31 2	1	2	-25	6.9	0.79	0.49

7 Exchangeable Dyads - Intensive Longitudinal

7.1 Exchangeable Dyads - Longitudinal DIM/APIM

- We need an APIM or DIM on both the between person level and the within-person level.
- Due to equivalence, we could have a DIM on one level and an APIM on the other.

The generated `.provided_support_cwp_dyad_mean` and `.provided_support_cwp_within_dyad_dev` columns form the within-person DIM. The corresponding `.provided_support_cbp_dyad_mean` and `.provided_support_cbp_within_dyad_dev` columns form the between-person DIM (Bolger & Laurenceau, 2013).

Caveat: these simulated data contain gender differences, which exchangeable models ignore. The member-level variances and correlations reported below absorb these differences, so they do not match the simulated values. The example only illustrates the workflow.

7.2 Exchangeable Dyads - L-DIM/L-APIM: Preparing the Member Contrast

`dyadMLM` generates `.member_contrast_arbitrary` as an arbitrary $-1/+1$ member contrast. The fixed seed makes that assignment reproducible.

userID	.member contrast arbitrary	day	day c	.support BP dyad mean	.support BP within dyad dev
31 1	-1	0	-27	0.61	0.04
31 1	-1	1	-26	0.61	0.04
31 1	-1	2	-25	0.61	0.04
31 1	-1	3	-24	0.61	0.04
...	...	...	...	...	...
31 2	1	0	-27	0.61	-0.04
31 2	1	1	-26	0.61	-0.04
31 2	1	2	-25	0.61	-0.04
31 2	1	3	-24	0.61	-0.04

7.3 Exchangeable Dyads - L-DIM/L-APIM: Preparing the Member Contrast

userID	.member contrast arbitrary	day	day c	.support WP dyad mean	.support WP within dyad dev
31 1	-1	0	-27	0.97	-0.57
31 1	-1	1	-26	0.96	-0.44
31 1	-1	2	-25	0.64	-0.15
31 1	-1	3	-24	0.61	0.77
31 1	-1	4	-23	0.36	0.72
...	...	...	...	...	...
31 2	1	0	-27	0.97	0.57
31 2	1	1	-26	0.96	0.44
31 2	1	2	-25	0.64	0.15
31 2	1	3	-24	0.61	-0.77
31 2	1	4	-23	0.36	-0.72

7.4 Exchangeable Dyads - L-DIM/L-APIM: glmmTMB

```

1 model_exch_long_apim_glmmTMB <- glmmTMB(
2   closeness ~ 1 +
3
4   diaryday_c +
5
6   # Within-person APIM
7   .provided_support_cwp_actor +
8   .provided_support_cwp_partner +
9   # Equivalent to within-person DIM:
10  # .provided_support_cwp_dyad_mean +
11  # .provided_support_cwp_within_dyad_dev +
12
13  # Between-person APIM
14  .provided_support_cbp_actor +
15  .provided_support_cbp_partner +
16  # Equivalent to between-person DIM
17  # .provided_support_cbp_within_dyad_dev +
18  # .provided_support_cbp_dyad_mean +
19
20  # Dyad-Level intercept and slopes for time-varying predictors
21  (1 + diaryday_c + .provided_support_cwp_actor + .provided_support_cwp_partner | coupleID) +
22
23  # Both partners' deviations from these dyad-level means and slopes.
24  # Note: separate random-effects block to make them uncorrelated with dyad-level REs.
25  (0 + .member_contrast_arbitrary +
26    I(.member_contrast_arbitrary * diaryday_c) +
27    I(.member_contrast_arbitrary * .provided_support_cwp_actor) +
28    I(.member_contrast_arbitrary * .provided_support_cwp_partner) | coupleID) +
29
30  # After accounting for stable differences between partners, they may still be
31  # non-independent each day due to external occurrences and daily exchange processes
32  # not captured in the fixed effects. Thus, residuals are not yet independent.
33  # Homogeneous same-day residual covariance between partners:
34  (1 | coupleID:diaryday) +
35  (0 + .member_contrast_arbitrary | coupleID:diaryday)
36
37  # For this Gaussian model, remove the additional independent residual
38  # variance because the two couple-day blocks represent it.
39  , dispformula = ~ 0
40  , data = df_long_dim
41 )

```

7.5 Exchangeable Dyads - L-DIM/L-APIM: glmmTMB

In this example, the glmmTMB model does not converge properly. The random-effects structure is too complex for the information available in these data, so we would have to simplify it. Instead, we use brms below.

7.6 Exchangeable Dyads - L-DIM/L-APIM: brms

In brms, the same model can be estimated as:

Unlike the distinguishable longitudinal model, this exchangeable specification keeps one pooled residual σ ($\sigma \sim 1$ is implied). Its residual SD prior therefore targets `class = "sigma"` directly.

```
1 formula_exch_long_apim <- bf(
2   closeness ~ 1 +
3
4   diaryday_c +
5
6   # Within-person APIM
7   .provided_support_cwp_actor +
8   .provided_support_cwp_partner +
9
10  # Between-person APIM
11  .provided_support_cbp_actor +
12  .provided_support_cbp_partner +
13
14  # Dyad-Level intercept and slopes for time-varying predictors
15  (1 + diaryday_c + .provided_support_cwp_actor + .provided_support_cwp_partner | coupleID) +
16
17  # Both partners' deviations from these dyad-level means and slopes.
18  # Note: separate random-effects block to make them uncorrelated with dyad-level REs.
19  (0 + .member_contrast_arbitrary +
20    I(.member_contrast_arbitrary * diaryday_c) +
21    I(.member_contrast_arbitrary * .provided_support_cwp_actor) +
22    I(.member_contrast_arbitrary * .provided_support_cwp_partner) | coupleID) +
23
24  # Modelling Level 1 residuals in brms:
25  unstr(time = .member_contrast_arbitrary, gr = coupleID:diaryday)
26
27  # Again, no need to model heterogeneous residual variances (sigma)
28  # Implied: sigma = ~ 1
29 )
30
31 priors_exch_long_apim <- c(
32   prior(normal(4, 2), class = "Intercept"),
33   prior(normal(0, 2), class = "b"),
34   prior(exponential(1), class = "sd"),
35   prior(lkj(2), class = "cor"),
36   prior(student_t(3, 0, 1.5), class = "sigma"),
37   prior(lkj(2), class = "cortime")
38 )
39
40 model_exch_long_apim <- brm(
41   formula = formula_exch_long_apim,
42   data = df_long_dim,
43   family = gaussian(link = identity),
44   prior = priors_exch_long_apim,
45   chains = 4,
46   cores = 4,
47   iter = 2000,
48   warmup = 1000,
49   seed = 123,
50   file = file.path('brms_cache', 'model_apim_ind_long_apim')
51 )
```

7.7 Exchangeable Dyads - L-DIM/L-APIM: brms

The equivalent DIM specification:

```
1 # DIM Version
2 formula_exch_long_dim <- bf(
3   closeness ~ 1 +
4
5     diaryday_c +
6
7     .provided_support_cwp_dyad_mean +
8     .provided_support_cwp_within_dyad_dev +
9
10    .provided_support_cbp_dyad_mean +
11    .provided_support_cbp_within_dyad_dev +
12
13    (1 + diaryday_c + .provided_support_cwp_actor + .provided_support_cwp_partner | coupleID) +
14    (0 + .member_contrast_arbitrary +
15      I(.member_contrast_arbitrary * diaryday_c) +
16      I(.member_contrast_arbitrary * .provided_support_cwp_actor) +
17      I(.member_contrast_arbitrary * .provided_support_cwp_partner) | coupleID) +
18
19    unstr(time = .member_contrast_arbitrary, gr = coupleID:diaryday)
20 )
21
22 priors_exch_long_dim <- c(
23   prior(normal(4, 2), class = "Intercept"),
24   prior(normal(0, 2), class = "b"),
25   prior(exponential(1), class = "sd"),
26   prior(lkj(2), class = "cor"),
27   prior(student_t(3, 0, 1.5), class = "sigma"),
28   prior(lkj(2), class = "cortime")
29 )
30
31 model_exch_long_dim <- brm(
32   formula = formula_exch_long_dim,
33   data = df_long_dim,
34   family = gaussian(link = identity),
35   prior = priors_exch_long_dim,
36   chains = 4,
37   cores = 4,
38   iter = 2000,
39   warmup = 1000,
40   seed = 123,
41   file = file.path('brms_cache', 'model_apim_ind_long_dim')
42 )
```

7.8 Exchangeable Dyads - L-DIM/L-APIM: Member-Contrast Coding

For appropriate exchangeable random effects, we can use the generated `.member_contrast_arbitrary` column (del Rosario & West, 2025; Kenny & Ackerman, 2023):

- Randomly give one partner a constant of -1 and the other a constant of 1
- The couple-level intercept represents the average/common intercept of the two partners. (1 | coupleID)
- A column of 1s and -1s represents each partner's deviation from the couple-level effect, with partners contributing equally in opposite directions (+1 and -1)

Exchangeability is retained: if partners are flipped, the result is the same.

(del Rosario & West (2025) provide practical guidance on how to reduce the random effects structure in case of non-convergence.)

7.9 Exchangeable Dyads - L-DIM/L-APIM: Common and Deviation Components

For two partners coded with `.member_contrast_arbitrary = +1` and `.member_contrast_arbitrary = -1`, the glmmTMB structure `(1 | coupleID:diaryday) + (0 + .member_contrast_arbitrary | coupleID:diaryday)` uses independent common and member-deviation components to imply a homogeneous two-partner residual covariance.

This requires exactly two rows per couple-day and independent common and deviation blocks, and `dispformula = ~ 0`. If their variances are τ_c^2 and τ_d^2 , member variance is $\tau_c^2 + \tau_d^2$, covariance is $\tau_c^2 - \tau_d^2$, and their ratio is the correlation. No manual partner indicators are needed (del Rosario & West, 2025).

7.10 Exchangeable Dyads - L-DIM/L-APIM: Results

Comparing APIM (left) and DIM (right) output of fixed effects.

	Est.	95% CI
Fixed Effects		
Intercept	5.10	[4.97, 5.24]
day c	0.00	[0.00, 0.01]
.support WP actor	0.30	[0.27, 0.33]
.support WP partner	0.15	[0.12, 0.18]
.support BP actor	1.32	[1.14, 1.48]
.support BP partner	0.38	[0.21, 0.56]

	Est.	95% CI
Fixed Effects		
Intercept	5.11	[4.98, 5.23]
day c	0.00	[0.00, 0.01]
.support WP dyad mean	0.45	[0.41, 0.49]
.support WP within dyad dev	0.15	[0.11, 0.19]
.support BP dyad mean	1.70	[1.55, 1.86]
.support BP within dyad dev	0.93	[0.61, 1.21]

- Equivalence holds on both levels. Numeric deviations arise due to priors, sampling noise, and rounding.

7.11 Exchangeable Dyads - L-DIM/L-APIM: Results

APIM Results in Detail:

	Est.	95% CI	Rhat	Bulk ESS	Tail ESS
Fixed Effects					
Intercept	5.10	[4.97, 5.24]	1.017	175	225
day c	0.00	[0.00, 0.01]	1.005	463	1553
.support WP actor	0.30	[0.27, 0.33]	1.001	2845	2572
.support WP partner	0.15	[0.12, 0.18]	1.000	3249	2819
.support BP actor	1.32	[1.14, 1.48]	1.017	171	286
.support BP partner	0.38	[0.21, 0.56]	1.005	212	492
Random Effects					
sd(Intercept)	0.67	[0.58, 0.77]	1.022	389	702
sd(day c)	0.01	[0.01, 0.01]	1.001	1581	2780
sd(.support WP actor)	0.05	[0.01, 0.09]	1.004	990	953
sd(.support WP partner)	0.08	[0.04, 0.12]	1.002	1158	1197
sd(.member contrast arbitrary)	0.84	[0.74, 0.97]	1.049	218	539
sd(I.member contrast arbitraryMUsday c)	0.01	[0.01, 0.02]	1.010	1152	1947
sd(I.member contrast arbitraryMU.support WP actor)	0.14	[0.11, 0.18]	1.004	1154	2284
sd(I.member contrast arbitraryMU.support WP partner)	0.07	[0.01, 0.11]	1.004	754	627
cor(Intercept, day c)	0.56	[0.38, 0.70]	1.004	1129	1909
cor(Intercept, .support WP actor)	0.49	[0.02, 0.82]	1.002	2958	2405
cor(day c, .support WP actor)	0.37	[-0.10, 0.76]	1.002	2789	2668
cor(Intercept, .support WP partner)	0.21	[-0.12, 0.53]	1.001	2870	2182
cor(day c, .support WP partner)	0.19	[-0.19, 0.54]	1.003	2961	2724
cor(.support WP actor, .support WP partner)	0.35	[-0.27, 0.80]	1.002	687	1343
cor(.member contrast arbitrary, I.member contrast arbitraryMUsday c)	0.60	[0.44, 0.73]	1.014	788	1455
cor(.member contrast arbitrary, I.member contrast arbitraryMU.support WP actor)	0.66	[0.46, 0.81]	1.004	1299	1965
cor(I.member contrast arbitraryMUsday c, I.member contrast arbitraryMU.support WP actor)	0.42	[0.15, 0.63]	1.008	1619	2359
cor(.member contrast arbitrary, I.member contrast arbitraryMU.support WP partner)	0.12	[-0.29, 0.53]	1.000	2816	1776
cor(I.member contrast arbitraryMUsday c, I.member contrast arbitraryMU.support WP partner)	0.11	[-0.32, 0.55]	1.003	3148	1966
cor(I.member contrast arbitraryMU.support WP actor, I.member contrast arbitraryMU.support WP partner)	0.34	[-0.17, 0.76]	1.000	1647	2123
Residual Structure					
cortime(-1, 1)	0.04	[0.01, 0.07]	1.001	4908	2263
sigma	0.94	[0.92, 0.95]	1.000	6231	2668

7.12 Extract Full APIM Random Effects Variance-Covariance Matrix

We can rotate the random effects structure back to obtain the full APIM Random effects variance-covariance matrix, based on (Kenny & Ackerman, 2023). Just as we would in a SEM model with equality constraints!

For example, the within-partner variance of the random intercept is:

$$\text{Var}(u_{\text{common intercept}}) + \text{Var}(u_{\text{deviation intercept}})$$

and the cross-partner covariance of both partners' random intercepts is:

$$\text{Var}(u_{\text{common intercept}}) - \text{Var}(u_{\text{deviation intercept}})$$

In the model output, the common-intercept variance is labelled **Intercept**, and the deviation-intercept variance is labelled **.member_contrast_arbitrary**. This rotation only holds when the common/couple-mean and member-deviation random effects are uncorrelated. This is why we put them in separate random-effects blocks.

7.13 Extract Full APIM Random Effects Variance-Covariance Matrix

```
a <- summarize_exchangeable_apim_brms(  
  model_exch_long_apim,  
  gr = "coupleID",  
  deviation_term = ".member_contrast_arbitrary",  
  partner_labels = c("PartnerA", "PartnerB")  
)
```

7.14 Extract Full APIM Random Effects Variance-Covariance Matrix: Within-Person Matrix

```
print_df(a$within_person_covariance_matrix)
```

	Intercept	day c	.support WP actor	.support WP partner
Intercept	1.1802004	0.0112332	0.0955767	0.0179927
day c	0.0112332	0.0003159	0.0010075	0.0002727
.support WP actor	0.0955767	0.0010075	0.0238464	0.0042531
.support WP partner	0.0179927	0.0002727	0.0042531	0.0118398

7.15 Extract Full APIM Random Effects Variance-Covariance Matrix: Cross-Person Matrix

```
print_df(a$cross_person_covariance_matrix)
```

	Intercept	day c	.support WP actor	.support WP partner
Intercept	-0.2635988	-0.0024112	-0.0630951	0.0048753
day c	-0.0024112	-0.0000434	-0.0005769	0.0000857
.support WP actor	-0.0630951	-0.0005769	-0.0179709	-0.0015373
.support WP partner	0.0048753	0.0000857	-0.0015373	0.0024947

7.16 Extract Full APIM Random Effects Variance-Covariance Matrix: Full Matrix

```
print_wide_matrix(a$full_covariance_matrix, font_size = 6)
```

	PA Int	PA day c	PA .sup WP act	PA .sup WP prt	PB Int	PB day c	PB .sup WP act	PB .sup WP prt
PA Int	1.180	0.011	0.096	0.018	-0.264	-0.002	-0.063	0.005
PA day c	0.011	0.000	0.001	0.000	-0.002	0.000	-0.001	0.000
PA .sup WP act	0.096	0.001	0.024	0.004	-0.063	-0.001	-0.018	-0.002
PA .sup WP prt	0.018	0.000	0.004	0.012	0.005	0.000	-0.002	0.002
PB Int	-0.264	-0.002	-0.063	0.005	1.180	0.011	0.096	0.018
PB day c	-0.002	0.000	-0.001	0.000	0.011	0.000	0.001	0.000
PB .sup WP act	-0.063	-0.001	-0.018	-0.002	0.096	0.001	0.024	0.004
PB .sup WP prt	0.005	0.000	-0.002	0.002	0.018	0.000	0.004	0.012

The helper function `summarize_exchangeable_apim_brms()` is defined in `00_R_Functions/ReportModels.R`. It rotates every posterior draw, so the interval estimates for the transformed SDs, correlations, covariances, and residual quantities are computed on the transformed scale.

For `glmmTMB`, the same back-transformation is algebraically possible, but interval estimation is less direct because there are no posterior draws. One would usually transform parametric bootstrap draws or asymptotic draws from the fitted parameter covariance matrix.

7.17 Random effects SDs

```
print_df(
  a$sd_summary %>%
    mutate(across(where(is.numeric), ~ round(.x, 3)))
)
```

parameter	estimate	est error	q low	q high
PartnerA .support WP actor	0.153	0.018	0.119	0.191
PartnerA .support WP partner	0.107	0.020	0.066	0.144
PartnerA Intercept	1.085	0.056	0.987	1.206
PartnerA day c	0.018	0.001	0.016	0.020
PartnerB .support WP actor	0.153	0.018	0.119	0.191
PartnerB .support WP partner	0.107	0.020	0.066	0.144
PartnerB Intercept	1.085	0.056	0.987	1.206
PartnerB day c	0.018	0.001	0.016	0.020

7.18 Random effect correlation matrix

```
print_wide_matrix(a$full_correlation_matrix, font_size = 6)
```

	PA Int	PA day c	PA .sup WP act	PA .sup WP prt	PB Int	PB day c	PB .sup WP act	PB .sup WP prt
PA Int	1.000	0.582	0.570	0.152	-0.223	-0.125	-0.376	0.041
PA day c	0.582	1.000	0.367	0.141	-0.125	-0.137	-0.210	0.044
PA .sup WP act	0.570	0.367	1.000	0.253	-0.376	-0.210	-0.754	-0.091
PA .sup WP prt	0.152	0.141	0.253	1.000	0.041	0.044	-0.091	0.211
PB Int	-0.223	-0.125	-0.376	0.041	1.000	0.582	0.570	0.152
PB day c	-0.125	-0.137	-0.210	0.044	0.582	1.000	0.367	0.141
PB .sup WP act	-0.376	-0.210	-0.754	-0.091	0.570	0.367	1.000	0.253
PB .sup WP prt	0.041	0.044	-0.091	0.211	0.152	0.141	0.253	1.000

7.19 Full reporting summary

```
section_runs <- rle(a$reporting_summary$section)
section_ends <- cumsum(section_runs$lengths)
section_starts <- section_ends - section_runs$lengths + 1
section_labels <- c(
  "Fixed effects" = "Fixed Effects",
  "Back-transformed random-effect SDs" = "Back-Transformed SDs",
  "Back-transformed random-effect correlations" = "Back-Transformed Correlations",
  "Residual structure" = "Residual Structure"
)
reporting_rows_to_pack <- Map(c, section_starts, section_ends)
names(reporting_rows_to_pack) <- unname(section_labels[section_runs$values])

print_df(
  a$reporting_summary %>%
    mutate(across(where(is.numeric), ~ round(.x, 3))),
  rows_to_pack = reporting_rows_to_pack,
  scroll_height = '50vh'
)
```

section	parameter	estimate	est error	q low	q high
Fixed Effects					
Fixed effects	Intercept	5.102	0.070	4.966	5.240
Fixed effects	day c	0.004	0.001	0.001	0.006
Fixed effects	.support WP actor	0.300	0.014	0.273	0.328
Fixed effects	.support WP partner	0.149	0.015	0.120	0.177
Fixed effects	.support BP actor	1.316	0.088	1.140	1.483
Fixed effects	.support BP partner	0.382	0.086	0.212	0.557
Back-Transformed SDs					
Back-transformed random-effect SDs	PartnerA .support WP actor	0.153	0.018	0.119	0.191
Back-transformed random-effect SDs	PartnerA .support WP partner	0.107	0.020	0.066	0.144
Back-transformed random-effect SDs	PartnerA Intercept	1.085	0.056	0.987	1.206
Back-transformed random-effect SDs	PartnerA day c	0.018	0.001	0.016	0.020
Back-transformed random-effect SDs	PartnerB .support WP actor	0.153	0.018	0.119	0.191
Back-transformed random-effect SDs	PartnerB .support WP partner	0.107	0.020	0.066	0.144
Back-transformed random-effect SDs	PartnerB Intercept	1.085	0.056	0.987	1.206
Back-transformed random-effect SDs	PartnerB day c	0.018	0.001	0.016	0.020
Back-Transformed Correlations					
Back-transformed random-effect correlations	PartnerA .support WP actor with PartnerA Intercept	0.572	0.083	0.403	0.723
Back-transformed random-effect correlations	PartnerA .support WP actor with PartnerA day c	0.369	0.101	0.169	0.558

(continued)

section	parameter	estimate	est error	q low	q high
Back-transformed random-effect correlations	PartnerA .support WP partner with PartnerA .support WP actor	0.266	0.152	-0.028	0.558
Back-transformed random-effect correlations	PartnerA .support WP partner with PartnerA Intercept	0.157	0.117	-0.069	0.382
Back-transformed random-effect correlations	PartnerA .support WP partner with PartnerA day c	0.146	0.129	-0.114	0.400
Back-transformed random-effect correlations	PartnerA day c with PartnerA Intercept	0.581	0.056	0.470	0.681
Back-transformed random-effect correlations	PartnerB .support WP actor with PartnerA .support WP actor	-0.755	0.151	-0.983	-0.412
Back-transformed random-effect correlations	PartnerB .support WP actor with PartnerA .support WP partner	-0.096	0.160	-0.412	0.215
Back-transformed random-effect correlations	PartnerB .support WP actor with PartnerA Intercept	-0.377	0.103	-0.572	-0.163
Back-transformed random-effect correlations	PartnerB .support WP actor with PartnerA day c	-0.211	0.111	-0.415	0.019
Back-transformed random-effect correlations	PartnerB .support WP actor with PartnerB Intercept	0.572	0.083	0.403	0.723
Back-transformed random-effect correlations	PartnerB .support WP actor with PartnerB day c	0.369	0.101	0.169	0.558
Back-transformed random-effect correlations	PartnerB .support WP partner with PartnerA .support WP actor	-0.096	0.160	-0.412	0.215
Back-transformed random-effect correlations	PartnerB .support WP partner with PartnerA .support WP partner	0.230	0.394	-0.570	0.960
Back-transformed random-effect correlations	PartnerB .support WP partner with PartnerA Intercept	0.043	0.125	-0.199	0.281
Back-transformed random-effect correlations	PartnerB .support WP partner with PartnerA day c	0.046	0.138	-0.231	0.310
Back-transformed random-effect correlations	PartnerB .support WP partner with PartnerB .support WP actor	0.266	0.152	-0.028	0.558
Back-transformed random-effect correlations	PartnerB .support WP partner with PartnerB Intercept	0.157	0.117	-0.069	0.382
Back-transformed random-effect correlations	PartnerB .support WP partner with PartnerB day c	0.146	0.129	-0.114	0.400
Back-transformed random-effect correlations	PartnerB Intercept with PartnerA .support WP actor	-0.377	0.103	-0.572	-0.163
Back-transformed random-effect correlations	PartnerB Intercept with PartnerA .support WP partner	0.043	0.125	-0.199	0.281
Back-transformed random-effect correlations	PartnerB Intercept with PartnerA Intercept	-0.221	0.095	-0.402	-0.039
Back-transformed random-effect correlations	PartnerB Intercept with PartnerA day c	-0.124	0.084	-0.288	0.040
Back-transformed random-effect correlations	PartnerB day c with PartnerA .support WP actor	-0.211	0.111	-0.415	0.019
Back-transformed random-effect correlations	PartnerB day c with PartnerA .support WP partner	0.046	0.138	-0.231	0.310
Back-transformed random-effect correlations	PartnerB day c with PartnerA Intercept	-0.124	0.084	-0.288	0.040
Back-transformed random-effect correlations	PartnerB day c with PartnerA day c	-0.136	0.118	-0.362	0.094
Back-transformed random-effect correlations	PartnerB day c with PartnerB Intercept	0.581	0.056	0.470	0.681
Residual Structure					
Residual structure	residual variance	0.878	0.012	0.854	0.903
Residual structure	same day residual correlation	0.037	0.014	0.009	0.066
Residual structure	same day residual covariance	0.033	0.012	0.008	0.058
Residual structure	sigma	0.937	0.007	0.924	0.950

References

- Barr, D. J., Levy, R., Scheepers, C., & Tily, H. J. (2013). Random effects structure for confirmatory hypothesis testing: Keep it maximal. *Journal of Memory and Language*, 68(3), 255–278. <https://doi.org/10.1016/j.jml.2012.11.001>
- Bolger, N., & Laurenceau, J.-P. (2013). *Intensive longitudinal methods: An introduction to diary and experience sampling research*. Guilford Press. <https://www.guilford.com/books/Intensive-Longitudinal-Methods/Bolger-Laurenceau/9781462506781>
- Bolger, N., Laurenceau, J.-P., & DiGiovanni, A. (2025). Unified analysis model for indistinguishable and distinguishable dyads. *Innovations in Interpersonal Relationships and Health Research: Advancing*

- the Integration of Interdisciplinary Approaches to Dyadic Behavior Change*. <https://doi.org/10.17605/OSF.IO/WYDCJ>
- Brooks, M. E., Kristensen, K., van Benthem, K. J., Magnusson, A., Berg, C. W., Nielsen, A., Skaug, H. J., Maechler, M., & Bolker, B. M. (2017). glmmTMB balances speed and flexibility among packages for zero-inflated generalized linear mixed modeling. *The R Journal*, 9(2), 378–400. <https://doi.org/10.32614/RJ-2017-066>
- Bürkner, P.-C. (2025). *Brms: Bayesian regression models using stan*. <https://github.com/paul-buerkner/brms>
- Bürkner, P.-C., Gabry, J., & Vehtari, A. (2021). Efficient leave-one-out cross-validation for bayesian non-factorized normal and student-t models. *Computational Statistics*, 36, 1243–1261. <https://doi.org/10.1007/s00180-020-01045-4>
- del Rosario, K. S., & West, T. V. (2025). A Practical Guide to Specifying Random Effects in Longitudinal Dyadic Multilevel Modeling. *Advances in Methods and Practices in Psychological Science*, 8(3), 25152459251351286. <https://doi.org/10.1177/25152459251351286>
- Gabry, J., Češnovar, R., Johnson, A., & Bröder, S. (2025). *Cmdstanr: R interface to CmdStan*. <https://mc-stan.org/cmdstanr/>
- Guo, J., Gabry, J., Goodrich, B., Johnson, A., Weber, S., & Badr, H. S. (2025). *Rstan: R interface to stan*. <https://mc-stan.org/rstan/>
- Hartig, F. (2026). *DHARMa: Residual diagnostics for hierarchical (multi-level / mixed) regression models*. <http://florianhartig.github.io/DHARMa/>
- Iida, M., Seidman, G., & Shrout, P. E. (2018). Models of interdependent individuals versus dyadic processes in relationship research. *Journal of Social and Personal Relationships*, 35(1), 59–88. <https://doi.org/10.1177/0265407517725407>
- Kenny, D. A., & Ackerman, R. A. (2023). *Estimation of random effects with over-time dyadic data using multilevel modeling: The sum and difference method*. OSF. <https://osf.io/fju72>
- Kenny, D. A., & Cook, W. (1999). Partner effects in relationship research: Conceptual issues, analytic difficulties, and illustrations. *Personal Relationships*, 6(4), 433–448. <https://doi.org/10.1111/j.1475-6811.1999.tb00202.x>
- Kenny, D. A., & Kashy, D. A. (2011). Dyadic Data Analysis Using Multilevel Modeling. In *Handbook of Advanced Multilevel Analysis*. Routledge.
- Kenny, D. A., Kashy, D. A., & Cook, W. L. (2006). *Dyadic data analysis*. Guilford Press.
- Küng, P. (2026). *dyadMLM: Tools for dyadic multilevel models*. <https://doi.org/10.5281/zenodo.21481720>
- Lüdtke, D., Makowski, D., Ben-Shachar, M. S., Patil, I., Wiernik, B. M., Bacher, E., & Thériault, R. (2026). *Easystats: Framework for easy statistical modeling, visualization, and reporting*. <https://easystats.github.io/easystats/>
- Nickell, S. (1981). Biases in dynamic models with fixed effects. *Econometrica*, 49(6), 1417–1426. <https://doi.org/10.2307/1911408>
- Pinheiro, J., Bates, D., & R Core Team. (2026). *Nlme: Linear and nonlinear mixed effects models*. <https://svn.r-project.org/R-packages/trunk/nlme/>
- Ripley, B., & Venables, B. (2025). *MASS: Support functions and datasets for venables and ripley's MASS*. <http://www.stats.ox.ac.uk/pub/MASS4/>
- Sivula, T., Magnusson, M., Matamoros, A. A., & Vehtari, A. (2025). Uncertainty in Bayesian leave-one-out cross-validation based model comparison. *Bayesian Analysis*. <https://doi.org/10.1214/25-BA1569>
- Stadler, G., Scholz, U., Bolger, N., Shrout, P. E., Knoll, N., & Lüscher, J. (2023). How is companionship related to romantic partners' affect, relationship satisfaction, and health behavior? Using a longitudinal dyadic score model to understand daily and couple-level effects of a dyadic predictor. *Applied Psychology: Health and Well-Being*, 15(4), 1530–1554. <https://doi.org/10.1111/aphw.12450>
- Vehtari, A., Gabry, J., Magnusson, M., Yao, Y., Bürkner, P.-C., Paananen, T., & Gelman, A. (2025). *Loo: Efficient leave-one-out cross-validation and WAIC for bayesian models*. <https://mc-stan.org/loo/>
- Vehtari, A., Gelman, A., & Gabry, J. (2017). Practical bayesian model evaluation using leave-one-out cross-validation and WAIC. *Statistics and Computing*, 27, 1413–1432. <https://doi.org/10.1007/s11222-016-9696-4>
- Wickham, H. (2023). *Tidyverse: Easily install and load the tidyverse*. <https://tidyverse.tidyverse.org>