

Laboratorio 4

Repositorio:

https://github.com/Pasita24/3479A321_2022479621

Actividad N°1



Se pidió realizar una Branch en el repositorio de github, para esta actividad se puede realizar de dos formas distintas, La primera es utilizando. Git lo cual se intento hacer primeramente esta forma, pero por errores de permisos no se pudo implementar, pero realmente no es difícil crear un Branch si no que se necesita tener vinculado tu pc con la cuenta git y se opto por crearla a través de la aplicación Github Desktop.

Con .Git:

```
benja@PasitaPC:/mnt/c/Users/benja/Documents/fultter_aplication_laboratorio$ git remote -v
origin  git@github.com:Pasita24/3479A321_2022479621.git (fetch)
origin  git@github.com:Pasita24/3479A321_2022479621.git (push)
benja@PasitaPC:/mnt/c/Users/benja/Documents/fultter_aplication_laboratorio$ git branch
* master
benja@PasitaPC:/mnt/c/Users/benja/Documents/fultter_aplication_laboratorio$ git checkout -b Desarrollo
benja@PasitaPC:/mnt/c/Users/benja/Documents/fultter_aplication_laboratorio$ git branch
* Desarrollo
  master
benja@PasitaPC:/mnt/c/Users/benja/Documents/fultter_aplication_laboratorio$ git add .
benja@PasitaPC:/mnt/c/Users/benja/Documents/fultter_aplication_laboratorio$ git commit -m "commit en la rama de desarrollo"
On branch Desarrollo
nothing to commit, working tree clean
benja@PasitaPC:/mnt/c/Users/benja/Documents/fultter_aplication_laboratorio$ git push -u origin Desarrollo
The authenticity of host 'github.com (20.201.28.151)' can't be established.
ED25519 key fingerprint is SHA256:+DiY3wvV6TuzJJhbpZisF/zLDA0zPMSvHdKtr4UvCQqU.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? y
Please type 'yes', 'no' or the fingerprint: yes
Warning: Permanently added 'github.com' (ED25519) to the list of known hosts.
git@github.com: Permission denied (publickey).
fatal: Could not read from remote repository.

Please make sure you have the correct access rights
and the repository exists.
benja@PasitaPC:/mnt/c/Users/benja/Documents/fultter_aplication_laboratorio$
```


Con Github Desktop:

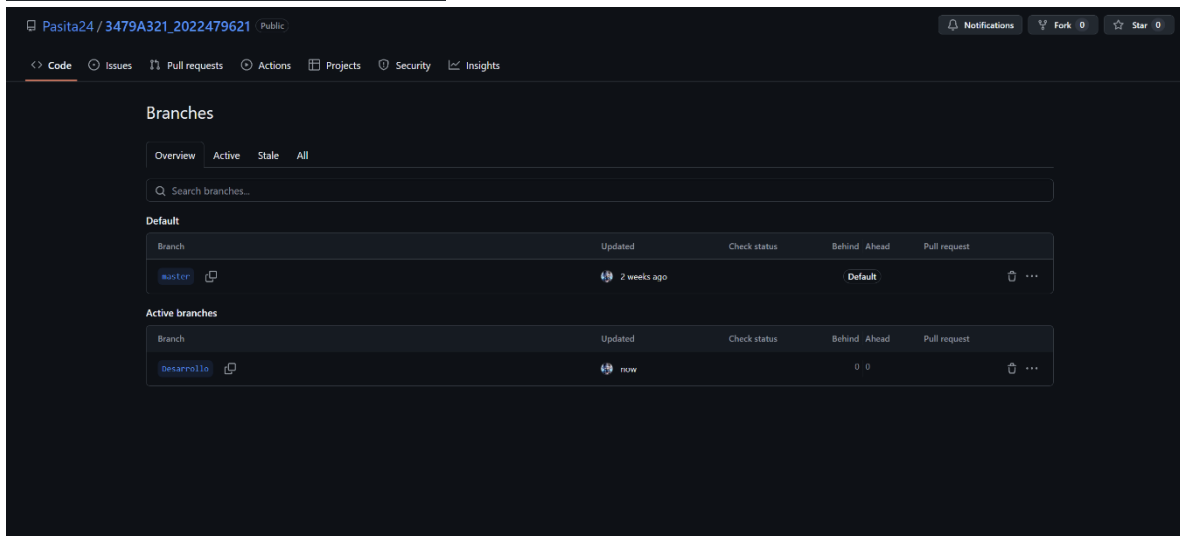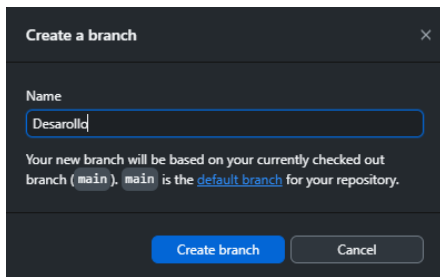

Actividad N°2

Se pide incluir nuevas imágenes para nuestro proyecto, para obtener lo pedido se realizó lo siguientes pasos

- Crear la carpeta assets y icons
- Actualizamos el archivo pubspec.yaml para importar las imágenes a nuestro proyecto
- Por ultimo agregamos la dependencia para utilizar las importaciones .svg

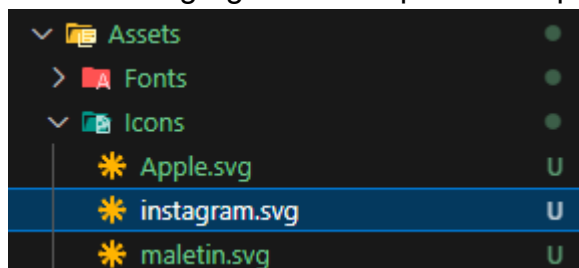

```
# To add assets to your application, add an assets section, like this:  
assets:  
  - assets/icons/Apple.svg
```

```
dependencies:
  flutter:
    sdk: flutter


  # The following adds the Cupertino Icons font to your application.
  # Use with the CupertinoIcons class for iOS style icons.
  cupertino_icons: ^1.0.8
  flutter_svg: ^2.0.17
  logger: ^2.5.0

dev_dependencies:
  flutter_test:
    sdk: flutter
```

Actividad N°3

Ahora debemos implementar el icono agregado para que se refleje dentro de nuestra interfaz, para esto se debe agregar en el main donde uno quiere que se vea reflejado el icono

```
children: <Widget>[
  SvgPicture.asset(
    "Assets/Icons/Apple.svg",
    semanticsLabel: 'Dart Logo',
  ), // SvgPicture.asset
```

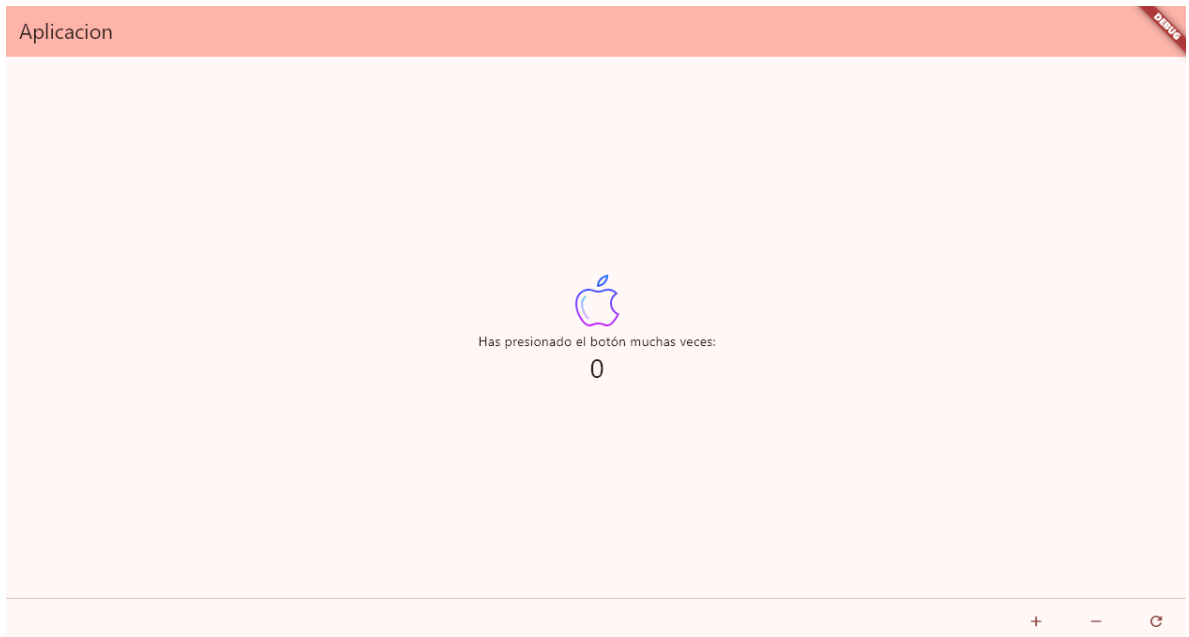


Actividad N°4

En esta actividad nos dan libre elección para la actividad que no nosotros queramos incluir, En mi caso elegio la opción B, la cual es incluir una fuente

propia, en este punto es muy similar como importar una imagen, para esto se aplicaron los siguientes pasos.

- Se busca la fuente que queramos incluir en mi caso utilice Google fonts.
- Creamos una carpeta en assets llamada “Fonts”.
- Implementamos las dependencias correspondientes para incluir nuestro formato de texto.

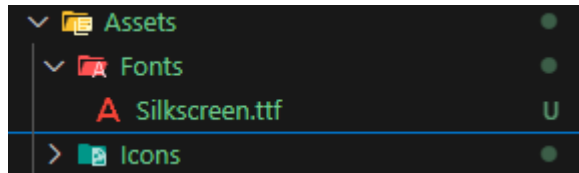


En la clase “pubspec.yaml”

```
fonts:  
  - family: Silkscreen  
    fonts:  
      - asset: assets/fonts/Silkscreen.ttf
```

En la clase “Main.dart”

```
title: 'Flutter Demo',  
theme: ThemeData(  
  fontFamily: 'Silkscreen',  
  // This is the theme of your application.  
  //  
  // TRY THIS: Try running your application with "flutter run". You'll see  
  // the application has a purple toolbar. Then, without quitting the app  
  // try changing the seedColor in the colorScheme below to Colors.green  
  // and then invoke "hot reload" (save your changes or press the "hot  
  // reload" button in a Flutter-supported IDE, or press "r" if you used  
  // the command line to start the app).  
  //  
  // Notice that the counter didn't reset back to zero; the application  
  // state is not lost during the reload. To reset the state, use hot  
  // restart instead.  
  //  
  // This works for code too, not just values: Most code changes can be  
  // tested with just a hot reload.  
  colorScheme: ColorScheme.fromSeed(seedColor: Colors.red),  
), // ThemeData  
home: const MyHomePage(title: 'Aplicacion'),  
); // MaterialApp
```

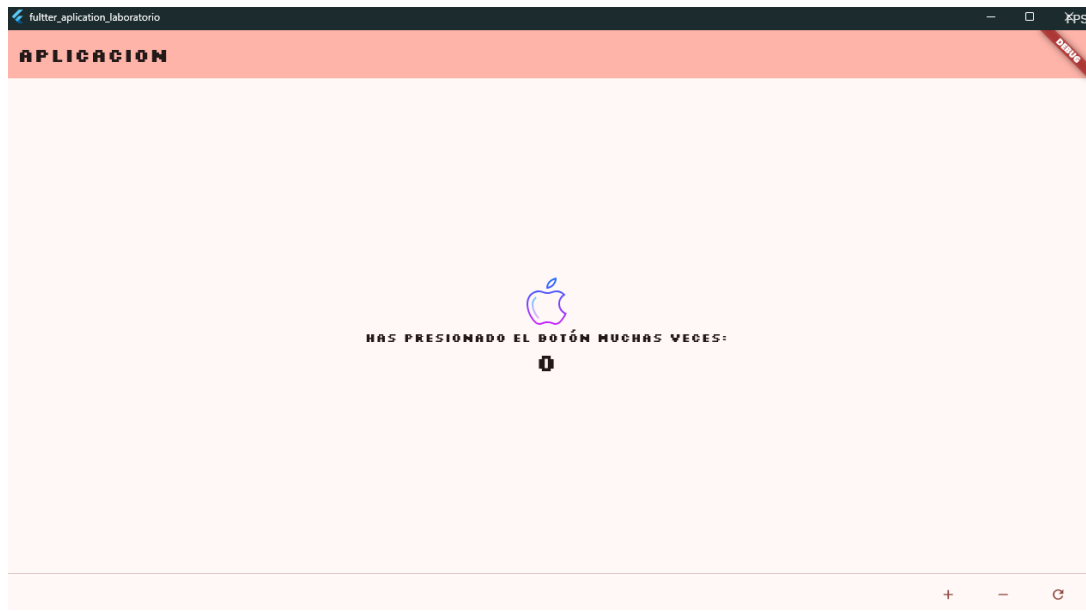


Actividad N°5

Se pide trabajar con logger para trabajar con logs en los repositorios, para poder implementar logger a nuestro proyecto se deben de seguir los siguientes pasos.

- Instalar las dependencias de logger
- Agregamos las dependencias a la clase "pubspec.yaml"
- Importamos las dependencias en el main.dart
- Agregamos en la Función "MyApp" lo que se pide en el documento de pub.dev
- Verificamos que funcione correctamente.

Paso 1

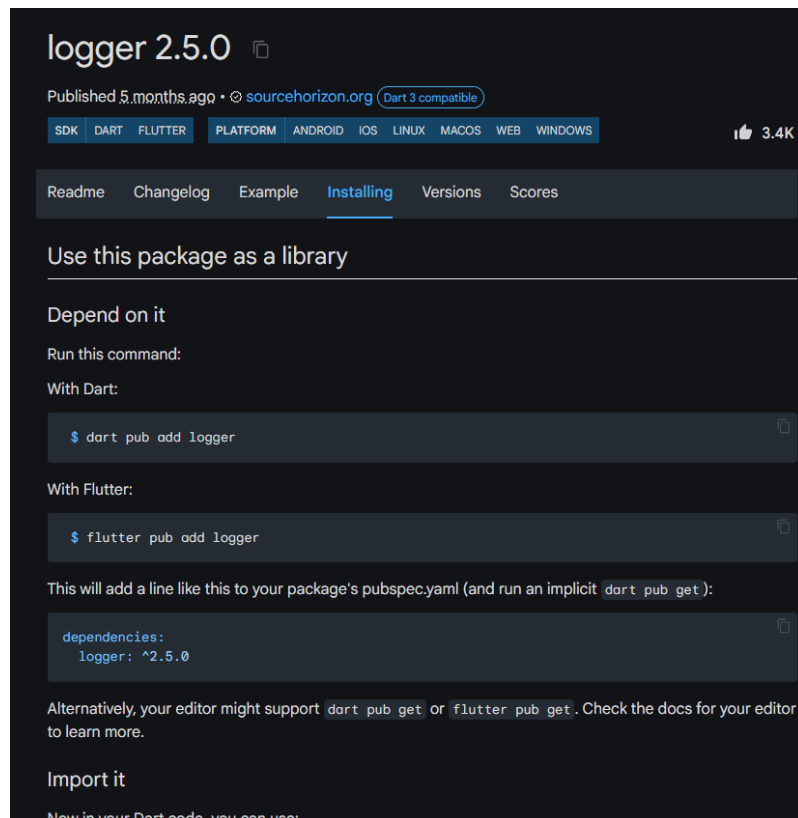

The screenshot shows the pub.dev page for the 'logger' package version 2.5.0. The page is dark-themed and includes navigation tabs for SDK, DART, FLUTTER, PLATFORM, ANDROID, IOS, LINUX, MACOS, WEB, and WINDOWS. The 'Installing' tab is selected. Below the navigation, there are links for Readme, Changelog, Example, Installing, Versions, and Scores. The main content area is titled 'Use this package as a library' and includes instructions on how to depend on the package. It shows the command 'dart pub add logger' and 'flutter pub add logger'. It also shows the resulting 'dependencies' section in a pubspec.yaml file, which includes 'logger: ^2.5.0'. At the bottom, there is a section for 'Import it' with the instruction 'Now in your Dart code, you can use:'.

logger 2.5.0

Published 5 months ago • © sourcehorizon.org (Dart 3 compatible)

SDK DART FLUTTER PLATFORM ANDROID IOS LINUX MACOS WEB WINDOWS

Readme Changelog Example Installing Versions Scores

Use this package as a library

Depend on it

Run this command:

With Dart:

```
$ dart pub add logger
```

With Flutter:

```
$ flutter pub add logger
```

This will add a line like this to your package's pubspec.yaml (and run an implicit `dart pub get`):

```
dependencies:
  logger: ^2.5.0
```

Alternatively, your editor might support `dart pub get` or `flutter pub get`. Check the docs for your editor to learn more.

Import it

Now in your Dart code, you can use:

Paso 2

```
dependencies:
  flutter:
    sdk: flutter

# The following adds the Cupertino Icons font to your application.
# Use with the CupertinoIcons class for iOS style icons.
cupertino_icons: ^1.0.8
flutter_svg: ^2.0.17
logger: ^2.5.0
```

Paso 3

```
import 'package:flutter/material.dart';
import 'Pages/home.dart';
import 'package:logger/logger.dart';
```

Paso 4

```
class MyApp extends StatelessWidget {
  const MyApp({super.key});

  // This widget is the root of your application.
  @override
  Widget build(BuildContext context) {
    Logger logger = Logger();
    logger.i('Logger is working!');

    @override
    Widget build(BuildContext context) {
      Logger logger = Logger();
      logger.i('Logger is working!');
      // This method is rerun every time setState is called, for instance as done
      // by the _incrementCounter method above.
      //
      // The Flutter framework has been optimized to make rerunning build methods
      // fast, so that you can just rebuild anything that needs updating rather
      // than having to individually change instances of widgets.
      return Scaffold(
        appBar: AppBar(
          // TRY THIS: Try changing the color here to a specific color (to
          // Colors.amber, perhaps?) and trigger a hot reload to see the AppBar
```

Paso 5

```
Launching lib/main.dart on Windows in debug mode...
✓ Built build\windows\x64\runner\Debug\flutter_aplication_laboratorio.exe
Connecting to VM Service at ws://127.0.0.1:53461/RMTiGknwHg=/ws
Connected to the VM Service.
flutter:
flutter: #0 MyApp.build (package:fultter_aplication_laboratorio/main.dart:16:12)
flutter: #1 StatelessElement.build (package:flutter/src/widgets/framework.dart:5799:49)
flutter:
flutter: ✨ Logger is working!
flutter:
flutter:
flutter: #0 _MyHomePageState.build (package:flutter_aplication_laboratorio/Pages/home.dart:57:12)
flutter: #1 StatefulElement.build (package:flutter/src/widgets/framework.dart:5841:27)
flutter:
flutter: ✨ Logger is working!
flutter:
Lost connection to device.

Exited.
```

Actividad N°6


Se nos pide crear una nueva clase “Home” donde deben de estar las carpetas dentro de lib, debe ir el contenido de Widget de la pantalla MyHomePage y resolver errores de dependencias.

Para realizar lo pedido se deben seguir los siguientes pasos

- Creamos la carpeta Home dentro de la carpeta Lib

- Importamos todo el contenido de Widget de la pantalla MyHomePage
- Se actualizaron las importaciones para que el archivo Main lea el contenido de Home.dart

Paso 1



Paso 2

```
import 'package:flutter/material.dart'; The file name 'Home.dart' isn't a low
import 'package:flutter_svg/svg.dart';
import 'package:logger/logger.dart';

class MyHomePage extends StatefulWidget {
  const MyHomePage({super.key, required this.title});

  // This widget is the home page of your application. It is stateful, meaning
  // that it has a State object (defined below) that contains fields that affect
  // how it looks.

  // This class is the configuration for the state. It holds the values (in this
  // case the title) provided by the parent (in this case the App widget) and
  // used by the build method of the State. Fields in a Widget subclass are
  // always marked "final".

  final String title;

  @override
  State<MyHomePage> createState() => _MyHomePageState();
}

class _MyHomePageState extends State<MyHomePage> {
  int _counter = 0;

  void _incrementCounter() {
    setState(() {
      // This call to setState tells the Flutter framework that something has
      // changed in this State, which causes it to rerun the build method below
      // so that the display can reflect the updated values. If we changed
      // _counter without calling setState(), then the build method would not be
      // called again, and so nothing would appear to happen.
      _counter++;
    });
  }

  void _decreaseCounter() {
    setState(() {
      // This call to setState tells the Flutter framework that something has
      // changed in this State, which causes it to rerun the build method below
      // so that the display can reflect the updated values. If we changed
      // _counter without calling setState(), then the build method would not be
      // called again, and so nothing would appear to happen.
      _counter--;
    });
  }
}
```

Paso 3


```
main.dart M X  * instagram.svg U  pubspec.yaml M  home.dart U
lib > main.dart > MyApp > build
1 import 'package:flutter/material.dart';
2 import 'Pages/home.dart';
3 import 'package:logger/logger.dart';
4
Run | Debug | Profile
5 void main() {
6   runApp(const MyApp());
7 }
8
9 class MyApp extends StatelessWidget {
10   const MyApp({super.key});
11
12   // This widget is the root of your application.
13   @override
14   Widget build(BuildContext context) {
15     Logger logger = Logger();
16     logger.i('Logger is working!');
17     return MaterialApp(
18       title: 'Flutter Demo',
19       theme: ThemeData(
20         fontFamily: 'Silkscreen',
21         // This is the theme of your application.
22         //
23         // TRY THIS: Try running your application with "flutter run". You'll see
24         // the application has a purple toolbar. Then, without quitting the app
25         // try changing the seedColor in the colorScheme below to Colors.green
26         // and then invoke "hot reload" (save your changes or press the "hot
27         // reload" button in a Flutter-supported IDE, or press "r" if you used
28         // the command line to start the app).
29         //
30         // Notice that the counter didn't reset back to zero; the application
31         // state is not lost during the reload. To reset the state, use hot
32         // restart instead.
33         //
34         // This works for code too, not just values: Most code changes can be
35         // tested with just a hot reload.
36         colorScheme: ColorScheme.fromSeed(seedColor: Colors.red),
37       ), // ThemeData
38       home: const MyHomePage(title: 'Aplicacion'),
39     ); // MaterialApp
40   }
41 }
42
```