

# Introduction

This is not so much an instructional manual, but rather notes, tables, and examples for Python syntax. It was created by the author as an additional resource during training, meant to be distributed as a physical notebook. Participants (who favor the physical characteristics of dead tree material) could add their own notes, thoughts, and have a valuable reference of curated examples.

## Running Python

### Installation

To check if Python is installed, run the following from a terminal:

```
$ python3 --version
```

Otherwise, install Python 3 from the website<sup>1</sup>.

### Invoking Python

The Python executable will behave differently depending on the command line options you give it:

- Start the Python REPL:  

```
$ python3
```
- Execute the `file.py` file:  

```
$ python3 file.py
```
- Execute the `file.py` file, and drop into REPL with namespace of `file.py`:  

```
$ python3 -i file.py
```
- Execute the `json/tool.py` module:  

```
$ python3 -m json.tool
```
- Execute `"print('hi')"` :  

```
$ python3 -c "print('hi')"
```

### REPL

- Use the `help` function to read the documentation for a module/class/function. As a standalone invocation, you enter the help system and can explore various topics.
- Use the `dir` function to list contents of the namespace, or attributes of an object if you pass one in.

Note

The majority of code in this book is written as if it were executed in a REPL. If you are typing it in, ignore the primary and secondary prompts (`>>>` and `...`).

## The Zen of Python

Run the following in an interpreter to get an Easter egg that describes some of the ethos behind Python. This is also codified in PEP 20:

```
>>> import this
The Zen of Python, by Tim Peters
```

```
Beautiful is better than ugly.
Explicit is better than implicit.
```

---

<sup>1</sup><http://python.org>

Simple is better than complex.  
Complex is better than complicated.  
Flat is better than nested.  
Sparse is better than dense.  
Readability counts.  
Special cases aren't special enough to break the rules.  
Although practicality beats purity.  
Errors should never pass silently.  
Unless explicitly silenced.  
In the face of ambiguity, refuse the temptation to guess.  
There should be one --and preferably only one-- obvious way to do it.  
Although that way may not be obvious at first unless you're Dutch.  
Now is better than never.  
Although never is often better than *\*right\** now.  
If the implementation is hard to explain, it's a bad idea.  
If the implementation is easy to explain, it may be a good idea.  
Namespaces are one honking great idea -- let's do more of those!

These might just seem like silly one liners, but there is a lot of wisdom packed in here. It is good for Python programmers to review these every once in a while and see if these hold true for their code. (Or to justify their code reviews)

## Built-in Types

### Variables

Python variables are like cattle tags, they point to objects (which can be classes, instances, modules, or functions), but variables are not the objects. You can reuse variable names for different object types (though you probably shouldn't):

```
>>> a = 400      # a points to an integer
>>> a = '400'    # a now points to a string
```

Note

The # character denotes the start of a comment. There are no multi-line comments, though most editors with Python support can comment out a region.

The figure that follows illustrates how everything is an object in Python and variables just point to them.

# Rebinding Variables


Code

```
a = 400
```

What Computer Does

Variables


Objects

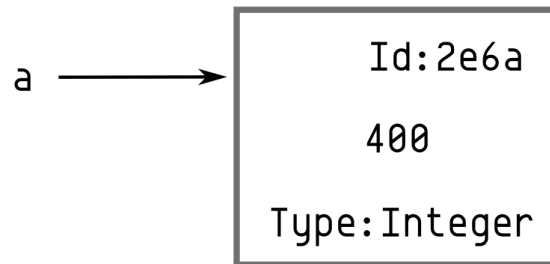

```
a = '400'
```

Variables

Objects

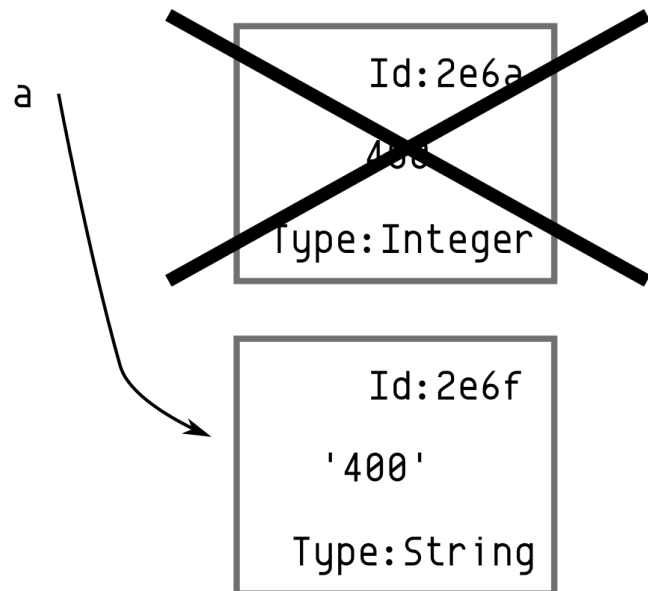

Old Object is Garbage Collected

Figure 1: Illustration of reusing the same variable

## Assignment Expressions

In Python 3.8 the *walrus operator* was introduced, `:=`. The following code:

```
rows = connection.fetch(200)
while rows:
    process(rows)
    rows = connection.fetch(200)
```

Can be rewritten as:

```
while rows := connection.fetch(200):
    process(rows)
```

Normal assignment statements cannot be put in `if` or `while` statements, but an assignment expression evaluates to the value of the variable, so it can.

## Numbers

Python includes three types of numeric literals: *integers* (unlimited precision), *floats* (usually C `double`, see `sys.float_info`), and *complex numbers*. Python 3.6 added the ability to use underscores to improve readability (PEP 515):

```
>>> dollars = 3_283_999
```

Floats in general are approximations, though since Python 3.1, they are rounded when they are displayed so that may mask the lack of precision to casual users.

Table 1: Number types

Type	Example
Integer	14
Integer (Hex)	0xe
Integer (Octal)	0o16
Integer (Binary)	0b1110
Float	14.0
Float	1.4e1
Complex	14+0j
Underscore	1_000

There are many built-in functions for manipulating numbers ie. `abs`, `min`, `max`, `ceil`. Also see the `math`, `random`, and `statistics` modules in the standard library. See the `fractions` and `decimal` libraries in the standard library for rational numbers and precise floating point numbers.

Table 2: Number magic methods

Operation	Provided By	Result
<code>abs(num)</code>	<code>--abs--</code>	Absolute value of <code>num</code>
<code>num + num2</code>	<code>--add--</code>	Addition
<code>bool(num)</code>	<code>--bool--</code>	Boolean conversion
<code>num == num2</code>	<code>--eq--</code>	Equality
<code>float(num)</code>	<code>--float--</code>	Float conversion
<code>num // num2</code>	<code>--floordiv--</code>	Integer division
<code>num &gt;= num2</code>	<code>--ge--</code>	Greater or equal
<code>num &gt; num2</code>	<code>--gt--</code>	Greater than
<code>int(num)</code>	<code>--int--</code>	Integer conversion
<code>num &lt;= num2</code>	<code>--le--</code>	Less or equal
<code>num &lt; num2</code>	<code>--lt--</code>	Less than
<code>num % num2</code>	<code>--mod--</code>	Modulus
<code>num * num2</code>	<code>--mul--</code>	Multiplication
<code>num != num2</code>	<code>--ne--</code>	Not equal
<code>-num</code>	<code>--neg--</code>	Negative
<code>+num</code>	<code>--pos--</code>	Positive
<code>num ** num2</code>	<code>--pow--</code>	Power
<code>round(num)</code>	<code>--round--</code>	Round
<code>num.__sizeof__()</code>	<code>--sizeof--</code>	Bytes for internal representation
<code>str(num)</code>	<code>--str--</code>	String conversion
<code>num - num2</code>	<code>--sub--</code>	Subtraction
<code>num / num2</code>	<code>--truediv--</code>	Float division
<code>math.trunc(num)</code>	<code>--trunc--</code>	Truncation

See `math.isclose` and `cmath.isclose` for floating point equality testing.

Table 3: Integer specific methods and operations

Operation	Provided By	Result
<code>num &amp; num2</code>	<code>--and--</code>	Bitwise and
<code>math.ceil(num)</code>	<code>--ceil--</code>	Ceiling
<code>math.floor(num)</code>	<code>--floor--</code>	Floor
<code>~num</code>	<code>--invert--</code>	Bitwise inverse
<code>num &lt;&lt; num2</code>	<code>--lshift--</code>	Left shift

Operation	Provided By	Result
<code>num   num2</code>	<code>--or--</code>	Bitwise or
<code>num &gt;&gt; num2</code>	<code>--rshift--</code>	Right shift
<code>num ^ num2</code>	<code>--xor--</code>	Bitwise xor
<code>num.bit_length()</code>	<code>bit_length</code>	Number of bits necessary

Table 4: Float specific methods and operations

Operation	Result
<code>f.as_integer_ratio()</code>	Returns num, denom tuple
<code>f.is_integer()</code>	Boolean if whole number
<code>f.hex()</code>	Hex base 2 version
<code>float.fromhex(h)</code>	Convert above to float

See IEEE 754 for how `.as_integer_ratio` works. See `math.isclose` for comparing float values.

## Strings

Python 3 strings hold Unicode data. Python has a few ways to represent strings. There is also a bytes type (PEP 3137). Strings can be created using string literals or by passing an object, or bytes into `str`:

```
>>> str(1)
'1'
```

Table 5: String types

Type	Example
String	"hello\tthere"
String	'hello'
String	'''He said, "hello"'''
Raw string	r'hello\tthere'
Byte string	b'hello'

Table 6: Escape Characters

Escape Sequence	Output
\ newline	Ignore trailing newline in triple quoted string
\\	Backslash
\'	Single quote
\"	Double quote
\a	ASCII Bell
\b	ASCII Backspace
\n	Newline
\r	ASCII carriage return
\t	Tab
\u12af	Unicode 16 bit
\U12af89bc	Unicode 32 bit
\N{BLACK STAR}	Unicode name
\o84	Octal character
\xFF	Hex character

Table 7: String operations

Operation	Provided By	Result
s + s2	__add__	String concatenation
"foo" in s	__contains__	Membership
s == s2	__eq__	Equality
s >= s2	__ge__	Greater or equal
s[0]	__getitem__	Index operation
s > s2	__gt__	Greater
s <= s2	__le__	Less than or equal
len(s)	__len__	Length
s < s2	__lt__	Less than
s % (1, 'foo')	__mod__	Formatting
s * 3	__mul__	Repetition
s != s2	__ne__	Not equal
repr(s)	__repr__	Programmer friendly string
s.__sizeof__()	__sizeof__	Bytes for internal representation
str(s)	__str__	User friendly string

Table 8: String methods

Operation	Result
<code>s.capitalize()</code>	Capitalizes a string
<code>s.casefold()</code>	Lowercase in a unicode compliant manner
<code>s.center(w, [char])</code>	Center a string in <code>w</code> spaces with <code>char</code> (default " ")
<code>s.count(sub, [start, [end]])</code>	Count <code>sub</code> in <code>s</code> between <code>start</code> and <code>end</code>
<code>s.encode(encoding, errors= 'strict')</code>	Encode a string into bytes
<code>s.endswith(sub)</code>	Check for a suffix
<code>s.expandtabs( tabsize=8)</code>	Replaces tabs with spaces
<code>s.find(sub, [start, [end]])</code>	Find substring or return -1
<code>s.format(*args, **kw)</code>	Format string
<code>s.format_map( mapping)</code>	Format strings with a mapping
<code>s.index(sub, [start, [end]])</code>	Find substring or raise <code>ValueError</code>
<code>s.isalnum()</code>	Boolean if alphanumeric
<code>s.isalpha()</code>	Boolean if alphabetic
<code>s.isdecimal()</code>	Boolean if decimal
<code>s.isdigit()</code>	Boolean if digit
<code>s.isidentifier()</code>	Boolean if valid identifier
<code>s.islower()</code>	Boolean if lowercase
<code>s.isnumeric()</code>	Boolean if numeric
<code>s.isprintable()</code>	Boolean if printable
<code>s.isspace()</code>	Boolean if whitespace
<code>s.istitle()</code>	Boolean if titlecased
<code>s.isupper()</code>	Boolean if uppercased
<code>s.join(iterable)</code>	Return a string inserted between sequence
<code>s.ljust(w, [char])</code>	Left justify in <code>w</code> spaces with <code>char</code> (default ' ')
<code>s.lower()</code>	Lowercase
<code>s.lstrip([chars])</code>	Left strip <code>chars</code> (default spacing).
<code>s.partition(sub)</code>	Split string at first occurrence of substring, return ( <code>before</code> , <code>sub</code> , <code>after</code> )
<code>s.removeprefix(sub)</code>	Remove <code>sub</code> from start of string
<code>s.removesuffix(sub)</code>	Remove <code>sub</code> from end of string
<code>s.replace(old, new, [count])</code>	Replace substring with new string
<code>s.rfind(sub, [start, [end]])</code>	Find rightmost substring or return -1
<code>s.rindex(sub, [start, [end]])</code>	Find rightmost substring or raise <code>ValueError</code>
<code>s.rjust(w, [char])</code>	Right justify in <code>w</code> spaces with <code>char</code> (default " ")
<code>s.rpartition(sub)</code>	Rightmost partition
<code>s.rsplit([sep, [maxsplit=-1])</code>	Rightmost split by <code>sep</code> (defaults to whitespace)
<code>s.rstrip([chars])</code>	Right strip
<code>s.split([sep, [maxsplit=-1]])</code>	Split a string into sequence around substring
<code>s.splitlines( keepends=False)</code>	Break string at line boundaries
<code>s.startswith( prefix, [start, [end]])</code>	Check for prefix
<code>s.strip([chars])</code>	Remove leading and trailing whitespace (default) or <code>chars</code>
<code>s.swapcase()</code>	Swap casing of string
<code>s.title()</code>	Titlecase string
<code>s.translate(table)</code>	Use a translation table to replace strings
<code>s.upper()</code>	Uppercase
<code>s.zfill(width)</code>	Left fill with 0 so string fills <code>width</code> (no truncation)

## Lists

Lists are ordered mutable sequences. They can be created with the list literal syntax:

```
>>> people = ['Paul', 'John', 'George']
>>> people.append('Ringo')
```

Lists can also be created by calling the constructor with an optional sequence:



```
>>> people = list(('Paul', 'John', 'George'))
>>> people
['Paul', 'John', 'George']
```

The `in` operator is useful for checking membership on sequences:

```
>>> 'Yoko' in people
False
```

If we need the index number during iteration, the `enumerate` function gives us a tuple of index, item pairs:

```
>>> for i, name in enumerate(people, 1):
...     print('{} - {}'.format(i, name))
1 - Paul
2 - John
3 - George
```

We can do index operations on most sequences:

```
>>> people[0]
'Paul'
>>> people[-1] # len(people) - 1
'George'
```

We can also do *slicing* operations on most sequences:

```
>>> people[1:2]
['John']
>>> people[:1] # Implicit start at 0
['Paul']
>>> people[1:] # Implicit end at len(people)
['John', 'George']
>>> people[::2] # Take every other item
['Paul', 'George']
>>> people[::-1] # Reverse sequence
['George', 'John', 'Paul']
```

Table 9: List Operations

Operation	Provided By	Result
<code>l + l2</code>	<code>__add__</code>	List concatenation (see <code>.extend</code> )
<code>"name" in l</code>	<code>__contains__</code>	Membership
<code>del l[idx]</code>	<code>__del__</code>	Remove item at index <code>idx</code> (see <code>.pop</code> )
<code>l == l2</code>	<code>__eq__</code>	Equality
<code>"{}".format(l)</code>	<code>__format__</code>	String format of list
<code>l &gt;= l2</code>	<code>__ge__</code>	Greater or equal. Compares items in lists from left
<code>l[idx]</code>	<code>__getitem__</code>	Index operation
<code>l &gt; l2</code>	<code>__gt__</code>	Greater. Compares items in lists from left
No hash	<code>__hash__</code>	Set to <code>None</code> to ensure you can't insert in dictionary
<code>l += l2</code>	<code>__iadd__</code>	Augmented (mutates <code>l</code> ) concatenation
<code>l *= 3</code>	<code>__imul__</code>	Augmented (mutates <code>l</code> ) repetition
<code>for thing in l:</code>	<code>__iter__</code>	Iteration
<code>l &lt;= l2</code>	<code>__le__</code>	Less than or equal. Compares items in lists from left
<code>len(l)</code>	<code>__len__</code>	Length
<code>l &lt; l2</code>	<code>__lt__</code>	Less than. Compares items in lists from left
<code>l * 2</code>	<code>__mul__</code>	Repetition
<code>l != l2</code>	<code>__ne__</code>	Not equal
<code>repr(l)</code>	<code>__repr__</code>	Programmer friendly string
<code>reversed(l)</code>	<code>__reversed__</code>	Reverse
<code>foo * l</code>	<code>__rmul__</code>	Called if <code>foo</code> doesn't implement <code>__mul__</code>
<code>l[idx] = 'bar'</code>	<code>__setitem__</code>	Index operation to set value
<code>l.__sizeof__()</code>	<code>__sizeof__</code>	Bytes for internal representation
<code>str(l)</code>	<code>__str__</code>	User friendly string

Table 10: List Methods

Operation	Result
<code>l.append(item)</code>	Append <code>item</code> to end
<code>l.clear()</code>	Empty list (mutates <code>l</code> )
<code>l.copy()</code>	Shallow copy
<code>l.count(thing)</code>	Number of occurrences of <code>thing</code>
<code>l.extend(l2)</code>	List concatenation (mutates <code>l</code> )
<code>l.index(thing[, start[, stop]])</code>	Index of <code>thing</code> else <code>ValueError</code> . Python 3.10 has added optional arguments <code>start</code> and <code>stop</code> to search for <code>thing</code> within a subsection of the array
<code>l.insert(idx, bar)</code>	Insert <code>bar</code> at index <code>idx</code>
<code>l.pop([idx])</code>	Remove last item or item at <code>idx</code>
<code>l.remove(bar)</code>	Remove first instance of <code>bar</code> else <code>ValueError</code>
<code>l.reverse()</code>	Reverse (mutates <code>l</code> )
<code>l.sort([key=], reverse=False)</code>	In-place sort, by optional <code>key</code> function (mutates <code>l</code> )

## Dictionaries

Dictionaries are mutable mappings of keys to values. Keys must be hashable, but values can be any object. Here is a dictionary literal:

```
>>> instruments = {'Paul': 'Bass',
...                'John': 'Guitar'}
```

Dictionaries can also be made by calling the constructor with an optional mapping, an iterable, or using keyword arguments. The iterable must be a sequence of 2-pairs:

```
>>> instruments = dict([('Paul', 'Bass'),
...     ('John', 'Guitar')])
```

Here is an example using keyword arguments:

```
>>> instruments = dict(Paul='Bass',
...     John='Guitar')
```

If you have two parallel arrays the following also works:

```
>>> names = ['Paul', 'John']
>>> insts = ['Bass', 'Guitar']
>>> instruments = dict(zip(names, insts))
```

They support index operations, containment, and looping:

```
>>> instruments['George'] = 'Guitar'
>>> 'Ringo' in instruments
False
```

```
>>> for name in instruments:
...     print('{} - {}'.format(name,
...         instruments[name]))
Paul - Bass
John - Guitar
George - Guitar
```

Dictionaries have an `.update` method to merge two dictionaries:

```
>>> i2 = {'Ringo': 'Drums'}
>>> i2.update(instruments)
>>> i2
{'Ringo': 'Drums', 'Paul': 'Bass', 'John': 'Guitar',
 'George': 'Guitar'}
```

PEP 448 introduced Additional Unpacking Generalizations in Python 3.5. This adds the ability to unpack into a dictionary literal and can be used to merge dictionaries:

```
>>> {'Ringo': 'Drums', **instruments}
{'Ringo': 'Drums', 'Paul': 'Bass', 'John': 'Guitar',
 'George': 'Guitar'}
```

You can unpack into the `dict` constructor if the keys are strings:

```
>>> dict(Ringo='Drums', **instruments)
{'Ringo': 'Drums', 'Paul': 'Bass', 'John': 'Guitar',
 'George': 'Guitar'}
```

PEP 584 added union operators to dictionaries (Python 3.9):

```
>>> {'Ringo': 'Drums'} | instruments
{'Ringo': 'Drums', 'Paul': 'Bass', 'John': 'Guitar',
 'George': 'Guitar'}
```

Table 11: Magic Dictionary Methods

Operation	Provided By	Result
<code>key in d</code>	<code>__contains__</code>	Membership
<code>del d[key]</code>	<code>__delitem__</code>	Delete key
<code>d == d2</code>	<code>__eq__</code>	Equality. Dicts are equal or not equal
<code>"{}".format(d)</code>	<code>__format__</code>	String format of dict
<code>d[key]</code>	<code>__getitem__</code>	Get value for <code>key</code> (see <code>.get</code> )
<code>for key in d:</code>	<code>__iter__</code>	Iteration over keys

Operation	Provided By	Result
<code>len(d)</code>	<code>__len__</code>	Length
<code>d != d2</code>	<code>__ne__</code>	Not equal
<code>repr(d)</code>	<code>__repr__</code>	Programmer friendly string
<code>d[key] = value</code>	<code>__setitem__</code>	Set <code>value</code> for <code>key</code>
<code>d.__sizeof__()</code>	<code>__sizeof__</code>	Bytes for internal representation
<code>d   d2</code>	<code>__or__</code>	Return a new dictionary overwriting common keys with <code>d2</code>
<code>d  = d2</code>	<code>__ior__</code>	Mutate <code>d</code> with values of <code>d2</code> (dictionary or iterable of (key, value) pairs)

Table 12: Dictionary Methods

Operation	Result
<code>d.clear()</code>	Remove all items (mutates <code>d</code> )
<code>d.copy()</code>	Shallow copy
<code>d.fromkeys(iter, value=None)</code>	Create dict from iterable with values set to <code>value</code>
<code>d.get(key, [default])</code>	Get value for <code>key</code> or return default ( <code>None</code> )
<code>d.items()</code>	View of (key, value) pairs
<code>d.keys()</code>	View of keys
<code>d.pop(key, [default])</code>	Return value for <code>key</code> or default ( <code>KeyError</code> if not set)
<code>d.popitem()</code>	Return arbitrary (key, value) tuple. <code>KeyError</code> if empty
<code>d.setdefault(k, [default])</code>	Does <code>d.get(k, default)</code> . If <code>k</code> missing, sets to default
<code>d.update(d2)</code>	Mutate <code>d</code> with values of <code>d2</code> (dictionary or iterable of (key, value) pairs)
<code>d.values()</code>	View of values

## Tuples

Tuples are immutable sequences. Typically they are used to store *record* type data. Here they are created with tuple literals:

```
>>> member = ('Paul', 'Bass', 1942)
>>> member2 = ('Ringo', 'Drums', 1940)
```

You can also use the tuple constructor which takes an optional sequence:

```
>>> member2 = tuple(['Ringo', 'Drums', 1940])
```

Note that parentheses aren't usually required:

```
>>> row = 1, 'Fred'      # 2 item tuple
>>> row2 = (2, 'Bob')    # 2 item tuple
>>> row3 = ('Bill')      # String!
>>> row4 = ('Bill',)     # 1 item tuple
>>> row5 = 'Bill',       # 1 item tuple
>>> row6 = ()            # Empty tuple
```

Named tuples can be used in place of normal tuples and allow context (or names) to be added to positional members. The syntax for creating them is a little different because we are dynamically creating a class first (hence the capitalized variable):

```
>>> from collections import namedtuple
>>> Member = namedtuple('Member',
...                     'name, instrument, birth_year')
>>> member3 = Member('George', 'Guitar', 1943)
```

We can access members by position or name (name allows us to be more explicit):

```
>>> member3[0]
'George'
```

```
>>> member3.name
'George'
```

Table 13: Tuple Operations

Operation	Provided	Result
<code>t + t2</code>	<code>__add__</code>	Tuple concatenation
<code>"name" in t</code>	<code>__contains__</code>	Membership
<code>t == t2</code>	<code>__eq__</code>	Equality
<code>"{}".format(t)</code>	<code>__format__</code>	String format of tuple
<code>t &gt;= t2</code>	<code>__ge__</code>	Greater or equal. Compares items in tuple from left
<code>t[idx]</code>	<code>__getitem__</code>	Index operation
<code>t &gt; t2</code>	<code>__gt__</code>	Greater. Compares items in tuple from left
<code>hash(t)</code>	<code>__hash__</code>	For set/dict insertion
<code>for thing in t:</code>	<code>__iter__</code>	Iteration
<code>t &lt;= t2</code>	<code>__le__</code>	Less than or equal. Compares items in tuple from left
<code>len(t)</code>	<code>__len__</code>	Length
<code>t &lt; t2</code>	<code>__lt__</code>	Less than. Compares items in tuple from left
<code>t * 2</code>	<code>__mul__</code>	Repetition
<code>t != t2</code>	<code>__ne__</code>	Not equal
<code>repr(t)</code>	<code>__repr__</code>	Programmer friendly string
<code>foo * t</code>	<code>__rmul__</code>	Called if <code>foo</code> doesn't implement <code>__mul__</code>
<code>t.__sizeof__()</code>	<code>__sizeof__</code>	Bytes for internal representation
<code>str(t)</code>	<code>__str__</code>	User friendly string

Table 14: Tuple Methods

Operation	Result
<code>t.count(item)</code>	Count of item
<code>t.index(thing)</code>	Index of <code>thing</code> else <code>ValueError</code>

## Sets

A set is a mutable unordered collection that cannot contain duplicates. Sets can be created with the literal syntax:

```
>>> vowels = {'a', 'e', 'i', 'o', 'u'}
```

Set can also be created by passing a sequence to the constructor:

```
>>> vowels = set('aeiou')
```

Sets are used to remove duplicates and test for membership:

```
>>> digits = [0, 1, 1, 2, 3, 4, 5, 6,
...          7, 8, 9]
>>> digit_set = set(digits)    # remove extra 1
```

```
>>> 9 in digit_set
True
```

Sets are useful because they provide *set operations*, such as union (`|`), intersection (`&`), difference (`-`), and xor (`^`):

```
>>> odd = {1, 3, 5, 7, 9}
>>> prime = set([2, 3, 5, 7])
>>> even = digit_set - odd
>>> even
```

```
{0, 2, 4, 6, 8}
```

```
>>> prime & even # in intersection  
{2}
```

```
>>> odd | even # in both  
{0, 1, 2, 3, 4, 5, 6, 7, 8, 9}
```

```
>>> even ^ prime # not in both  
{0, 3, 4, 5, 6, 7, 8}
```

Note

There is no literal syntax for an empty set. You need to use:

```
>>> empty = set()
```

Table 15: Set Operations

Operation	Provided By	Result
<code>s &amp; s2</code>	<code>__and__</code>	Set intersection (see <code>.intersection</code> )
<code>"name" in s</code>	<code>__contains__</code>	Membership
<code>s == s2</code>	<code>__eq__</code>	Equality. Sets are equal or not equal
<code>"{}".format(s)</code>	<code>__format__</code>	String format of set
<code>s &gt;= s2</code>	<code>__ge__</code>	<code>s</code> in <code>s2</code> (see <code>.issuperset</code> )
<code>s &gt; s2</code>	<code>__gt__</code>	Strict superset ( <code>s &gt;= s2</code> but <code>s != s2</code> )
No hash	<code>__hash__</code>	Set to <code>None</code> to ensure you can't insert in dictionary
<code>s &amp;= s2</code>	<code>__iand__</code>	Augmented (mutates <code>s</code> ) intersection (see <code>.intersection_update</code> )
<code>s  = s2</code>	<code>__ior__</code>	Augmented (mutates <code>s</code> ) union (see <code>.update</code> )
<code>s -= s2</code>	<code>__isub__</code>	Augmented (mutates <code>s</code> ) difference (see <code>.difference_update</code> )
<code>for thing in s:</code>	<code>__iter__</code>	Iteration
<code>s ^= s2</code>	<code>__ixor__</code>	Augmented (mutates <code>s</code> ) xor (see <code>.symmetric_difference_update</code> )
<code>s &lt;= s2</code>	<code>__le__</code>	<code>s2</code> in <code>s</code> (see <code>.issubset</code> )
<code>len(s)</code>	<code>__len__</code>	Length
<code>s &lt; s2</code>	<code>__lt__</code>	Strict subset ( <code>s &lt;= s2</code> but <code>s != s2</code> )
<code>s != s2</code>	<code>__ne__</code>	Not equal
<code>s   s2</code>	<code>__or__</code>	Set union (see <code>.union</code> )
<code>foo &amp; s</code>	<code>__rand__</code>	Called if <code>foo</code> doesn't implement <code>__and__</code>
<code>repr(s)</code>	<code>__repr__</code>	Programmer friendly string
<code>foo   s</code>	<code>__ror__</code>	Called if <code>foo</code> doesn't implement <code>__or__</code>
<code>foo - s</code>	<code>__rsub__</code>	Called if <code>foo</code> doesn't implement <code>__sub__</code>
<code>foo ^ s</code>	<code>__rxor__</code>	Called if <code>foo</code> doesn't implement <code>__xor__</code>
<code>s.__sizeof__()</code>	<code>__sizeof__</code>	Bytes for internal representation
<code>str(s)</code>	<code>__str__</code>	User friendly string
<code>s - s2</code>	<code>__sub__</code>	Set difference (see <code>.difference</code> )
<code>s ^ s2</code>	<code>__xor__</code>	Set xor (see <code>.symmetric_difference</code> )

Table 16: Set Methods

Operation	Result
<code>s.add(item)</code>	Add <code>item</code> to <code>s</code> (mutates <code>s</code> )
<code>s.clear()</code>	Remove elements from <code>s</code> (mutates <code>s</code> )
<code>s.copy()</code>	Shallow copy
<code>s.difference(s2)</code>	Return set with elements from <code>s</code> and not <code>s2</code>
<code>s.difference_update(s2)</code>	Remove <code>s2</code> items from <code>s</code> (mutates <code>s</code> )
<code>s.discard(item)</code>	Remove <code>item</code> from <code>s</code> (mutates <code>s</code> ). No error on missing <code>item</code>
<code>s.intersection(s2)</code>	Return set with elements from both sets
<code>s.intersection_update(s2)</code>	Update <code>s</code> with members of <code>s2</code> (mutates <code>s</code> )
<code>s.isdisjoint(s2)</code>	<code>True</code> if there is no intersection of these two sets
<code>s.issubset(s2)</code>	<code>True</code> if all elements of <code>s</code> are in <code>s2</code>
<code>s.issuperset(s2)</code>	<code>True</code> if all elements of <code>s2</code> are in <code>s</code>
<code>s.pop()</code>	Remove arbitrary item from <code>s</code> (mutates <code>s</code> ). <code>KeyError</code> on missing <code>item</code>
<code>s.remove(item)</code>	Remove <code>item</code> from <code>s</code> (mutates <code>s</code> ). <code>KeyError</code> on missing <code>item</code>
<code>s.symmetric_difference(s2)</code>	Return set with elements only in one of the sets
<code>s.symmetric_difference_update(s2)</code>	Update <code>s</code> with elements only in one of the sets (mutates <code>s</code> )
<code>s.union(s2)</code>	Return all elements of both sets
<code>s.update(s2)</code>	Update <code>s</code> with all elements of both sets (mutates <code>s</code> )

## Built in Functions

In the default namespace you have access to various callables:

Table 17: Built in callables

Operation	Result
<code>abs(x)</code>	Absolute value protocol (call <code>x.__abs__()</code> )
<code>all(seq)</code>	Boolean check if all items in <code>seq</code> are truthy
<code>any(seq)</code>	Boolean check if at least one item in <code>seq</code> is truthy
<code>ascii(x)</code>	ASCII representation of object
<code>bin(i)</code>	String containing binary version of number ( <code>int(bin(i), 2)</code> to reverse)
<code>bool(x)</code>	Boolean protocol (call <code>x.__bool__()</code> )
<code>breakpoint()</code>	Create a breakpoint (convenience to call <code>sys.breakpointhook()</code> ie <code>import pdb; pdb.set_trace()</code> )
<code>bytearray(x)</code>	Create a mutable bytearray from iterable of ints, text string, bytes, an integer, or pass nothing for an empty bytearray
<code>bytes(x)</code>	Create an immutable bytes from iterable of ints, text string, bytes, an integer, or pass nothing for an empty bytes
<code>callable(x)</code>	Boolean check if you can do <code>x()</code> (ie <code>x.__call__</code> exists)
<code>chr(i)</code>	Convert integer codepoint to Unicode string ( <code>ord(chr(i))</code> to reverse)
<code>@classmethod</code>	Use to decorate a method so you can invoke it on the class
<code>compile(source, fname, mode)</code>	Compile <code>source</code> to code ( <code>fname</code> used for error, <code>mode</code> is <code>exec</code> : module, <code>single</code> : statement, <code>eval</code> : expression). Can run <code>eval(code)</code> on expression, <code>exec(code)</code> on statement
<code>complex(i, y)</code>	Create complex number
<code>copyright</code>	Python copyright string
<code>credits</code>	Python credits string
<code>delattr(obj, attr)</code>	Remove attribute from <code>obj</code> ( <code>del obj.attr</code> )



Operation	Result
<code>dict([x])</code>	Create a dictionary from a mapping, iterable of k,v tuples, named parameters, or pass nothing for an empty dictionary
<code>dir([obj])</code>	List attributes of <code>obj</code> , or names in current namespace if no <code>obj</code> provided
<code>divmod(num, denom)</code>	Return tuple pair of <code>num//denom</code> and <code>num%denom</code>
<code>enumerate(seq, [start])</code>	Return iterator of index, item tuple pairs. Index begins at <code>start</code> or 0 (default)
<code>eval(source, globals=None, locals=None)</code>	Run <code>source</code> (expression string or result of <code>compile</code> ) with <code>globals</code> and <code>locals</code>
<code>exec(source, globals=None, locals=None)</code>	Run <code>source</code> (statement string or result of <code>compile</code> ) with <code>globals</code> and <code>locals</code>
<code>exit([code])</code>	Exit Python interpreter and return code (default 0)
<code>filter([function], seq)</code>	Return iterator of items where <code>function(item)</code> is truthy (or <code>item</code> is truthy if <code>function</code> is missing)
<code>float(x)</code>	Convert string or number to float (call <code>x.__float__()</code> )
<code>format(obj, fmt)</code>	Format protocol (call <code>obj.__format__(fmt)</code> )
<code>frozenset([seq])</code>	Create <code>frozenset</code> from <code>seq</code> (empty if missing)
<code>getattr(obj, attr)</code>	Get attribute from <code>obj</code> ( <code>obj.attr</code> )
<code>globals()</code>	Return <i>mutable</i> dictionary with current global variables
<code>hasattr(obj, attr)</code>	Check if attribute on <code>obj</code> ( <code>obj.attr</code> doesn't throw <code>AttributeError</code> )
<code>hash(x)</code>	Hash value protocol for object (call <code>x.__hash__()</code> )
<code>help([x])</code>	Start interactive help (if no <code>x</code> ), or print documentation for <code>x</code>
<code>hex(i)</code>	String containing hexadecimal version of number ( <code>int(hex(i), 16)</code> to reverse)
<code>id(x)</code>	Identity of <code>x</code>
<code>input([prompt])</code>	Read string from standard input
<code>int(x, [base=10])</code>	Create integer from number or string
<code>isinstance(obj, class_or_tuple)</code>	Boolean check if <code>obj</code> is an instance or subclass of <code>class_or_tuple</code> . As of PEP 604 (Python 3.10), calls to this method is also supported with a type union object.
<code>issubclass(cls, class_or_tuple)</code>	Boolean check if <code>cls</code> is the class or derived from <code>class_or_tuple</code> . As of PEP 604 (Python 3.10), calls to this method is also supported with a type union object.
<code>iter(seq)</code>	Iteration protocol (call <code>seq.__iter__()</code> )
<code>len(seq)</code>	Number of items in sequence
<code>license()</code>	Display Python licenses
<code>list([seq])</code>	Convert <code>seq</code> to list (empty if missing)
<code>locals()</code>	Return dictionary of local attributes (unlike <code>globals</code> , not guaranteed to update namespace when mutated)
<code>map(function, *seqs)</code>	Call <code>function(item)</code> for item in <code>seqs</code> (if single sequence) or <code>function(seqs[0][0], seqs[1][0]...)</code>
<code>max(seq, *, [default], [key])</code>	Return maximum value from <code>seq</code> . <code>default</code> (value if empty <code>seq</code> ) and <code>key</code> (function to determine magnitude) are keyword parameters.
<code>memoryview(obj)</code>	Create <code>memoryview</code> from <code>obj</code>
<code>min(seq, *, [default], [key])</code>	Return minimum value from <code>seq</code> . <code>default</code> (value if empty <code>seq</code> ) and <code>key</code> (function to determine magnitude) are keyword parameters.
<code>next(iter, [default])</code>	Get next item from iteration protocol (call <code>iter.__next__()</code> ), if <code>default</code> provide return instead of raising <code>StopIteration</code>
<code>object</code>	Root base type

Operation	Result
<code>oct(i)</code>	String containing octal version of number ( <code>int(oct(i), 8)</code> to reverse)
<code>open(filename, [mode], [encoding], [errors])</code>	Open a file
<code>ord(s)</code>	Convert Unicode string to integer codepoint ( <code>chr(ord(s))</code> to reverse)
<code>pow(num, exp, [z])</code>	Power protocol (call <code>num.__pow__(exp, z)</code> ) ( <code>num ** exp</code> or <code>num ** exp % z</code> )
<code>print(val, [val2 ...], *, sep=' ', end='\n', file=sys.stdout)</code>	Print values to file. Print protocol (call <code>val.__str__()</code> )
<code>@property</code>	Decorator to turn a method into an attribute
<code>quit()</code>	Quit interpreter
<code>range([start], stop, [step])</code>	Return range object that iterates from <b>start</b> (default 0) to <b>stop</b> - 1, by <b>step</b> increments (default 1)
<code>repr(x)</code>	Representation protocol (call <code>x.__repr__()</code> )
<code>reversed(seq)</code>	Reverse iterator
<code>round(num, [ndigits=0])</code>	Round to <b>ndigits</b> protocol (call <code>num.__round__()</code> ) (use banker's rounding)
<code>set([seq])</code>	Create <b>set</b> from <b>seq</b> (empty if missing)
<code>setattr(obj, attr, val)</code>	Set attribute on <b>obj</b> ( <code>obj.attr = val</code> )
<code>slice([start], stop, [step])</code>	Create <b>slice</b> object
<code>sorted(seq, * [key=None], [reverse=False])</code>	Sorted list in ascending order (use <b>key</b> function to customize sort property)
<code>@staticmethod</code>	Use to decorate a method so you can invoke it on the class or instance
<code>str(obj)</code>	Create string (call <code>obj.__str__()</code> )
<code>str(bytes, [encoding], [errors])</code>	Create string from bytes ( <b>errors</b> defaults to <b>strict</b> )
<code>sum(seq, [start=0])</code>	Sum values from <b>seq</b> (use <b>start</b> as initial value)
<code>super()</code>	Get access to superclass
<code>tuple([seq])</code>	Convert <b>seq</b> to tuple (empty if missing)
<code>type(name, bases, dict)</code>	Create a new type of <b>name</b> , with base classes <b>bases</b> , and attributes <b>dict</b>
<code>type(obj)</code>	Return type of <b>obj</b>
<code>vars([obj])</code>	Return <code>obj.__dict__</code> or <code>locals()</code> if missing
<code>zip(seq1, [seq2, ...], [strict=False])</code>	Return iterable of tuples of ( <code>seq1[0]</code> , <code>seq2[0]</code> ), ( <code>seq1[1]</code> , <code>seq2[1]</code> ), ... until shortest sequence (set <b>strict=True</b> to require all sequences have an equal length)

## Unicode

Python 3 represents strings as Unicode. We can *encode* strings to a series of bytes such as UTF-8. If we have bytes, we can *decode* them to a Unicode string:

```
>>> x_sq = 'x²'
>>> x_sq.encode('utf-8')
b'x\xc2\xb2'

>>> utf8_bytes = b'x\xc2\xb2'
>>> utf8_bytes.decode('utf-8')
'x²'
```

If you have the unicode glyph, you can use that directly. Alternatively, you can enter a code point using `\u` followed by the 16-bit hex value `xxxx`. For larger code points, use `\U` followed by `xxxxxxxx`. If you have the Unicode name (obtained by consulting tables at [unicode.org](http://unicode.org)), you can use the `\N` syntax. The following are equivalent:

```
>>> result = 'x²'
>>> result = 'x\u00b2'
>>> result = 'x\N{SUPERSCRIPT TWO}'
```

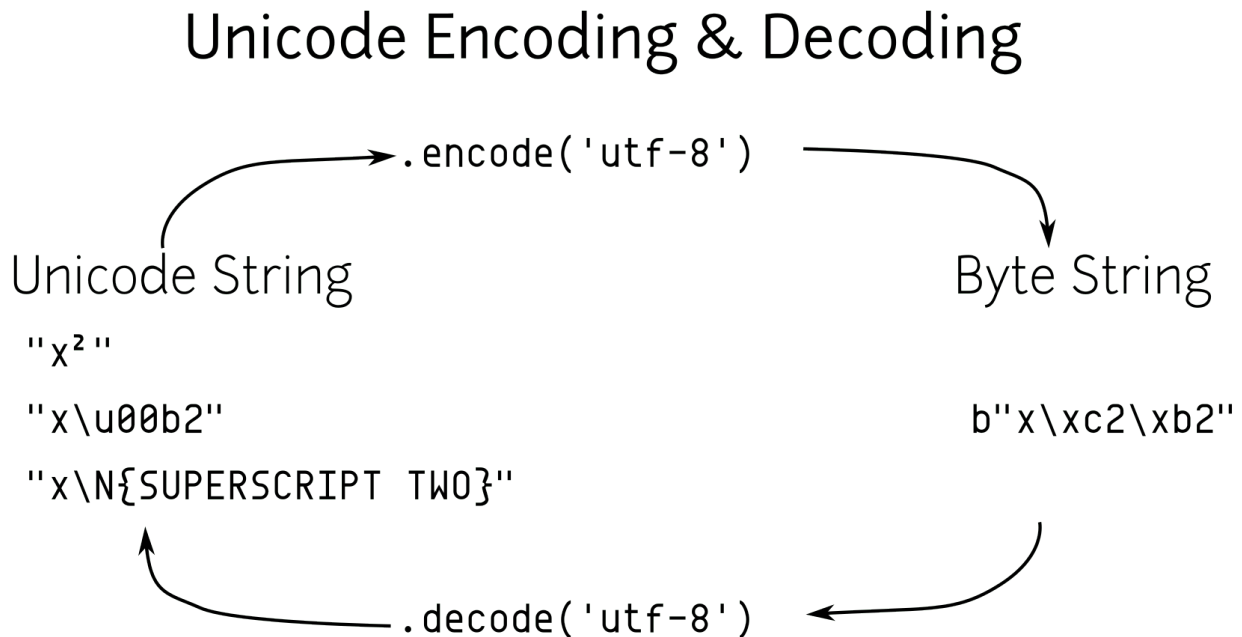


Figure 2: Image illustrating *encoding* a Unicode string to a byte representation. In this case, we convert to UTF-8. There are other byte encodings for this string. If we have a UTF-8 byte string, we can *decode* it into a Unicode string. Note that we should be explicit about the decoding as there are potentially other encodings that we could decode to that might give the user erroneous data, or *mojibake*.

Note

PEP 3131 introduced Unicode identifiers. You can create variables that have Unicode characters in them:

```
>>> Ω_val = 10
>>> Ω_val
10
```

## String Formatting

Most modern Python code uses the `.format` method (PEP 3101) to create strings from other parts. The format method uses `{}` as a placeholder.

Inside of the placeholder we can provide different specifiers:

- `{0}` - reference first positional argument
- `{}` - reference implicit positional argument
- `{result}` - reference keyword argument
- `{bike.tire}` - reference attribute of argument
- `{names[0]}` - reference first element of argument

```
>>> person = {'name': 'Paul',
...           'instrument': 'Bass'}
>>> inst = person['instrument']
```

```
>>> print("Name: {} plays: {}".format(
...     person['name'], inst))
Name: Paul plays: Bass
```

or:

```
>>> print("Name: {name} "
...     "plays: {inst}".format(
...     name=person['name'], inst=inst))
Name: Paul plays: Bass
```

You can also use *f-strings* in Python 3.6 (see PEP 498):

```
>>> print(f'Name: {person["name"]} plays: {inst}')
Name: Paul plays: Bass
```

F-strings inspect variables that are available and allow you to inline methods, or attributes from those variables.

In Python 3.8, f-strings support `=` for self-documenting expressions, which insert the variable name before the value. This is useful for debugging:

```
>>> name = 'Paul'
>>> print(f'{name=}')
name='Paul'
```

You can also use the `=` specifier with expressions:

```
>>> print(f'Name: {person["name"]=} plays: {inst=}')
Name: person["name"]='Paul' plays: inst='Bass'
```

## Conversion Flags

You can provide a *conversion flag* inside the placeholder.

- `!s` - Call `str()` on argument
- `!r` - Call `repr()` on argument
- `!a` - Call `ascii()` on argument

```
>>> class Cat:
...     def __init__(self, name):
...         self.name = name
...     def __format__(self, data):
...         return "Format"
...     def __str__(self):
...         return "Str"
...     def __repr__(self):
...         return "Repr"

>>> cat = Cat("Fred")
>>> print("{} {!s} {!a} {!r}".format(cat, cat, cat,
...     cat))
Format Str Repr Repr
```

## Format Specification

You can provide a format specification following a colon. The grammar for format specification is as follows:

```
[[fill]align][sign][#][0][width][grouping_option]
[.precision][type]
```

The following table lists the field meanings.

Table 18: Field meanings

Field	Meaning
fill	Character used to fill in <code>align</code> (default is space)
align	Align output <code>&lt;</code> (left align), <code>&gt;</code> (right align), <code>^</code> (center align), or <code>=</code> (put padding after sign)
sign	For numbers <code>+</code> (show sign on both positive and negative numbers), <code>-</code> (default, only on negative), or <code>space</code> (leading space for positive, sign on negative)
#	Prefix integers. <code>0b</code> (binary), <code>0o</code> (octal), or <code>0x</code> (hex)
0	Enable zero padding
width	Minimum field width
grouping_option	Number separator <code>,</code> (use comma for thousands separator), <code>_</code> (Use underscore for thousands separator)
.precision	For floats (digits after period (floats), for non-numeric (max length)
type	Number type or <code>s</code> (string format default) see Integer and Float charts

The tables below lists the various options we have for formatting integer and floating point numbers.

Integer Types	Meaning
<code>b</code>	binary
<code>c</code>	character - convert to unicode character
<code>d</code>	decimal (default)
<code>n</code>	decimal with locale specific separators
<code>o</code>	octal
<code>x</code>	hex (lower-case)
<code>X</code>	hex (upper-case)

Float Types	Meaning
e/E	Exponent. Lower/upper-case e
f	Fixed point
g/G	General. Fixed with exponent for large, and small numbers (g default)
n	g with locale specific separators
%	Percentage (multiplies by 100)

## Some format Examples

Here are a few examples of using `.format`. Let's format a string in the center of 12 characters surrounded by `*`. `*` is the *fill* character, `^` is the *align* field, and 12 is the *width* field:

```
>>> "Name: {:*^12}".format("Ringo")
'Name: ***Ringo****'
```

Next, we format a percentage using a width of 10, one decimal place and the sign before the width padding. `=` is the *align* field, `10.1` are the *width* and *precision* fields, and `%` is the *float type*, which converts the number to a percentage:

```
>>> "Percent: {:=10.1%}".format(-44/100)
'Percent: -    44.0%'
```

Below is a binary and a hex conversion. The *integer type* field is set to `b` and `x` respectively:

```
>>> "Binary: {:#b}".format(12)
'Binary: 0b1100'
```

```
>>> "Hex: {:#x}".format(12)
'Hex: 0xc'
```

## Files

The `open` function will take a file path and mode as input and return a file handle. There are various modes to open a file, depending on the content and your needs. If you open the file in binary mode, you will get bytes out. In text mode you will get strings back:

Table 21: File Modes

Mode	Meaning
'r'	Read text file (default)
'w'	Write text file (truncates if exists)
'x'	Write text file, throw <code>FileExistsError</code> if exists.
'a'	Append to text file (write to end)
'rb'	Read binary file
'wb'	Write binary (truncate)
'w+b'	Open binary file for reading and writing
'xb'	Write binary file, throw <code>FileExistsError</code> if exists.
'ab'	Append to binary file (write to end)

## Writing Files

We use a context manager with a file to ensure that the file is closed when the context block exits.

```
>>> with open('/tmp/names.txt', 'w') as fout:
...     fout.write('Paul\r\nJohn\n')
...     fout.writelines(['Ringo\n', 'George\n'])
```

## Reading Files

With an opened text file, you can iterate over the lines. This saves memory as the lines are only read in as needed:

```
>>> with open('/tmp/names.txt') as fin:
...     for line in fin:
...         print(repr(line))
'Paul\n'
'John\n'
'Ringo\n'
'George\n'
```

Table 22: File Methods/Attributes

Operation	Result
<code>f.__iter__()</code>	Support iteration
<code>f.__next__()</code>	Return next item of iteration (line in text)
<code>f.__repr__()</code>	Implementation for <code>repr(f)</code>
<code>f.buffer</code>	File buffer
<code>f.close()</code>	Close file
<code>f.closed</code>	Is closed
<code>f.detach()</code>	Detach file buffer from file
<code>f.encoding</code>	The encoding of the file (default is <code>locale.getpreferredencoding()</code> )
<code>f.errors</code>	Error mode of encoding ('strict' default)
<code>f.fileno()</code>	Return file descriptor
<code>f.flush()</code>	Write file buffer
<code>f.isatty()</code>	Is interactive file
<code>f.linebuffering</code>	Buffered by lines
<code>f.name</code>	Name of file
<code>f.newlines</code>	End of line characters encountered (tuple or string)
<code>f.read( size=-1)</code>	Read <b>size</b> characters (-1 is whole file)
<code>f.readable()</code>	Is opened for reading
<code>f.readline( size=-1)</code>	Read <b>size</b> characters from line (-1 is whole line)
<code>f.readlines( hint=-1)</code>	Read bytes less than <b>hint</b> characters of lines from file (-1 is all file)
<code>f.seek(cookie, whence=0)</code>	Change stream location to <b>cookie</b> bytes (may be negative) offset from <b>whence</b> (0 - start, 1 - current position, 2 - end).
<code>f.seekable()</code>	File supports random access
<code>f.tell()</code>	Current stream location
<code>f.truncate( pos=None)</code>	Truncate file to <b>pos</b> bytes
<code>f.writable()</code>	File supports writing
<code>f.write(text)</code>	Write <b>text</b> to file
<code>f.writelines( lines)</code>	Write <b>lines</b> to file (provide newlines if you want them)

## Functions

### Defining functions

Functions may take input, do some processing, and return output. You can provide a docstring directly following the name and parameters of the function:

```
>>> def add_numbers(x, y):
...     """ add_numbers sums up x and y
...
...     Arguments:
...     x -- object that supports addition
...     y -- object that supports addition
...     """
...     return x + y
```

Note

We use whitespace to specify a block in Python. We typically indent following a colon. PEP 8 recommends using 4 spaces. Don't mix tabs and spaces.

We can create anonymous functions using the `lambda` statement. Because they only allow an expression following the colon, it is somewhat crippled in functionality. They are commonly used as a **key** argument to `sorted`, `min`, or `max`:

```
>>> add = lambda x, y: x + y
>>> add(4, 5)
9
```

Functions can have *default* arguments. Since Python 3.7, you can have more than 255 arguments for a single function! Be careful with mutable types as arguments, as the default is bound to the function when the function is created, not when it is called:

```
>>> def add_n(x, n=42):
...     return x + n

>>> add_n(10)
52
>>> add_n(3, -10)
-7
```

Functions can support variable positional arguments:

```
>>> def add_many(*args):
...     result = 0
...     for arg in args:
...         result += arg
...     return result

>>> add_many()
0
>>> add_many(1)
1
>>> add_many(42, 3.14)
45.14
```

Functions can support variable keyword arguments:

```
>>> def add_kwargs(**kwargs):
...     result = 0
...     for key in kwargs:
...         result += kwargs[key]
...     return result

>>> add_kwargs(x=1, y=2, z=3)
6

>>> add_kwargs()
```



0

```
>>> add_kwargs(4)
Traceback (most recent call last):
...
TypeError: add_kwargs() takes 0 positional arguments
but 1 was given
```

You can indicate the end of positional parameters by using a single \*. This gives you *keyword only* parameters (PEP 3102):

```
>>> def add_points(*, x1=0, y1=0, x2=0, y2=0):
...     return x1 + x2, y1 + y2
```

```
>>> add_points(x1=1, y1=1, x2=3, y2=4)
(4, 5)
```

```
>>> add_points(1, 1, 3, 4)
Traceback (most recent call last):
...
TypeError: add_points() takes 0 positional arguments
but 4 were given
```

Python 3.8 added *positional only* parameters (PEP 570). Parameters that precede a / are positional only, and can have a keyword provided when they are invoked. There are many Python functions coded in C (ie `math.sin`) that do not support keyword arguments, so this allows Python functions to emulate this behavior:

```
>>> def mysin(x, /):
...     import math
...     return math.sin(x)
```

Note

Many of the built-in functions and methods in Python have a / in the documentation. That slash indicates that the parameters before it are positional only:

```
>>> help(math.sin)
Help on built-in function sin in module math:
```

```
sin(x, /)
    Return the sine of x (measured in radians).
```

## Calling Functions

You can also use \* and \*\* to *unpack* sequence and dictionary arguments:

```
>>> def add_all(*args, **kwargs):
...     """Add all arguments"""
...     result = 0
...     for num in args + tuple(kwargs.values()):
...         result += num
...     return result
```

```
>>> sizes = (2, 4.5)
>>> named_sizes = {"this": 3, "that": 1}
```

The following two examples are the equivalent:

```
>>> add_all(*sizes)
6.5
```

```
>>> add_all(sizes[0], sizes[1])
```



The following two examples are the equivalent:

```
>>> add_all(**named_sizes)
4
```

```
>>> add_all(this=3, that=1)
4
```

You can also combine `*` and `**` on invocation:

```
>>> add_all(*sizes, **named_sizes)
10.5
```

## Getting Help

You can get help on a function that has a docstring by using `help`:

```
>>> help(add_all)
Help on function add_all in module __main__:

add_all(*args, **kwargs)
    Add all arguments
```

## Classes

Python supports object oriented programming but doesn't require you to create classes. You can use the built-in data structures to great effect. Here's a class for a simple bike. The class attribute, `num_passengers`, is shared for all instances of `Bike`. The instance attributes, `size` and `ratio`, are unique to each instance:

```
>>> class Bike:
...     ''' Represents a bike '''
...     num_passengers = 1    # class attribute
...
...     def __init__(self, wheel_size,
...                     gear_ratio):
...         ''' Create a bike specifying the
...             wheel size, and gear ratio '''
...         # instance attributes
...         self.size = wheel_size
...         self.ratio = gear_ratio
...
...     def gear_inches(self):
...         return self.ratio * self.size
```

We can call the constructor (`__init__`), by invoking the class name. Note that `self` is the instance, but Python passes that around for us automatically:

```
>>> bike = Bike(26, 34/13)
>>> print(bike.gear_inches())
68.0
```

We can access both class attributes and instance attributes on the instance:

```
>>> bike.num_passengers
1

>>> bike.size
26
```

If an attribute is not found on the instance, Python will then look for it on the class, it will look through the parent classes to continue to try and find it. If the lookup is unsuccessful, an `AttributeError` is raised.

## Subclasses

To subclass a class, simply place the parent class name in parentheses following the class name in the declaration. We can call the `super` function to gain access to parent methods:

```
>>> class Tandem(Bike):
...     num_passengers = 2
...
...     def __init__(self, wheel_size, rings, cogs):
...         self.rings = rings
...         self.cogs = cogs
...         ratio = rings[0] / cogs[0]
...         super().__init__(wheel_size, ratio)
...
...     def shift(self, ring_idx, cog_idx):
...         self.ratio = self.rings[ring_idx] \
...             / self.cogs[cog_idx]
...
...
```

Note

In the above example, we used a `\` to indicate that the line continued on the following line. This is usually required unless there is an implicit line continuation with an opening brace that hasn't been closed (`(`, `[`, or `{`).

The instance of the subclass can call methods that are defined on its class or the parent class:

```
>>> tan = Tandem(26, [42, 36], [24, 20, 15, 11])
>>> tan.shift(1, -1)
>>> tan.gear_inches()
85.090909090909091
```

## Class Methods and Static Methods

The `classmethod` decorator is used to create methods that you can invoke directly on the class. This allows us to create alternate constructors. Note that the implicit first argument is the class, commonly named `cls` (as `class` is a keyword and will error out):

```
>>> INCHES_PER_METER = 39.37

>>> class MountainBike(Bike):
...     @classmethod
...     def from_metric(cls, size_meters, ratio):
...         return cls(size_meters *
...                     INCHES_PER_METER,
...                     ratio)

>>> mtn = MountainBike.from_metric(.559, 38/11)
>>> mtn.gear_inches()
76.027049090909091
```

Note

In the above example, we had an implicit line continuation without a backslash, because there was a `(` on the line.

The `staticmethod` decorator lets you attach functions to a class. (I don't like them, just use a function). Note that they don't get an implicit first argument. It can be called on the instance or the class:

```
>>> class Recumbent(Bike):
...     @staticmethod
...     def is_fast():
...         return True
```

```
>>> Recumbent.is_fast()
True

>>> lawnchair = Recumbent(20, 4)
>>> lawnchair.is_fast()
True
```

## Properties

If you want to have actions occur under the covers on attribute access, you can use properties to do that:

```
>>> class Person:
...     def __init__(self, name):
...         self._name = name
...
...     @property
...     def name(self):
...         if self._name == 'Richard':
...             return 'Ringo'
...         return self._name
...
...     @name.setter
...     def name(self, value):
...         self._name = value
...
...     @name.deleter
...     def name(self):
...         del self._name
```

Rather than calling the `.name()` method, we access the attribute:

```
>>> p = Person('Richard')
>>> p.name
'Ringo'

>>> p.name = 'Fred'
```

## Data classes

Python 3.7 introduced data classes (PEP 557). They can describe the attributes of a class using annotations:

```
>>> import typing
>>> from dataclasses import dataclass
>>> @dataclass
... class Bike2:
...     num_passengers: typing.ClassVar[int]
...     wheel_size: float
...     gear_ratio: float
...
...     def gear_inches(self):
...         return self.gear_ratio * self.wheel_size
```

## Looping

You can loop over objects in a sequence:

```
>>> names = ['John', 'Paul', 'Ringo']
>>> for name in names:
```

```
...     print(name)
John
Paul
Ringo
```

The `break` statement will pop you out of a loop:

```
>>> for name in names:
...     if name == 'Paul':
...         break
...     print(name)
John
```

The `continue` statement skips over the body of the loop and *continues* at the next item of iteration:

```
>>> for name in names:
...     if name == 'Paul':
...         continue
...     print(name)
John
Ringo
```

You can use the `else` statement to indicate that every item was looped over, and a `break` was never encountered:

```
>>> for name in names:
...     if name == 'George':
...         break
... else:
...     raise ValueError("No Georges")
Traceback (most recent call last):
...
ValueError: No Georges
```

Don't loop over index values (`range(len(names))`). Use `enumerate`:

```
>>> for i, name in enumerate(names, 1):
...     print("{}: {}".format(i, name))
1. John
2. Paul
3. Ringo
```

## while Loops

You can use `while` loops to create loops as well. If it is an infinite loop, you can break out of it:

```
>>> done = False
>>> while not done:
...     # some work
...     done = True
```

You can add an `else` clause that only runs when the `while` conditional becomes false. If you break out of the loop it will not run.

## Iteration Protocol

To make an iterator implement `__iter__` and `__next__`:

```
>>> class fib:
...     def __init__(self, limit=None):
...         self.val1 = 1
...         self.val2 = 1
...         self.limit = limit
```

```

...
...     def __iter__(self):
...         return self
...
...     def __next__(self):
...         val = self.val1
...         self.val1 = self.val2
...         self.val2 = val + self.val1
...         if self.limit is not None and \
...             val < self.limit:
...             return val
...         raise StopIteration

```

Use the iterator in a loop:

```

>>> e = fib(6)
>>> for val in e:
...     print(val)
1
1
2
3
5

```

Unrolling the protocol:

```

>>> e = fib(6)
>>> it = iter(e) # calls e.__iter__()
>>> next(it)     # calls it.__next__()
1
>>> next(it)
1
>>> next(it)
2
>>> next(it)
3
>>> next(it)
5
>>> next(it)
Traceback (most recent call last):
...
StopIteration

```

## Conditionals

Python has an `if` statement with zero or more `elif` statements, and an optional `else` statement at the end. In Python, the word `elif` is Dutch for *else if*:

```

>>> grade = 72

>>> def letter_grade(grade):
...     if grade > 90:
...         return 'A'
...     elif grade > 80:
...         return 'B'
...     elif grade > 70:
...         return 'C'
...     else:

```

```
...         return 'D'
```

```
>>> letter_grade(grade)
'C'
```

Python supports the following tests: `>`, `>=`, `<`, `<=`, `==`, and `!=`. For boolean operators use `and`, `or`, and `not` (`&`, `|`, and `^` are the bitwise operators).

Note that Python also supports *range comparisons*:

```
>>> x = 4
>>> if 3 < x < 5:
...     print("Four!")
Four!
```

Python does not have a switch statement, often dictionaries are used to support a similar construct:

```
>>> def add(x, y):
...     return x + y

>>> def sub(x, y):
...     return x - y

>>> ops = {'+': add, '-': sub}

>>> op = '+'
>>> a = 2
>>> b = 3
>>> ops[op](a, b)
5
```

## Truthiness

You can define the `__bool__` method to teach your classes how to act in a boolean context. If that doesn't exist, Python will use `__len__`, and finally default to `True`.

The following table lists *truthy* and *falsey* values:

Truthy	Falsey
<code>True</code>	<code>False</code>
Most objects	<code>None</code>
<code>1</code>	<code>0</code>
<code>3.2</code>	<code>0.0</code>
<code>[1, 2]</code>	<code>[]</code> (empty list)
<code>{'a': 1, 'b': 2}</code>	<code>{}</code> (empty dict)
<code>'string'</code>	<code>""</code> (empty string)
<code>'False'</code>	
<code>'0'</code>	

## Short Circuiting

The `and` statement will short circuit if it evaluates to false:

```
>>> 0 and 1/0
0
```

Likewise, the `or` statement will short circuit when something evaluates to true:

```
>>> 1 or 1/0
1
```



## Ternary Operator

Python has its own ternary operator, called a *conditional expression* (see PEP 308). These are handy as they can be used in comprehension constructs and `lambda` functions:

```
>>> last = 'Lennon' if band == 'Beatles' else 'Jones'
```

Note that this has similar behavior to an `if` statement, but it is an expression, and not a statement. Python distinguishes these two. An easy way to determine between the two, is to remember that an expression follows a `return` statement. Anything you can `return` is an expression.

## Exceptions

Python can catch one or more exceptions (PEP 3110). You can provide a chain of different exceptions to catch if you want to react differently. A few hints:

- Try to keep the block of the `try` statement down to the code that throws exceptions
- Be specific about the exceptions that you catch
- If you want to inspect the exception, use `as` to create a variable to point to it

If you use a bare `raise` inside of an `except` block, Python's traceback will point back to the location of the original exception, rather than where it is raised from.

```
>>> def avg(seq):
...     try:
...         result = sum(seq) / len(seq)
...     except ZeroDivisionError as e:
...         return None
...     except Exception:
...         raise
...     return result

>>> avg([1, 2, 4])
2.3333333333333335

>>> avg([]) is None
True

>>> avg('matt')
Traceback (most recent call last):
...
TypeError: unsupported operand type(s) for +: 'int'
and 'str'
```

## Raising Exceptions

You can raise an exception using the `raise` statement (PEP 3109):

```
>>> def bad_code(x):
...     raise ValueError('Bad code')

>>> bad_code(1)
Traceback (most recent call last):
...
ValueError: Bad code
```

## Decorators

A decorator (PEP 318) allows us to insert logic before and after a function is called. You can define a decorator with a function that takes a function as input and returns a function as output. Here is the identity decorator:

```
>>> def identity(func):
...     return func
```

We can decorate a function with it like this:

```
>>> @identity
... def add(x, y):
...     return x + y
```

A more useful decorator can inject logic before and after calling the original function. To do this we create a function inside of the function and return that:

```
>>> import functools
>>> def verbose(func):
...     @functools.wraps(func)
...     def inner(*args, **kwargs):
...         print("Calling with:{} {}".format(args,
...             kwargs))
...         res = func(*args, **kwargs)
...         print("Result:{}".format(res))
...         return res
...     return inner
```

Above, we use print functions to illustrate before/after behavior, otherwise this is very similar to identity decorator.

There is a special syntax for applying the decorator. We put @ before the decorator name and place that on a line directly above the function we wish to decorate. Using the @verbose line before a function declaration is syntactic sugar for re-assigning the variable pointing to the function to the result of calling the decorator with the function passed into it:

```
>>> @verbose
... def sub(x, y):
...     return x - y
```

This could also be written as, `sub = verbose(sub)`. Note that our decorated function will still call our original function, but add in some `print` statements:

```
>>> sub(5, 4)
Calling with:(5, 4) {}
Result:1
1
```

As of Python 3.9 (PEP 614), any valid expression can be used as a decorator.

## Parameterized Decorators

Because we can use closures to create functions, we can use closures to create decorators as well. This is very similar to our decorator above, but now we make a function that will return a decorator. Based on the inputs to that function, we can control (or parameterize) the behavior of the decorator:

```
>>> def verbose_level(level):
...     def verbose(func):
...         @functools.wraps(func)
...         def inner(*args, **kwargs):
...             for i in range(level): # parameterized!
...                 print("Calling with:{} {}".format(
...                     args, kwargs))
...                 res = func(*args, **kwargs)
...                 print("Result:{}".format(res))
...                 return res
...             return inner
...     return verbose
```

When you decorate with parameterized decorators, the decoration looks differently, because we need to invoke the function to create a decorator:

```
>>> @verbose_level(2)
... def div(x, y):
...     return x/y

>>> div(1, 5)
Calling with:(1, 5) {}
Calling with:(1, 5) {}
Result:0.2
0.2
```

## Class Decorators and Metaclasses

Python allows you to dynamically create and modify classes. Class decorators and metaclasses are two ways to do this.

### Class Decorators

You can decorate a class definition with a *class decorator* (PEP 3129). It is a function that takes a class as input and returns a class.

```
>>> def add_chirp(cls):
...     'Class decorator to add speak method'
...     def chirp(self):
...         return "CHIRP"
...     cls.speak = chirp
...     return cls
...
>>> @add_chirp
... class Bird:
...     pass

>>> b = Bird()
>>> print(b.speak())
CHIRP
```

### Creating Classes with type

You can use `type` to determine the type of an object, but you can also provide the name, parents, and attributes map, and it will return a class.

```
>>> def howl(self):
...     return "HOWL"
```

```
>>> parents = ()
>>> attrs_map = {'speak': howl}
>>> F = type('F', parents, attrs_map)

>>> f = F()
>>> print(f.speak())
HOWL
```

## Metaclasses with Functions

In the class definition you can specify a metaclass (PEP 3115), which can be a function or a class. Here is an example of a function that can alter the class.

```
>>> def meta(name, parents, attrs_map):
...     def bark(self):
...         return "WOOF!"
...     attrs_map['speak'] = bark
...     return type(name, parents, attrs_map)

>>> class Dog(metaclass=meta):
...     pass

>>> d = Dog()
>>> print(d.speak())
WOOF!
```

## Metaclasses with Classes

You can define a class decorator and use either `__new__` or `__init__`. Typically most use `__new__` as it can alter attributes like `__slots__`.

```
>>> class CatMeta(type): # Needs to subclass type
...     def __new__(cls, name, parents, attrs_map):
...         # cls is CatMeta
...         # res is the class we are creating
...         res = super().__new__(cls, name,
...                                 parents, attrs_map)
...         def meow(self):
...             return "MEOW"
...         res.speak = meow
...         return res
...
...     def __init__(cls, name, parents, attrs_map):
...         super().__init__(name, parents, attrs_map)

>>> class Cat(metaclass=CatMeta):
...     pass

>>> c = Cat()
>>> print(c.speak())
MEOW
```

## Generators

Generators (PEP 255) are functions that suspend their state as you iterate over the results of them. Each `yield` statement returns the next item of iteration and then *freezes* the state of the function. When iteration is resumed,

the function continues from the point it was frozen. Note, that the result of calling the function is a generator:

```
>>> def fib_gen():
...     val1, val2 = 1, 1
...     while 1:
...         yield val1
...         val1, val2 = val2, (val1+val2)
```

We can simulate iteration by using the iteration protocol:

```
>>> gen = fib_gen()
>>> gen_iter = iter(gen)
>>> next(gen_iter)
1
>>> next(gen_iter)
1
>>> next(gen_iter)
2
>>> next(gen_iter)
3
```

## Coroutines

The `asyncio` library (PEP 3153) provides asynchronous I/O in Python 3. We use `async def` to define a *coroutine function* (see PEP 492). The result of calling this is a *coroutine object*. Inside a coroutine we can use `var = await future` to suspend the coroutine and wait for `future` to return. We can also await another coroutine. A coroutine object may be created but isn't run until an event loop is running:

```
>>> import asyncio
>>> async def greeting():
...     print("Here they are!")

>>> co = greeting()
>>> co # Not running
<coroutine object greeting at 0x1087dcba0>

>>> loop = asyncio.get_event_loop()
>>> loop.run_until_complete(co)
Here they are!
>>> loop.close()
```

Note

Since Python 3.7 you can use:

```
asyncio.run(greeting())
```

instead of explicitly creating and running the loop.

To return an object, use an `asyncio.Future`:

```
>>> async def compute(future):
...     print("Starting...")
...     # Simulate IO...
...     res = await answer()
...     future.set_result(res)

>>> async def answer():
...     await asyncio.sleep(1)
...     return 42

>>> f = asyncio.Future()
>>> loop = asyncio.get_event_loop()
>>> loop.run_until_complete(compute(f))
>>> loop.close()
>>> f.result()
42
```

Note

`await` and `async` are *soft keywords* in Python 3.6. You will get a warning if you use them for variable names. Since Python 3.7, they are reserved keywords.

Note

For backwards compatibility in Python 3.4:

- `await` can be replaced with `yield from`
- `async def` can be replaced with a function decorated with `@asyncio.coroutine`

## Asynchronous Generators

Python 3.6 adds asynchronous generators (PEP 525). You can use the `yield` statement in an `async def` function:

```
>>> async def fib():
...     v1, v2 = 1, 1
...     while True:
...         # simulate io
...         await asyncio.sleep(1)
...         yield v1
...         v1, v2 = v2, v1+v2
...         if v1 > 5:
...             break

>>> async def get_results():
...     async for num in fib():
...         print(num)

>>> loop = asyncio.get_event_loop()
>>> loop.run_until_complete(get_results())
1 # sleeps for 1 sec before each print
1
```

```

2
3
5
>>> loop.close()

```

## Comprehensions

Comprehension constructs allow us to combine the functional ideas behind map and filter into an easy to read, single line of code. When you see code that is aggregating into a list (or dict, set, or generator), you can replace it with a list comprehension (or dict, set comprehension, or generator expression). Here is an example of the code smell:

```

>>> nums = range(10)
>>> result = []
>>> for num in nums:
...     if num % 2 == 0: # filter
...         result.append(num*num) # map

```

This can be specified with a list comprehension (PEP 202):

```

>>> result = [num*num for num in nums
...           if num % 2 == 0]

```

To construct a list comprehension:

- Assign the result (**result**) to brackets. The brackets signal to the reader of the code that a list will be returned:

```
result = [ ]
```

- Place the *for* loop construct inside the brackets. No colons are necessary:

```
result = [for num in nums]
```

- Insert any operations that filter the accumulation after the *for* loop:

```
result = [for num in nums if num % 2 == 0]
```

- Insert the accumulated object (**num\*num**) at the front directly following the left bracket. Insert parentheses around the object if it is a tuple:

```
result = [num*num for num in nums
          if num % 2 == 0]
```

## Set Comprehensions

If you replace the [ with {, you will get a set comprehension (PEP 274) instead of a list comprehension:

```

>>> {num*num for num in nums if num % 2 == 0}
{0, 64, 4, 36, 16}

```

## Dict Comprehensions

If you replace the [ with {, and separate the key and value with a colon, you will get a dictionary comprehension (PEP 274):

```

>>> {num:num*num for num in nums if num % 2 == 0}
{0: 0, 2: 4, 4: 16, 6: 36, 8: 64}

```

Note

Since Python 3.6, dictionaries are now ordered by key entry. Hence the ordering above.

## Generator Expressions

If you replace the `[]` with `()`, you will get a generator instead of a list. This is called a *generator expression* (PEP 289):

```
>>> (num*num for num in nums if num % 2 == 0)
<generator object <genexpr> at 0x10a6f8780>
```

## Asynchronous Comprehensions

Python 3.6 (PEP 530) gives us *asynchronous comprehensions*. You can add `async` following what you are collecting to make it asynchronous. If you had the following code:

```
>>> async def process(aiter):
...     result = []
...     async for num in aiter:
...         if num % 2 == 0: # filter
...             result.append(num*num) # map
```

You could replace it with:

```
>>> async def process(aiter):
...     result = [num*num async for num in aiter
...               if num % 2 == 0]
```

## Context Managers

If you find code where you need to make sure something happens before *and* after a block, a context manager (PEP 343) is a convenient way to enforce that. Another code smell that indicates you could be using a context manager is a `try/finally` block.

Context managers can be created with functions or classes.

If we were writing a Python module to write TeX, we might do something like this to ensure that the environments are closed properly:

```
>>> def start(env):
...     return '\\begin{{{}}}'.format(env)
```

```
>>> def end(env):
...     return '\\end{{{}}}'.format(env)
```

```
>>> def may_error():
...     import random
...     if random.random() < .5:
...         return 'content'
...     raise ValueError('Problem')
```

```
>>> out = []
>>> out.append(start('center'))

>>> try:
...     out.append(may_error())
... except ValueError:
...     pass
... finally:
...     out.append(end('center'))
```

This code can use a context manager to be a little cleaner.



## Function Based Context Managers

To create a context manager with a function, decorate with `contextlib.contextmanager`, and yield where you want to insert your block:

```
>>> import contextlib
>>> @contextlib.contextmanager
... def env(name, content):
...     content.append('\begin{{{}}}'.format(name))
...     try:
...         yield
...     except ValueError:
...         pass
...     finally:
...         content.append('\end{{{}}}'.format(name))
```

Our code looks better now, and there will always be a closing tag:

```
>>> out = []
>>> with env('center', out):
...     out.append(may_error())

>>> out
['\begin{center}', 'content', '\end{center}']
```

## Class Based Context Managers

To create a class based context manager, implement the `__enter__` and `__exit__` methods:

```
>>> class env:
...     def __init__(self, name, content):
...         self.name = name
...         self.content = content
...
...     def __enter__(self):
...         self.content.append('\begin{{{}}}'.format(
...             self.name))
...
...     def __exit__(self, type, value, tb):
...         # if error in block, t, v, & tb
...         # have non None values
...         # return True to hide exception
...         self.content.append('\end{{{}}}'.format(
...             self.name))
...         return True
```

The code looks the same as using the function based context manager:

```
>>> out = []
>>> with env('center', out):
...     out.append(may_error())

>>> out # may_error had an issue
['\begin{center}', '\end{center}']
```

Parenthesized context managers -----Using enclosing parentheses for continuation across multiple lines in context managers is supported since Python 3.10 (PEP 617) Now it is possible to format long collections of context managers, in multiple lines, in a similar way as it was already possible with import statements.

**Examples of which is now valid:** »> with ( ... CtxManager1() as example1, ... CtxManager2() as example2, ... CtxManager3() as example3, ...):

## Context objects

Some context managers create objects that we can use while inside of the context. The `open` context manager returns a file object:

```
with open('/tmp/test.txt') as fin:
    # muck around with fin
```

To create an object in a function based context manager, simply `yield` the object. In a class based context manager, return the object in the `__enter__` method.

## Type Union Operator

Python 3.10 (PEP 605) has introduced a new type union operator overloading the `|` operator on types which enables the syntax `X | Y`. This operator lets us write "either type X or type Y" in cleaner format.

A basic example:

```
>>> (int | str) | float == int | str | float
True
```

It can also be used to apply type hints to methods accepting arguments of multiple types:

```
>>> def square(number: int | float) -> int | float:
...     return number ** 2
```

The union type operator can also be passed as second argument to `isinstance()` and `issubclass()` method:

```
>>> x = 10
>>> isinstance(x, int | str)
True
```

## Type Annotations

Python 3.6 (PEP 483 and 484) allows you to provide types for input and output of functions. They can be used to:

- Allow 3rd party libraries such as `mypy`<sup>2</sup> to run static typing
- Assist editors with type inference
- Aid developers in understanding code

Types can be expressed as:

- Built-in classes
- Third party classes
- Abstract Base Classes
- Types found in the `types` module
- User-defined classes

A basic example:

```
>>> def add(x: int, y: int) -> float:
...     return x + y

>>> add(2, 3)
5
```

Note that Python does not do type checking, you need to use something like `mypy`:

```
>>> add("foo", "bar")
'foobar'
```

You can also specify the types of variables with a comment:

---

<sup>2</sup><http://mypy-lang.org/>

```
>>> from typing import Dict
>>> ages = {} # type: Dict[str, int]
```

As of PEP 585 (Python 3.9) you type hint on built in container without using the parallel types from the `typing` module. You can also *parameterize* the type:

```
>>> from __future__ import annotations
>>> ages: dict[str, int] = {}
```

As of PEP 604 (Python 3.10) you can use the new union operator `|` to define a union instead of `typing.Union`:

```
>>> typing.List[str | int]
>>> typing.Dict[str, int | float]
```

**As of PEP 613 (Python 3.10) the `typing` module has a special value `TypeAlias` which allows the type alias declaration**

```
»> x = 1 # untyped global expression »> x: int = 1 # typed global expression
»> x: TypeAlias = int # type alias »> x: TypeAlias = "MyClass" # type alias
```

## The `typing` Module

This module allows you to provide hints for:

- Callback functions
- Generic containers
- The `Any` type

To designate a class or function to not type check its annotations, use the `@typing.no_type_check` decorator.

## Type Checking

Python provides no support for type checking. You will need to install a tool like `mypy`:

```
$ pip install mypy
$ python3 -m mypy script.py
```

## Scripts, Packages, and Modules

### Scripts

A script is a Python file that you invoke `python` on. Typically there is a line near the bottom that looks like this:

```
if __name__ == '__main__':
    # execute something
```

This test allows you to change the code path when you execute the code versus when you import the code. The `__name__` attribute of a module is set to `'__main__'` when you execute that module. Otherwise, if you import the module, it will be the name of the module (without `.py`).

### Modules

Modules are files that end in `.py`. According to PEP 8, we lowercase the module name and don't put underscores between the words in them. Any module found in the `PYTHONPATH` environment variable or the `sys.path` list, can be imported.

### Packages

A directory that has a file named `__init__.py` in it is a *package*. A package can have modules in it as well as sub packages. The package should be found in `PYTHONPATH` or `sys.path` to be imported. An example might look like this:

```
packagename/  
  __init__.py  
  module1.py  
  module2.py  
  subpackage/  
    __init__.py
```

The `__init__.py` module can be empty or can import code from other modules in the package to remove nesting in import statements.

## Importing

You can import a package or a module:

```
import packagename  
import packagename.module1
```

Assume there is a `fib` function in `module1`. You have access to everything in the namespace of the module you imported. To use this function you will need to use the fully qualified name, `packagename.module1.fib`:

```
import packagename.module1  
  
packagename.module1.fib()
```

If you only want to import the `fib` function, use the `from` variant:

```
from packagename.module1 import fib  
  
fib()
```

You can also rename imports using `as`:

```
from packagename.module1 import fib as package_fib  
  
package_fib()
```

## Environments

Python 3 includes the `venv` module for creating a sandbox for your project or a *virtual environment*.

To create an environment on Unix systems, run:

```
$ python3 -m venv /path/to/env
```

On Windows, run:

```
c:\> python -m venv c:\path\to\env
```

To enter or *activate* the environment on Unix, run:

```
$ source /path/to/env/bin/activate
```

On Windows, run:

```
c:\> c:\path\to\env\Scripts\activate.bat
```

Your prompt should have the name of the active virtual environment in parentheses. To *deactivate* an environment on both platforms, just run the following:

```
(env) $ deactivate
```

## Installing Packages

You should now have a `pip` executable, that will install a package from PyPI<sup>3</sup> into your virtual environment:

---

<sup>3</sup><https://pypi.python.org/pypi>

```
(env) $ pip install django
```

To uninstall a package run:

```
(env) $ pip uninstall django
```

If you are having issues installing a package, you might want to look into alternative Python distributions such as Anaconda<sup>4</sup> that have prepackaged many harder to install packages.

## Conda

Even though Conda<sup>5</sup> is not part of Python, it is a common tool for managing it. Here are the Conda equivalents of virtual environments and pip. The commands are the same on Windows and Unix.

To create a Conda environment, run:

```
$ conda create --name ENV_NAME python
```

To list Conda environments, run:

```
$ conda info --envs
```

To activate a Conda environment, run:

```
$ conda activate ENV_NAME
```

To deactivate a Conda environment, run:

```
$ conda deactivate
```

To install a package, run:

```
$ conda install django
```

---

<sup>4</sup><https://docs.continuum.io/anaconda/>

<sup>5</sup><https://conda.io>