


Groovy

This document will cover the Groovy module for Ops4J.

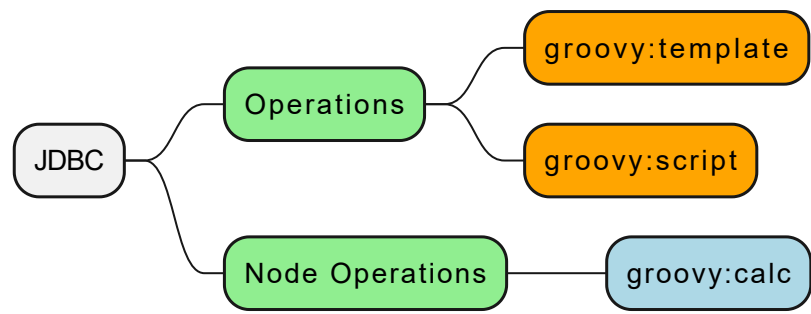

COMMAND	EXAMPLE	DESCRIPTION
groovy:template	S	Write stream data to groovy templates.
groovy:script		Rewrite the stream using groovy.
groovy:calc		Return the results of a groovy calculation.

Configuration

N/A

Operations

groovy:template

Write stream data to a template and project it to other forms..

The `groovy:template` operation will combine stream data with the template to produce alternate representations of the data such as charts, reports and other visuals.

```
$ groovy:template -H
Usage: groovy:template [-C=<view>] [-L=<logLevel>] [-N=<name>]
                        [-t=<templatePath>]
```

Render a Groovy template.

```
-C, --config=<view>    The configuration view for this operation.
-L, --log=<logLevel>   The log level of this operation.
-N, --name=<name>      The name of this operation.
-t, --template=<templatePath>
                        The template.
```

Class: org.ops4j.groovy.op.GroovyTemplate

Examples

Ex1

groovy:script

Node Operations

groovy:calc
