Step 1----- Work with code pipeline--- select version 1 and source as git

Step 2—Create empty repository on github

Step 3—TO upload the local code on repository.

1. Be in the same folder where the main code is and run command git init
2. Git status
3. npx gitignore your_folder_name
4. add the names of files and folders to be ignored in gitignore file and run git status to check it.
5. Git add . to add all files to be committed
6. git commit -m "first commit"
7. git branch -M main
8. git remote add origin https://github.com/ramanpreet98148/node.git
9. git push -u origin main

Step 6,7,8,9 can be copied from github repository documentation

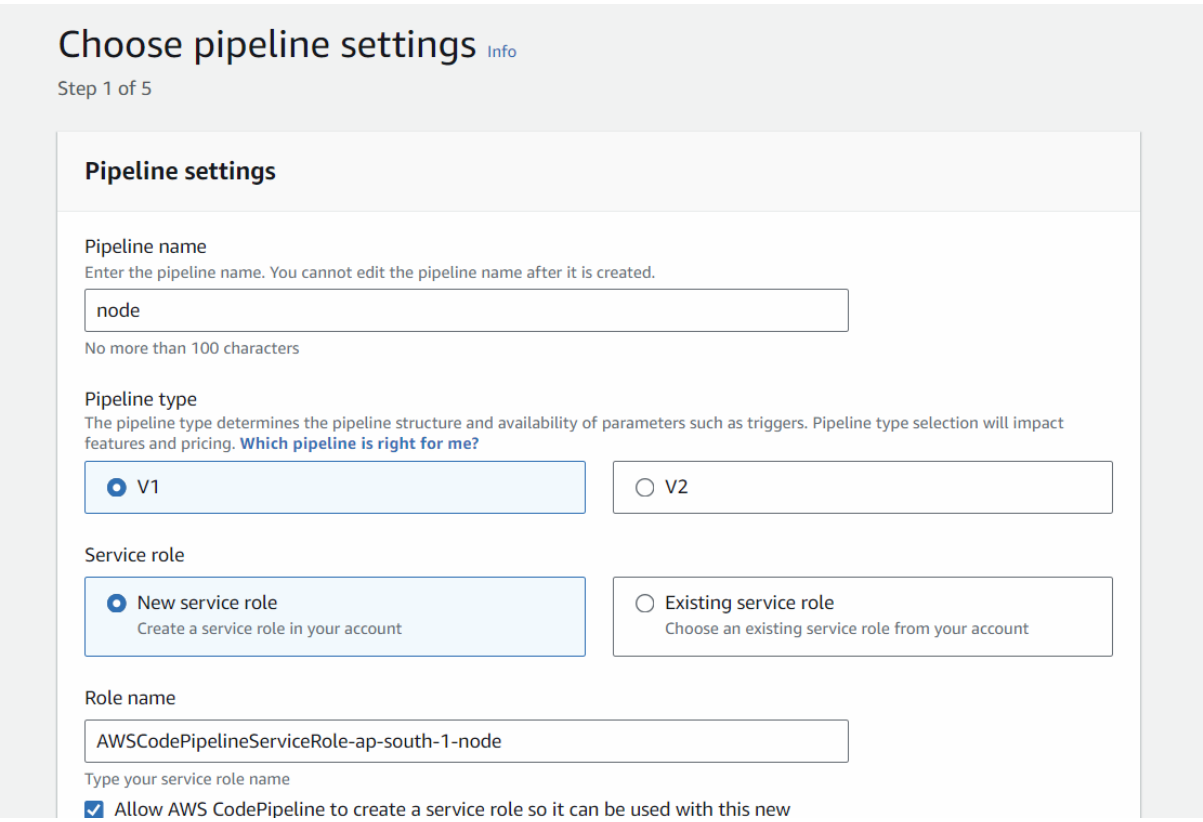

No variables defined at the pipeline level in this pipeline.

Add variable

You can add up to 50 variables.

The first pipeline execution will fail if variables have no default values.

Advanced settings

Artifact store

- Default location
  Create a default S3 bucket in your account.
- Custom location
  Choose an existing S3 location from your account in the same region and account as your pipeline

Encryption key

- Default AWS Managed Key
  Use the AWS managed customer master key for CodePipeline in your account to encrypt the data in the artifact store.
- Customer Managed Key
  To encrypt the data in the artifact store under an AWS KMS customer managed key, specify the key ID, key ARN, or alias ARN.

Cancel Next

Step 2 of 5

Source

Source provider

This is where you stored your input artifacts for your pipeline. Choose the provider and then provide the connection details.

GitHub (Version 1)

Grant AWS CodePipeline access to your GitHub repository. This allows AWS CodePipeline to upload commits from GitHub to your pipeline.

Connected

You have successfully configured the action with the provider.

The GitHub (Version 1) action is not recommended

The selected action uses OAuth apps to access your GitHub repository. This is no longer the recommended method. Instead, choose the GitHub (Version 2) action to access your repository by creating a connection. Connections use GitHub Apps to manage authentication and can be shared with other resources. Learn more

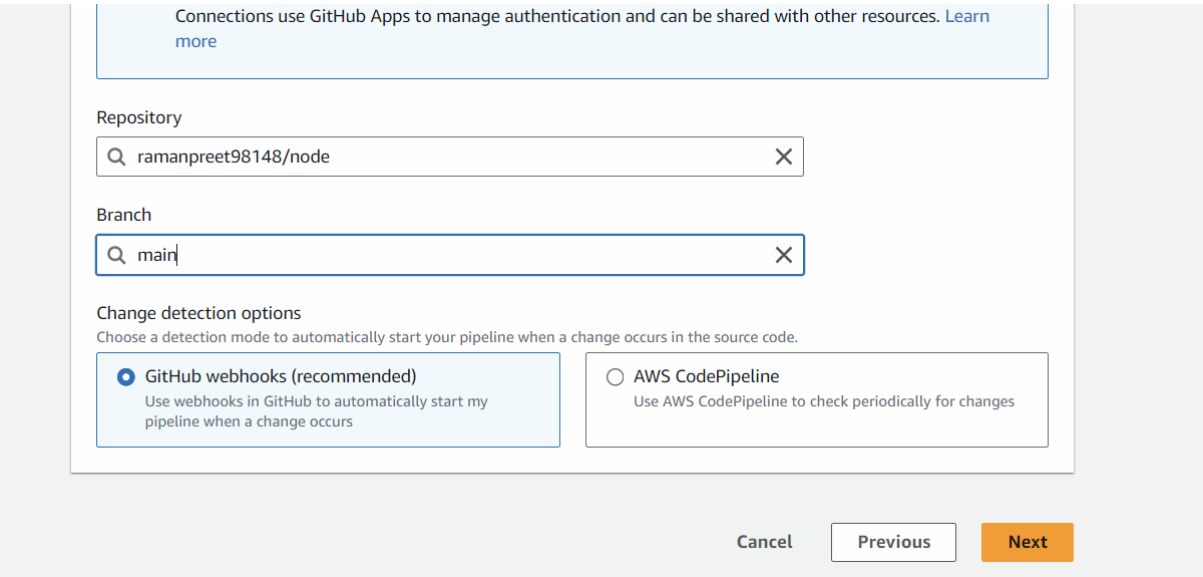

Skip build stage for now

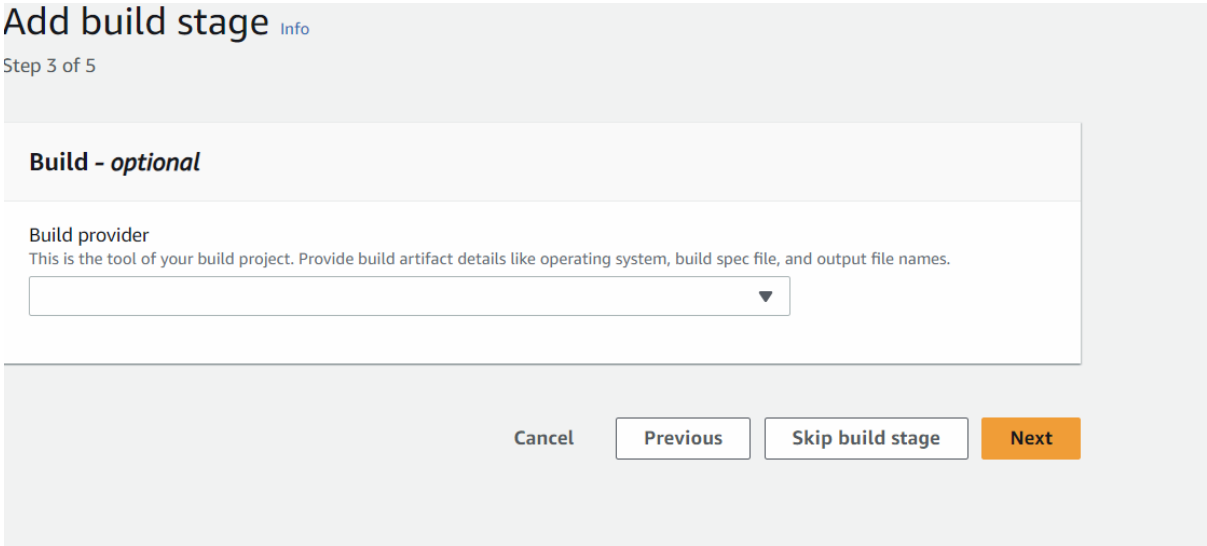

Next is the deploy stage

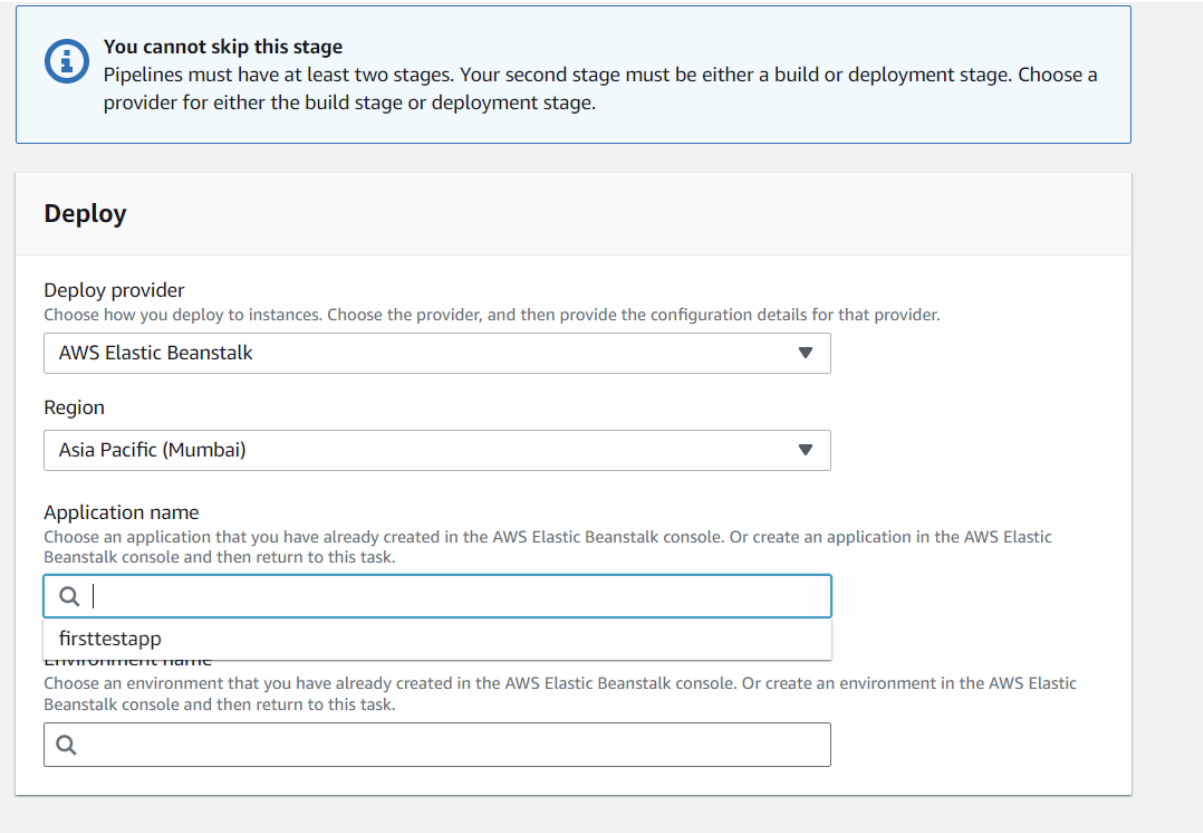

Here we have to choose the application name to which to deploy these changes from source stage

Go and create new application in elastic bean

All the steps to create application already done in practical 1

Configure environment Info

Environment tier Info

Amazon Elastic Beanstalk has two types of environment tiers to support different types of web applications.

- (●) Web server environment
  Run a website, web application, or web API that serves HTTP requests. Learn more
- ( ) Worker environment
  Run a worker application that processes long-running workloads on demand or performs tasks on a schedule. Learn more

Application information Info

Application name

node

Maximum length of 100 characters.

▶ Application tags (optional)

Environment information Info

Choose the name, subdomain and description for your environment. These cannot be changed later.

Environment name

Node-env

Must be from 4 to 40 characters in length. The name can contain only letters, numbers, and hyphens. It can't start or end with a hyphen. This name must be unique within a region in your account.

Domain

Leave blank for autogenerated value .ap-south-1.elasticbeanstalk.com Check availability

Environment description

Platform Info

Platform type

- (●) Managed platform
  Platforms published and maintained by Amazon Elastic Beanstalk. Learn more
- ( ) Custom platform
  Platforms created and owned by you. This option is unavailable if you have no platforms.

Platform

Node.js

Platform branch

Node.js 18 running on 64bit Amazon Linux 2023

Platform version

6.0.4 (Recommended)

Application code Info

- (●) Sample application
- ( ) Existing version
  Application versions that you have uploaded.
- ( ) Upload your code
  Upload a source bundle from your computer or copy one from Amazon S3.

Presets Info

Start from a preset that matches your use case or choose custom configuration to unset recommended values and use the service's default values.

Configuration presets

- (●) Single instance (free tier eligible)
- ( ) Single instance (using spot instance)
- ( ) High availability
- ( ) High availability (using spot and on-demand instances)
- ( ) Custom configuration

Cancel Next

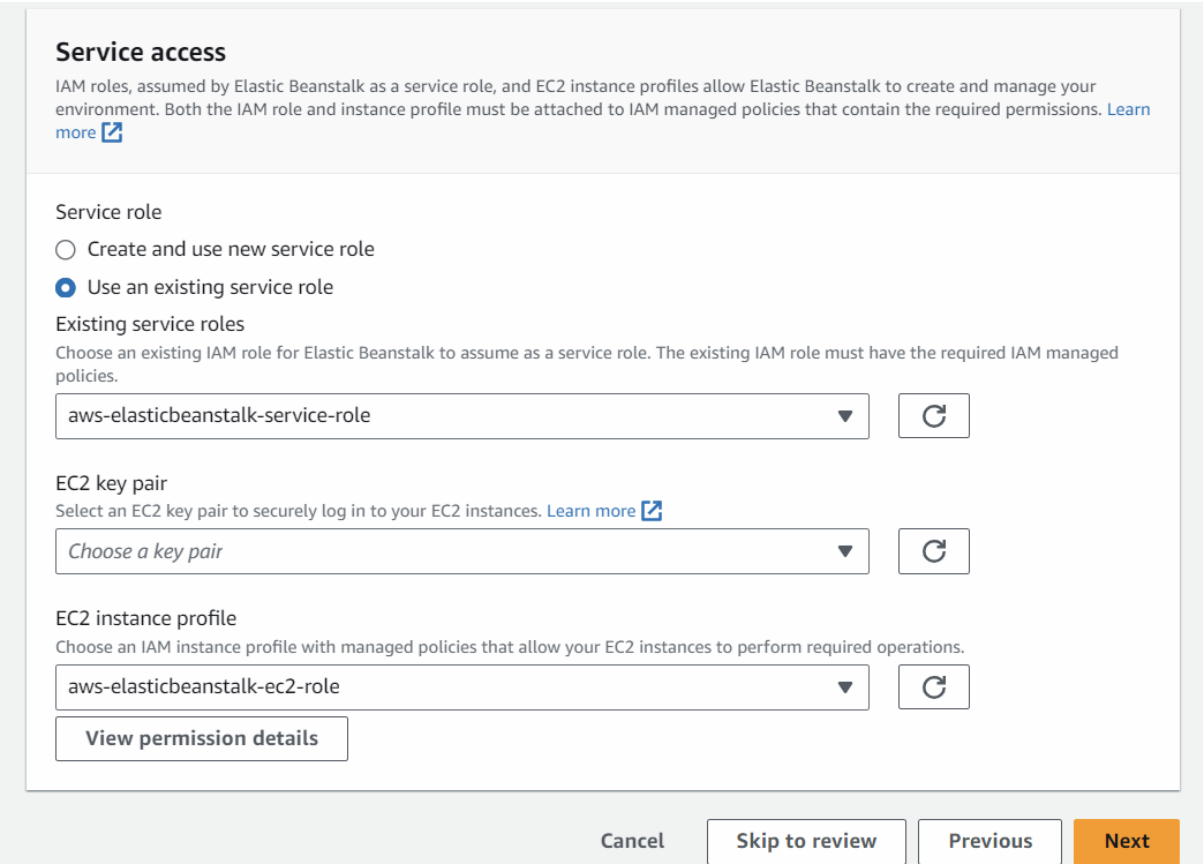

If default roles are not available we need to set them using IAM

Once application is created put the application name and environment name in the pipeline deploy section

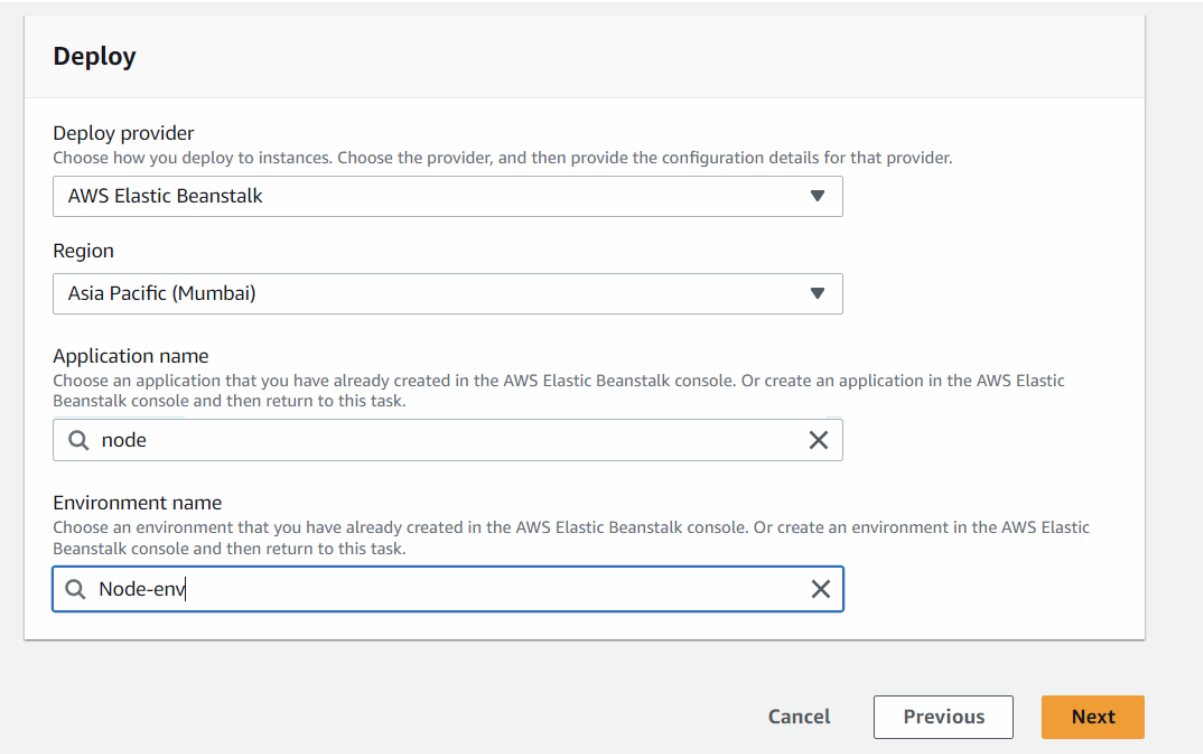

Click on Next, review all details and click on Create pipeline