

Batch B Group2

Experiment 8(b)

Aditya Patkar [181070045]

Mohammed Mehdi [181070036]

Archeel Parekh [181070044]

To Display the digital clock with current time of the server.

Overview :

To Display the digital clock with current time of the server.

Goals

1. PHP date function is an in-built function that simplify working with date data types.
2. The PHP date function is used to format a date or time into a human readable format.
3. It can be used to display the date of article being published. record the last updated data in a database.

.

Date_default_timezone():

date_default_timezone_set(timezone).

The date_default_timezone_set function allows you to set the default time zone from a PHP Script. The set time zone will then be used by all date php function scripts.

Syntax:

```
<?php
```

```
date_default_timezone_set ( string $timezone_identifier );
```

```
?>
```

TimeStamp

A timestamp is a numeric value in seconds between the current time and value as at 1 st January, 1970 00:00:00 Greenwich Mean Time (GMT).

The value returned by the time function depends on the default time zone.

The default time zone is set in the php.ini file.

It can also be set programmatically using date_default_timezone_set function.

PHP Check End-Of-File - feof()

The following methods allow to set date/time components:

setFullYear(year, [month], [date])

setMonth(month, [date])

setDate(date)

setHours(hour, [min], [sec], [ms])

setMinutes(min, [sec], [ms])

setSeconds(sec, [ms])

setMilliseconds(ms)

setTime(milliseconds) (sets the whole date by milliseconds since 01.01.1970 UTC)


Github link :

<https://github.com/mehdi1514/phpProject/blob/master/proj1.php>

PHP Code :

```
<?php  
  
echo date("D M d, Y G:i a");  
  
?>
```

Screenshots :

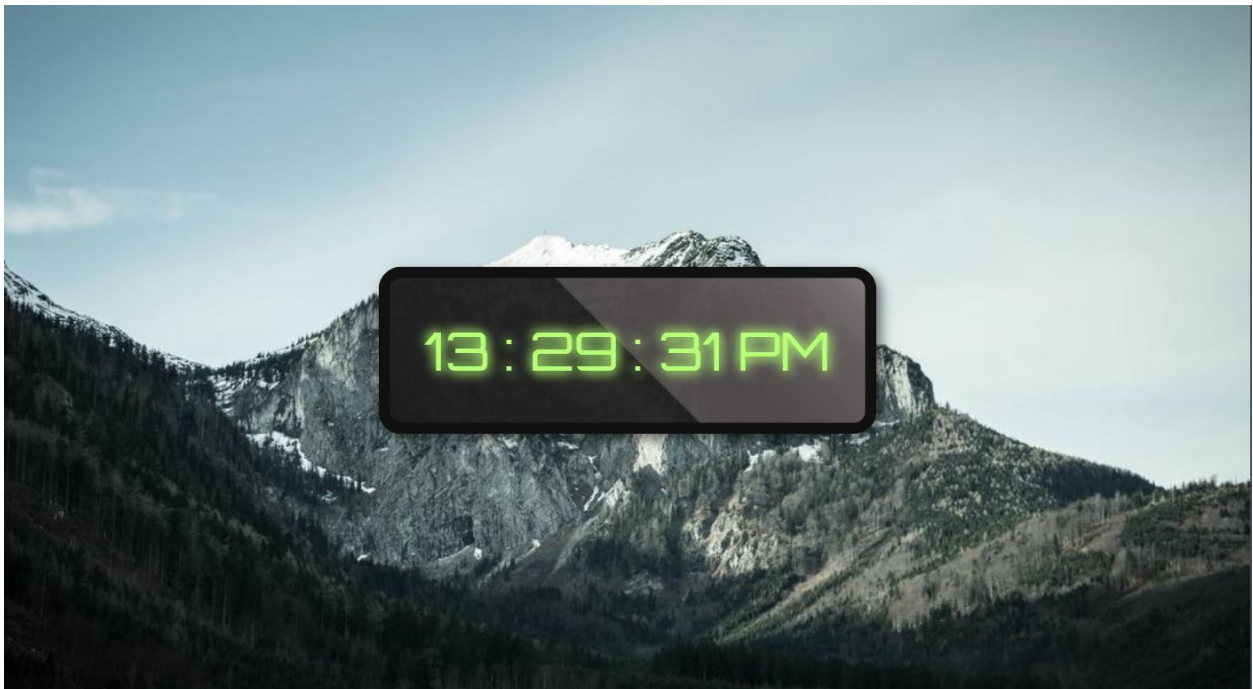

Conclusion :

Thus from this experiment I executed the php file handling operations to achieve the aim of displaying number of visitors on the website