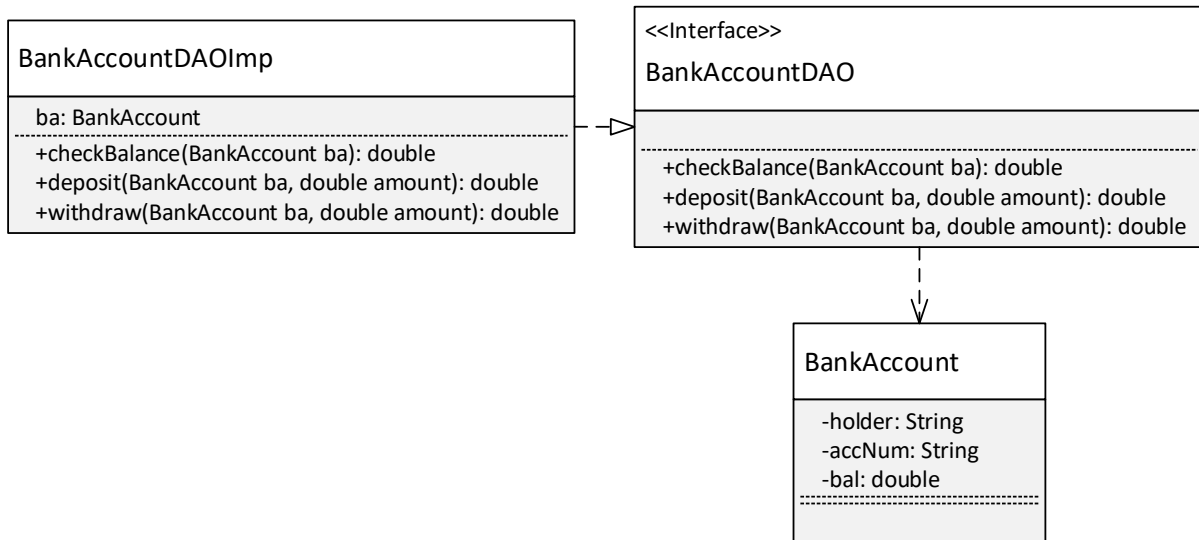
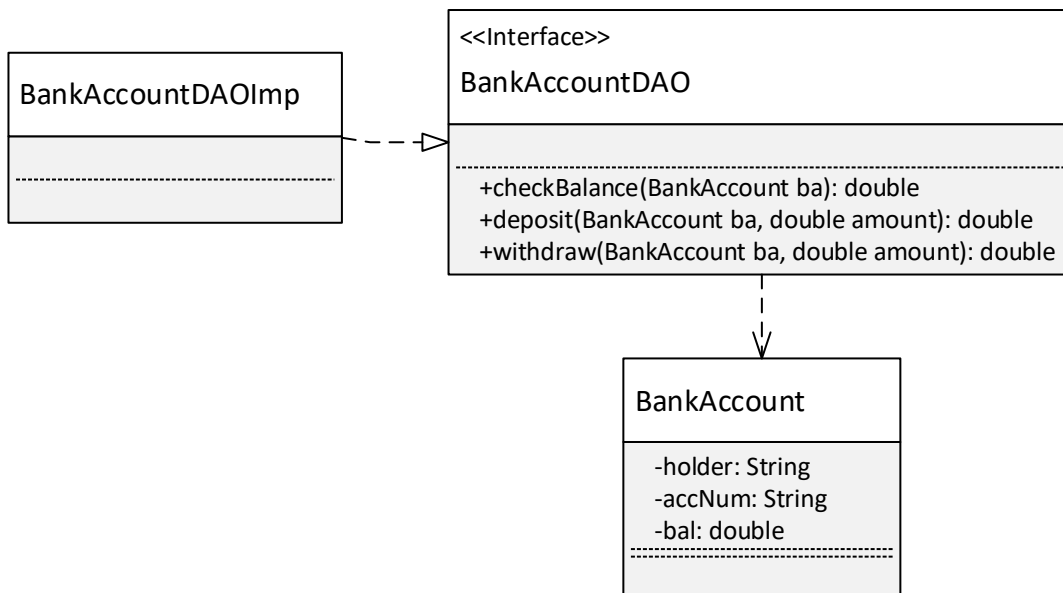

DAO Exercise (Bank Account)

The UML diagram below shows the class **BankAccount**, the interface **BankAccountDAO** and the class **BankAccountDAOImp**.



OR



1. **BankAccount** contains **holder** (account holder), **accnum** (account number) and **bal** (current balance).
2. **BankAccountDAO** contains the abstract methods
 - a. `checkBalance(BankAccount ba)`: returns the current balance of a bank account
 - b. `deposit(BankAccount ba, double amount)`: adds the amount to deposit and returns the new balance of a bank account

- c. `withdraw(BankAccount ba, double amount)`: subtracts the amount to withdraw and returns the new balance of a bank account

Use the information above to write the code for **1** to **4** below.

1. **BankAccount**
2. **BankAccountDAO**
3. **BankAccountDAOImp**
4. **Tester** to create instances of **BankAccount** and **BankAccountDAOImp** and display the balance, new balance after deposit and new balance after withdrawal