


Khaya Blocks manufactures, sells and delivers blocks. An order from a customer shows the unit price (**UNITPRICE**), R10.0; customer name (**custName**); quantity (**qty**) to buy and the distance (**dist**) to deliver to. The class below processes an order.

ProcessOrder
+ <u>UNITPRICE</u> : double=10.0 -custName:String -qty: int -dist: double
+calcTotPrice(): double +calcTotDeliv(): double +calcTotAmount(): double

- calcTotalPrice() returns the total price of blocks (quantity X unit price),
 - calcTotDel() returns total delivery cost based on distance (**free for the first 10km; any additional kilometer is charged at R5**)
 - calcTotAmount() returns the total amount (i.e., total price of blocks + total delivery cost)
1. What is wrong with the class?
 2. Use DAO to refactor the class.

The new design separates an order (class **Order**, a POCO), the interface (**IOrder**, a collection of methods to be performed on the POCO) and an implementation class (**IOrderImp**, which implements the interface).

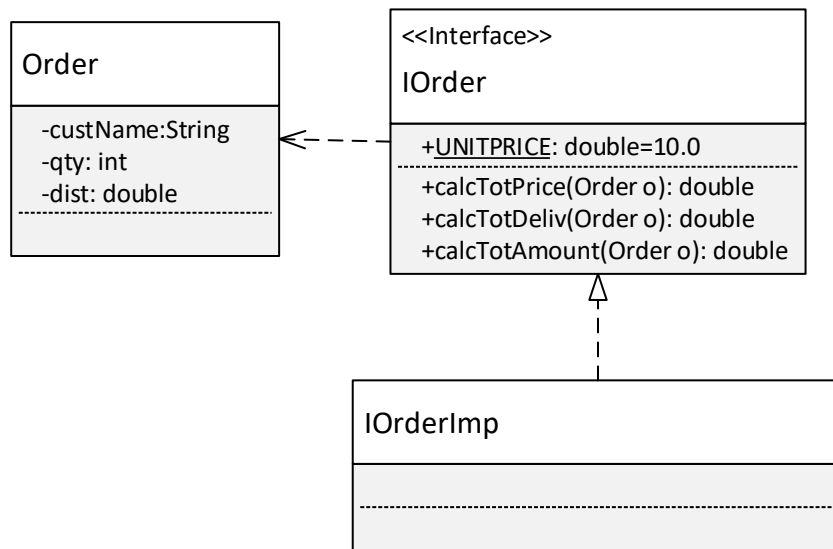

1. Is it necessary to include the methods in IOrderImp?
2. Why do you think the methods use Order as data type of parameters?
3. Can we use the variables in class Order as parameters?
4. Convert the above diagram to a Java program
5. Write a Tester program to test the program in (3) above

