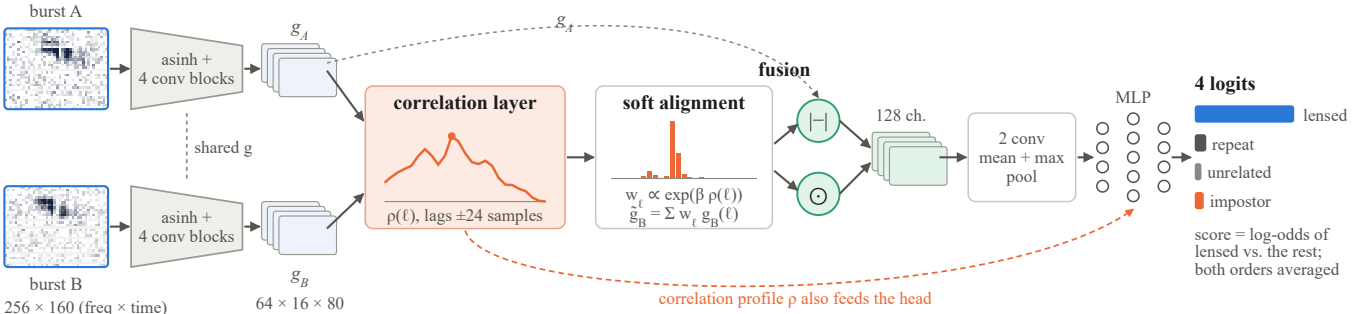

burst A
asinh + 4 conv blocks
shared g
asinh + 4 conv blocks
burst B
256 × 160 (freq × time)
g_A
g_B
64 × 16 × 80
g_A
correlation layer
ρ(ℓ), lags ±24 samples
soft alignment
$w_\ell \propto \exp(\beta\, \rho(\ell))$
$g_B = \Sigma\, w_\ell\, g_B(\ell)$
fusion
128 ch.
2 conv mean + max pool
MLP
4 logits
lensed
repeat
unrelated
impostor
score = log-odds of lensed vs. the rest; both orders averaged
correlation profile ρ also feeds the head