
MORIATZ LABS / RELEASE RECORD

Strawn v0.7

Implementation and Replication Manual

A complete technical record of the font rebuild, website integration, quality gates, GitHub release, and production deployment. Written as a deterministic runbook that can be followed without relying on unstated design knowledge.

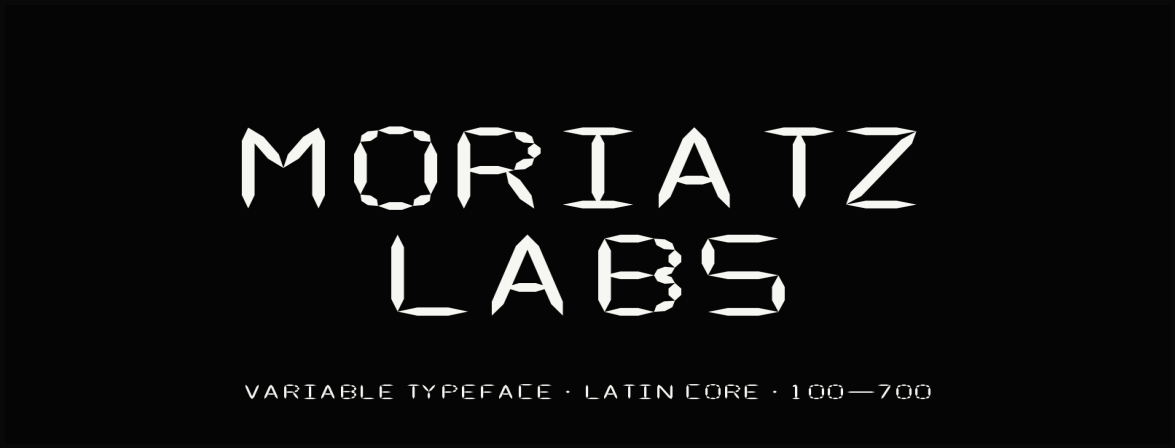

Family: Strawn | Version: 0.7.0 | Axis: wght 100-700 | Default: 500 Dense

Released 26 August 2026

01

Executive record

What was delivered, where it lives, and what was deliberately not hidden.

Surface	Final state	Canonical location
Font source	Programmatic vector source, build, tests, generated binaries	C:\Users\loqpm\Desktop\Paul\products\projects\moriatz-sans
GitHub source	Repository renamed; About and topics rewritten as a font	github.com/moriatz-labs/strawn-font
Specimen site	Font-only React specimen with downloads and 319-character inspector	C:\Users\loqpm\Desktop\Paul\products\projects\strawn
Production	Verified GitHub Actions deployment	strawn.moriatz.com/font
Release	Nine downloadable release assets plus license	github.com/moriatz-labs/strawn-font/releases/tag/v0.7.0
npm	Not published: local npm session is unauthenticated	@moriatz-labs/strawn

Outcome
The original toothpick identity was preserved while the engineering underneath it was replaced: explicit spacing, compatible masters, OpenType layout, Latin Core coverage, deterministic outputs, and release-grade validation.

Merged work

- Font source pull request #10, merged as commit cca021d41b60d70093575f5698fb7706a9d5443f.
- Specimen pull request #32, merged as commit 60c77254a585b76fe5108120556a0492882c4530.
- GitHub release v0.7.0 published with variable and static fonts, manifests, and OFL license.
- Production workflow run 32935855700 completed successfully, including deployment to Vercel.

Important scope boundary

Strawn is now represented everywhere as a font, not a React design system. The public site retains only the font experience. Old design-system topics and About copy were removed from GitHub. The font package name is **@moriatz-labs/strawn**.

02

System architecture

The build is split into one canonical font generator and one independent specimen consumer.

Layer	Input	Operation	Output
Glyph source	Skeleton paths, explicit metrics, codepoint repertoire	Build six-point tapered polygons for each stroke	Four compatible master TTFs
Variation	100, 300, 500, 700 masters	FontTools designspace + varLib	Strawn-Variable.ttf
Web compression	Variable TTF	WOFF2 flavor conversion	Strawn-Variable.woff2
Static instances	Variable TTF + named weights	varLib instancer + overlap removal	Fine, Signature, Dense, Structural TTFs
OpenType	Feature source and metadata	feaLib + table population	kern, mark, mkmk, ccmp, STAT, fvar, OS/2
Specimen	WOFF2 + character manifest	React/Vite renders controls and proofs	Font-only website
Release	Verified Git commits	PR checks, merge, tag, GitHub release	Versioned public artifacts

Single-source-of-truth rule

All glyph geometry, master weights, sidebearings, OpenType tables, CSS, manifests, and specimen generation originate in **scripts/build.py**. Never repair a generated TTF directly. Never draw a special website-only glyph to hide a font defect. Fix the source, rebuild, rerun every gate, and then copy the new artifacts into the site.

> **Stop condition**
> **If a visual defect appears in both the inspector and normal text, treat it as a font-source defect. CSS must not be used to compensate for sidebearings, baseline errors, or glyph-specific width defects.**

Canonical constants

Constant	Value	Meaning
UPM	1000	Font design-space units per em
CAP_HEIGHT	720	Flat capital alignment
X_HEIGHT	520	Flat lowercase alignment
ASCENDER_HEIGHT	720	Lowercase ascenders
DESCENDER_HEIGHT	-220	Alphabetic descenders
VERSION	0.7.0	Font and manifest release identity
FAMILY_NAME	Strawn	Canonical OpenType family
PACKAGE_NAME	@moriatz-labs/strawn	Canonical package identity

03

Toothpick vector construction

How the recognisable pointed stroke is generated and how weight changes without erasing the identity.

The canonical geometry

Glyphs are stored as skeletal line segments, not pre-expanded outline drawings. Every segment has a start point, end point, and direction. The builder converts the segment into a six-point polygon: a point at the start, two body corners around the start side, a point at the end, and two body corners around the end side. This is the toothpick silhouette.

For a segment from A to B:

```
1. Compute direction d = normalize(B - A).
2. Compute perpendicular n = (-d.y, d.x).
3. Choose body width w from the current master.
4. Choose taper length t = min(segment_length * 0.32, max(w * 1.55, 24)).
5. Emit six compatible points around A + d*t and B - d*t.
6. Close the polygon and preserve overlap in the variable source.
```

Why this survives bold weights

- The skeleton stays fixed; density grows perpendicular to the stroke.
- The taper cap is bounded by segment length so it cannot consume short segments.
- The taper scales with body width but has a floor, preserving visible points in Fine.
- All four masters use compatible contour order and point topology.
- Static instances remove overlaps; the variable font keeps compatible overlaps and sets overlap flags.

What went wrong in the old behavior

A naive bolding method expands every dimension equally. That rounds or blunts the tips, makes bowls look inflated, and allows intersections to dominate the skeleton. The repaired build increases body width while bounding taper length. This preserves the sharp toothpick terminal at 700 Structural.

> **Model instruction**
> **Do not use CSS text-shadow, stroke, transform scale, synthetic bold, or browser font-synthesis to create heavier weights. A weight must be a real interpolated master result.**

04

Metrics, overshoot, and spacing

The most important repair: make the font itself align correctly so specimens need no optical hacks.

Vertical zones

Class	Target bounds	Reason
Flat capitals	0 to 720	Hard alignment for I, H, T, and similar forms
Round capitals	-12 to 732	Optical overshoot compensates for rounded appearance
Flat lowercase	0 to 520	Shared baseline and x-height
Round lowercase	-10 to 530	Optical overshoot for a, e, o, and bowls
Ascenders	to 720	Align b, d, h, k, l with capitals
Descenders	to -220	Consistent g, j, p, q, y depth
Typographic box	900 to -260	Extra room for marks without clipping

Explicit sidebearings

The old mathematical centering and special T/r/t width patch were removed. Every glyph now receives an explicit left sidebearing and a resulting advance. Spacing is optical: round forms, diagonals, narrow stems, punctuation, and combining marks cannot be centered by one formula.

- Advance widths are identical at 100, 300, 500, and 700 unless a width-changing exception is documented. The current exception set is empty.
- Known problem groups are reviewed as systems: T/t/r/f/j; A/V/W/Y; b/d/h/n/p/q; a/e/o/s; punctuation around rounds, diagonals, and narrow forms.
- Website letter-spacing workarounds were removed so every proof shows the font's real spacing.

Kerning

GPOS class kerning was added and verified through HarfBuzz. The proof set includes AV, AW, AT, FA, LT, PA, TA, To, Te, Ty, Tr, Va, Wa, Yo, rt, and ry. A passing test requires the shaped advance with kerning enabled to be smaller than the same pair with kerning disabled.

> **Critical gotcha**
> **Sidebearings solve default spacing; kerning solves exceptional pair relationships. Do not use kerning to repair a globally bad sidebearing, and do not change a sidebearing to fix one isolated pair.**

05

Lowercase harmony and loop closure

How the repeated bowl system was regularised without making every letter a copy of o.

Shared structural rule

The repaired lowercase uses one shared vertical language but preserves letter-specific anatomy. The loop-bearing family b, d, h, p, and q shares a documented secondary closure level. Ascenders reach 720, lowercase bodies occupy the 520 x-height zone, and descenders reach -220 where applicable.

Glyph	Primary distinction	Audit question
a	Bowl plus defining right-side construction	Does it read as a, not a modified o?
b	Left ascender plus lower bowl	Does the curve close below x-height?
d	Right ascender plus lower bowl	Is it a mirrored system, not an oversized loop?
h	Ascender plus shoulder, no closed bowl	Can it be distinguished from n instantly?
p	Left stem descends; bowl stays lowercase	Is the bowl no larger than b/d?
q	Right descender; bowl stays lowercase	Is the tail long enough without enlarging the bowl?
g	Lowercase bowl plus descender construction	Does it use the full vertical allowance?
k	Ascender reaches cap height; clean diagonals	Does it avoid looking like an enlarged x-height k?

Inspection protocol

```
For each glyph in b d h n p q a e o s g k:
- render at weights 100, 300, 500, 700
- render at sizes 12, 14, 16, 24, 48, 96, 160 px
- compare cap height, x-height, baseline, descender, and closure guide
- compare beside H O n o and inside words
- reject if the identity depends on specimen CSS
```

Why the inspector matters

The site inspector is a diagnostic view, not the source of truth. It overlays the declared metric guides, uses arrow-key/Home/End navigation, and exposes all non-whitespace, non-combining glyphs from the generated character-set manifest. On small screens, labels move into a two-column block above the SVG so they cannot overlap the drawing.

06

Latin Core and marks

The repertoire was expanded from a display subset to the exact Google Fonts Latin Core set.

Coverage contract

The build embeds the exact 319-codepoint GF Latin Core repertoire. The generated Strawn-Character-Set.json is versioned and consumed by the website. Tests compare the font cmap against the expected set and fail on one missing or extra codepoint.

Construction strategy

- Base Latin glyphs are drawn from canonical Strawn skeletons.
- Accented letters are composites assembled from base glyphs and reusable marks.
- Combining marks are spacing-aware during construction and are exposed with mark anchors.
- Special letterforms such as AE/ae, Eth, Oslash, Thorn, Eszett, Lslash, OE/oe, Dcroat, Hbar, and dotless i/j receive explicit constructions.
- GSUB ccmp supports canonical composition; GPOS mark and mkmk position marks and stacked marks.

Language proof set

Proof English, French, German, Spanish, Portuguese, Italian, Dutch, Polish, Czech, Slovak, Hungarian, Romanian, Danish, Norwegian, Swedish, Finnish, and Icelandic. A proof passes only if shaping maps every codepoint to a non-.notdef glyph and marks are positioned without fallback.

> **Critical gotcha**
> **A glyph appearing in the cmap is not enough. It can still have broken anchors, incorrect decomposition, missing advance, bad mark stacking, or browser fallback. Test shaping and inspect language strings.**

Manifest use in the website

```
import characterSet from './Strawn-Character-Set.json';

fontGlyphs = characters
 .filter(name is not COMBINING)
 .map(character)
 .filter(non-whitespace);

fontCharacterList = characters
 .map(combining marks with a non-breaking-space carrier)
 .join(' ');
```

07

OpenType engineering

The binary now identifies, interpolates, installs, embeds, and shapes as a production family.

Table / feature	Required state	Why it matters
name	Family Strawn; no Moriatz Sans records; version 0.7.0	Prevents family mismatch and browser fallback
fvar	wght 100/500/700; named instances	Defines variable axis and discoverable styles
STAT	Fine, Signature, Regular, Dense, Bold, Structural	Style linking across modern applications
avar	Identity mapping	Explicit predictable axis mapping
OS/2	Version 4, fsType 0, cap/x-height, PANOSE, ranges	Embedding, metrics, platform classification
GPOS	kern, mark, mkmk	Pair spacing and mark attachment
GSUB	ccmp	Canonical composition behavior
gasp	0x000F through max ppem	Full-range grayscale/symmetric smoothing
prep	gftools non-hinting program	Avoid inconsistent partial hint behavior
head/hhea	Union bounds across all masters	Prevents clipping at interpolation extremes

Named weights

Axis value	Brand name	Interoperability role
100	Fine	Lightest named release
300	Signature	Lighter branded instance
400	Regular	Compatibility alias
500	Dense	Default and Moriatz product default
700	Structural / Bold	Branded maximum and compatibility alias

Never skip
After renaming a font family, rebuild every binary. Editing CSS font-family alone creates a binary/CSS family mismatch and browsers fall back silently.

08

Release artifact manifest

Every generated file, its role, and its verified v0.7 size.

Artifact	Bytes	Purpose
Strawn-Variable.ttf	64,488	Desktop variable family and direct website download
Strawn-Variable.woff2	20,580	Compressed web font
Strawn-Fine.ttf	31,764	Overlap-free static 100 instance
Strawn-Signature.ttf	31,468	Overlap-free static 300 instance
Strawn-Dense.ttf	33,492	Overlap-free static 500 instance
Strawn-Structural.ttf	33,456	Overlap-free static 700 instance
Strawn-Character-Set.json	36,567	Versioned 319-character manifest
Strawn-Metrics.json	718	Metrics, axis, named instances, optical zones
Strawn-Hero-Strokes.json	2,995	Versioned canonical hero path data
dist/index.css	187	Canonical @font-face entry
OFL.txt	4,444	SIL Open Font License 1.1

Canonical web CSS

```
@font-face {
 font-family: 'Strawn';
 src: url('./files/Strawn-Variable.woff2') format('woff2-variations');
 font-display: swap;
 font-style: normal;
 font-weight: 100 700;
}
```

Static versus variable overlap policy

Compatible overlapping contours remain in the variable font and are marked with the overlap flag. Static instances are generated through FontTools varLib instancing and then flattened with skia-pathops. Do not remove overlaps from masters before interpolation: contour compatibility can be destroyed.

09

Specimen website integration

How the website consumes the font without becoming a second typography source of truth.

Files changed

File	Responsibility
apps/docs/src/assets/fonts/Strawn-Variable.woff2	Bundled render font
apps/docs/public/downloads/*	Direct public variable and static downloads
features/font/Strawn-Character-Set.json	Exact repertoire consumed by React
features/font/fontData.ts	Version, metrics, paths, character arrays
features/font/FontHero.tsx	Static hero and direct v0.7 download
features/font/FontPage.tsx	Playground, inspector, weights, full list, details
fonts.css	Variable @font-face with swap
styles.css	Real font spacing and responsive metric labels
quality-tests/browser/visual.spec.ts	Responsive overflow, alignment, and label regression

Integration rules

- Copy binaries from a passing font build; compare SHA-256 hashes after copying.
- The body and specimens use Strawn directly. No synthetic spacing or font-weight fallback.
- Default playground size is 48px, weight is 500 Dense, and spacing is not user-adjustable.
- The sample copy is a useful full Lorem ipsum sentence.
- Inspector navigation preserves ArrowLeft, ArrowRight, Home, and End.
- Combining marks receive a non-breaking-space carrier in the full list so they remain visible.
- Downloads are same-origin and self-hosted.

Responsive fix

At 320px and 375px, metric labels are removed from their absolute positions and rendered as a two-column block above the glyph SVG. The loop-closure row spans both columns. Tests assert that labels do not overlap one another and that their bottom edge stays above the SVG.

10

Quality gates

A font release is accepted only when geometry, shaping, binaries, UI, and production all agree.

Gate	Command	Acceptance
Build	python scripts/build.py	All variable/static artifacts and specimens generated
Font contract	python scripts/test_font.py	Tables, naming, coverage, bounds, advances, shaping pass
Determinism	python scripts/test_determinism.py	Two clean builds have identical normalized hashes
FontBakery	python scripts/test_fontbakery.py	Zero failures; warnings limited to checked-in allowlist
Package	npm pack --dry-run --json	Expected 13 entries; no source or secret leakage
Site quality	bun run quality	Lint, typecheck, unit, build, motion, bundle pass
Functional	bun run test:browser:functional	4 browser tests pass
Visual	bun run test:browser:visual	10 tests across required widths pass
Lighthouse	bun run quality:lighthouse	All categories >=90; LCP <2.5s; CLS <0.1
Live	Browser + HEAD request	No console warnings, no overflow, font download HTTP 200

Observed final results

- Font build, contract tests, determinism, and FontBakery all passed.
- FontBakery returned zero failures. Documented warnings cover compatible variable overlaps, decomposed static accent outlines, and expected contour-count differences.
- Functional browser suite: 4 passed.
- Responsive visual suite: 10 passed at 320, 375, 768, 862, 1440, and 1920px.
- Lighthouse: Performance 100, Accessibility 100, Best Practices 100, SEO 100.
- LCP 342ms; CLS 0.000.
- Live download returned HTTP 200 with font/ttf content type.

> **Release rule**
> **Never treat a local build as a release. Merge only after the same checks pass in GitHub Actions, then verify the production URL after deployment.**

11

Replication runbook: prerequisites

Follow these steps in order. Each step has evidence and a stop condition.

A. Required repositories

```
git clone https://github.com/moriatz-labs/strawn-font.git
git clone https://github.com/moriatz-labs/strawn.git
```

B. Required runtimes

- Python 3.12.
- FontTools 4.63.0 with WOFF support.
- Pillow 12.3.0.
- skia-pathops 0.9.2.
- uharfbuzz 0.52.0.
- FontBakery 1.1.0 and gftools 0.9.999 for quality runs.
- Bun 1.3.14 and Playwright for the specimen.

C. Windows environment setup

```
cd C:\path\to\strawn-font
python -m venv .venv
.venv\Scripts\python -m pip install --requirement requirements-quality.txt
```

D. Clean-start evidence

```
git status --short
git branch --show-current
python --version
.venv\Scripts\python -m pip freeze
```

STOP
Do not edit generated binaries. Do not continue if the worktree contains unrelated changes you cannot identify. Preserve user work and create a dedicated branch.

12

Replication runbook: font rebuild

Literal ordered procedure for rebuilding the family.

Step	Action	Non-negotiable evidence
1	Set identity	In scripts/build.py set VERSION, FAMILY_NAME, and PACKAGE_NAME. Update package.json, README, and test expectations in the same change.
2	Freeze metrics	Set UPM, cap height, x-height, ascender, descender, typo ascent, and typo descent. Add tests before editing outlines.
3	Define masters	Use 100, 300, 500, 700 with compatible skeletons. Keep all advances equal across masters.
4	Repair taper	Convert every line segment to the same six-point construction and use the bounded taper formula. Inspect short segments at both axis extremes.
5	Assign spacing	Replace automatic centering with explicit left sidebearings. Review control strings before adding kerning.
6	Add kerning	Create GPOS class rules for repeatable classes and explicit exceptions only where necessary. Prove the required pairs through HarfBuzz.
7	Add repertoire	Use exact GF Latin Core codepoints. Build accents from components and reusable marks. Add anchors and ccmp.
8	Build masters	Generate all master TTFs from the same glyph order and compatible contours.
9	Build variable	Create the designspace, run varLib, set names/STAT/fvar/avar, union global bounds, and export WOFF2.
10	Build statics	Instantiate 100/300/500/700 and remove overlaps with skia-pathops. Apply static names.
11	Write manifests	Generate metrics, character-set, hero-path JSON, CSS, and specimen files from the same constants.
12	Run every gate	Build, tests, determinism, FontBakery, package dry-run. Stop on any failure.

Exact local command sequence

```
.venv\Scripts\python scripts\build.py
.venv\Scripts\python scripts\test_font.py
.venv\Scripts\python scripts\test_determinism.py
.venv\Scripts\python scripts\test_fontbakery.py
npm pack --dry-run --json
```

Expected terminal summary
Built Strawn-Variable.ttf and WOFF2; rendered specimen; quality checks passed; builds deterministic; FontBakery passed with only documented warnings.

13

Replication runbook: site integration

Only integrate artifacts from a completely passing font build.

1. Copy verified files

```
Copy Strawn-Variable.woff2 to:
 apps/docs/src/assets/fonts/Strawn-Variable.woff2
 apps/docs/public/downloads/Strawn-Variable.woff2

Copy variable/static TTFs to:
 apps/docs/public/downloads/

Copy Strawn-Character-Set.json to:
 apps/docs/src/features/font/
```

2. Verify hashes

```
Get-FileHash path\to\font-source\Strawn-Variable.woff2
Get-FileHash apps\docs\src\assets\fonts\Strawn-Variable.woff2
Get-FileHash apps\docs\public\downloads\Strawn-Variable.woff2
```

All three hashes must match. The verified v0.7 WOFF2 SHA-256 was 70ac6b9b0f8eaf1fc42a28583b9018f46f661af6baf447eee342f7569b2e61df.

3. Update the data contract

- Set version 0.7.0 and default weight 500.
- Set direct download URL and canonical GitHub repository URL.
- Derive inspector and full-list arrays from the manifest. Never paste a parallel list.

4. Remove CSS compensations

- Remove hero, live sample, weight proof, and character-list letter-spacing overrides.
- Use real font-weight and font-variation-settings values.
- Retain normal line-height and responsive wrapping; do not distort glyphs.

5. Verify

```
bun install --frozen-lockfile
bun run quality
bun run test:browser:functional
bun run test:browser:visual
bun run quality:lighthouse
```

> **STOP**
> **Do not deploy if hashes differ, a browser test is skipped, Lighthouse is below the gate, there is horizontal overflow, or the console contains a warning/error.**

14

Replication runbook: review and release

The release process is intentionally evidence-first.

Branch and commit

```
git switch -c codex/strawn-v0.7-font
git add <only font-release files>
git commit -m 'Rebuild Strawn as a production Latin variable font'
git push -u origin codex/strawn-v0.7-font
```

Pull request

- Describe intentional layout breaks.
- List coverage, spacing, OpenType, static-instance, and deterministic-build changes.
- Wait for every required CI job. Do not merge while pending.

Merge and deploy

```
gh pr merge <font-pr> --repo moriatz-labs/strawn-font --squash --delete-branch
gh pr merge <site-pr> --repo moriatz-labs/strawn --squash --delete-branch
gh run watch <site-main-run> --repo moriatz-labs/strawn --exit-status
```

GitHub release

Create tag v0.7.0 from the verified main commit and attach variable TTF/WOFF2, all four static TTFs, metrics and character manifests, and OFL.txt. Release notes must warn that v0.7 can change widths, wrapping, and outlines.

Production verification

- Open https://strawn.moriatz.com/font after deployment.
- Confirm title uses Strawn, version says 0.7.0, and the page has no overflow.
- Inspect desktop and mobile screenshots.
- Check browser console warnings/errors.
- HEAD /downloads/Strawn-Variable.ttf and require HTTP 200 with font/ttf.

npm limitation

The scoped npm package was not published because the local npm CLI is unauthenticated and the package does not yet exist. To finish: authenticate an owner of the Moriatz Labs npm scope, verify **npm whoami**, then run **npm publish --access public --provenance** from the exact v0.7.0 tag. Never paste an npm token into logs or a report.

15

Failure modes and gotchas

The defects most likely to be missed by a weak implementation or review.

Symptom	Likely cause	Correct repair
Browser shows generic sans	CSS family differs from binary name records	Rebuild binaries and validate name table; do not rename only CSS
Bold loses toothpick points	Synthetic bold or unbounded taper	Use real masters and bounded taper formula
T and r look misaligned	Bad sidebearings hidden by line-specific offsets	Fix explicit sidebearings; remove hero optical offsets
b/d/p/q loops too large	Loop closure tied to ascender/cap height	Use shared lowercase secondary closure level
h reads as n	Ascender/shoulder distinction too weak	Raise ascender to 720 and preserve shoulder anatomy
Marks clip	Global bounds only measured at default master	Union bounds across every master and allow typo metric room
Weight slider causes reflow	Advances differ between masters	Make all advances invariant and assert the entire map
Accents exist but look wrong	Cmap-only coverage without anchors	Build components, mark/mkmk anchors, and language proofs
Variable font breaks after overlap removal	Masters flattened before interpolation	Keep compatible overlaps in variable; flatten statics only
Mobile labels overlap glyph	Desktop absolute labels retained	Move labels to normal flow at 320/375 and test geometry
Full list has invisible marks	Combining marks rendered without carrier	Prefix display-only NBSP while preserving actual cmap
Release differs from local	Uncommitted or stale artifacts deployed	Deploy CI-built artifact from merged commit

Warnings versus failures

FontBakery failures are never allowed. Warnings require a checked-in code-based allowlist and a reason. The current warning categories are compatible variable overlap, decomposed static accent outlines, and expected contour-count differences. A new warning is a release failure until reviewed.

> **Anti-cheat rule**
> **Never weaken a test to accept a new visual defect. First prove that the output is correct, then document a narrowly identified tool warning if it is unavoidable.**

16

Low-capability model protocol

A prompt and control system designed to prevent an assistant from skipping invisible font work.

Use this master instruction

```
You are modifying a production variable font.

Rules:
1. Read repository AGENTS.md before any action.
2. scripts/build.py is the only glyph source of truth.
3. Never edit generated TTF/WOFF2 directly.
4. Never hide a font defect with CSS spacing or transforms.
5. Preserve the six-point tapered toothpick construction.
6. Keep advances identical across all weights.
7. Run build, contract, determinism, FontBakery, site, browser, and Lighthouse gates.
8. Stop on any failure or unexpected warning.
9. Show git diff and git status before commit.
10. Release only through reviewed PRs and verified GitHub Actions.
```

Force evidence after every stage

Stage	Evidence the model must return before continuing
Discovery	Repository roots, AGENTS instructions, current branch, clean/dirty status
Metrics	Constants and vertical-zone test assertions
Glyph edit	Affected skeletons, sidebearings, all four master screenshots/proofs
OpenType	Table list, feature tags, family names, fvar and STAT values
Coverage	Exact cmap count and missing/extra codepoint diff
Spacing	Control strings and HarfBuzz kern-on/kern-off measurements
Artifacts	File list, sizes, and SHA-256 hashes
Site	Copied artifact hash equality and removal of CSS workarounds
Browser	Required viewport results, console log result, accessibility result
Release	Merged commit, successful Actions run, release URL, live HTTP check

The key principle
A weak model can follow a checklist. It cannot be trusted to infer optical quality. Make it produce measurable evidence and stop whenever evidence is missing.

17

Maintenance and next release

How to change Strawn again without reintroducing the defects repaired in v0.7.

When editing one glyph

- Edit its canonical skeleton and explicit sidebearing in scripts/build.py.
- Review the related family, not the isolated glyph.
- Check all four masters and the interpolation between them.
- Re-run pair proofs if the glyph participates in kerning.
- Rebuild every artifact and recopy the website WOFF2/manifest.
- Bump version only when artifacts and manifests agree.

When adding a character

- Add the Unicode codepoint to the declared repertoire.
- Prefer components for accents and anchors for marks.
- Add language and shaping proofs.
- Update the expected cmap count only after exact set comparison passes.

When adding an axis

Do not bolt an axis onto existing masters. Define compatible source geometry, axis mapping, STAT values, instances, test matrices, and product CSS defaults first. Width, grade, optical size, and italic remain out of scope for v0.7.

Versioning policy

- Patch: metadata, documentation, or non-layout correction.
- Minor: new characters, features, or outline/spacing changes that can reflow text.
- Major: incompatible family/axis redesign or removal of supported behavior.

> **Rollback**
> **Keep v0.6 tagged and downloadable. Never overwrite a released binary under an existing version tag.**

18

Release acceptance checklist

A compact final checklist for the next operator.

- [ ] Family name is Strawn in every name record and CSS declaration.
- [ ] Version is identical in fontRevision, name ID 5, manifests, package.json, site copy, and release tag.
- [ ] wght axis is 100-700 with default 500.
- [ ] Fine, Signature, Dense, Structural and compatibility Regular/Bold records are present.
- [ ] All advances are invariant across masters.
- [ ] GF Latin Core cmap contains exactly 319 codepoints.
- [ ] kern, mark, mkmk, and ccmp are present and shaping proofs pass.
- [ ] OS/2 fsType is 0 and global bounds cover all master outlines.
- [ ] Variable overlaps are flagged; static overlaps are removed.
- [ ] Build outputs are deterministic after timestamp normalization.
- [ ] FontBakery has zero failures and no undocumented warnings.
- [ ] Site uses the exact built WOFF2 and manifest hashes.
- [ ] No specimen uses letter-spacing to repair font spacing.
- [ ] Inspector keys and mobile metric labels work.
- [ ] Functional, visual, accessibility, bundle, motion, and Lighthouse gates pass.
- [ ] GitHub About, topics, README, release notes, and download URLs describe a font only.
- [ ] Production page and direct font download return HTTP 200 with no console errors.
- [ ] npm publishing is performed only from the verified release tag by an authenticated scope owner.

Final verified references

- Production: https://strawn.moriatz.com/font
- Font repository: https://github.com/moriatz-labs/strawn-font
- Specimen repository: https://github.com/moriatz-labs/strawn
- Release: https://github.com/moriatz-labs/strawn-font/releases/tag/v0.7.0

This report is a generated handoff artifact. It is intentionally not committed to either repository.