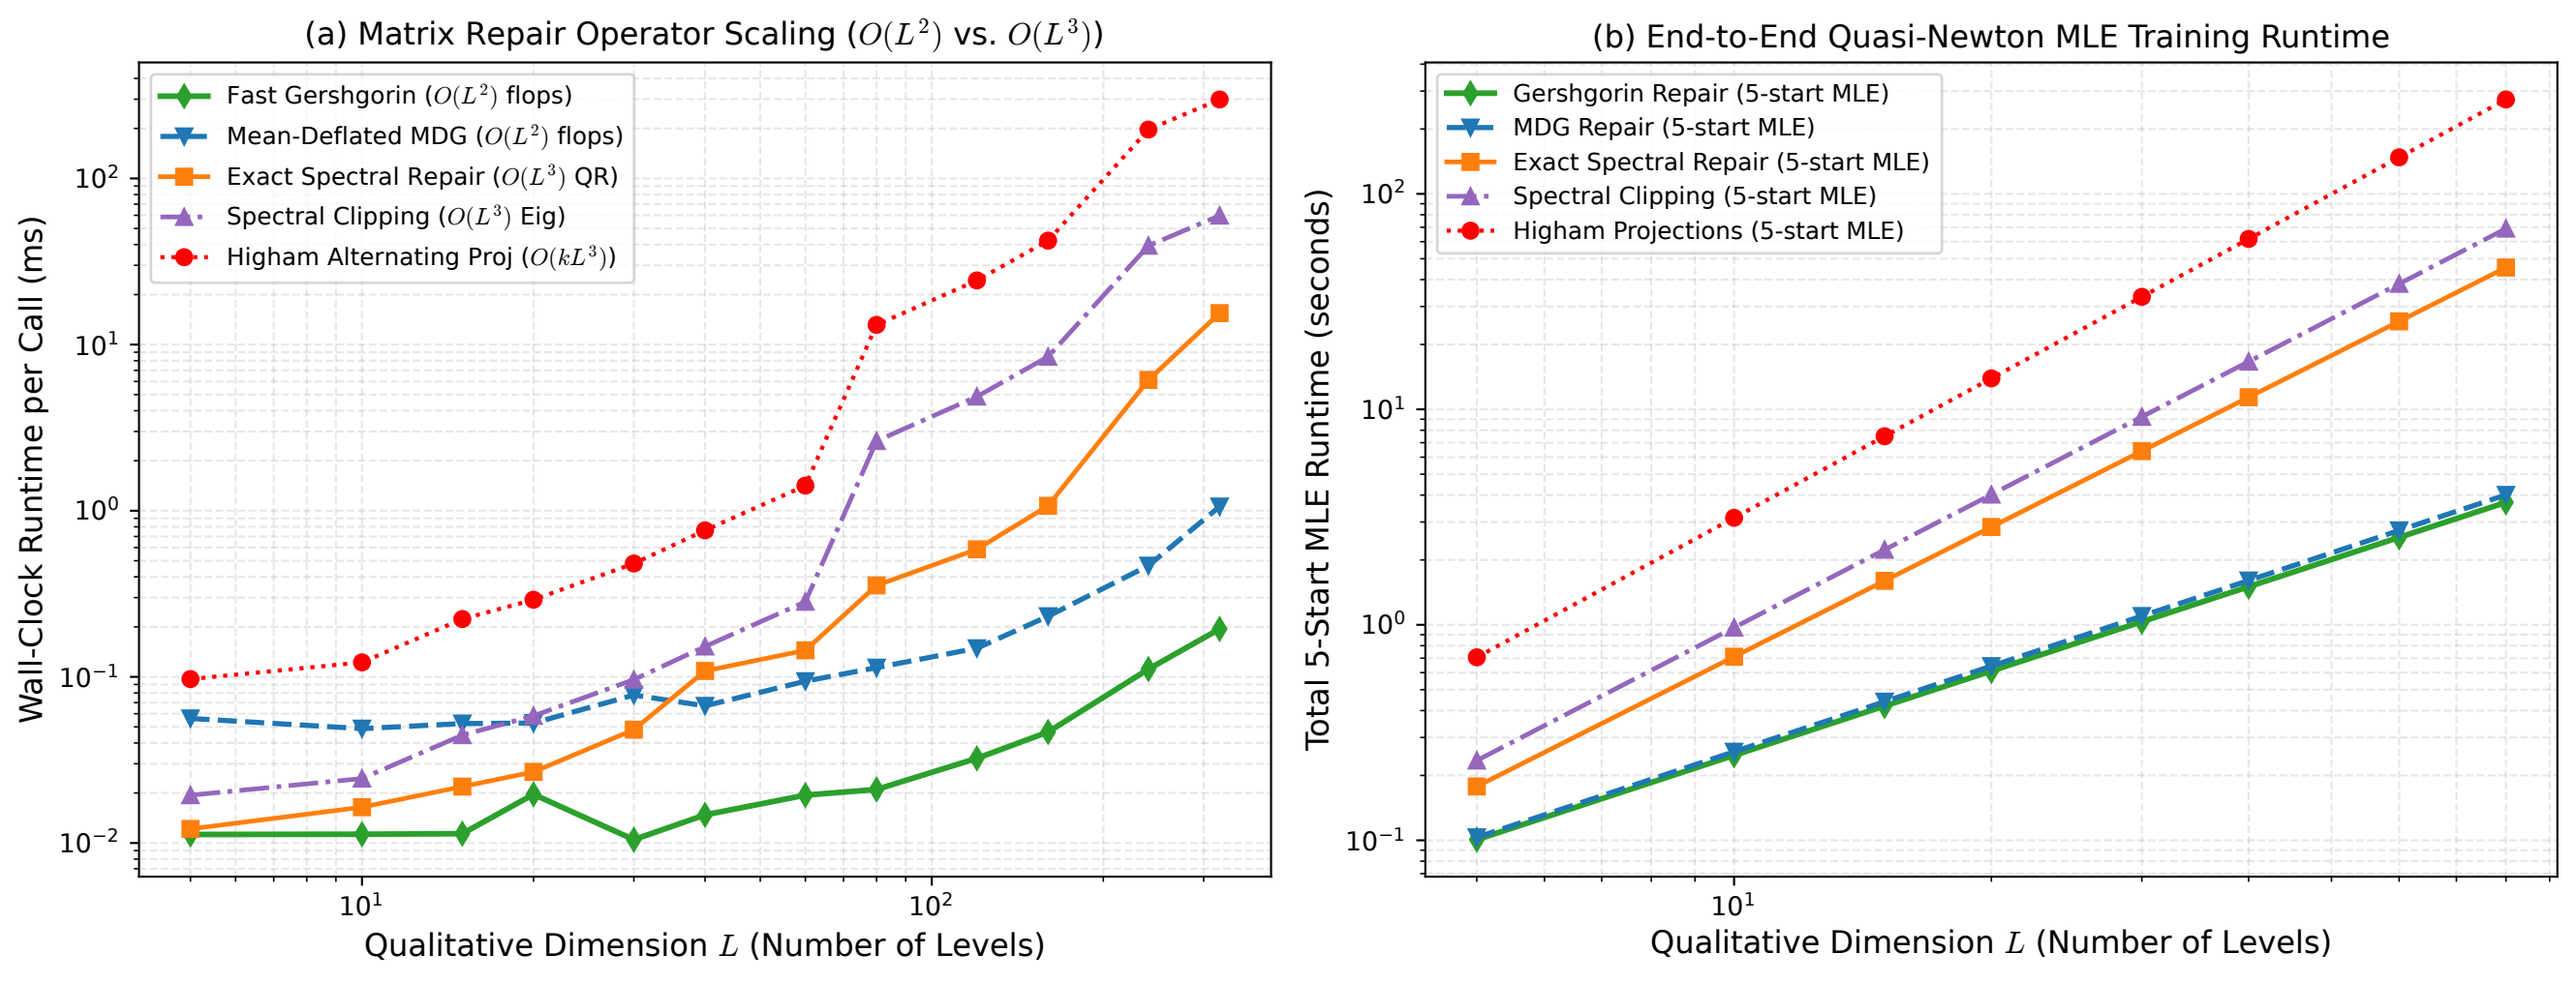
(a) Matrix Repair Operator Scaling ($O(L^2)$ vs. $O(L^3)$)
Fast Gershgorin ($O(L^2)$ flops)
Mean-Deflated MDG ($O(L^2)$ flops)
Exact Spectral Repair ($O(L^3)$ QR)
Spectral Clipping ($O(L^3)$ Eig)
Higham Alternating Proj ($O(kL^3)$)
Wall-Clock Runtime per Call (ms)
10^{2}
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{1}
10^{2}
Qualitative Dimension L (Number of Levels)
(b) End-to-End Quasi-Newton MLE Training Runtime
Gershgorin Repair (5-start MLE)
MDG Repair (5-start MLE)
Exact Spectral Repair (5-start MLE)
Spectral Clipping (5-start MLE)
Higham Projections (5-start MLE)
Total 5-Start MLE Runtime (seconds)
10^{2}
10^{1}
10^{0}
10^{-1}
10^{1}
Qualitative Dimension L (Number of Levels)