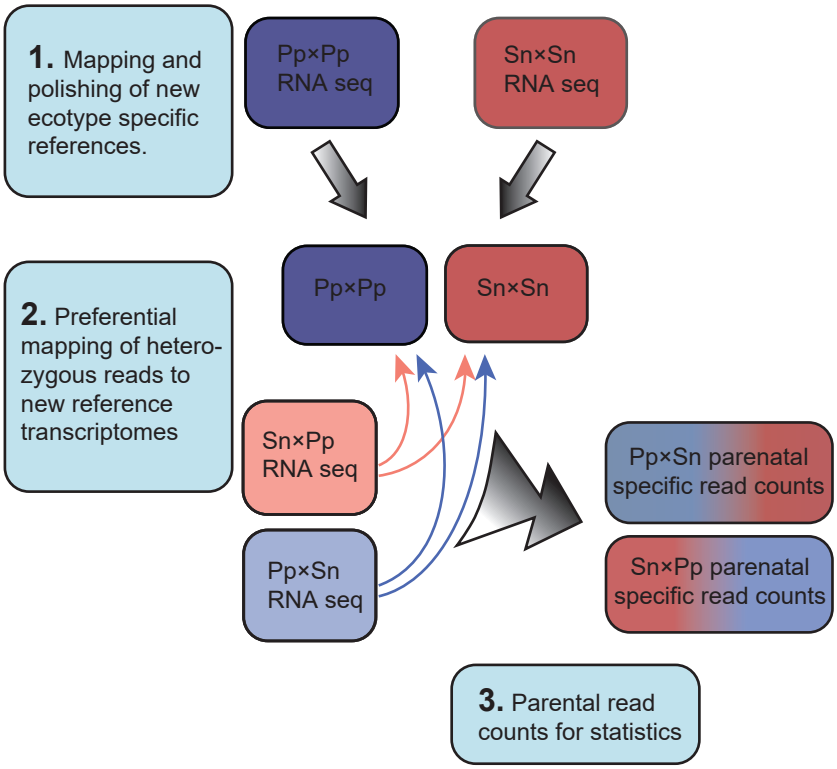

Supplementary Figure S2. Outline of the IRP pipeline. Reads from intra-accession (Pp×Pp and Sn×Sn) crosses were used in the Informative read pipeline (IRP) to generate and polish accession specific transcriptomes. RNA sequencing reads from inter-accession crosses (Pp×Sn and Sn×Pp) were subsequently mapped to the new transcriptomes following the IRP pipeline to identify parent of origin dependent expression patterns.