

# Standardised Dutch NLP pipeline

Paul Huygen <paul.huygen@huygen.nl>

27th July 2015  
08:08 h.

## Abstract

This is a description and documentation of the installation of the current NLP modules on Lisa, so that they can be used in pipelines.

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	List of the modules to be installed . . . . .	3
1.2	File-structure of the pipeline . . . . .	3
<b>2</b>	<b>How to obtain modules and other material</b>	<b>5</b>
2.1	Location-dependency . . . . .	5
2.2	Reversible update . . . . .	6
2.3	Installation from Github . . . . .	6
2.4	Installation from the snapshot . . . . .	7
<b>3</b>	<b>Java and Python environment</b>	<b>8</b>
3.1	Java . . . . .	8
3.2	Maven . . . . .	9
3.3	Python . . . . .	10
3.3.1	Transplant ActivePython . . . . .	11
3.3.2	Virtual environment . . . . .	13
3.3.3	Transplant the virtual environment . . . . .	14
3.3.4	KafNafParserPy . . . . .	14
3.3.5	Python packages . . . . .	15
<b>4</b>	<b>Installation of the modules</b>	<b>15</b>
4.1	The installation script . . . . .	15
4.2	Check availability of resources . . . . .	16
4.3	Install utilities and resources . . . . .	17
4.3.1	Alpino . . . . .	17
4.3.2	Treetagger . . . . .	17
4.3.3	Timbl and Ticcutils . . . . .	19
4.3.4	Spotlight . . . . .	20
4.4	Install modules . . . . .	21
4.4.1	Install tokenizer . . . . .	21
4.4.2	Morphosyntactic parser . . . . .	22
4.4.3	Nominal coreference-base . . . . .	23
4.4.4	Named entity recognition (NERC) . . . . .	23
4.4.5	Wordsense-disambiguation . . . . .	25

4.4.6	Lexical-unit converter . . . . .	26
4.4.7	NED . . . . .	27
4.4.8	Ontotagger . . . . .	28
4.4.9	Framenet SRL . . . . .	29
4.4.10	Heideltime . . . . .	30
4.4.11	Semantic Role labelling . . . . .	32
4.4.12	SRL postprocessing . . . . .	33
4.4.13	Event coreference . . . . .	34
4.4.14	Dbpedia-ner . . . . .	34
4.5	Nominal events . . . . .	35
<b>5</b>	<b>Utilities</b> . . . . .	<b>36</b>
5.1	Test script . . . . .	36
5.2	Logging . . . . .	36
5.3	Misc . . . . .	36
<b>A</b>	<b>How to read and translate this document</b> . . . . .	<b>37</b>
A.1	Read this document . . . . .	37
A.2	Process the document . . . . .	38
A.3	The Makefile for this project. . . . .	39
A.4	Get Nuweb . . . . .	40
A.5	Pre-processing . . . . .	40
A.5.1	Process ‘dollar’ characters . . . . .	41
A.5.2	Run the M4 pre-processor . . . . .	41
A.6	Typeset this document . . . . .	41
A.6.1	Figures . . . . .	41
A.6.2	Bibliography . . . . .	43
A.6.3	Create a printable/viewable document . . . . .	43
A.6.4	Create HTML files . . . . .	46
A.7	Create the program sources . . . . .	49
A.8	Restore paths after transplantation . . . . .	49
<b>B</b>	<b>References</b> . . . . .	<b>50</b>
B.1	Literature . . . . .	50
<b>C</b>	<b>Indexes</b> . . . . .	<b>50</b>
C.1	Filenames . . . . .	50
C.2	Macro’s . . . . .	51
C.3	Variables . . . . .	52

## 1 Introduction

This document describes the current set-up of pipeline that annotates dutch texts in order to extract knowledge. The pipeline has been set up by the Computational Lexicology an Terminology Lab (CLTL <sup>1</sup>) as part of the newsreader <sup>2</sup> project.

Apart from describing the pipeline set-up, the document actually constructs the pipeline. Currently, the pipeline has been succesfully implemented on a specific supercomputer (Lisa, Surfsara, Amsterdam <sup>3</sup>) and on computers running Ubuntu and Centos.

The installation has been parameterised. The locations and names that you read (and that will be used to build the pipeline) have been read from variables in file `inst.m4` in the nuweb directory.

1. <http://wordpress.let.vupr.nl>

2. <http://www.newsreader-project.eu>

3. <https://surfsara.nl/systems/lisa>

## 1.1 List of the modules to be installed

Table 1 lists the modules in the pipeline. The column *source* indicates the origin of the module.

Module	Section	Source	Commit	Script
Tokenizer	4.4.1	Github	56f83ce4b61680346f15e5d4e6de6293764f7383	tok
morphosyntactic parser	4.4.2	Github	c6cabea2cc37ac3098c5927f5ec5b180ac31246f	mor
NERC	4.4.4	Gith./snap	5cacac28fcaa6e91d5f2a4cc9b486b24ac163641	nerc
WSD	4.4.5	Gith./snap	2babeb40a81b3720274a0521ccc2a27c5eff28c9	wsd
Onto-tagger	4.4.8	snapshot		onto
Heideltime	4.4.10	Gith./snap.	057c93ccc857a427145b9e2ff72fd645172d34df	heideltime
SRL	4.4.11	Github	675d22d361289ede23df11dcdb17195f008c54bf	srl
SRL-POST	4.4.12	snapshot		postsrl
NED	4.4.7	Github	d35d4df5cb71940bf642bb1a83e2b5b7584010df	ned
Nom. coref	4.4.3	Github	bfa5aec0fa498e57fe14dd4d2c51365dd09a0757	nomcoref
Ev. coref	4.4.13	snapshot		evcoref
Framenet SRL	4.4.9	snapshot		fsrl
Dbpedia_ner	4.4.14	Github	ab1dcdbd860f0ff29bc979f646dc382122a101fc2	dbpner

Table 1: List of the modules to be installed. Column description: **directory**: Name of the subdirectory below subdirectory *modules* in which it is installed; **source**: From where the module has been obtained; **commit**: Commit-name or version-tag **script**: Script to be included in a pipeline. **Note**: The tokenizer module has been temporarily obtained from the snapshot, because the commit that we used has disappeared from the Github repository.

The modules are obtained in one of the following ways:

1. If possible, the module is directly obtained from an open-source repository like Github.
2. Some modules have not been officially published in a repository. These modules have been packed in a tar-ball that can be obtained by the author. In table 1 this has been indicated as SNAPSHOT.

The modules themselves use other utilities like dependency-taggers and POS taggers. These utilities are listed in table 2.

Module	Version	Section	Source
KafNafParserPy	Feb 1, 2015	3.3.4	Github
Alpino	20706	4.3.1	RUG
Ticcutils	0.7	4.3.3	ILK
Timbl	6.4.6	4.3.3	ILK
Treetagger	3.2	4.3.2	Uni. München
Spotlight server	0.7	4.3.4	Spotlight

Table 2: List of the modules to be installed. Column description: **directory**: Name of the subdirectory below *mod* in which it is installed; **source**: From where the module has been obtained; **script**: Script to be included in a pipeline.

## 1.2 File-structure of the pipeline

The files that make up the pipeline are organised in set of directories as shown in figure 1. The directories have the following functions.

**socket**: The directory in the host where the pipeline is to be implemented.

**root**: The root of the pipeline directory-structure.

**nuweb**: This directory contains this document and everything to create the pipeline from the open sources of the modules.

**modules**: Contains subdirectories with the NLP modules that can be applied in the pipeline.

**bin**: Contains for each of the applicable modules a script that reads NAF input, passes it to the module in the *modules* directory and produces the output on standard out. Furthermore,

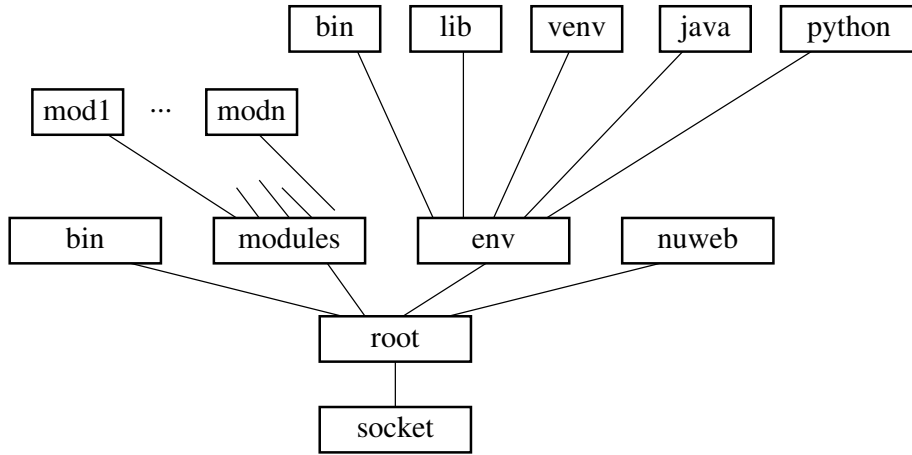


Figure 1: *Directory-structure of the pipeline (see text).*

the subdirectory contains the script `install-modules` that performs the installation, and a script `test` that shows that the pipeline works in a trivial case.

**env:** The programming environment. It contains a.o. the Java development kit, Python, the Python virtual environment (**venv**), libraries and binaries.

$\langle$  *directories to create 4a*  $\rangle \equiv$   
`../modules`  $\diamond$

Fragment defined by [4abc](#), [9afg](#), [13e](#), [44b](#).  
 Fragment referenced in [49b](#).

$\langle$  *directories to create 4b*  $\rangle \equiv$   
`../bin ../env/bin`  $\diamond$

Fragment defined by [4abc](#), [9afg](#), [13e](#), [44b](#).  
 Fragment referenced in [49b](#).

$\langle$  *directories to create 4c*  $\rangle \equiv$   
`../env/lib`  $\diamond$

Fragment defined by [4abc](#), [9afg](#), [13e](#), [44b](#).  
 Fragment referenced in [49b](#).

The following macro defines variable `piperoot` and makes it to point to the root directory in figure 1. Next it defines variables that point to other directories in the figure. The value-setting of `piperoot` can be overruled by defining the variable before running any of the script. In this way the directory tree can be moved to another location, even to another computer, after successful installation.

```

⟨ set variables that point to the directory-structure 5a ⟩ ≡
  if
    [ "$piperoot" == "" ]
  then
    export piperoot=/usr/local/share/pipelines/nlpp
  fi
  export pipesocket=${piperoot%%/nlpp}
  export nuwebdir=$piperoot/nuweb
  export envdir=$piperoot/env
  export envbindir=$envdir/bin
  export envlibdir=$envdir/lib
  export modulesdir=$piperoot/modules
  export pipebin=$piperoot/bin
  export javadir=$envdir/java
  export jarsdir=$javadir/jars
  ◇

```

Fragment defined by 5ab.

Fragment referenced in 5c, 15b, 50b.

Uses: nuweb 45d.

Add the environment bin directory to PATH:

```

⟨ set variables that point to the directory-structure 5b ⟩ ≡
  export PATH=$envbindir:$PATH
  ◇

```

Fragment defined by 5ab.

Fragment referenced in 5c, 15b, 50b.

Defines: PATH 9e, 10b.

Put the macro to set variables in a script that can later be sourced by the scripts of the pipeline modules.

```

"../env/bin/progenv" 5c≡
  #!/bin/bash
  ⟨ set variables that point to the directory-structure 5a, ... ⟩
  ◇

```

File defined by 5c, 8c.

## 2 How to obtain modules and other material

As illustrated in tables 1 and 2, most of the modules are obtained as source-code from Github, some of the modules or parts of some modules are downloaded from a snapshot, and some of the utilities are obtained in binary form from the supplier.

This section builds standardised methods to obtain modules and utilities from Github or from the snapshot.

### 2.1 Location-dependency

The basic way of installation is, to clone this repository from Github on the intended location in the file-system of the target computer and then run the install-scripts. However, it may be advantageous to be able to transplant a complete installation to another location in another computer. This could be done by making all path-descriptions in all scripts relative to anchorpoints

within the installation, while it may be hard to find such anchorpoints in advance. Therefore, we take another approach in which we supply a script that repairs paths-descriptions after the transplantation (section A.8).

## 2.2 Reversible update

This script might be used to update an existing installation. To minimize the risk that the “update” actually ruins an existing installation, move existing modules away before installing the latest version. When the new modules has been installed succesfully, the moved module will be removed. The following macro’s help to achieve this:

```

⟨ move module 6a ⟩ ≡
  if
    [ -e @1 ]
  then
    mv @1 old.@1
  fi
  ◇

```

Fragment referenced in 7a, 14c, 37a.

```

⟨ remove old module 6b ⟩ ≡
  rm -rf old.@1
  ◇

```

Fragment referenced in 7a, 14c, 37a.

```

⟨ re-instate old module 6c ⟩ ≡
  mv old.@1 @1
  MESS="Replaced previous version of @1"
  ⟨ logmess (6d $MESS ) 36c ⟩
  ◇

```

Fragment referenced in 7a, 14c, 37a.

## 2.3 Installation from Github

The following macro can be used to install a module from Github. Before issuing this macro, the following four variables must be set:

**MODNAM:** Name of the module.

**DIRN:** Name of the root directory of the module.

**GITU:** Github URL to clone from.

**GITC:** Github commit-name or version tag.

```

< install from github 7a > ≡
  cd $modulesdir
  < move module (7b $DIRN ) 6a >
  git clone $GITU
  if
    [ $? -gt 0 ]
  then
    < logmess (7c Cannot install current $MODNAM version ) 36c >
    < re-instate old module (7d $DIRN ) 6c >
  else
    < remove old module (7e $DIRN ) 6b >
    cd $modulesdir/$DIRN
    git checkout $GITC
  fi

```

◇

Fragment referenced in 22c, 23a, 25d, 27b, 32d, 35a.

## 2.4 Installation from the snapshot

The snapshot can be accessed over scp on URL [newsreader@kyoto.let.vu.nl](mailto:newsreader@kyoto.let.vu.nl). Access is protected by a public/private key system. So, a private key is needed and this program expects to find the key as `$pipesocket/nrkey`. The key can be obtained from the author. Let us check whether we indeed do have the key:

```

< check this first 7f > ≡
  if
    [ ! -e $pipesocket/nrkey ]
  then
    echo "No key to connect to snapshot!"
    exit 1
  fi

```

◇

Fragment defined by 7f, 16c.

Fragment referenced in 15b.

Use the following macro to download a resource if it is not already present in the “socket” directory. It turns out that sometimes there is a time-out for unknown reasons. In that case we will try it multiple times.

```

⟨ get or have 8a ⟩ ≡
    counter=0
    while
        [ ! -e $pipesocket/@1 ]
    do
        cd $pipesocket
        scp -i "nrkey" newsreader@kyoto.let.vu.nl:nlpp_resources/@1 .
        if
            [ $? -gt 0 ]
        then
            counter=$((counter+1))
            if
                [ $counter -gt 3 ]
            then
                echo "Cannot contact snapshot server"
                exit 1
            fi
        fi
    done

```

Fragment referenced in 9b, 11b, 17b, 20a, 21a, 25a, 26be, 28c, 32a, 33e, 34b, 35c.

### 3 Java and Python environment

To be independent from the software environment of the host computer and to perform reproducible processing, the pipeline features its own Java and Python environment. The costs of this feature are that the pipeline takes more disk-space by reproducing infra-structure that is already present in the system and that installation takes more time.

The following macro generates a script that specifies the programming environment. Initially it is empty, because we have to create the programming environment first.

```

⟨ create javapython script 8b ⟩ ≡
    echo '#!/bin/bash' > /usr/local/share/pipelines/nlpp/env/bin/javapython

```

Fragment referenced in 15b.

Cause the module scripts to read the javapython script.

```

"../env/bin/progenv" 8c ≡
    source $envbindir/javapython

```

File defined by 5c, 8c.

#### 3.1 Java

To install Java, download `server-jre-7u72-linux-x64.tar.gz` from <http://www.oracle.com/technetwork/java/javase/downloads/server-jre7-downloads-1931105.html>. Find it in the root directory and unpack it in a subdirectory of `envdir`.



```

< directories to create 9a > ≡
    ../env/java ◇

```

Fragment defined by [4abc](#), [9afg](#), [13e](#), [44b](#).

Fragment referenced in [49b](#).

```

< set up java 9b > ≡
    < get or have (9c server-jre-7u72-linux-x64.tar.gz ) 8a >
    cd $envdir/java
    tar -xzf $pipesocket/server-jre-7u72-linux-x64.tar.gz
    ◇

```

Fragment defined by [9be](#).

Fragment referenced in [15b](#).

Remove the java-ball when cleaning up:

```

< clean up 9d > ≡
    rm -rf $pipesocket/server-jre-7u72-linux-x64.tar.gz
    ◇

```

Fragment defined by [9d](#), [10c](#), [17f](#), [33g](#), [40c](#).

Fragment referenced in [39d](#).

```

< set up java 9e > ≡

```

```

    echo 'export JAVA_HOME=$envdir/java/jdk1.7.0_72' >> /usr/local/share/pipelines/nlpp/env/bin/javapython
    echo 'export PATH=$JAVA_HOME/bin:$PATH' >> /usr/local/share/pipelines/nlpp/env/bin/javapython
    export JAVA_HOME=$envdir/java/jdk1.7.0_72
    export PATH=$JAVA_HOME/bin:$PATH
    ◇

```

Fragment defined by [9be](#).

Fragment referenced in [15b](#).

Uses: [PATH 5b](#).

Put jars in the jar subdirectory of the java directory:

```

< directories to create 9f > ≡
    ../env/java/jars ◇

```

Fragment defined by [4abc](#), [9afg](#), [13e](#), [44b](#).

Fragment referenced in [49b](#).

## 3.2 Maven

Some Java-based modules can best be compiled with [Maven](#).

```

< directories to create 9g > ≡
    ../env/apache-maven-3.0.5 ◇

```

Fragment defined by [4abc](#), [9afg](#), [13e](#), [44b](#).

Fragment referenced in [49b](#).

```

< install maven 10a > ≡
    cd $envdir
    wget http://apache.rediris.es/maven/maven-3/3.0.5/binaries/apache-maven-3.0.5-
    bin.tar.gz
    tar -xzf apache-maven-3.0.5-bin.tar.gz
    rm apache-maven-3.0.5-bin.tar.gz
    ◇

```

Fragment defined by [10ab](#).  
 Fragment referenced in [15b](#).

```

< install maven 10b > ≡
    export MAVEN_HOME=$envdir/apache-maven-3.0.5
    export PATH=${MAVEN_HOME}/bin:${PATH}
    ◇

```

Fragment defined by [10ab](#).  
 Fragment referenced in [15b](#).  
 Uses: [PATH 5b](#).

When the installation has been done, remove maven, because it is no longer needed.

```

< clean up 10c > ≡
    rm -rf ../env/apache-maven-3.0.5
    ◇

```

Fragment defined by [9d](#), [10c](#), [17f](#), [33g](#), [40c](#).  
 Fragment referenced in [39d](#).

### 3.3 Python

Set up the environment for Python (version 2.7). I could not find an easy way to set up Python from scratch. Therefore we will use Python 2.7 if it has been installed on the host. Otherwise, we will use a binary distribution obtained from [ActiveState](#). A tarball of ActivePython can be obtained from the snapshot.

In order to be independent of the software on the host, we generate a virtual Python environment. In the virtual environment we will install KafNafParserPy and other Python packages that are needed.

```

< set up python 10d > ≡
    < check/install the correct version of python 11a >
    < create a virtual environment for Python 13b >
    < activate the python environment 13d, ... >
    < install kafnafparserpy 14c >
    < install python packages 15a >
    ◇

```

Fragment referenced in [15b](#).

```

< check/install the correct version of python 11a > ≡
pythonok='python --
version 2>&1 | gawk '{if(match($2, "2.7")) print "yes" ; else print "no" }'
if
[ "$pythonok" == "no" ]
then
  < install ActivePython 11b >
fi
◇

```

Fragment referenced in 10d.

Defines: pythonok Never used.

Uses: print 43b.

Unpack the tarball in a temporary directory and install active python in the `env` subdirectory of `nlpp`. It turns out that you must upgrade `pip`, `virtualenv` and `setuptools` after the installation (see <https://github.com/ActiveState/activepython-docker/commit/10fff72069e51dbd36330cb8a7c2f0845bcd7b3> and <https://github.com/ActiveState/activepython-docker/issues/1>).

```

< install ActivePython 11b > ≡
< get or have (11c ActivePython-2.7.8.10-linux-x86_64.tar.gz ) 8a >
pytinsdir='mktemp -d -t activepyt.XXXXXX'
cd $pytinsdir
tar -xzf $pipesocket/ActivePython-2.7.8.10-linux-x86_64.tar.gz
acdir='ls -1'
cd $acdir
./install.sh -I $envdir
cd $piperoot
rm -rf $pytinsdir
pip install -U pip virtualenv setuptools
◇

```

Fragment referenced in 11a.

### 3.3.1 Transplant ActivePython

Activepython produces scripts in `env/bin` that contain “shabangs” with absolute path. Furthermore, activePython seems to have an implicit `pythonpath` with an absolute path. So, when transplanting the directorytree to another location we have to solve these two problems.

While doing this, we also modify the scripts in the Python Virenv binary directory (see 3.3.2).

Modify the scripts as follows:

1. Create a temporary directory.
2. Generate an AWK script that replaces the shabang line with a correct one.
3. Generate a script that moves a script from `env/bin` to the temporary directory and then applies the AWK script.
4. Apply the generated script on the scripts in `env/bin`.

```

< set paths after transplantation 12a > ≡
    transdir='mktemp -d -t trans.XXXXXX'
    cd $transdir
    < write script tran 12d >
    < write script chasbang.awk 12e >
    < apply script tran on the scripts in (12b $envbindir ) 12f >
    < apply script tran on the scripts in (12c $envdir/venv/bin ) 12f >
    cd $projroot
    rm -rf $transdir
    ◇

```

Fragment defined by 12a, 13a, 14b.

Fragment referenced in 50b.

```

< write script tran 12d > ≡
    cat <<EOF >tran
    workfil=$1
    mv $workfil ./wor
    gawk -f chasbang.awk ./wor >$workfil
    EOF
    chmod 775 ./tran
    ◇

```

Fragment referenced in 12a.

```

< write script chasbang.awk 12e > ≡
    cat <<EOF >chasbang.awk
    #!/usr/bin/gawk -f
    BEGIN { shabang="#!$envbindir/python"}

    /\^#\!.*python.*/ { print shabang
                        next
                      }

    {print}
    EOF
    ◇

```

Fragment referenced in 12a.

Uses: print 43b.

The following looks complicated. The `find` command applies the `file` command on the files in the `env/bin` directory. The `grep` command filters out the names of the files that are scripts. it produces a filename, followed by a colon, followed by a description of the type of the file. The `gawk` command prints the filenames only and the `xargs` command applies the `tran` script on the file.

```

< apply script tran on the scripts in 12f > ≡
    find @1 -type f -exec file {} + | grep script | gawk '{print $1}' FS=':' | xargs -
    iaap ./tran aap
    ◇

```

Fragment referenced in 12a.

Uses: print 43b.

Add `env/lib/python2.7` to the `PYTHONPATH` variable.

```

< set paths after transplantation 13a > ≡
    echo export PYTHONPATH=\$envdir/lib/python2.7:\$PYTHONPATH >> \$envbindir/javapython
    export PYTHONPATH=\$envdir/lib/python2.7:\$PYTHONPATH
    ◇

```

Fragment defined by 12a, 13a, 14b.  
 Fragment referenced in 50b.  
 Uses: PYTHONPATH 14a.

### 3.3.2 Virtual environment

Create a virtual environment. To begin this, we need the Python module virtualenv on the host.

```

< create a virtual environment for Python 13b > ≡
    < test whether virtualenv is present on the host 13c >
    cd $envdir
    virtualenv venv
    ◇

```

Fragment referenced in 10d.  
 Uses: virtualenv 13c.

```

< test whether virtualenv is present on the host 13c > ≡
    which virtualenv
    if
        [ $? -ne 0 ]
    then
        echo Please install virtualenv
        exit 1
    fi
    ◇

```

Fragment referenced in 13b.  
 Defines: virtualenv 11b, 13b.

```

< activate the python environment 13d > ≡
    source $envdir/venv/bin/activate
    echo 'source $en-
    vdir/venv/bin/activate' >> /usr/local/share/pipelines/nlpp/env/bin/javapython
    ◇

```

Fragment defined by 13d, 14a.  
 Fragment referenced in 10d.  
 Defines: activate 14b.

Subdirectory \$envdir/python will contain general Python packages like KafnafParserPy.

```

< directories to create 13e > ≡
    ../env/python ◇

```

Fragment defined by 4abc, 9afg, 13e, 44b.  
 Fragment referenced in 49b.

Activation of Python include pointing to the place where Python packages are:

```

< activate the python environment 14a > ≡
    echo ex-
    port 'PYTHONPATH=$envdir/python:$PYTHONPATH' >> /usr/local/share/pipelines/nlpp/env/bin/javapython
    export PYTHONPATH=$envdir/python:$PYTHONPATH
    ◇

```

Fragment defined by 13d, 14a.

Fragment referenced in 10d.

Defines: PYTHONPATH 13a.

### 3.3.3 Transplant the virtual environment

It turns out that the script “activate” to engage the virtual environment contains an absolute path, in the definition of VIRTUAL\_ENV

```

< set paths after transplantation 14b > ≡
    transdir='mktemp -d -t trans.XXXXXX'
    cd $transdir
    cat <<EOF >redef.awk
    #!/usr/bin/gawk -f
    BEGIN { envd="$envdir/venv"}

    /~VIRTUAL_ENV=/ { print "VIRTUAL_ENV=\"" envd "\""
                      next
                    }

    {print}
    EOF

    mv $envdir/venv/bin/activate .
    gawk -f redef.awk ./activate > $envdir/venv/bin/activate
    cd $projroot
    rm -rf $transdir
    ◇

```

Fragment defined by 12a, 13a, 14b.

Fragment referenced in 50b.

Uses: activate 13d, print 43b.

### 3.3.4 KafNafParserPy

A cornerstone Pythonmodule for the pipeline is [KafNafParserPy](#). It is a feature of this module that you cannot install it with PIP, but that you can add it to your PYTHONPATH.

```

< install kafnafparserpy 14c > ≡
    cd $envdir/python
    DIRN=KafNafParserPy
    < move module (14d $DIRN ) 6a >
    git clone https://github.com/cltl/KafNafParserPy.git
    if
        [ $? -gt 0 ]
    then
        < logmess (14e Cannot install current $DIRN version ) 36c >
        < re-instate old module (14f $DIRN ) 6c >
    else
        < remove old module (14g $DIRN ) 6b >
    fi
    ◇

```

Fragment referenced in 10d.

### 3.3.5 Python packages

Install python packages:

**lxml:**

**pyyaml:** for coreference-graph

```

< install python packages 15a > ≡
    pip install lxml
    pip install pyyaml
    ◇

```

Fragment referenced in 10d.

Defines: **lxml** Never used, **pyyaml** Never used.

## 4 Installation of the modules

This section describes how the modules are obtained from their (open-)source and installed.

### 4.1 The installation script

The installation is performed by script `install-modules`. The first part of the script installs the utilities:

```

"../bin/install-modules" 15b≡
    #!/bin/bash
    echo Set up environment
    < set variables that point to the directory-structure 5a, ... >
    < variables of install-modules 36b >
    < check this first 7f, ... >
    < create javapython script 8b >
    echo ... Java
    < set up java 9b, ... >
    < install maven 10a, ... >
    echo ... Python
    < set up python 10d >
    echo ... Alpino
    < install Alpino 17b >
    echo ... Spotlight
    < install the Spotlight server 21a, ... >
    echo ... Treetagger
    < install the treetagger utility 18a, ... >
    echo ... Ticcutils and Timbl
    < install the ticcutils utility 19c >
    < install the timbl utility 19d >
    ◇

```

File defined by 15b, 16a.

Next, install the modules:

```

"../bin/install-modules" 16a≡
    echo Install modules
    echo ... Tokenizer
    <install the tokenizer 22a>
    echo ... Morphosyntactic parser
    <install the morphosyntactic parser 22c>
    echo ... NERC
    <install the NERC module 23c>
    echo ... Coreference base
    <install coreference-base 23a>
    echo ... WSD
    <install the WSD module 25d>
    echo ... Ontotagger
    <install the onto module 28c>
    echo ... Heideltime
    <install the new heideltime module 32a>
    echo ... SRL
    <install the srl module 32d>
    echo ... NED
    <install the NED module 27b>
    echo ... Event-coreference
    <install the event-coreference module 34b>
    echo ... lu2synset
    <install the lu2synset converter 26e>
    echo ... dbpedia-ner
    <install the dbpedia-ner module 35a>
    echo ... nominal event
    <install the nomevent module 35c>
    <install the post-SRL module 33e>
    echo Final
    ◇

```

File defined by 15b, 16a.

```

<make scripts executable 16b> ≡
    chmod 775 ../bin/install-modules
    ◇

```

Fragment defined by 16b, 49c.

Fragment referenced in 49d.

## 4.2 Check availability of resources

Test for some resources that we need and that may not be available on this host.

```

<check this first 16c> ≡
    <check whether mercurial is present 17a>
    ◇

```

Fragment defined by 7f, 16c.

Fragment referenced in 15b.



```

< check whether mercurial is present 17a > ≡
    which hg
    if
        [ $? -ne 0 ]
    then
        echo Please install Mercurial.
        exit 1
    fi
◇

```

Fragment referenced in 16c.

Defines: hg 23a.

### 4.3 Install utilities and resources

#### 4.3.1 Alpino

Binary versions of Alpino can be obtained from the [official Alpino website](#) of Gertjan van Noort. However, it seems that older versions are not always retained there, or the location of older versions change. Therefore we have a copy in the snapshot.

##### Module

```

< install Alpino 17b > ≡
    < get or have (17c Alpino-x86_64-linux-glibc2.5-20706-sicstus.tar.gz ) 8a >
    cd $modulesdir
    tar -xzf $pipesocket/Alpino-x86_64-linux-glibc2.5-20706-sicstus.tar.gz
    < logmess (17d Installed Alpino ) 36c >
◇

```

Fragment referenced in 15b.

Currently, alpino is not used as a pipeline-module on its own, but it is included in other pipeline-modules. Modules that use Alpino should set the following variables:

```

< set alpinohome 17e > ≡
    export ALPINO_HOME=$modulesdir/Alpino
◇

```

Fragment referenced in 22d.

Defines: ALPINO\_HOME Never used.

Remove the tarball when cleaning up:

```

< clean up 17f > ≡
    rm -rf $pipesocket/Alpino-x86_64-linux-glibc2.5-20706-sicstus.tar.gz
◇

```

Fragment defined by 9d, 10c, 17f, 33g, 40c.

Fragment referenced in 39d.

#### 4.3.2 Treetagger

Installation of Treetagger goes as follows (See [Treetagger's homepage](#)):

1. Download and unpack the Treetagger tarball. This generates the subdirectories bin, cmd and doc

## 2. Download and unpack the tagger-scripts tarball

The location where Treetagger comes from and the location where it is going to reside:

```
< install the treetagger utility 18a > ≡
TREETAGDIR=treetagger
TREETAG_BASIS_URL=http://www.cis.uni-muenchen.de/%7Eschmid/tools/TreeTagger/data/
TREETAGURL=http://www.cis.uni-muenchen.de/%7Eschmid/tools/TreeTagger/data/
◇
```

Fragment defined by 18abcde, 19ab.

Fragment referenced in 15b.

The source tarball, scripts and the installation-script:

```
< install the treetagger utility 18b > ≡
TREETAGSRC=tree-tagger-linux-3.2.tar.gz
TREETAGSCRIPTS=tagger-scripts.tar.gz
TREETAG_INSTALLSCRIPT=install-tagger.sh
◇
```

Fragment defined by 18abcde, 19ab.

Fragment referenced in 15b.

Parametersets:

```
< install the treetagger utility 18c > ≡
DUTCHPARS_UTF_GZ=dutch-par-linux-3.2-utf8.bin.gz
DUTCH_TAGSET=dutch-tagset.txt
DUTCHPARS_2_GZ=dutch2-par-linux-3.2-utf8.bin.gz
◇
```

Fragment defined by 18abcde, 19ab.

Fragment referenced in 15b.

Download everything in the target directory:

```
< install the treetagger utility 18d > ≡
mkdir -p $modulesdir/$TREETAGDIR
cd $modulesdir/$TREETAGDIR
wget $TREETAGURL/$TREETAGSRC
wget $TREETAGURL/$TREETAGSCRIPTS
wget $TREETAGURL/$TREETAG_INSTALLSCRIPT
wget $TREETAGURL/$DUTCHPARS_UTF_GZ
wget $TREETAGURL/$DUTCH_TAGSET
wget $TREETAGURL/$DUTCHPARS_2_GZ
◇
```

Fragment defined by 18abcde, 19ab.

Fragment referenced in 15b.

Run the install-script:

```
< install the treetagger utility 18e > ≡
chmod 775 $TREETAG_INSTALLSCRIPT
./$TREETAG_INSTALLSCRIPT
◇
```

Fragment defined by 18abcde, 19ab.

Fragment referenced in 15b.

Make the treetagger utilities available for everybody.

```
< install the treetagger utility 19a > ≡
  chmod -R o+rx $modulesdir/$TREETAGDIR/bin
  chmod -R o+rx $modulesdir/$TREETAGDIR/cmd
  chmod -R o+r $modulesdir/$TREETAGDIR/doc
  chmod -R o+rx $modulesdir/$TREETAGDIR/lib
  ◇
```

Fragment defined by 18abcde, 19ab.

Fragment referenced in 15b.

Remove the tarballs:

```
< install the treetagger utility 19b > ≡
  rm $TREETAGSRC
  rm $TREETAGSCRIPTS
  rm $TREETAG_INSTALLSCRIPT
  rm $DUTCHPARS_UTF_GZ
  rm $DUTCH_TAGSET
  rm $DUTCHPARS_2_GZ
  ◇
```

Fragment defined by 18abcde, 19ab.

Fragment referenced in 15b.

#### 4.3.3 Timbl and Ticcutils

Timbl and Ticcutils are installed from their source-tarballs. The installation is not (yet?) completely reproducibe because it uses the C-compiler that happens to be available on the host. Installation involves:

1. Download the tarball in a temporary directory.
2. Unpack the tarball.
3. cd to the unpacked directory and perform `./configure`, `make` and `make install`. Note the argument that causes the files to be installed in the `lib` and the `bin` sub-directories of the `env` directory.

```
< install the ticcutils utility 19c > ≡
  URL=http://software.ticc.uvt.nl/ticcutils-0.7.tar.gz
  TARB=ticcutils-0.7.tar.gz
  DIR=ticcutils-0.7
  < unpack ticcutils or timbl 20a >
  ◇
```

Fragment referenced in 15b, 20c.

```
< install the timbl utility 19d > ≡
  TARB=timbl-6.4.6.tar.gz
  DIR=timbl-6.4.6
  < unpack ticcutils or timbl 20a >
  ◇
```

Fragment referenced in 15b, 20c.

```

< unpack ticcutils or timbl 20a > ≡
  < get or have (20b $TARB ) 8a >
  SUCCES=0
  ticbeldir='mktemp -t -d tickbel.XXXXXX'
  cd $ticbeldir
  tar -xzf $pipesocket/$TARB
  cd $DIR
  ./configure --prefix=$envdir
  make
  make install
  cd $piperoot
  rm -rf $ticbeldir
  ◇

```

Fragment referenced in 19cd.

When the installation has been transplanted, Timbl and Ticcutils have to be re-installed.

```

< re-install modules after the transplantation 20c > ≡
  < install the ticcutils utility 19c >
  < install the timbl utility 19d >
  ◇

```

Fragment referenced in 50b.

#### 4.3.4 Spotlight

Install Spotlight in the way that Itziar Aldabe (<mailto:itziar.aldabe@ehu.es>) described:

The NED module works for English, Spanish, Dutch and Italian. The module returns multiple candidates and correspondences for all the languages. If you want to integrate it in your Dutch or Italian pipeline, you will need:

1. The jar file with the dbpedia-spotlight server. You need the version that Aitor developed in order to correctly use the "candidates" option. You can copy it from the English VM. The jar file name is `dbpedia-spotlight-0.7-jar-with-dependencies-candidates.jar`
2. The Dutch/Italian model for the dbpedia-spotlight. You can download them from: <http://spotlight.sztaki.hu/downloads/>
3. The jar file with the NED module: `ixa-pipe-ned-1.0.jar`. You can copy it from the English VM too.
4. The file: `wikipedia-db.v1.tar.gz`. You can download it from: <http://ixa2.si.ehu.es/ixa-pipes/models/wikipedia-db.v1.tar.gz>. This file contains the required information to do the mappings between the wikipedia-entries. The zip file contains three files: `wikipedia-db`, `wikipedia-db.p` and `wikipedia-db.t`

To start the dbpedia server: Italian server:

```
java -jar -Xmx8g dbpedia-spotlight-0.7-jar-with-dependencies-candidates.jar \
it http://localhost:2050/rest
```

Dutch server:

```
java -jar -Xmx8g dbpedia-spotlight-0.7-jar-with-dependencies-candidates.jar nl http://local
```

We set 8Gb for the English server, but the Italian and Dutch Spotlight will require less memory.

So, let's do that.

```

< install the Spotlight server 21a > ≡
  < get or have (21b spotlightnl.tgz ) 8a >
  cd $envdir
  tar -xzf $pipesocket/spotlightnl.tgz
  cd $envdir/spotlight
  wget http://spotlight.sztaki.hu/downloads/nl.tar.gz
  tar -xzf nl.tar.gz
  rm nl.tar.gz
  ◇

```

Fragment defined by 21ac.  
 Fragment referenced in 15b.

We choose to put the Wikipedia database in the spotlight directory.

```

< install the Spotlight server 21c > ≡
  cd $envdir/spotlight
  wget http://ixa2.si.ehu.es/ixa-pipes/models/wikipedia-db.v1.tar.gz
  tar -xzf wikipedia-db.v1.tar.gz
  rm wikipedia-db.v1.tar.gz
  ◇

```

Fragment defined by 21ac.  
 Fragment referenced in 15b.

```

< start the Spotlight server 21d > ≡
  cd /usr/local/share/pipelines/nlpp/env/spotlight
  java -jar -Xmx8g dbpedia-spotlight-0.7-jar-with-dependencies-
  candidates.jar nl http://localhost:2060/rest &
  ◇

```

Fragment referenced in 21e.

We start the spotlight-server only in case it is not already running. Assume that Spotlight runs when something listens on port 2060 of localhost:

```

< check/start the Spotlight server 21e > ≡
  spottasks='netstat -an | grep :2060 | wc -l'
  if
    [ $spottasks -eq 0 ]
  then
    < start the Spotlight server 21d >
    sleep 60
  fi
  ◇

```

Fragment referenced in 28b, 35b.

## 4.4 Install modules

### 4.4.1 Install tokenizer

*Module* The tokenizer is just a jar that has to be run in Java. Although the jar is directly available from <http://ixa2.si.ehu.es/ixa-pipes/download.html>, we prefer to compile the package in order to make this thing ready for reproducible set-ups.

To install the tokenizer, we proceed as follows:

1. Clone the source from github into a temporary directory.
2. Compile to produce the jar file with the tokenizer.
3. move the jar file into the jar directory.
4. remove the tempdir with the sourcecode.

```

< install the tokenizer 22a > ≡
tempdir='mktemp -d -t tok.XXXXXX'
cd $tempdir
git clone https://github.com/ixa-ehu/ixa-pipe-tok.git
cd ixa-pipe-tok
git checkout 56f83ce4b61680346f15e5d4e6de6293764f7383
mvn clean package
mv target/ixa-pipe-tok-1.8.0.jar $jarsdir
cd $piperoot
rm -rf $tempdir
◇

```

Fragment referenced in 16a.

*Script* The script runs the tokenizerscript.

```

"../bin/tok" 22b≡
#!/bin/bash
source /usr/local/share/pipelines/nlpp/env/bin/progenv
JARFILE=$jarsdir/ixa-pipe-tok-1.8.0.jar
java -Xmx1000m -jar $JARFILE tok -l nl --inputkaf
◇

```

#### 4.4.2 Morphosyntactic parser

*Module*

```

< install the morphosyntactic parser 22c > ≡
MODNAM=morphsynparser
DIRN=morphosyntactic_parser_nl
GITU=https://github.com/cltl/morphosyntactic_parser_nl.git
GITC=c6cabea2cc37ac3098c5927f5ec5b180ac31246f
< install from github 7a >
cd $modulesdir/morphosyntactic_parser_nl
git checkout c6cabea2cc37ac3098c5927f5ec5b180ac31246f
◇

```

Fragment referenced in 16a.

*Script*

```

"../bin/mor" 22d≡
#!/bin/bash
source /usr/local/share/pipelines/nlpp/env/bin/progenv
ROOT=$piperoot
MODDIR=$modulesdir/morphosyntactic_parser_nl
< set alpinohome 17e >
cat | python $MODDIR/core/morph_syn_parser.py
◇

```

## 4.4.3 Nominal coreference-base

Get this thing from Github (<https://github.com/opener-project/coreference-base/>) and apply the instruction of <https://github.com/opener-project/coreference-base/blob/master/core/README.md>. We implement it, but it does not work yet, because it is too picky on the structure of the NAF format.

*Module*

```

< install coreference-base 23a > ≡
  MODNAM=coreference-base
  DIRN=coreference-base
  GITU=https://github.com/opener-project/coreference-base.git
  GITC=bfa5aec0fa498e57fe14dd4d2c51365dd09a0757
  < install from github 7a >
  pip install --upgrade hg+https://bitbucket.org/Josu/pykaf#egg=pykaf
  pip install --upgrade networkx
  ◇

```

Fragment referenced in 16a.

Uses: hg 17a.

*Script*

```

"../bin/coreference-base" 23b ≡
  #!/bin/bash
  source /usr/local/share/pipelines/nlpp/env/bin/progenv
  cd $modulesdir/coreference-base/core
  cat | python -m corefgraph.process.file --language nl --singleton --sieves NO
  ◇

```

## 4.4.4 Named entity recognition (NERC)

*Module* The Nerc program can be installed from Github (<https://github.com/ixa-ehu/ixa-pipe-nerc>). However, the model that is needed is not publicly available. Therefore, models have been put in the snapshot-tarball.

```

< install the NERC module 23c > ≡
  < compile the nerc jar 24 >
  < get the nerc models 25a >
  ◇

```

Fragment referenced in 16a.

The nerc module is a Java program that is contained in a jar. Put the source from Github in a temporary directory, compile the jar with java and move the jar to the jars directory.

```

⟨ compile the nerc jar 24 ⟩ ≡
    TEMPDIR='mktemp -d -t nerc.XXXXXX'
    cd $TEMPDIR
    git clone https://github.com/ixa-ehu/ixa-pipe-nerc
    cd ixa-pipe-nerc/
    git checkout 5cacac28fcaa6e91d5f2a4cc9b486b24ac163641
    mvn clean package
    mv target/ixa-pipe-nerc-1.5.2.jar $jarsdir/
    cd $nuwebdir
    rm -rf $TEMPDIR
    ◇

```

Fragment referenced in 23c.

The current version of the pipeline uses the following models, that have been made available by Rodrigo Agerri on march 2, 2015. Rodrigo wrote:

I have recently trained new models for Dutch using both the CoNLL 2002 and the Sonar corpora. These models are better than the one currently being used in the Dutch Newsreader pipeline. They are not yet in the resources of the ixa pipes (no public yet) but in the meantime they might be useful if you plan to do some processing in Dutch.

For CoNLL 2002, the new model obtains 83.46 F1, being the previously best published result 77.05 on that dataset.

The Sonar model is trained on the full corpus, and evaluated using random 10 fold cross validation. The only previous result I know of obtains 80.71 F1 wrt to our model which obtains 87.84. However, because it is not evaluated on a separate test partition I do not take these results too seriously.

You will need to update the ixa-pipe-nerc module. The CoNLL 2002 model runs as before but to use the Sonar model you need to add the extra parameter `--clearFeatures` yes, like this:

```

Sonar model: cat file.pos.naf | java -jar ixa-pipe-nerc-1.3.6.jar tag
-m $nermodel --clearFeatures yes
CoNLL model: cat file.pos.naf | java -jar ixa-pipe-nerc-1.3.6.jar tag
-m $nermodel

```

<http://www.lt3.ugent.be/en/publications/fine-grained-dutch-named-entity-recognition/>

[..]

In any case, here are the models.

<http://ixa2.si.ehu.es/ragerri/dutch-nerc-models.tar.gz>

The tarball `dutch-nerc-models.tar.gz` contains the models `nl-clusters-conll102.bin` and `nl-clusters-sonar.bin`. Both models have been placed in subdirectory `/nerc-models-nl/nerc-resources/nl` of the snapshot.



```

⟨ get the nerc models 25a ⟩ ≡
  ⟨ get or have (25b nerc-models-nl.tgz ) 8a ⟩
  mkdir -p $modulesdir/nerc-models-nl
  cd $modulesdir/nerc-models-nl
  tar -xzf $pipesocket/nerc-models-nl.tgz
  chmod -R 775 $modulesdir/nerc-models-nl
  ◇

```

Fragment referenced in 23c.

*Script* Make a script that uses the conll02 model and a script that uses the Sonar model

```

"../bin/nerc_conll02" 25c≡
  #!/bin/bash
  source /usr/local/share/pipelines/nlpp/env/bin/progenv
  MODDIR=$modulesdir/nerc-models-nl
  JAR=$jarsdir/ixa-pipe-nerc-1.5.2.jar
  MODEL=nl-clusters-conll02.bin
  cat | java -Xmx1000m -jar $JAR tag -m $MODDIR/nl/$MODEL
  ◇

```

#### 4.4.5 Wordsense-disambiguation

Install WSD from its Github source ([https://github.com/cltl/svm\\_wsd.git](https://github.com/cltl/svm_wsd.git)). According to the `readme` of that module, the next thing to do is, to execute install-script `install.sh` or `install_naf.sh`. The latter script installs a “Support-Vector-Machine” (SVM) module, “Dutch-SemCor” (DSC) models and `KafNafParserPy`.

*Module*

```

⟨ install the WSD module 25d ⟩ ≡
  MODNAM=wsd
  DIRN=svm_wsd
  GITU=https://github.com/cltl/svm_wsd.git
  GITC=2babeb40a81b3720274a0521ccc2a27c5eff28c9
  ⟨ install from github 7a ⟩
  cd $modulesdir/svm_wsd
  ⟨ install svm lib 26a ⟩
  ⟨ download svm models 26b ⟩
  ◇

```

Fragment referenced in 16a.

This part has been copied from `install_naf.sh` in the WSD module.

```

< install svm lib 26a > ≡
    mkdir lib
    cd lib
    wget --no-check-
    certificate https://github.com/cjlin1/libsvm/archive/master.zip 2>/dev/null
    zip_name='ls -1 | head -1'
    unzip $zip_name > /dev/null
    rm $zip_name
    folder_name='ls -1 | head -1'
    mv $folder_name libsvm
    cd libsvm/python
    make > /dev/null 2> /dev/null
    echo LIBSVM installed correctly lib/libsvm
    ◇

```

Fragment referenced in 25d.

This part has also been copied from `install_naf.sh` in the WSD module.

```

< download svm models 26b > ≡
    < get or have (26c svm_wsd.tgz ) 8a >
    cd $modulesdir
    tar -xzf $pipesocket/svm_wsd.tgz
    ◇

```

Fragment referenced in 25d.

### Script

```

"../bin/wsd" 26d≡
    #!/bin/bash
    # WSD -- wrapper for word-sense disambiguation
    # 8 Jan 2014 Ruben Izquierdo
    # 16 sep 2014 Paul Huygen
    source /usr/local/share/pipelines/nlpp/env/bin/progenv
    WSDDIR=$modulesdir/svm_wsd
    WSDSCRIPT=dsc_wsd_tagger.py
    cat | python $WSDDIR/$WSDSCRIPT --naf
    ◇

```

#### 4.4.6 Lexical-unit converter

*Module* There is not an official repository for this module yet, so copy the module from the tarball.

```

< install the lu2synset converter 26e > ≡
    < get or have (26f lu2synset.tgz ) 8a >
    cd $modulesdir
    tar -xzf $pipesocket/lu2synset.tgz
    ◇

```

Fragment referenced in 16a.

*Script*

```
"../bin/lu2synset" 27a≡
#!/bin/bash
source /usr/local/share/pipelines/nlpp/env/bin/progenv
ROOT=$piperoot
JAVAILIBDIR=$modulesdir/lexicalunitconvertor/lib
RESOURCESDIR=$modulesdir/lexicalunitconvertor/resources
JARFILE=WordnetTools-1.0-jar-with-dependencies.jar
java -Xmx812m -
cp $JAVAILIBDIR/$JARFILE vu.wntools.util.NafLexicalUnitToSynsetReferences \
--wn-lmf "$RESOURCESDIR/cornetto2.1.lmf.xml" --format naf
◇
```

## 4.4.7 NED

The NED module is rather picky about the structure of the NAF file. In any case, it does not accept a file that has been produced by the ontotagger. Hence, in a pipeline NED should be executed before the ontotagger.

The NED module wants to consult the Dbpedia Spotlight server, so that one has to be installed somewhere. For this moment, let us suppose that it has been installed on localhost.

*Module*

```
<install the NED module 27b> ≡
<put spotlight jar in the Maven repository 28a>
MODNAM=ned
DIRN=ixa-pipe-ned
GITU=https://github.com/ixa-ehu/ixa-pipe-ned.git
GITC=d35d4df5cb71940bf642bb1a83e2b5b7584010df
<install from github 7a>
cd $modulesdir/ixa-pipe-ned
mvn -Dmaven.compiler.target=1.7 -Dmaven.compiler.source=1.7 clean package
mv target/ixa-pipe-ned-1.1.1.jar $jarsdir/
◇
```

Fragment referenced in 16a.

NED needs to have dbpedia-spotlight-0.7.jar in the local Maven repository. That is a different jar than the jar that we use to start Spotlight.

```

< put spotlight jar in the Maven repository 28a > ≡
    echo Put Spotlight jar in the Maven repository.
    tempdir='mktemp -d -t simplespot.XXXXXX'
    cd $tempdir
    wget http://spotlight.sztaki.hu/downloads/dbpedia-spotlight-0.7.jar
    wget http://spotlight.sztaki.hu/downloads/nl.tar.gz
    tar -xzf nl.tar.gz
    MVN_SPOTLIGHT_OPTIONS="-Dfile=dbpedia-spotlight-0.7.jar"
    MVN_SPOTLIGHT_OPTIONS="$MVN_SPOTLIGHT_OPTIONS -DgroupId=ixa"
    MVN_SPOTLIGHT_OPTIONS="$MVN_SPOTLIGHT_OPTIONS -DartifactId=dbpedia-spotlight"
    MVN_SPOTLIGHT_OPTIONS="$MVN_SPOTLIGHT_OPTIONS -Dversion=0.7"
    MVN_SPOTLIGHT_OPTIONS="$MVN_SPOTLIGHT_OPTIONS -Dpackaging=jar"
    MVN_SPOTLIGHT_OPTIONS="$MVN_SPOTLIGHT_OPTIONS -DgeneratePom=true"
    mvn install:install-file $MVN_SPOTLIGHT_OPTIONS

    cd $PROJROOT
    rm -rf $tempdir
    ◇

```

Fragment referenced in 27b.

### Script

```

"../bin/ned" 28b ≡
    #!/bin/bash
    source /usr/local/share/pipelines/nlpp/env/bin/progenv
    ROOT=$piperoot
    JARDIR=$jarsdir
    < check/start the Spotlight server 21e >
    cat | java -Xmx1000m -jar $jarsdir/ixa-pipe-ned-1.1.1.jar -p 2060 -e candidates -
    i $envdir/spotlight/wikipedia-db -n nlEn
    ◇

```

### 4.4.8 Ontotagger

We do not yet have a source-repository of the Ontotagger module. Therefore, install from a snapshot (vua-ontotagger-v1.0.tar.gz).

### Module

```

< install the onto module 28c > ≡
    < get or have (28d vua-ontotagger-v1.0.tar.gz ) 8a >
    cd $modulesdir
    tar -xzf $pipesocket/vua-ontotagger-v1.0.tar.gz
    rm $pipesocket/vua-ontotagger-v1.0.tar.gz
    chmod -R o+r $modulesdir/vua-ontotagger-v1.0
    ◇

```

Fragment referenced in 16a.

### Script

```

"../bin/onto" 29≡
    #!/bin/bash
    source /usr/local/share/pipelines/nlpp/env/bin/progenv
    ROOT=$piperoot
    ONTODIR=$modulesdir/vua-ontotagger-v1.0
    JARDIR=$ONTODIR/lib
    RESOURCESDIR=$ONTODIR/resources
    PREDICATEMATRIX="$RESOURCESDIR/PredicateMatrix_nl_lu_withESO.v0.2.role.txt"
    GRAMMATICALWORDS="$RESOURCESDIR/grammaticals/Grammatical-words.nl"
    TMPFIL='mktemp -t stap6.XXXXXX'
    cat >$TMPFIL

    CLASSPATH=$JARDIR/ontotagger-1.0-jar-with-dependencies.jar
    JAVASCRIPT=eu.kyotoproject.main.KafPredicateMatrixTagger

    MAPPINGS="fn;mcr;ili;eso"
    JAVA_ARGS="--mappings $MAPPINGS"
    JAVA_ARGS="$JAVA_ARGS --key odwn-eq"
    JAVA_ARGS="$JAVA_ARGS --version 1.1"
    JAVA_ARGS="$JAVA_ARGS --predicate-matrix $PREDICATEMATRIX"
    JAVA_ARGS="$JAVA_ARGS --grammatical-words $GRAMMATICALWORDS"
    JAVA_ARGS="$JAVA_ARGS --naf-file $TMPFIL"
    java -Xmx1812m -cp $CLASSPATH $JAVASCRIPT $JAVA_ARGS
    rm -rf $TMPFIL

    ◇

```

#### 4.4.9 Framenet SRL

The framenet SRL is part of the package that contains the ontotagger. We only need a different script.

*Script* The script contains a hack, because the framesrl script produces spurious lines containing “frameMap.size()=...”. A GAWK script removes these lines.

```

"../bin/framesrl" 30≡
  #!/bin/bash
  source /usr/local/share/pipelines/nlpp/env/bin/progen
  ONTODIR=$modulesdir/vua-ontotagger-v1.0
  JARDIR=$ONTODIR/lib
  RESOURCEDIR=$ONTODIR/resources
  PREDICATEMATRIX="$RESOURCEDIR/PredicateMatrix_nl_lu_withESO.v0.2.role.txt"
  GRAMMATICALWORDS="$RESOURCEDIR/grammaticals/Grammatical-words.nl"
  TMPFIL='mkttemp -t framesrl.XXXXXX'
  cat >$TMPFIL

  CLASSPATH=$JARDIR/ontotagger-1.0-jar-with-dependencies.jar
  JAVASCRIPT=eu.kyotoproject.main.SrlFrameNetTagger

  JAVA_ARGS="--naf-file $TMPFIL"
  JAVA_ARGS="$JAVA_ARGS --format naf"
  JAVA_ARGS="$JAVA_ARGS --frame-ns fn:"
  JAVA_ARGS="$JAVA_ARGS --role-ns fn-role:;pb-role:;fn-pb-role:;eso-role:"
  JAVA_ARGS="$JAVA_ARGS --ili-ns mcr:ili"
  JAVA_ARGS="$JAVA_ARGS --sense-conf 0.25"
  JAVA_ARGS="$JAVA_ARGS --frame-conf 70"

  java -Xmx1812m -
  cp $CLASSPATH $JAVASCRIPT $JAVA_ARGS | gawk '/^frameMap.size()/ {next}; {print}'
  rm -rf $TMPFIL

```

◇

Uses: [print 43b](#).

#### 4.4.10 Heideltime

*New module* Heideltime has been updated. In principle the Heideltime module ought to be installed as described in the following message from Itziar Aldabe:

I managed to get everything ready, except for the README in github. I'll update it next week but I think I can give you some simple steps that should be enough to correctly use the module

- 1.- Download the code: `git clone https://github.com/ixa-ehu/ixa-pipe-time.git`
- 2.- In the `ixa-pipe-time` create the `lib` directory
- 3.- Download the `HeidelTimeStandalone` jar file from <https://code.google.com/p/heideltime/>

If you download the `heideltime-standalone-1.7` zip file, you will find two files that you need:

- `de.unihd.dbs.heideltime.standalone.jar`
- `config.props` => you will need this file to correctly execute the new time module

move the jar file to the lib directory

- 4.- Download a copy of `JVnTextPro` from <http://ixa2.si.ehu.es/~jibalar/jvntextpro-2.0.jar>

move the jar file to the lib directory

5.- Download the following script <https://github.com/carchrae/install-to-project-repo/blob/master>

6.- Execute the script within the `ixa-pipe-time` directory

=> It will create the repo directory and two dependencies that you don't need to copy in the p

7.- Download the mappings file: <http://ixa2.si.ehu.es/~jibalarieagles-to-treetager.csv>

8.- Create the jar file for the time module

```
mvn clean install
```

9.- Test the module

```
cat pos.naf | java -jar ${dirToJAR}/ixa.pipe.time.jar -m ${dirToFile}/eagles-to-treetager.csv
```

I think everything needed is included in the list of steps. Let me know if something is not cl

Regards,  
Itziar

Unfortunately, this procedure does not always seem to work. On the test-computer (Ubuntu Linux version 14.04) the instruction `mvn clean package` results in the following error message:

```
(venv)paul@klipperraak:~/projecten/cltl/pipelines/nlpp/modules/ixa-pipe-time$ mvn clean package
[INFO] Scanning for projects...
[INFO]
[INFO] -----
[INFO] Building IXAPipeHeidelTime 1.0.1
[INFO] -----
[WARNING] The POM for local:de.unihd.dbs.heideltime.standalone:jar:1.0 is missing, no dependency
[INFO] -----
[INFO] BUILD FAILURE
[INFO] -----
[INFO] Total time: 0.650s
[INFO] Finished at: Wed Jul 15 09:40:39 CEST 2015
[INFO] Final Memory: 7M/232M
[INFO] -----
[ERROR] Failed to execute goal on project time: Could not resolve dependencies for project ixa.pi
[ERROR]
[ERROR] To see the full stack trace of the errors, re-run Maven with the -e switch.
[ERROR] Re-run Maven using the -X switch to enable full debug logging.
[ERROR]
[ERROR] For more information about the errors and possible solutions, please read the following a
[ERROR] [Help 1] http://cwiki.apache.org/confluence/display/MAVEN/DependencyResolutionException
```

Therefore we have compiled the module in a computer where it worked and put the result in the snapshot.

```

< install the new heideltime module 32a > ≡
  < get or have (32b ixa-pipe-time.tgz ) 8a >
  cd $modulesdir
  tar -xzf $pipesocket/ixa-pipe-time.tgz
  ◇

```

Fragment referenced in 16a.

### Script

```

"../bin/heideltime" 32c≡
  #!/bin/bash
  source /usr/local/share/pipelines/nlpp/env/bin/progenv
  HEIDELDIR=$modulesdir/ixa-pipe-time
  cd $HEIDELDIR
  iconv -t utf-8//IGNORE | java -jar target/ixa.pipe.time.jar -m alpino-to-
  treetagger.csv -c config.props
  ◇

```

#### 4.4.11 Semantic Role labelling

### Module

```

< install the srl module 32d > ≡
  MODNAM=srl
  DIRN=vua-srl-nl
  GITU=https://github.com/newsreader/vua-srl-nl.git
  GITC=675d22d361289ede23df11dcdb17195f008c54bf
  < install from github 7a >
  ◇

```

Fragment referenced in 16a.

### Script First:

1. set the correct environment. The module needs python and timble.
2. create a tempdir and in that dir a file to store the input and a (scv) file with the feature-vector.

```

"../bin/srl" 32e≡
  #!/bin/bash
  source /usr/local/share/pipelines/nlpp/env/bin/progenv
  ROOT=$piperoot
  SRLDIR=$modulesdir/vua-srl-nl
  TMPDIR='mktemp -d -t SRLTMP.XXXXXX'
  cd $SRLDIR
  INPUTFILE=$TMPDIR/inputfile
  FEATUREVECTOR=$TMPDIR/csvfile
  TIMBLOUTPUTFILE=$TMPDIR/timblpredictions
  ◇

```

File defined by 32e, 33abcd.

Create a feature-vector.



```

"../bin/srl" 33a≡
    cat | tee $INPUTFILE | python nafAlpinoToSRLFeatures.py > $FEATUREVECTOR
    ◇

```

File defined by 32e, 33abcd.

Run the trained model on the feature-vector.

```

"../bin/srl" 33b≡
    timbl -m0:I1,2,3,4 -i 25Feb2015_e-mags_mags_press_newspapers.wgt -
    t $FEATUREVECTOR -o $TIMBLOUTPUTFILE >/dev/null 2>/dev/null
    ◇

```

File defined by 32e, 33abcd.

Insert the SRL values into the NAF file.

```

"../bin/srl" 33c≡
    python timblToAlpinoNAF.py $INPUTFILE $TIMBLOUTPUTFILE
    ◇

```

File defined by 32e, 33abcd.

Clean up.

```

"../bin/srl" 33d≡
    rm -rf $TEMPDIR
    ◇

```

File defined by 32e, 33abcd.

#### 4.4.12 SRL postprocessing

In addition to the Semantic Role Labeling there is hack that finds additional semantic roles.

*Module* Find the (Python) module in the snapshot and unpack it.

```

⟨ install the post-SRL module 33e ⟩ ≡
    ⟨ get or have (33f 20150706vua-srl-dutch-additional-roles.tgz ) 8a ⟩
    cd $modulesdir
    tar -xzf $pipesocket/20150706vua-srl-dutch-additional-roles.tgz
    ◇

```

Fragment referenced in 16a.

```

⟨ clean up 33g ⟩ ≡
    rm -rf $pipesocket/20150706vua-srl-dutch-additional-roles.tgz
    ◇

```

Fragment defined by 9d, 10c, 17f, 33g, 40c.

Fragment referenced in 39d.

*Script*

```
"../bin/postsr1" 34a≡
#!/bin/bash
source /usr/local/share/pipelines/nlpp/env/bin/progenv
MODDIR=$modulesdir/vua-srl-dutch-additional-roles
cat | python $MODDIR/vua-srl-dutch-additional-roles.py
◇
```

#### 4.4.13 Event coreference

*Module* Install the module from the snapshot.

```
<install the event-coreference module 34b> ≡
<get or have (34c 20150702-vua-eventcoreference_v2.tgz ) 8a>
cd $modulesdir
tar -xzf $pipesocket/20150702-vua-eventcoreference_v2.tgz
cd vua-eventcoreference_v2
cp lib/EventCoreference-1.0-SNAPSHOT-jar-with-dependencies.jar $jarsdir
◇
```

Fragment referenced in 16a.

#### *Script*

```
"../bin/evcoref" 34d≡
#!/bin/bash
source /usr/local/share/pipelines/nlpp/env/bin/progenv
MODROOT=$modulesdir/vua-eventcoreference_v2
RESOURCEDIR=$MODROOT/resources
JARFILE=$jarsdir/EventCoreference-1.0-SNAPSHOT-jar-with-dependencies.jar

JAVAMODULE=eu.newsreader.eventcoreference.naf.EventCorefWordnetSim
JAVAOPTIONS="--method leacock-chodorow"
JAVAOPTIONS="$JAVAOPTIONS --wn-lmf $RESOURCEDIR/cornetto2.1.lmf.xml"
JAVAOPTIONS="$JAVAOPTIONS --sim 2.0"
JAVAOPTIONS="$JAVAOPTIONS --
relations XPOS_NEAR_SYNONYM#HAS_HYPERONYM#HAS_XPOS_HYPERONYM"

java -Xmx812m -cp $JARFILE $JAVAMODULE $JAVAOPTIONS
◇
```

#### 4.4.14 Dbpedia-ner

Dbpedia-ner finds more named entities than NER, because it checks DBpedia for the candidate NE-'s.

#### *Module*

```

< install the dbpedia-ner module 35a > ≡
MODNAM=dbpedia_ner
DIRN=dbpedia_ner
GITU=https://github.com/PaulHuygen/dbpedia_ner.git
GITC=ab1dcdbd860f0ff29bc979f646dc382122a101fc2
< install from github 7a >
◇

```

Fragment referenced in 16a.

*Script* The main part of the module is a Python script. The README.md file of the Github repo lists the options that can be applied. One of the options is about the URL of the Spotlight server.

```

"../bin/dbpner" 35b ≡
#!/bin/bash
source /usr/local/share/pipelines/nlpp/env/bin/progenv
< check/start the Spotlight server 21e >
MODDIR=$modulesdir/dbpedia_ner
cat | iconv -f ISO8859-1 -t UTF-8 | $MODDIR/dbpedia_ner.py -
url http://localhost:2060/rest/candidates
◇

```

## 4.5 Nominal events

The module “postprocessing-nl” adds nominal events to the srl annotations. It has been obtained directly from the author (Piek Vossen). It is not yet available in a public repo. Probably in future versions the jar from the ontotagger module can be used for this module.

### Module

```

< install the nomevent module 35c > ≡
< get or have (35d vua-postprocess-nl.zip ) 8a >
cd $modulesdir
unzip -q $pipesocket/vua-postprocess-nl.zip
◇

```

Fragment referenced in 16a.

### Script

```

"../bin/nomevent" 35e ≡
#!/bin/bash
source /usr/local/share/pipelines/nlpp/env/bin/progenv
MODDIR=$modulesdir/vua-postprocess-nl
LIBDIR=$MODDIR/lib
RESOURCEDIR=$MODDIR/resources

JAR=$LIBDIR/ontotagger-1.0-jar-with-dependencies.jar
JAVAMODULE=eu.kyotoproject.main.NominalEventCoreference
cat | iconv -f ISO8859-1 -t UTF-8 | java -Xmx812m -cp $JAR $JAVAMODULE --framenet-
lu $RESOURCEDIR/nl-luIndex.xml
◇

```

## 5 Utilities

### 5.1 Test script

The following script pushes a single sentence through the modules of the pipeline.

```
"../bin/test" 36a≡
  #!/bin/bash
  ROOT=/usr/local/share/pipelines/nlpp
  TESTDIR=$ROOT/test
  BIND=$ROOT/bin
  mkdir -p $TESTDIR
  cd $TESTDIR
  cat $ROOT/nuweb/testin.naf | $BIND/tok > $TESTDIR/test.tok.naf
  cat test.tok.naf | $BIND/mor > $TESTDIR/test.mor.naf
  cat test.mor.naf | $BIND/nerc_conll02 > $TESTDIR/test.nerc.naf
  cat $TESTDIR/test.nerc.naf | $BIND/wsd > $TESTDIR/test.wsd.naf
  cat $TESTDIR/test.wsd.naf | $BIND/ned > $TESTDIR/test.ned.naf
  cat $TESTDIR/test.ned.naf | $BIND/heideltime > $TEST-
  DIR/test.times.naf
  cat $TESTDIR/test.times.naf | $BIND/onto > $TEST-
  DIR/test.onto.naf
  cat $TESTDIR/test.onto.naf | $BIND/srl > $TESTDIR/test.srl.naf
  cat $TESTDIR/test.srl.naf | $BIND/evcoref > $TESTDIR/test.ecrf.naf
  cat $TESTDIR/test.ecrf.naf | $BIND/framesrl > $TESTDIR/test.fsrl.naf
  cat $TESTDIR/test.fsrl.naf | $BIND/dbpner > $TESTDIR/test.dbpner.naf
  cat $TESTDIR/test.dbpner.naf | $BIND/nomevent > $TESTDIR/test.nomev.naf
  cat $TESTDIR/test.nomev.naf | $BIND/postsrl > $TESTDIR/test.psrl.naf
  ◇
```

Uses: nuweb 45d.

### 5.2 Logging

Write log messages to standard out if variable LOGLEVEL is equal to 1.

```
< variables of install-modules 36b > ≡
  LOGLEVEL=1
  ◇
```

Fragment referenced in 15b.

```
< logmess 36c > ≡
  if
  [ $LOGLEVEL -gt 0 ]
  then
    echo @1
  fi
  ◇
```

Fragment referenced in 6c, 7a, 14c, 17b, 37a.

### 5.3 Misc

Install a module from a tarball: The macro expects the following three variables to be present:

**URL:** The URL tfrom where the taball can be downloaded.

**TARB:** The name of the tarball.

**DIR**; Name of the directory for the module.

Arg 1: URL; Arg 2: tarball; Arg 3: directory.

```

< install from tarball 37a > ≡
  SUCCES=0
  cd $modulesdir
  < move module (37b $DIR ) 6a >
  wget $URL
  SUCCES=$?
  if
    [ $SUCCES -eq 0 ]
  then
    tar -xzf $TARB
    SUCCES=$?
    rm -rf $TARB
  fi
  if
    [ $SUCCES -eq 0 ]
  then
    < logmess (37c Installed $DIR ) 36c >
    < remove old module (37d $DIR ) 6b >
  else
    < re-instate old module (37e $DIR ) 6c >
  fi
  ◇

```

Fragment never referenced.

## A How to read and translate this document

This document is an example of *literate programming* [1]. It contains the code of all sorts of scripts and programs, combined with explaining texts. In this document the literate programming tool **nuweb** is used, that is currently available from Sourceforge (URL:[nuweb.sourceforge.net](http://nuweb.sourceforge.net)). The advantages of Nuweb are, that it can be used for every programming language and scripting language, that it can contain multiple program sources and that it is very simple.

### A.1 Read this document

The document contains *code scraps* that are collected into output files. An output file (e.g. `output.fil`) shows up in the text as follows:

```

"output.fil" 4a ≡
  # output.fil
  < a macro 4b >
  < another macro 4c >
  ◇

```

The above construction contains text for the file. It is labelled with a code (in this case 4a) The constructions between the < and > brackets are macro's, placeholders for texts that can be found in other places of the document. The test for a macro is found in constructions that look like:

```

< a macro 4b > ≡
  This is a scrap of code inside the macro.
  It is concatenated with other scraps inside the
  macro. The concatenated scraps replace

```

the invocation of the macro.

Macro defined by 4b, 87e

Macro referenced in 4a

Macro's can be defined on different places. They can contain other macro's.

< a scrap 87e >  $\equiv$

This is another scrap in the macro. It is concatenated to the text of scrap 4b.

This scrap contains another macro:

< another macro 45b >

Macro defined by 4b, 87e

Macro referenced in 4a

## A.2 Process the document

The raw document is named `a_nlpp.w`. Figure 2 shows pathways to translate it into print-

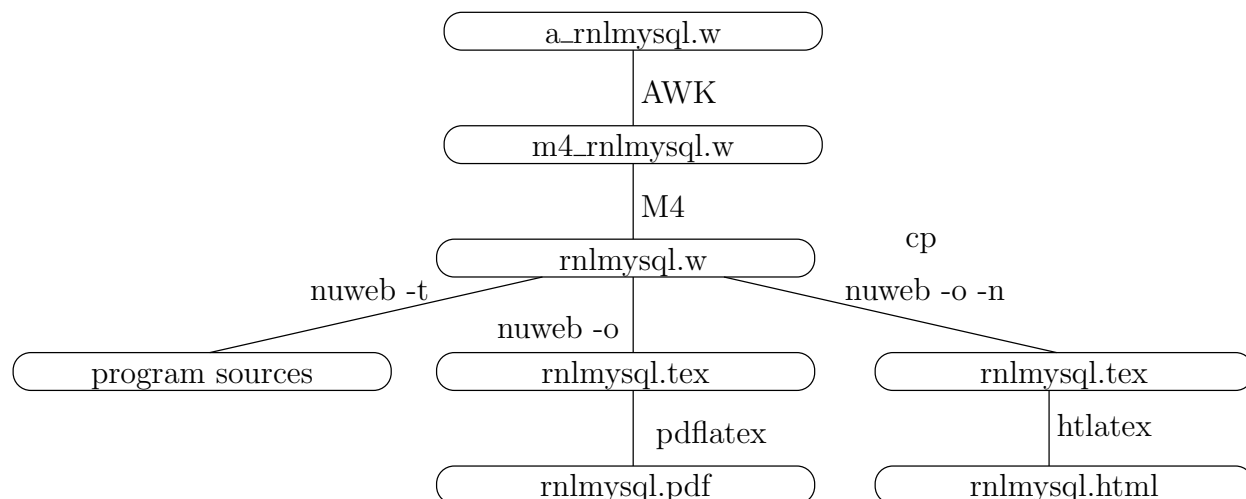


Figure 2: Translation of the raw code of this document into printable/viewable documents and into program sources. The figure shows the pathways and the main files involved.

able/viewable documents and to extract the program sources. Table 3 lists the tools that are

Tool	Source	Description
gawk	<a href="http://www.gnu.org/software/gawk/">www.gnu.org/software/gawk/</a>	text-processing scripting language
M4	<a href="http://www.gnu.org/software/m4/">www.gnu.org/software/m4/</a>	Gnu macro processor
nuweb	<a href="http://nuweb.sourceforge.net">nuweb.sourceforge.net</a>	Literate programming tool
tex	<a href="http://www.ctan.org">www.ctan.org</a>	Typesetting system
tex4ht	<a href="http://www.ctan.org">www.ctan.org</a>	Convert $\TeX$ documents into xml/html

Table 3: Tools to translate this document into readable code and to extract the program sources

needed for a translation. Most of the tools (except Nuweb) are available on a well-equipped Linux system.

```

<parameters in Makefile 39a> ≡
    NUWEB=../env/bin/nuweb
    ◇

```

Fragment defined by 39a, 40a, 42ab, 44c, 46b, 49a.  
 Fragment referenced in 39b.  
 Uses: nuweb 45d.

### A.3 The Makefile for this project.

This chapter assembles the Makefile for this project.

```

"Makefile" 39b≡
    <default target 39c>

    <parameters in Makefile 39a, ... >

    <impliciete make regels 42c, ... >
    <expliciete make regels 40b, ... >
    <make targets 39d, ... >
    ◇

```

The default target of make is all.

```

<default target 39c> ≡
    all : <all targets 39e>
    .PHONY : all
    ◇

```

Fragment referenced in 39b.  
 Defines: all Never used, PHONY 43a.

```

<make targets 39d> ≡
    clean:
        <clean up 9d, ... >
    ◇

```

Fragment defined by 39d, 43b, 44a, 47c, 49bd, 50a.  
 Fragment referenced in 39b.

One of the targets is certainly the PDF version of this document.

```

<all targets 39e> ≡
    nlpp.pdf◇

```

Fragment referenced in 39c.  
 Uses: pdf 43b.

We use many suffixes that were not known by the C-programmers who constructed the `make` utility. Add these suffixes to the list.

$\langle$  *parameters in Makefile 40a*  $\rangle \equiv$   
`.SUFFIXES: .pdf .w .tex .html .aux .log .php`

◇

Fragment defined by 39a, 40a, 42ab, 44c, 46b, 49a.  
 Fragment referenced in 39b.  
 Defines: SUFFIXES Never used.  
 Uses: pdf 43b.

## A.4 Get Nuweb

An annoying problem is, that this program uses nuweb, a utility that is seldom installed on a computer. Therefore, we are going to install that first if it is not present. Unfortunately, nuweb is hosted on sourceforge and it is difficult to achieve automatic downloading from that repository. Therefore I copied one of the versions on a location from where it can be downloaded with a script.

Put the nuweb binary in the nuweb subdirectory, so that it can be used before the directory-structure has been generated.

$\langle$  *expliciete make regels 40b*  $\rangle \equiv$

```
nuweb: $(NUWEB)

$(NUWEB): ../nuweb-1.58
    mkdir -p ../env/bin
    cd ../nuweb-1.58 && make nuweb
    cp ../nuweb-1.58/nuweb $(NUWEB)
```

◇

Fragment defined by 40bd, 41ab, 43a, 44d, 46c, 47b.  
 Fragment referenced in 39b.  
 Uses: nuweb 45d.

$\langle$  *clean up 40c*  $\rangle \equiv$

```
rm -rf ../nuweb-1.58
```

◇

Fragment defined by 9d, 10c, 17f, 33g, 40c.  
 Fragment referenced in 39d.  
 Uses: nuweb 45d.

$\langle$  *expliciete make regels 40d*  $\rangle \equiv$

```
../nuweb-1.58:
    cd .. && wget http://kyoto.let.vu.nl/~huygen/nuweb-1.58.tgz
    cd .. && tar -xzf nuweb-1.58.tgz
```

◇

Fragment defined by 40bd, 41ab, 43a, 44d, 46c, 47b.  
 Fragment referenced in 39b.  
 Uses: nuweb 45d.

## A.5 Pre-processing

To make usable things from the raw input `a_nlpp.w`, do the following:



1. Process \$ characters.
2. Run the m4 pre-processor.
3. Run nuweb.

This results in a  $\text{\LaTeX}$  file, that can be converted into a PDF or a HTML document, and in the program sources and scripts.

#### A.5.1 Process ‘dollar’ characters

Many “intelligent”  $\text{\TeX}$  editors (e.g. the auctex utility of Emacs) handle \$ characters as special, to switch into mathematics mode. This is irritating in program texts, that often contain \$ characters as well. Therefore, we make a stub, that translates the two-character sequence  $\backslash$ \$ into the single \$ character.

```
 $\langle$  expliciete make regels 41a  $\rangle \equiv$ 
  m4_nlpp.w : a_nlpp.w
      gawk '{if(match($$0, "@%")) {printf("%s", substr($$0,1,RSTART-
1))} else print}' a_nlpp.w \
      | gawk '{gsub(/[\$]/, "$$");print}' > m4_nlpp.w
```

◇

Fragment defined by 40bd, 41ab, 43a, 44d, 46c, 47b.

Fragment referenced in 39b.

Uses: print 43b.

#### A.5.2 Run the M4 pre-processor

```
 $\langle$  expliciete make regels 41b  $\rangle \equiv$ 
  nlpp.w : m4_nlpp.w inst.m4
      m4 -P m4_nlpp.w > nlpp.w
```

◇

Fragment defined by 40bd, 41ab, 43a, 44d, 46c, 47b.

Fragment referenced in 39b.

## A.6 Typeset this document

Enable the following:

1. Create a PDF document.
2. Print the typeset document.
3. View the typeset document with a viewer.
4. Create a HTMLdocument.

In the three items, a typeset PDF document is required or it is the requirement itself.

#### A.6.1 Figures

This document contains figures that have been made by **xfig**. Post-process the figures to enable inclusion in this document.

The list of figures to be included:

*< parameters in Makefile 42a >*  $\equiv$   
`FIGFILES=fileschema directorystructure`

◇

Fragment defined by 39a, 40a, 42ab, 44c, 46b, 49a.  
 Fragment referenced in 39b.  
 Defines: FIGFILES 42b.

We use the package `figlatex` to include the pictures. This package expects two files with extensions `.pdftex` and `.pdftex_t` for `pdflatex` and two files with extensions `.pstex` and `.pstex_t` for the `latex/dvips` combination. Probably `tex4ht` uses the latter two formats too.

Make lists of the graphical files that have to be present for `latex/pdflatex`:

*< parameters in Makefile 42b >*  $\equiv$   
`FIGFILENAMES=$(foreach fil,$(FIGFILES), $(fil).fig)`  
`PDFT_NAMES=$(foreach fil,$(FIGFILES), $(fil).pdftex_t)`  
`PDF_FIG_NAMES=$(foreach fil,$(FIGFILES), $(fil).pdftex)`  
`PST_NAMES=$(foreach fil,$(FIGFILES), $(fil).pstex_t)`  
`PS_FIG_NAMES=$(foreach fil,$(FIGFILES), $(fil).pstex)`

◇

Fragment defined by 39a, 40a, 42ab, 44c, 46b, 49a.  
 Fragment referenced in 39b.  
 Defines: FIGFILENAMES Never used, PDFT\_NAMES 44a, PDF\_FIG\_NAMES 44a, PST\_NAMES Never used,  
 PS\_FIG\_NAMES Never used.  
 Uses: FIGFILES 42a.

Create the graph files with program `fig2dev`:

*< impliciete make regels 42c >*  $\equiv$   
`%.eps: %.fig`  
`fig2dev -L eps $< > $@`  
  
`%.pstex: %.fig`  
`fig2dev -L pstex $< > $@`  
  
`.PRECIOUS : %.pstex`  
`%.pstex_t: %.fig %.pstex`  
`fig2dev -L pstex_t -p $*.pstex $< > $@`  
  
`%.pdftex: %.fig`  
`fig2dev -L pdftex $< > $@`  
  
`.PRECIOUS : %.pdftex`  
`%.pdftex_t: %.fig %.pstex`  
`fig2dev -L pdftex_t -p $*.pdftex $< > $@`

◇

Fragment defined by 42c, 47a.  
 Fragment referenced in 39b.  
 Defines: `fig2dev` Never used.

## A.6.2 Bibliography

To keep this document portable, create a portable bibliography file. It works as follows: This document refers in the `|bibliography|` statement to the local `bib`-file `nlpp.bib`. To create this file, copy the auxiliary file to another file `auxfil.aux`, but replace the argument of the command `\bibdata{nlpp}` to the names of the bibliography files that contain the actual references (they should exist on the computer on which you try this). This procedure should only be performed on the computer of the author. Therefore, it is dependent of a binary file on his computer.

```
< expliciete make regels 43a > ≡
    bibfile : nlpp.aux /home/paul/bin/mkportbib
              /home/paul/bin/mkportbib nlpp litprog

    .PHONY : bibfile
◇
```

Fragment defined by 40bd, 41ab, 43a, 44d, 46c, 47b.

Fragment referenced in 39b.

Uses: PHONY 39c.

## A.6.3 Create a printable/viewable document

Make a PDF document for printing and viewing.

```
< make targets 43b > ≡
    pdf : nlpp.pdf

    print : nlpp.pdf
            lpr nlpp.pdf

    view : nlpp.pdf
            evince nlpp.pdf

◇
```

Fragment defined by 39d, 43b, 44a, 47c, 49bd, 50a.

Fragment referenced in 39b.

Defines: pdf 39e, 40a, 44a, print 11a, 12ef, 14b, 30, 41a, view Never used.

Create the PDF document. This may involve multiple runs of `nuweb`, the  $\text{\LaTeX}$  processor and the `bibTeX` processor, and depends on the state of the `aux` file that the  $\text{\LaTeX}$  processor creates as a by-product. Therefore, this is performed in a separate script, `w2pdf`.

*The w2pdf script* The three processors `nuweb`,  $\text{\LaTeX}$  and `bibTeX` are intertwined.  $\text{\LaTeX}$  and `bibTeX` create parameters or change the value of parameters, and write them in an auxiliary file. The other processors may need those values to produce the correct output. The  $\text{\LaTeX}$  processor may even need the parameters in a second run. Therefore, consider the creation of the (PDF) document finished when none of the processors causes the auxiliary file to change. This is performed by a shell script `w2pdf`.

```

< make targets 44a > ≡
    nlpp.pdf : nlpp.w $(W2PDF) $(PDF_FIG_NAMES) $(PDFT_NAMES)
              chmod 775 $(W2PDF)
              $(W2PDF) $*

```

◇

Fragment defined by 39d, 43b, 44a, 47c, 49bd, 50a.

Fragment referenced in 39b.

Uses: pdf 43b, PDFT\_NAMES 42b, PDF\_FIG\_NAMES 42b.

The following is an ugly fix of an unsolved problem. Currently I develop this thing, while it resides on a remote computer that is connected via the `sshfs` filesystem. On my home computer I cannot run executables on this system, but on my work-computer I can. Therefore, place the following script on a local directory.

```

< directories to create 44b > ≡
    ../nuweb/bin ◇

```

Fragment defined by 4abc, 9afg, 13e, 44b.

Fragment referenced in 49b.

Uses: nuweb 45d.

```

< parameters in Makefile 44c > ≡
    W2PDF=../nuweb/bin/w2pdf
    ◇

```

Fragment defined by 39a, 40a, 42ab, 44c, 46b, 49a.

Fragment referenced in 39b.

Uses: nuweb 45d.

```

< expliciete make regels 44d > ≡
    $(W2PDF) : nlpp.w $(NUWEB)
              $(NUWEB) nlpp.w
    ◇

```

Fragment defined by 40bd, 41ab, 43a, 44d, 46c, 47b.

Fragment referenced in 39b.

```

"../nuweb/bin/w2pdf" 44e≡
    #!/bin/bash
    # w2pdf -- compile a nuweb file
    # usage: w2pdf [filename]
    # 20150724 at 0808h: Generated by nuweb from a_nlpp.w
    NUWEB=../env/bin/nuweb
    LATEXCOMPILER=pdflatex
    < filenames in nuweb compile script 45b >
    < compile nuweb 45a >

```

◇

Uses: nuweb 45d.

The script retains a copy of the latest version of the auxiliary file. Then it runs the four processors nuweb, L<sup>A</sup>T<sub>E</sub>X, MakeIndex and bibT<sub>E</sub>X, until they do not change the auxiliary file or the index.

```

⟨ compile nuweb 45a ⟩ ≡
    NUWEB=/usr/local/share/pipelines/nlpp/env/bin/nuweb
    ⟨ run the processors until the aux file remains unchanged 46a ⟩
    ⟨ remove the copy of the aux file 45c ⟩
    ◇

```

Fragment referenced in 44e.

Uses: nuweb 45d.

The user provides the name of the nuweb file as argument. Strip the extension (e.g. .w) from the filename and create the names of the L<sup>A</sup>T<sub>E</sub>X file (ends with .tex), the auxiliary file (ends with .aux) and the copy of the auxiliary file (add old. as a prefix to the auxiliary filename).

```

⟨ filenames in nuweb compile script 45b ⟩ ≡
    nufil=$1
    trunk=${1%.*}
    texfil=${trunk}.tex
    auxfil=${trunk}.aux
    oldaux=old.${trunk}.aux
    indexfil=${trunk}.idx
    oldindexfil=old.${trunk}.idx
    ◇

```

Fragment referenced in 44e.

Defines: auxfil 46a, 48ab, indexfil 46a, 48a, nufil 45d, 48ac, oldaux 45c, 46a, 48ab, oldindexfil 46a, 48a, texfil 45d, 48ac, trunk 45d, 48acd.

Remove the old copy if it is no longer needed.

```

⟨ remove the copy of the aux file 45c ⟩ ≡
    rm $oldaux
    ◇

```

Fragment referenced in 45a, 47e.

Uses: oldaux 45b, 48a.

Run the three processors. Do not use the option -o (to suppress generation of program sources) for nuweb, because w2pdf must be kept up to date as well.

```

⟨ run the three processors 45d ⟩ ≡
    $NUWEB $nufil
    $LATEXCOMPILER $texfil
    makeindex $trunk
    bibtex $trunk
    ◇

```

Fragment referenced in 46a.

Defines: bibtex 48cd, makeindex 48cd, nuweb 5a, 36a, 39a, 40bcd, 44bce, 45a, 46b, 47d.

Uses: nufil 45b, 48a, texfil 45b, 48a, trunk 45b, 48a.

Repeat to copy the auxiliary file and the index file and run the processors until the auxiliary file and the index file are equal to their copies. However, since I have not yet been able to test the aux file and the idx in the same test statement, currently only the aux file is tested.

It turns out, that sometimes a strange loop occurs in which the aux file will keep to change. Therefore, with a counter we prevent the loop to occur more than 10 times.

*< run the processors until the aux file remains unchanged 46a > ≡*

```
LOOPCOUNTER=0
while
  ! cmp -s $auxfil $oldaux
do
  if [ -e $auxfil ]
  then
    cp $auxfil $oldaux
  fi
  if [ -e $indexfil ]
  then
    cp $indexfil $oldindexfil
  fi
  < run the three processors 45d >
  if [ $LOOPCOUNTER -ge 10 ]
  then
    cp $auxfil $oldaux
  fi;
done
◇
```

Fragment referenced in 45a.

Uses: auxfil 45b, 48a, indexfil 45b, oldaux 45b, 48a, oldindexfil 45b.

#### A.6.4 Create HTML files

HTML is easier to read on-line than a PDF document that was made for printing. We use `tex4ht` to generate HTML code. An advantage of this system is, that we can include figures in the same way as we do for `pdflatex`.

To create a HTML doc, we do the following:

1. Create a directory `../nuweb/html` for the HTML document.
2. Put the nuweb source in it, together with style-files that are needed (see variable `HTMLSOURCE`).
3. Put the script `w2html` in it and make it executable.
4. Execute the script `w2html`.

Make a list of the entities that we mentioned above:

*< parameters in Makefile 46b > ≡*

```
htmldir=../nuweb/html
htmlsource=nlpp.w nlpp.bib html.sty artikel3.4ht w2html
htmlmaterial=$(foreach fil, $(htmlsource), $(htmldir)/$(fil))
htmltarget=$(htmldir)/nlpp.html
◇
```

Fragment defined by 39a, 40a, 42ab, 44c, 46b, 49a.

Fragment referenced in 39b.

Uses: nuweb 45d.

Make the directory:

*< expliciete make regels 46c > ≡*

```
$(htmldir) :
  mkdir -p $(htmldir)
◇
```

Fragment defined by 40bd, 41ab, 43a, 44d, 46c, 47b.

Fragment referenced in 39b.

The rule to copy files in it:

```
< implicate make regels 47a > ≡
    $(htmldir)/% : % $(htmldir)
    cp $< $(htmldir)/
```

◇

Fragment defined by 42c, 47a.

Fragment referenced in 39b.

Do the work:

```
< expliciete make regels 47b > ≡
    $(htmltarget) : $(htmlmaterial) $(htmldir)
    cd $(htmldir) && chmod 775 w2html
    cd $(htmldir) && ./w2html nlpp.w
```

◇

Fragment defined by 40bd, 41ab, 43a, 44d, 46c, 47b.

Fragment referenced in 39b.

Invoke:

```
< make targets 47c > ≡
    htm : $(htmldir) $(htmltarget)
```

◇

Fragment defined by 39d, 43b, 44a, 47c, 49bd, 50a.

Fragment referenced in 39b.

Create a script that performs the translation.

```
"w2html" 47d≡
#!/bin/bash
# w2html -- make a html file from a nuweb file
# usage: w2html [filename]
# [filename]: Name of the nuweb source file.
# 20150724 at 0808h: Generated by nuweb from a_nlpp.w
echo "translate " $1 >w2html.log
NUWEB=/usr/local/share/pipelines/nlpp/env/bin/nuweb
< filenames in w2html 48a >

< perform the task of w2html 47e >
```

◇

Uses: nuweb 45d.

The script is very much like the w2pdf script, but at this moment I have still difficulties to compile the source smoothly into HTML and that is why I make a separate file and do not recycle parts from the other file. However, the file works similar.

```
< perform the task of w2html 47e > ≡
    < run the html processors until the aux file remains unchanged 48b >
    < remove the copy of the aux file 45c >
```

◇

Fragment referenced in 47d.

The user provides the name of the nuweb file as argument. Strip the extension (e.g. `.w`) from the filename and create the names of the L<sup>A</sup>T<sub>E</sub>X file (ends with `.tex`), the auxiliary file (ends with `.aux`) and the copy of the auxiliary file (add `old.` as a prefix to the auxiliary filename).

```
<filenames in w2html 48a> ≡
  nufil=$1
  trunk=${1%.*}
  texfil=${trunk}.tex
  auxfil=${trunk}.aux
  oldaux=old.${trunk}.aux
  indexfil=${trunk}.idx
  oldindexfil=old.${trunk}.idx
  ◇
```

Fragment referenced in 47d.

Defines: `auxfil` 45b, 46a, 48b, `nufil` 45bd, 48c, `oldaux` 45bc, 46a, 48b, `texfil` 45bd, 48c, `trunk` 45bd, 48cd.

Uses: `indexfil` 45b, `oldindexfil` 45b.

```
<run the html processors until the aux file remains unchanged 48b> ≡
  while
    ! cmp -s $auxfil $oldaux
  do
    if [ -e $auxfil ]
    then
      cp $auxfil $oldaux
    fi
    <run the html processors 48c>
  done
  <run tex4ht 48d>
  ◇
```

Fragment referenced in 47e.

Uses: `auxfil` 45b, 48a, `oldaux` 45b, 48a.

To work for HTML, nuweb *must* be run with the `-n` option, because there are no page numbers.

```
<run the html processors 48c> ≡
  $NUWEB -o -n $nufil
  latex $texfil
  makeindex $trunk
  bibtex $trunk
  htlatex $trunk
  ◇
```

Fragment referenced in 48b.

Uses: `bibtex` 45d, `makeindex` 45d, `nufil` 45b, 48a, `texfil` 45b, 48a, `trunk` 45b, 48a.

When the compilation has been satisfied, run `makeindex` in a special way, run `bibtex` again (I don't know why this is necessary) and then run `htlatex` another time.

```
<run tex4ht 48d> ≡
  tex '\def\filename{{nlpp}{idx}{4dx}{ind}} \input idxmake.4ht'
  makeindex -o $trunk.ind $trunk.4dx
  bibtex $trunk
  htlatex $trunk
  ◇
```

Fragment referenced in 48b.

Uses: `bibtex` 45d, `makeindex` 45d, `trunk` 45b, 48a.



## A.7 Create the program sources

Run nuweb, but suppress the creation of the L<sup>A</sup>T<sub>E</sub>X documentation. Nuweb creates only sources that do not yet exist or that have been modified. Therefore make does not have to check this. However, “make” has to create the directories for the sources if they do not yet exist. So, let’s create the directories first.

```
< parameters in Makefile 49a > ≡
MKDIR = mkdir -p
```

◇

Fragment defined by 39a, 40a, 42ab, 44c, 46b, 49a.

Fragment referenced in 39b.

Defines: MKDIR 49b.

```
< make targets 49b > ≡
DIRS = < directories to create 4a, ... >
```

```
$(DIRS) :
    $(MKDIR) $@
```

◇

Fragment defined by 39d, 43b, 44a, 47c, 49bd, 50a.

Fragment referenced in 39b.

Defines: DIRS 49d.

Uses: MKDIR 49a.

```
< make scripts executable 49c > ≡
chmod -R 775 ../bin/*
chmod -R 775 ../env/bin/*
```

◇

Fragment defined by 16b, 49c.

Fragment referenced in 49d.

```
< make targets 49d > ≡
sources : nlpp.w $(DIRS) $(NUWEB)
          $(NUWEB) nlpp.w
          < make scripts executable 16b, ... >
```

◇

Fragment defined by 39d, 43b, 44a, 47c, 49bd, 50a.

Fragment referenced in 39b.

Uses: DIRS 49b.

## A.8 Restore paths after transplantation

When an existing installation has been transplanted to another location, many path indications have to be adapted to the new situation. The scripts that are generated by nuweb can be repaired by re-running nuweb. After that, configuration files of some modules must be modified.

```

< make targets 50a > ≡
  transplant :
    touch a_nlpp.w
    $(MAKE) sources
    ../env/bin/transplant

```

◇

Fragment defined by 39d, 43b, 44a, 47c, 49bd, 50a.

Fragment referenced in 39b.

In order to work as expected, the following script must be re-made after a transplantation.

```

"../env/bin/transplant" 50b≡
  #!/bin/bash
  LOGLEVEL=1
  < set variables that point to the directory-structure 5a, ... >
  < set paths after transplantation 12a, ... >
  < re-install modules after the transplantation 20c >

```

◇

## B References

### B.1 Literature

#### References

- [1] Donald E. Knuth. Literate programming. Technical report STAN-CS-83-981, Stanford University, Department of Computer Science, 1983.

## C Indexes

### C.1 Filenames

```

"../bin/coreference-base" Defined by 23b.
"../bin/dbpner" Defined by 35b.
"../bin/evcoref" Defined by 34d.
"../bin/framesrl" Defined by 30.
"../bin/heideltime" Defined by 32c.
"../bin/install-modules" Defined by 15b, 16a.
"../bin/lu2synset" Defined by 27a.
"../bin/mor" Defined by 22d.
"../bin/ned" Defined by 28b.
"../bin/nerc_conll02" Defined by 25c.
"../bin/nomevent" Defined by 35e.
"../bin/onto" Defined by 29.
"../bin/post srl" Defined by 34a.
"../bin/srl" Defined by 32e, 33abcd.
"../bin/test" Defined by 36a.
"../bin/tok" Defined by 22b.
"../bin/wsd" Defined by 26d.
"../env/bin/progenv" Defined by 5c, 8c.
"../env/bin/transplant" Defined by 50b.
"../nuweb/bin/w2pdf" Defined by 44e.

```

"Makefile" Defined by 39b.

"w2html" Defined by 47d.

## C.2 Macro's

<activate the python environment 13d, 14a> Referenced in 10d.  
 <all targets 39e> Referenced in 39c.  
 <apply script tran on the scripts in 12f> Referenced in 12a.  
 <check this first 7f, 16c> Referenced in 15b.  
 <check whether mercurial is present 17a> Referenced in 16c.  
 <check/install the correct version of python 11a> Referenced in 10d.  
 <check/start the Spotlight server 21e> Referenced in 28b, 35b.  
 <clean up 9d, 10c, 17f, 33g, 40c> Referenced in 39d.  
 <compile nuweb 45a> Referenced in 44e.  
 <compile the nerc jar 24> Referenced in 23c.  
 <create a virtual environment for Python 13b> Referenced in 10d.  
 <create javapython script 8b> Referenced in 15b.  
 <default target 39c> Referenced in 39b.  
 <directories to create 4abc, 9afg, 13e, 44b> Referenced in 49b.  
 <download svm models 26b> Referenced in 25d.  
 <expliciete make regels 40bd, 41ab, 43a, 44d, 46c, 47b> Referenced in 39b.  
 <filenames in nuweb compile script 45b> Referenced in 44e.  
 <filenames in w2html 48a> Referenced in 47d.  
 <get or have 8a> Referenced in 9b, 11b, 17b, 20a, 21a, 25a, 26be, 28c, 32a, 33e, 34b, 35c.  
 <get the nerc models 25a> Referenced in 23c.  
 <impliciete make regels 42c, 47a> Referenced in 39b.  
 <install ActivePython 11b> Referenced in 11a.  
 <install Alpino 17b> Referenced in 15b.  
 <install coreference-base 23a> Referenced in 16a.  
 <install from github 7a> Referenced in 22c, 23a, 25d, 27b, 32d, 35a.  
 <install from tarball 37a> Not referenced.  
 <install kafnafparserpy 14c> Referenced in 10d.  
 <install maven 10ab> Referenced in 15b.  
 <install python packages 15a> Referenced in 10d.  
 <install svm lib 26a> Referenced in 25d.  
 <install the dbpedia-ner module 35a> Referenced in 16a.  
 <install the event-coreference module 34b> Referenced in 16a.  
 <install the lu2synset converter 26e> Referenced in 16a.  
 <install the morphosyntactic parser 22c> Referenced in 16a.  
 <install the NERC module 23c> Referenced in 16a.  
 <install the new heidelttime module 32a> Referenced in 16a.  
 <install the nomevent module 35c> Referenced in 16a.  
 <install the onto module 28c> Referenced in 16a.  
 <install the post-SRL module 33e> Referenced in 16a.  
 <install the Spotlight server 21ac> Referenced in 15b.  
 <install the srl module 32d> Referenced in 16a.  
 <install the ticcutils utility 19c> Referenced in 15b, 20c.  
 <install the timbl utility 19d> Referenced in 15b, 20c.  
 <install the tokenizer 22a> Referenced in 16a.  
 <install the treetagger utility 18abcde, 19ab> Referenced in 15b.  
 <install the WSD module 25d> Referenced in 16a.  
 <install the NED module 27b> Referenced in 16a.  
 <logmess 36c> Referenced in 6c, 7a, 14c, 17b, 37a.  
 <make scripts executable 16b, 49c> Referenced in 49d.  
 <make targets 39d, 43b, 44a, 47c, 49bd, 50a> Referenced in 39b.  
 <move module 6a> Referenced in 7a, 14c, 37a.  
 <parameters in Makefile 39a, 40a, 42ab, 44c, 46b, 49a> Referenced in 39b.  
 <perform the task of w2html 47e> Referenced in 47d.

⟨put spotlight jar in the Maven repository 28a⟩ Referenced in 27b.  
 ⟨re-install modules after the transplantation 20c⟩ Referenced in 50b.  
 ⟨re-instate old module 6c⟩ Referenced in 7a, 14c, 37a.  
 ⟨remove old module 6b⟩ Referenced in 7a, 14c, 37a.  
 ⟨remove the copy of the aux file 45c⟩ Referenced in 45a, 47e.  
 ⟨run tex4ht 48d⟩ Referenced in 48b.  
 ⟨run the html processors 48c⟩ Referenced in 48b.  
 ⟨run the html processors until the aux file remains unchanged 48b⟩ Referenced in 47e.  
 ⟨run the processors until the aux file remains unchanged 46a⟩ Referenced in 45a.  
 ⟨run the three processors 45d⟩ Referenced in 46a.  
 ⟨set alpinohome 17e⟩ Referenced in 22d.  
 ⟨set paths after transplantation 12a, 13a, 14b⟩ Referenced in 50b.  
 ⟨set up java 9be⟩ Referenced in 15b.  
 ⟨set up python 10d⟩ Referenced in 15b.  
 ⟨set variables that point to the directory-structure 5ab⟩ Referenced in 5c, 15b, 50b.  
 ⟨start the Spotlight server 21d⟩ Referenced in 21e.  
 ⟨test whether virtualenv is present on the host 13c⟩ Referenced in 13b.  
 ⟨unpack ticcutils or timbl 20a⟩ Referenced in 19cd.  
 ⟨variables of install-modules 36b⟩ Referenced in 15b.  
 ⟨write script chasbang.awk 12e⟩ Referenced in 12a.  
 ⟨write script tran 12d⟩ Referenced in 12a.

### C.3 Variables

activate: 13d, 14b.  
 all: 39c.  
 ALPINO\_HOME: 17e.  
 auxfil: 45b, 46a, 48a, 48b.  
 bibtex: 45d, 48cd.  
 DIRS: 49b, 49d.  
 fig2dev: 42c.  
 FIGFILENAMES: 42b.  
 FIGFILES: 42a, 42b.  
 hg: 17a, 23a.  
 indexfil: 45b, 46a, 48a.  
 lxml: 15a.  
 makeindex: 45d, 48cd.  
 MKDIR: 49a, 49b.  
 nufil: 45b, 45d, 48a, 48c.  
 nuweb: 5a, 36a, 39a, 40bcd, 44bce, 45a, 45d, 46b, 47d.  
 oldaux: 45b, 45c, 46a, 48a, 48b.  
 oldindexfil: 45b, 46a, 48a.  
 PATH: 5b, 9e, 10b.  
 pdf: 39e, 40a, 43b, 44a.  
 PDFT\_NAMES: 42b, 44a.  
 PDF\_FIG\_NAMES: 42b, 44a.  
 PHONY: 39c, 43a.  
 print: 11a, 12ef, 14b, 30, 41a, 43b.  
 PST\_NAMES: 42b.  
 PS\_FIG\_NAMES: 42b.  
 pythonok: 11a.  
 PYTHONPATH: 13a, 14a.  
 pyyaml: 15a.  
 SUFFIXES: 40a.  
 texfil: 45b, 45d, 48a, 48c.  
 trunk: 45b, 45d, 48a, 48cd.  
 view: 43b.  
 virtualenv: 11b, 13b, 13c.