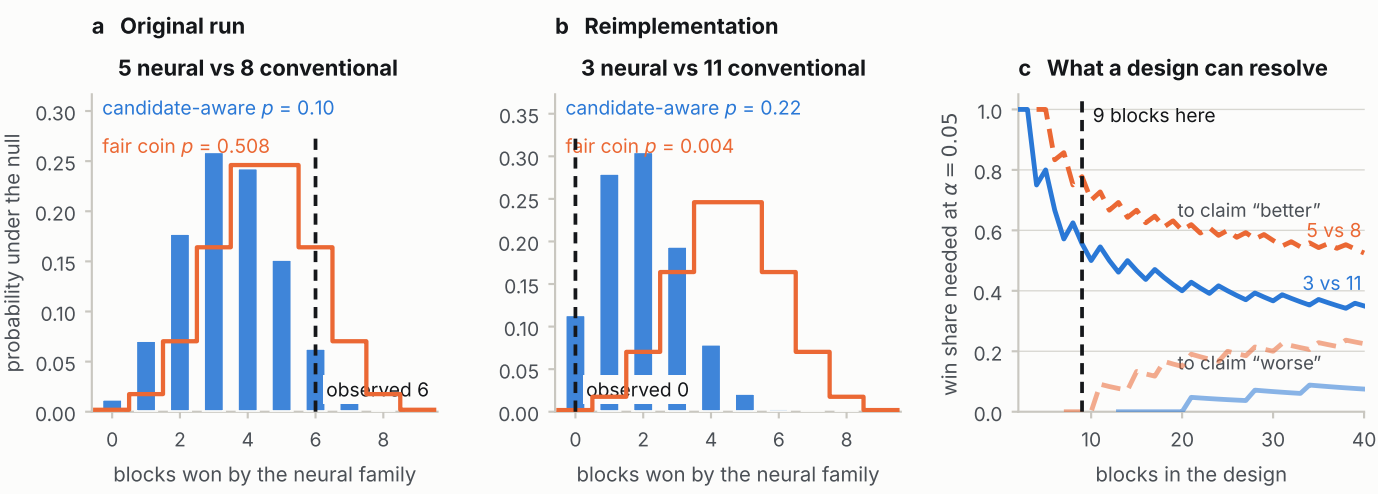
a Original run
5 neural vs 8 conventional
candidate-aware p = 0.10
fair coin p = 0.508
observed 6
probability under the null
blocks won by the neural family
b Reimplementation
3 neural vs 11 conventional
candidate-aware p = 0.22
fair coin p = 0.004
observed 0
blocks won by the neural family
c What a design can resolve
9 blocks here
to claim "better"
5 vs 8
3 vs 11
to claim "worse"
win share needed at α = 0.05
blocks in the design