



Conceptualisation de la base de données de l'application Shopwise réalisé à l'aide du logiciel Looping


1. Modèle Conceptuel de données dit MCD

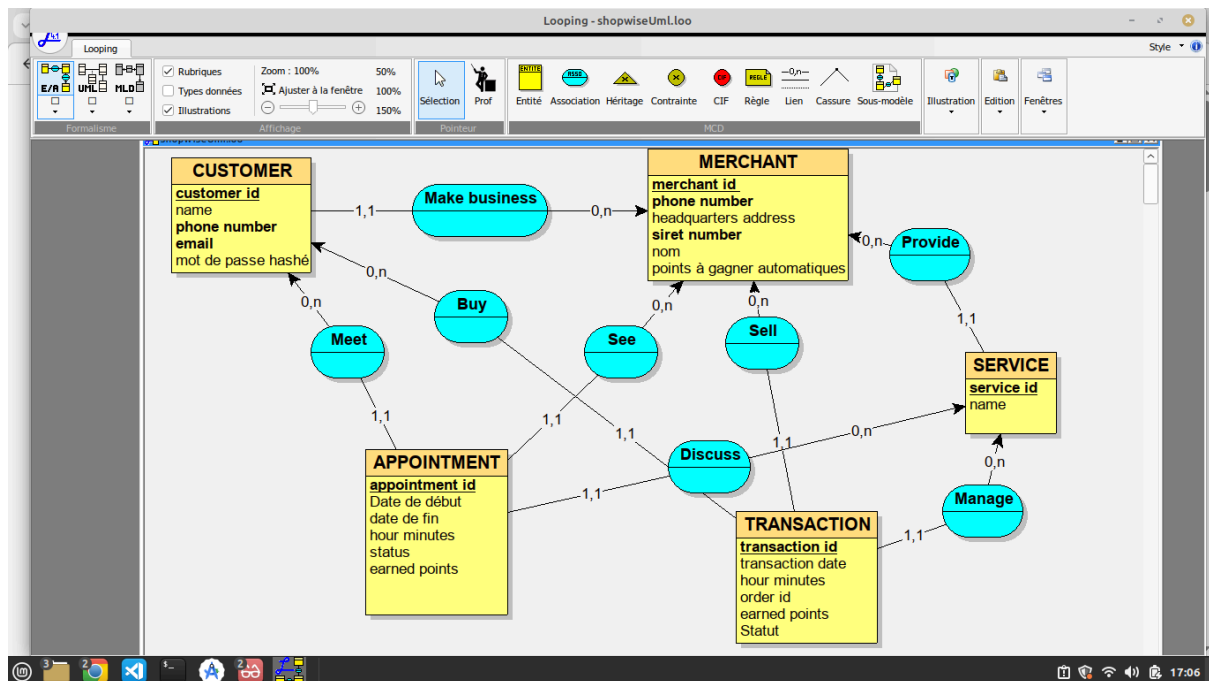

2. Unified Modeling Language dit UML

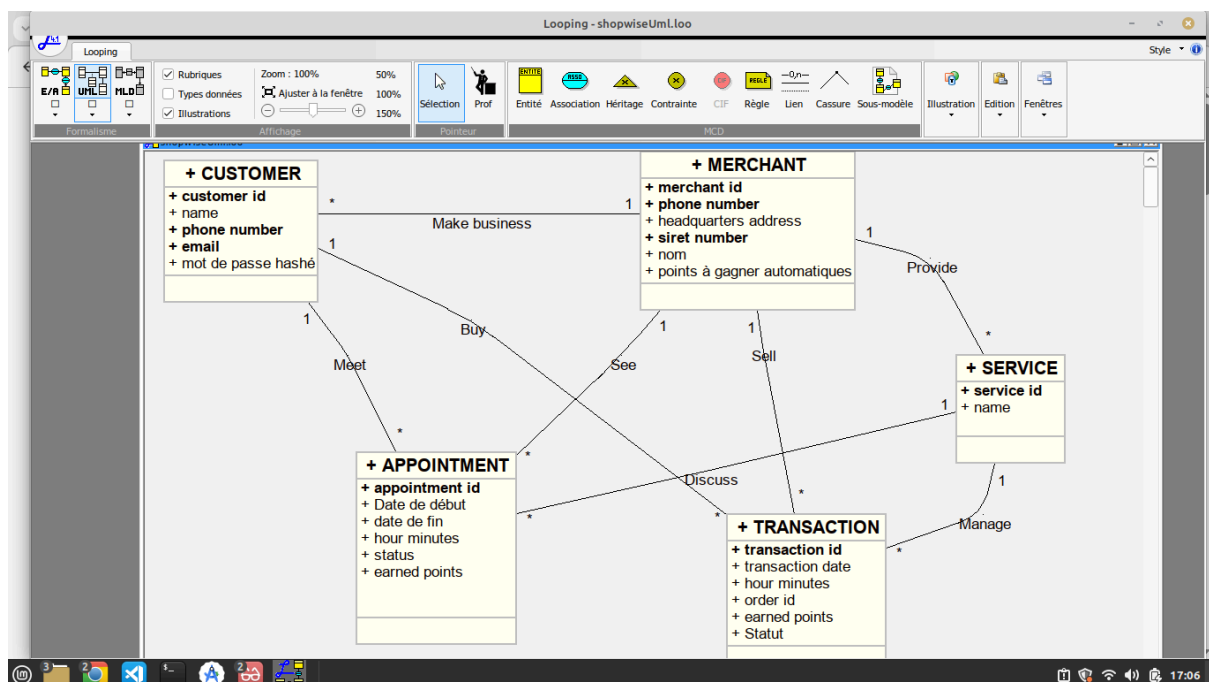

3. Modèle Logique de données dit MLD

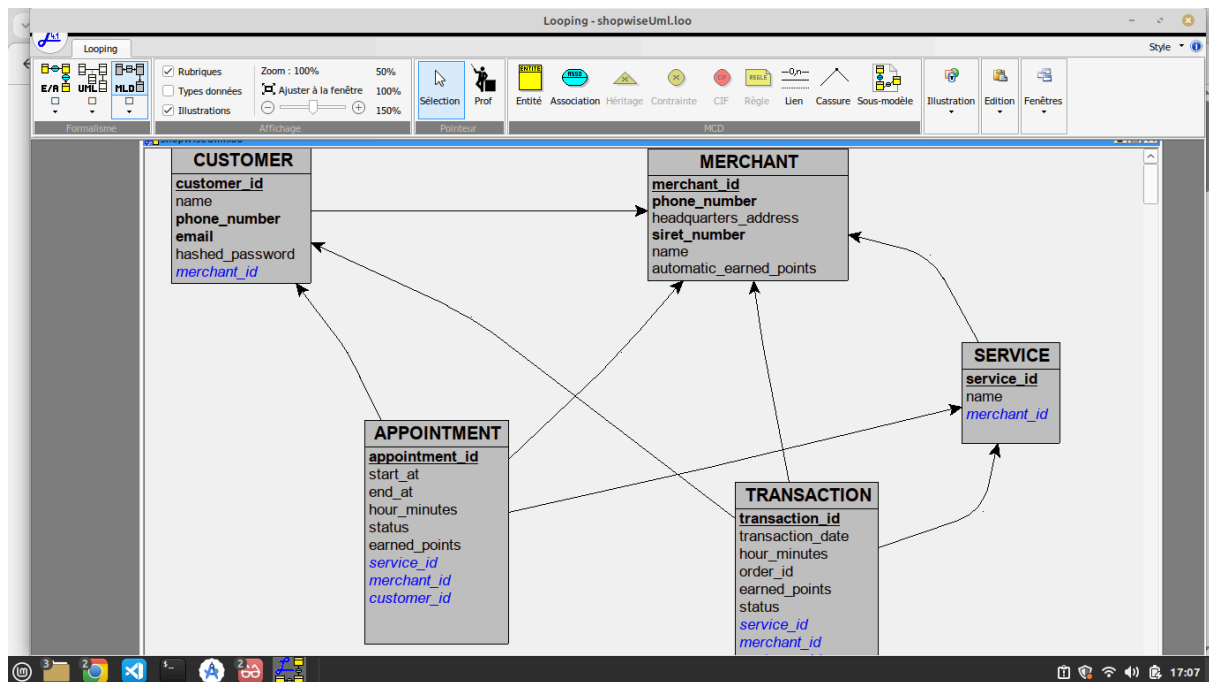

4. Modèle physique des données dit MPD

Script init.sql situé à la racine du projet.

```
CREATE EXTENSION IF NOT EXISTS "pgcrypto";

CREATE TABLE MERCHANT (
    merchant_id UUID DEFAULT gen_random_uuid(),
    name VARCHAR(255) NOT NULL,
    phone_number VARCHAR(15) NOT NULL,
    headquarters_address VARCHAR(255) NOT NULL,
    siret_number VARCHAR(14) NOT NULL,
    email VARCHAR(255) NOT NULL,
    hash_password VARCHAR(255) NOT NULL,
    automatic_earned_points SMALLINT,
    PRIMARY KEY(merchant_id),
    UNIQUE(phone_number),
    UNIQUE(siret_number),
    UNIQUE(email)
);

CREATE TABLE SERVICE (
    service_id UUID DEFAULT gen_random_uuid(),
```

```

        name VARCHAR(50) NOT NULL,
        merchant_id UUID NOT NULL,
        PRIMARY KEY(service_id),
        FOREIGN KEY(merchant_id) REFERENCES
MERCHANT(merchant_id)
);

CREATE TABLE CUSTOMER(
        customer_id UUID DEFAULT gen_random_uuid(),
        name VARCHAR(255) NOT NULL,
        phone_number VARCHAR(15) NOT NULL,
        email VARCHAR(255) NOT NULL,
        merchant_id UUID NOT NULL,
        hash_password VARCHAR(255),
        PRIMARY KEY(customer_id),
        UNIQUE(phone_number),
        UNIQUE(email),
        FOREIGN KEY(merchant_id) REFERENCES
MERCHANT(merchant_id)
);

CREATE TABLE APPOINTMENT(
        appointment_id UUID DEFAULT
gen_random_uuid(),
        start_at TIMESTAMP NOT NULL,
        end_at TIMESTAMP NOT NULL,
        status VARCHAR(255) NOT NULL,
        earned_points SMALLINT,
        service_id UUID NOT NULL,
        merchant_id UUID NOT NULL,
        customer_id UUID NOT NULL,
        PRIMARY KEY(appointment_id),
        FOREIGN KEY(service_id) REFERENCES
SERVICE(service_id),
        FOREIGN KEY(merchant_id) REFERENCES
MERCHANT(merchant_id),
        FOREIGN KEY(customer_id) REFERENCES
CUSTOMER(customer_id)
);

CREATE TABLE TRANSACTION(
        transaction_id UUID DEFAULT
gen_random_uuid(),

```

```
transaction_date TIMESTAMP NOT NULL,  
earned_points SMALLINT,  
status VARCHAR(255) NOT NULL,  
service_id UUID NOT NULL,  
merchant_id UUID NOT NULL,  
customer_id UUID NOT NULL,  
PRIMARY KEY(transaction_id),  
FOREIGN KEY(service_id) REFERENCES  
SERVICE(service_id),  
FOREIGN KEY(merchant_id) REFERENCES  
MERCHANT(merchant_id),  
FOREIGN KEY(customer_id) REFERENCES  
CUSTOMER(customer_id)  
);
```