

R Cheat Sheet

Paulo Monteiro

This is an R Markdown cheat sheet.

1 Linear Regression

1.1 Simple Linear Regression

The MASS library contains the Boston data set, which records medv (median house value) for 506 neighborhoods around Boston. We will seek to predict medv using 13 predictors such as rm (average number of rooms per house), age (average age of houses), and lstat (percent of households with low socioeconomic status).

Import libraries:

```
library(MASS)
library(ISLR)
```

Inspect the data:

```
fix(Boston)
names(Boston)
```


```
## [1] "crim"    "zn"      "indus"   "chas"    "nox"     "rm"      "age"
## [8] "dis"     "rad"     "tax"     "ptratio" "black"   "lstat"   "medv"
```

```
summary(Boston)
```

```
##      crim              zn              indus              chas
## Min.   : 0.00632   Min.   : 0.00   Min.   : 0.46   Min.   :0.00000
## 1st Qu.: 0.08204   1st Qu.: 0.00   1st Qu.: 5.19   1st Qu.:0.00000
## Median : 0.25651   Median : 0.00   Median : 9.69   Median :0.00000
## Mean   : 3.61352   Mean   : 11.36   Mean   :11.14   Mean   :0.06917
## 3rd Qu.: 3.67708   3rd Qu.: 12.50   3rd Qu.:18.10   3rd Qu.:0.00000
## Max.   :88.97620   Max.   :100.00   Max.   :27.74   Max.   :1.00000
##      nox              rm              age              dis
## Min.   :0.3850   Min.   :3.561   Min.   : 2.90   Min.   : 1.130
## 1st Qu.:0.4490   1st Qu.:5.886   1st Qu.: 45.02   1st Qu.: 2.100
## Median :0.5380   Median :6.208   Median : 77.50   Median : 3.207
## Mean   :0.5547   Mean   :6.285   Mean   : 68.57   Mean   : 3.795
## 3rd Qu.:0.6240   3rd Qu.:6.623   3rd Qu.: 94.08   3rd Qu.: 5.188
## Max.   :0.8710   Max.   :8.780   Max.   :100.00   Max.   :12.127
##      rad              tax              ptratio              black
## Min.   : 1.000   Min.   :187.0   Min.   :12.60   Min.   : 0.32
## 1st Qu.: 4.000   1st Qu.:279.0   1st Qu.:17.40   1st Qu.:375.38
## Median : 5.000   Median :330.0   Median :19.05   Median :391.44
## Mean   : 9.549   Mean   :408.2   Mean   :18.46   Mean   :356.67
## 3rd Qu.:24.000   3rd Qu.:666.0   3rd Qu.:20.20   3rd Qu.:396.23
## Max.   :24.000   Max.   :711.0   Max.   :22.00   Max.   :396.90
```

```
##      lstat      medv
## Min.   : 1.73   Min.   : 5.00
## 1st Qu.: 6.95   1st Qu.:17.02
## Median :11.36   Median :21.20
## Mean   :12.65   Mean   :22.53
## 3rd Qu.:16.95   3rd Qu.:25.00
## Max.   :37.97   Max.   :50.00
```

```
plot(Boston)
```

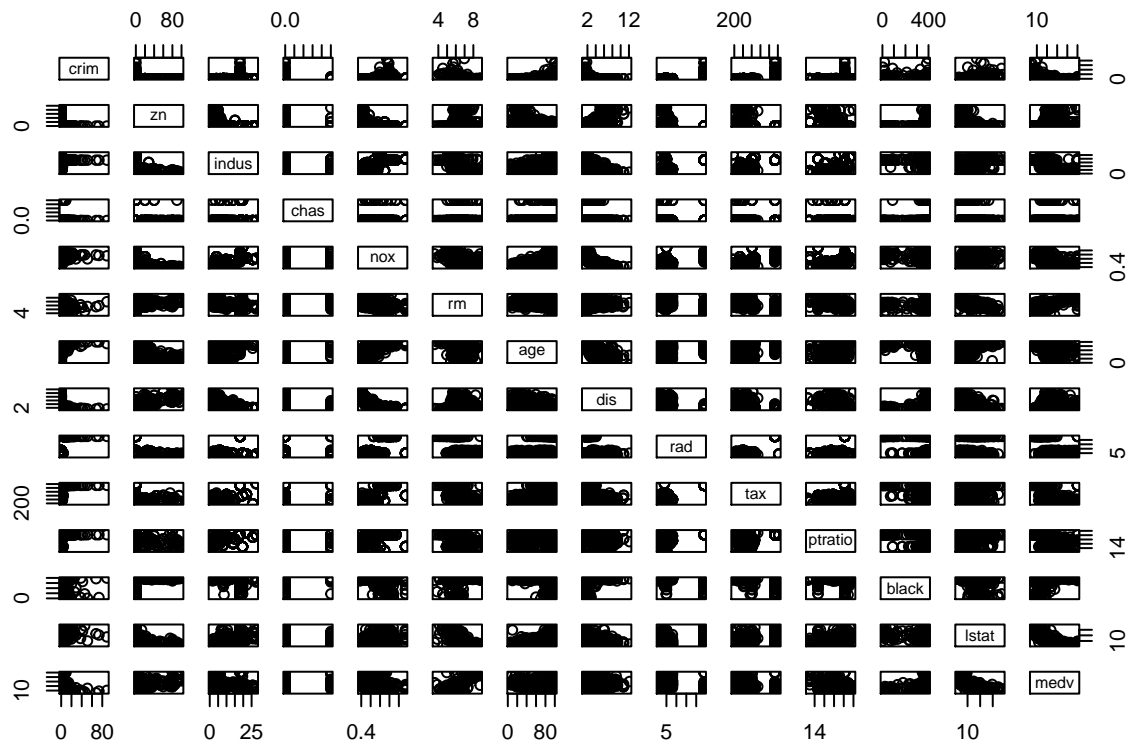

To find out
more about the data set, we can type `?Boston`

Use the `lm()` function to fit a simple linear regression model

```
lm.fit=lm(medv~lstat, data=Boston)
lm.fit
```

```
##
## Call:
## lm(formula = medv ~ lstat, data = Boston)
##
## Coefficients:
## (Intercept)      lstat
##      34.55      -0.95
```

We can also use `{r}attach(Boston)` to use the Boston variables