

Examen Pablo Nunez Fernandez.

1) CREATE USER 'user1'@'%' IDENTIFIED BY 'passwd123*';

2) CREATE USER 'user2'@'%' IDENTIFIED BY 'passwd456*';


```
MariaDB [mysql]> SELECT user, host FROM mysql.user;
```

User	Host
root	%
test	%
user1	%
user2'	%
user3	%
wp_remote_user	%
Macbook	100.76.79.98
ac901local	100.76.79.98
outerbase	100.76.79.98
healthcheck	127.0.0.1
Macbook	172.17.0.1
pablo	172.17.0.1
profesor	172.17.0.1
healthcheck	::1
ac903todo	localhost
healthcheck	localhost
mariadb.sys	localhost
root	localhost
user1	localhost
wp_local_user	localhost

```
+-----+-----+
```

20 rows in set (0.004 sec)

3)

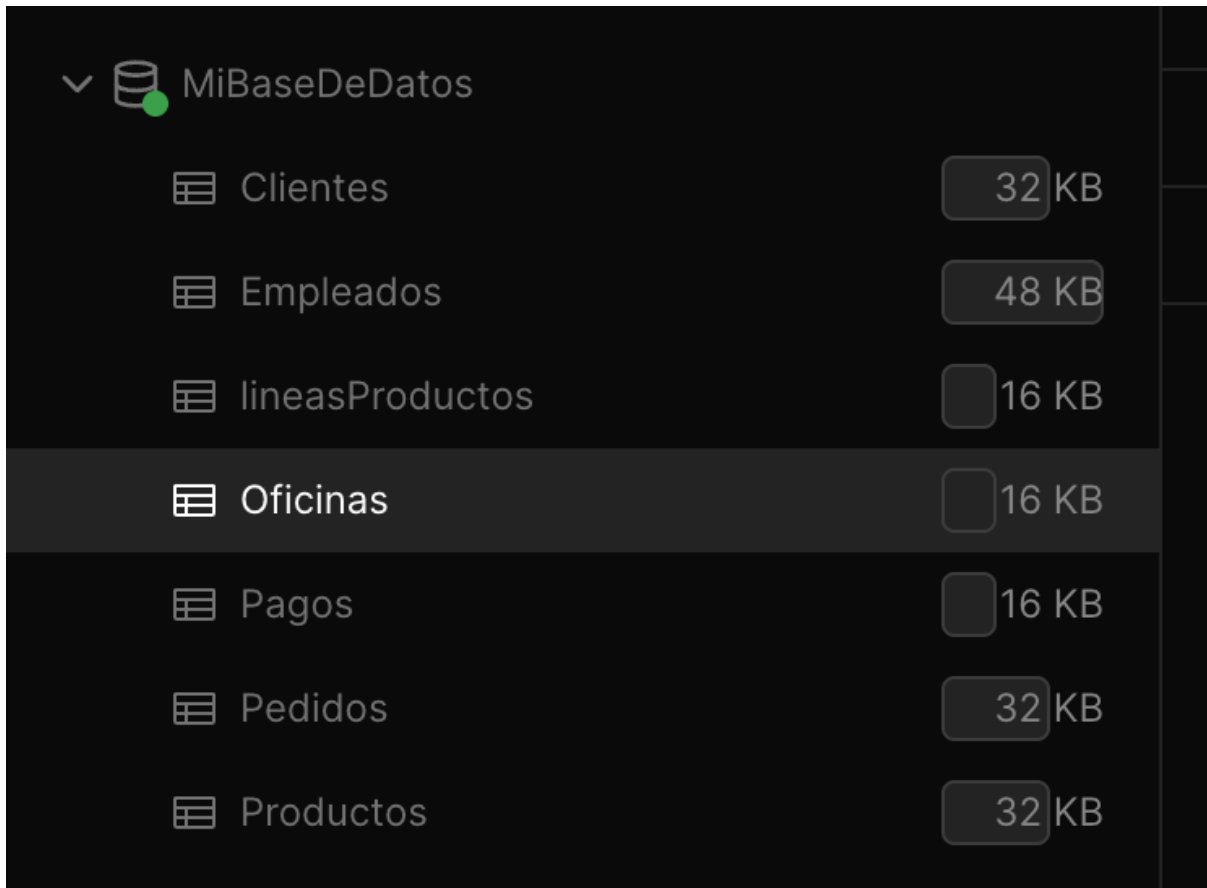

✓  MiBaseDeDatos	
 Clientes	32 KB
 Empleados	48 KB
 lineasProductos	16 KB
 Oficinas	16 KB
 Pagos	16 KB
 Pedidos	32 KB
 Productos	32 KB

4) GRANT ALL PRIVILEGES ON *.* TO 'user1'@'%';

```
MariaDB [(none)]> SELECT user1 FROM mysql.user;  
ERROR 1054 (42S22): Unknown column 'user1' in 'SELECT'  
MariaDB [(none)]> GRANT ALL PRIVILEGES ON *.* TO 'user1'@'%';  
Query OK, 0 rows affected (0.013 sec)
```

5)

```
MariaDB [(none)]> USE MiBaseDeDatos;  
Reading table information for completion of table and column names  
You can turn off this feature to get a quicker startup with -A  
  
Database changed  
MariaDB [MiBaseDeDatos]> █
```

6)

```
Database changed
MariaDB [MiBaseDeDatos]> select * from Clientes;
+-----+-----+-----+-----+
| idCliente | nombreCliente | apellidoContacto | n |
| direccion2 | ciudad | pr |
oResponsable | limiteCredito |
+-----+-----+-----+-----+
| 103 | Atelier graphique | Schmitt | C |
e | NULL | Nantes | NU |
1370 | 21000.00 |
| 112 | Signal Gift Stores | King | J |
| NULL | | | |
```

7) y 8)

```
pablo@rpi:~$ docker exec -it mariadb mariadb -u test2 -p '';
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 22
Server version: 12.1.2-MariaDB-ubu2404 mariadb.org binary distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> use MiBaseDeDatos;
ERROR 1044 (42000): Access denied for user 'test2'@'%' to database 'MiBaseDeDatos'
MariaDB [(none)]>
```

El user2 (test2 sin pw) no puede acceder a la base de datos por falta de privilegios que no se le han otorgado previamente.

9)

```
MariaDB [MiBaseDeDatos]> GRANT ALL PRIVILEGES ON MiBaseDeDatos.Oficinas TO 'test2'@'%';
Query OK, 0 rows affected (0.009 sec)
```

```
Database changed
MariaDB [MiBaseDeDatos]> select * from Oficinas;
+-----+-----+-----+-----+
| idOficina | ciudad | telefono | direccion1 |
al | territorio |
+-----+-----+-----+-----+
| 1 | San Francisco | +1 650 219 4782 | 100 Market Street |
| NA | | | |
| 2 | Boston | +1 215 837 0825 | 1550 Court Place |
| NA | | | |
| 3 | NYC | +1 212 555 3000 | 523 East 53rd Stre |
| NA | | | |
```