ROVER/HIRE

Hire a rover. Check every move.

BUILT ON

Hedera™ x OG

HEDERA · X402 · HCS · ERC-8004


OG COMPUTE (TEE) · OG STORAGE

PAY IN USDC ON HEDERA · BASE · SOLANA

Claude can think.
It can't move.

AI agents can already pay for APIs. We let one rent a body: a real rover, paid per move, with every move proven.

- An AI agent hires a real Arduino UNO Q rover to inspect a parcel.
- It pays every move in USDC with x402, before the wheels turn.
- An AI model on 0G picks every move inside sealed hardware, and signs it.
- Every step is saved where anyone can check it.



Three rules for every move

RULE



No pay, no move

Each move is paid in USDC before the wheels turn.

IF IT FAILS, THE FACE SHOWS

402

RULE



No brain, no move

An AI model on 0G picks the move. The rover never makes one up.

IF IT FAILS, THE FACE SHOWS

0G?

RULE



No proof, no move

The answer is signed inside 0G's TEE. The rover checks the signature first.

IF IT FAILS, THE FACE SHOWS

!TEE

If any rule fails, the wheels stay still and the rover's LED face says why.

One sentence, then it runs by itself

ERC-8004



Find

Claude's buyer agent finds the rovers listed on Hedera and checks each card.

1

A2A



Haggle

It counters at 75 % of the list price. Rover-A takes 0.015 USDC a move and 0.06 a photo.

2

0G + X402



Drive

Every move: a camera frame to 0G, a signed answer back, a paid move, then the wheels turn.

3

PHOTOS + REVIEW



Deliver

A photo is paid only when it reaches the chat. Then Claude reviews the rover on ERC-8004.

4

Watch it happen

YOU

Hire a rover to inspect parcel #3. 5 photos. Budget 0.80 USDC.

CLAUDE

Pay with Hedera, Base or Solana?

YOU

Hedera.


WHAT TO WATCH

- The rover: it looks around, finds box #3 among look-alikes, and circles it.
- The HUD: the brain, proof and money lights turn on before every move.
- The chat: each photo arrives a few seconds after it is taken.
- The replay site: the whole mission re-checked in your browser, at rover-replay.vercel.app.

ROVER/HIRE

ARCHITECTURE · THE WHOLE SYSTEM

Hedera × 0G

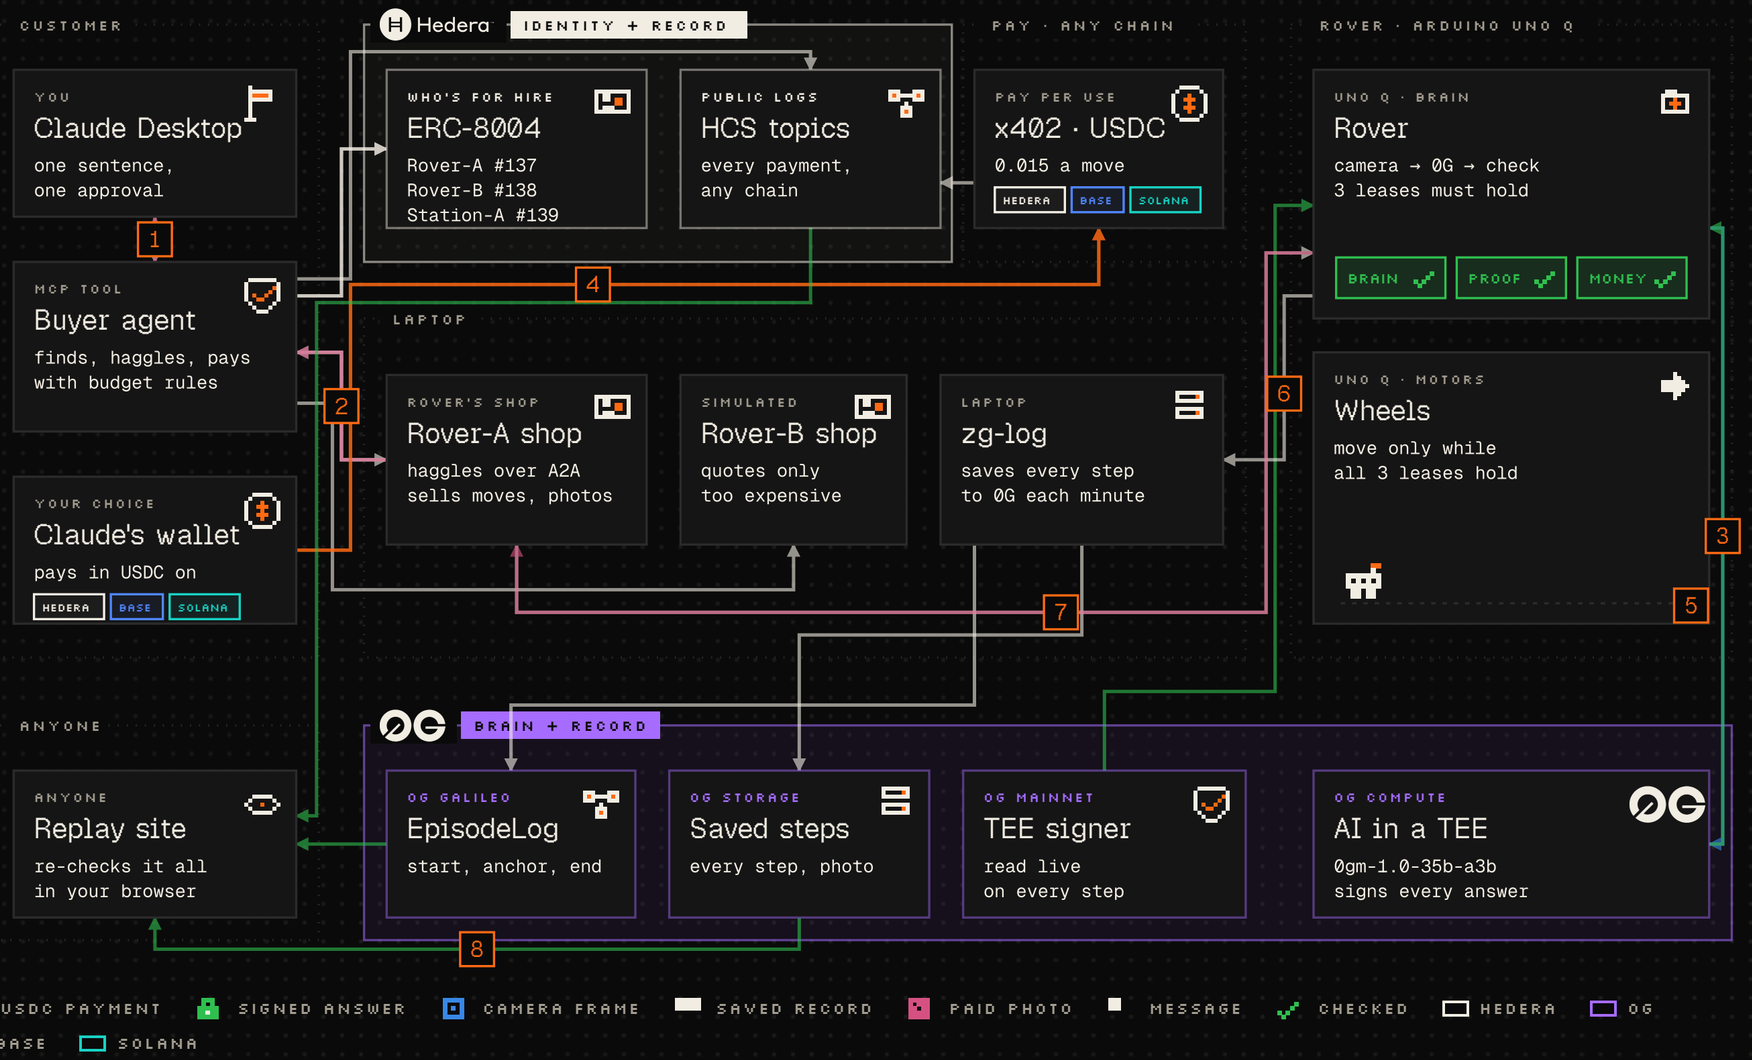

1. **Claude hires a rover**
   You ask Claude for an inspection and say which chain pays: Hedera, Base or Solana. Its buyer agent finds the rovers listed on Hedera.

2. **Haggle, then log the deal**
   The buyer haggles with each rover's shop. Rover-A takes the deal; it goes on a Hedera topic.

3. **0G decides the move**
   The rover sends a camera frame to an AI in 0G's secure hardware. The answer comes back signed, and the rover checks the signature.

4. **Pay before it moves**
   Claude's wallet pays 0.015 USDC on the chain you chose, and the payment goes on a Hedera topic. The shop lets the rover make one move.

5. **The wheels turn**
   Brain, proof and money all hold, so the rover moves. Without any one of them, it stays still.

6. **Every step saved on 0G**
   Each step is saved to 0G Storage and its fingerprint is written on 0G's chain.

7. **Photos paid on delivery**
   The rover takes a photo of the right parcel. Claude pays 0.06 USDC and sees it in the chat.

8. **Anyone can check**
   The replay site re-checks every step, signature and payment, on whichever chain paid. Claude leaves a review on Hedera.

0G is the brain, not the spinal cord

Motion stays on the rover. 0G makes every decision and keeps the record.

✓ A 0G call in the decision loop	Every move: one camera frame to `0gm-1.0-35b-a3b` in a TEE (TeeML, private mode), one signed move back.
✓ A log on 0G Storage, a request id per decision	Hash-chained step records go to 0G Storage every 60 s. Each root is anchored in EpisodeLog on Galileo, `0x44152879…B3E7`.
✓ Live hardware, or a replay	Both: the rover at the booth, and the replay site that re-checks every step from public data.
✓ A safe stop when 0G is unreachable	The rover holds still and shows 0G?. At the event, 0G's provider went down mid-mission: the rover stayed still for two minutes and nothing more was paid.

Agents that pay, on Hedera

- Rover-A's shop is x402 on every move (settled before it moves) and every photo (settled on delivery).
- The buyer agent finds, haggles and pays by itself, with no human approving.
- Hard limits: 0.20 USDC a payment, the mission budget, only the quoted payTo and price.
- Every payment is logged on HCS: the rover's money topic 0.0.11327288 and the buyer's spending topic 0.0.11327289.

ALSO USED


SPENDING CONTROLS | ERC-8004 IDENTITY #137 | ERC-8004 REVIEWS | HCS AUDIT LOGS | A2A HAGGLING | HTS USDC | HEDERA AGENT KIT

Settled by Blocky402, with x402.org as the backup. The facilitator pays the HBAR fee, so the agent only spends USDC.

ROVER/HIRE

PAY ON ANY CHAIN · HEDERA · BASE · SOLANA

Hedera × 0G

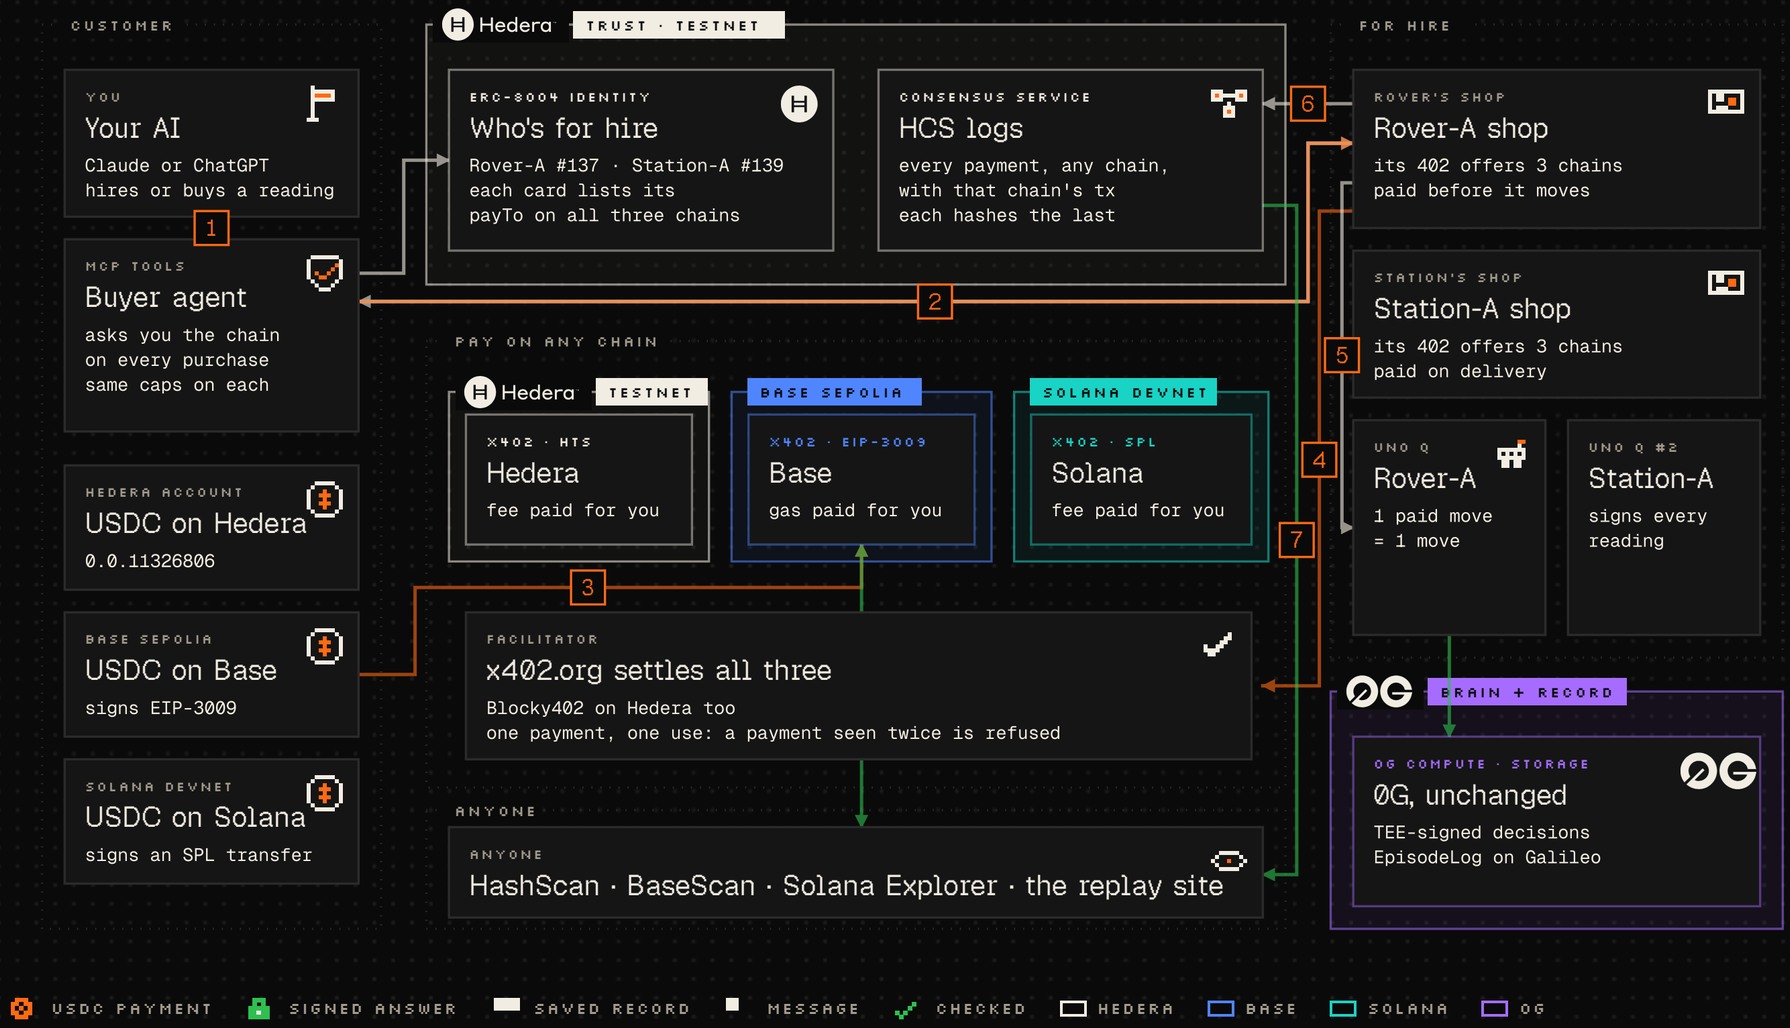

1 **Find who's for hire on Hedera**
Claude's buyer agent reads the ERC-8004 registry on Hedera. Each card lists where it can be paid: Hedera, Base and Solana. The buyer pays an address only if the shop names the same one.

2 **One 402, three ways to pay**
The shop answers HTTP 402 with the same price on all three chains, all USDC, all testnets.

3 **Pay on the chain you choose**
Your AI asks you which chain on every purchase and never picks for you; here you say Base. The agent signs a USDC transfer from that wallet, within the same limits.

4 **Settled once**
x402.org settles it on Base and pays the gas. A payment the shop has already seen is refused, so one payment buys one thing.

5 **Paid, so it moves**
Money is final before the wheels turn, whatever the chain. 0G still makes and signs every decision.

6 **Recorded on Hedera**
Every payment goes on the HCS log with its chain and that chain's transaction. Hedera stays the one record of who paid whom.

7 **Anyone can check**
The log on HashScan points to each payment on BaseScan, the Solana Explorer or HashScan, and the replay site checks them.

USDC PAYMENT · SIGNED ANSWER · SAVED RECORD · MESSAGE · CHECKED · HEDERA · BASE · SOLANA · 0G

Not one robot: a market for bodies

STATION-A · ERC-8004 #139



A second body sells data

- A second UNO Q sells signed readings: temperature, humidity, light, motion.
- 0.001 USDC a reading, on Hedera, Base or Solana, paid only on delivery.
- Signed on the board. The buyer checks every signature before it pays.
- Every sale on its own HCS topic, 0.0.11328274.

REMOTE MCP SERVER



Hire it from your own AI

- Claude, ChatGPT or any MCP app can hire the rover from anywhere.
- Your AI asks you which chain pays, every time. It never picks for you.
- Remote users pay from their own wallets: at most 1 USDC a mission, 2 USDC a day.
- The shop stays on the booth Wi-Fi behind a filter, and the owner has an off switch.

Don't trust us. Check it.

rover-replay.vercel.app

A static site. No server of ours sits in between: your browser reads 0G, Hedera, Base and Solana directly.

- Every 0G Storage root is recomputed in your browser.
- Every TEE signature is checked against 0G's on-chain signer.
- Every move was paid before the rover acted, on the chain that paid.
- Every step links to the one before: change one byte, and that step fails.

Mission a-7c7666ae

6 Nov 2026, at ETHGlobal Mumbai

3/3
PHOTOS

0.465
USDC ON HEDERA

203 s
MISSION

19/19
0G DECISIONS TEE-VERIFIED

Hard parts we solved

Proof without the flag	Sealed TEE mode hides 0G's own “verified” flag. So the rover checks every signature itself, against the signer it reads live from 0G's chain.
Pay first, never stall	Three moves are always paid ahead, and the money lease lapses one second after the shop stops vouching for it.
One payment, one thing	Every payment is fingerprinted, and a second use is refused. A lost reply is checked on the chain itself before paying again.
Look-alike boxes	Before every photo, 0G reads the box's number blind. Wrong number: no photo, no charge.

What we used, and why

OG COMPUTE · OG STORAGE · EPISODELOG

A brain with receipts

A vision model in a TEE signs every decision, and every step is stored and anchored, so anyone can re-check the mission.

X402 · USDC

Pay per move

Agents pay agents per request, settled before the move: no accounts, no invoices. On Hedera, Base or Solana.

HEDERA: ERC-8004 · A2A · HCS · AGENT KIT

Find, haggle, log

Sellers listed and reviewed on-chain, prices agreed agent to agent, every payment on a public log, limits enforced by policy.

ARDUINO UNO Q · MCP

A real body, any AI

Linux for the brain and a real-time microcontroller for the wheels, on one board. MCP lets any AI app hire it.

The ids

LIVE DEMO

rover-replay.vercel.app

CODE

github.com/Pavankumar07s/rover-for-hire

EPISODELOG · 0G GALILEO

0x44152879e809A63F70d4c529826660a65fd3B3E7

0G MODEL · PROVIDER

0gm-1.0-35b-a3b · TeeML · 0xf4FB8d2b…0079B250

ERC-8004 AGENTS · HEDERA TESTNET

Rover-A #137 · Rover-B #138 · Station-A #139

ROVER-A'S PAYTO

Hedera 0.0.11327287

HCS TOPICS

money 0.0.11327288 · spending 0.0.11327289 · audit 0.0.11327290 · station 0.0.11328274

ROVER-A ON BASE · SOLANA

0x79C515a8…4ce1 · GaHBts…ih58

ROVER/HIRE

No pay, no move.

No brain, no move.

No proof, no move.


rover-replay.vercel.app

BUILT ON HEDERA × 0G · PAY ON BASE · SOLANA

ROVER/HIRE

APPENDIX · ON HEDERA · ERC-8004 · A2A · X402 · HCS · AGENT KIT

Hedera

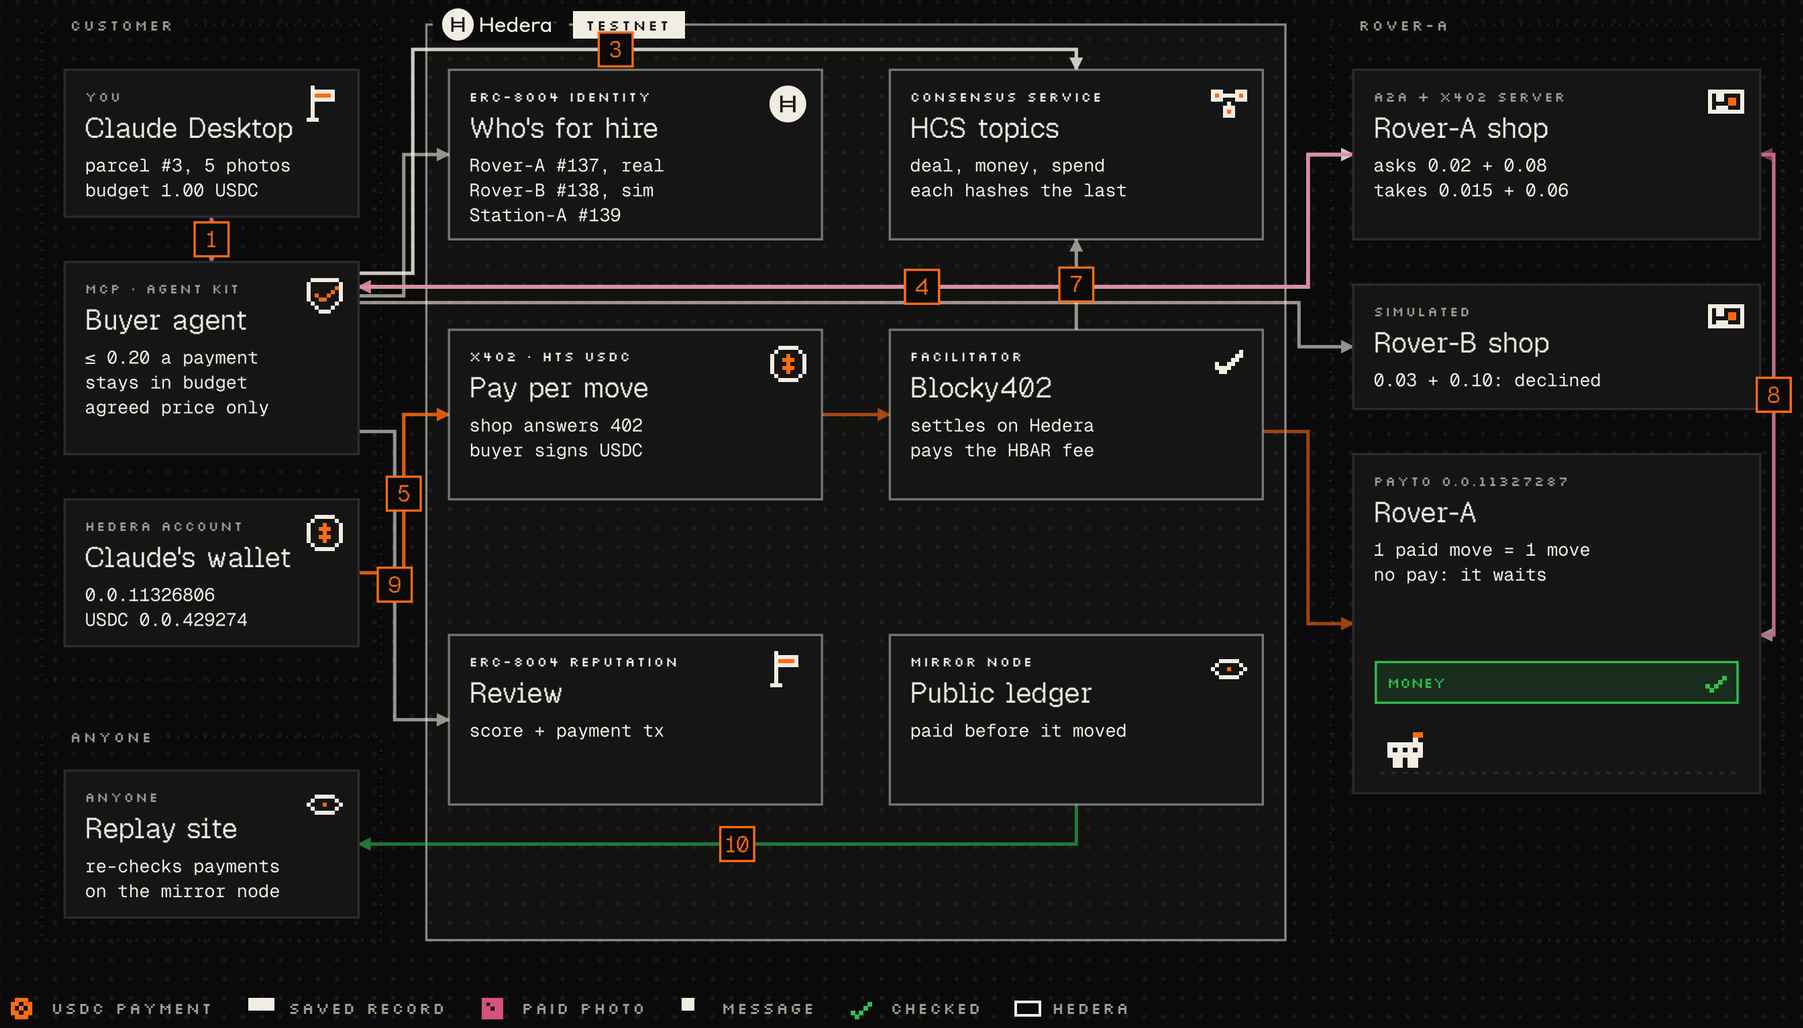

1 **Find rovers on ERC-8004**
Claude's buyer agent reads Hedera's ERC-8004 registry: Rover-A (#137, real) and Rover-B (#138, simulated).

2 **Haggle over A2A**
Rover-A asks 0.02 + 0.08 USDC and accepts 0.015 + 0.06. Rover-B asks too much and is declined.

3 **Log the deal on HCS**
The deal summary goes on a public HCS topic, through the Hedera Agent Kit.

4 **402: pay to move**
Before every move the shop answers HTTP 402 with the price. No payment, no move.

5 **x402 pays in USDC**
The buyer signs a USDC transfer. Blocky402 settles it on Hedera and pays the HBAR fee. Base and Solana work the same way.

6 **Paid, so it moves**
The shop sees the payment and gives the rover exactly one move.

7 **Public logs on HCS**
The rover's money and the buyer's spending go on their own topics, whichever chain paid. Each message carries the last one's hash.


8 **Photos paid on delivery**
A photo costs 0.06 USDC, paid only once it is delivered to Claude's chat.

9 **A review on ERC-8004**
The buyer scores the rover on the reputation registry, with a payment as proof.

10 **Anyone can check**
Every payment is public on the mirror node. The replay site checks each move was paid first.

ROVER/HIRE

APPENDIX · ON 0G · COMPUTE (TEE) · STORAGE · GALILEO

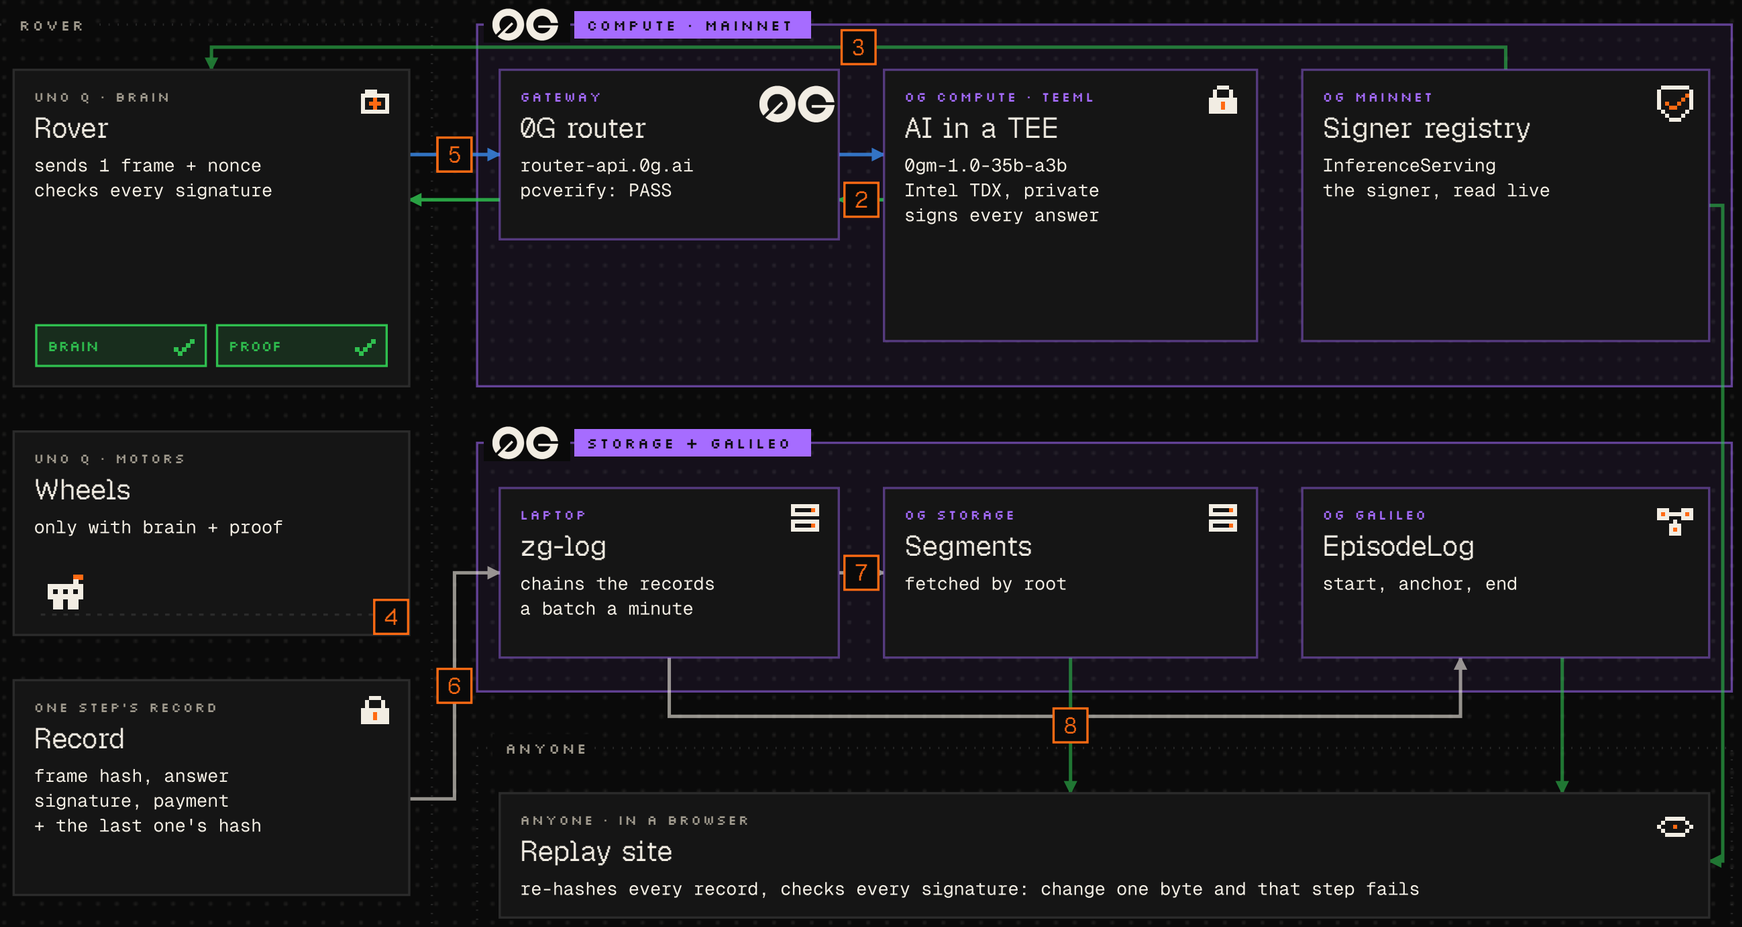

1 **One frame in**
The rover sends one camera frame and a fresh nonce through 0G's router to an AI in a TEE.

2 **One signed move out**
The AI picks one move. The answer is sealed and signed inside Intel TDX hardware (TeeML).

3 **The rover checks the proof**
The rover reads the signer from 0G's mainnet registry. The signature must match, or nothing moves.

4 **Then it moves**
Only a signed, checked answer can turn the wheels (once the move is paid, on Hedera, Base or Solana).

5 **A blind number check**
Before a photo, 0G reads the parcel's number without being told which one is wanted.

6 **Every step becomes a record**
The frame's hash, the answer, its signature and the payment, chained to the record before.

7 **Saved on 0G Storage**
A batch goes to 0G Storage every minute; its root is anchored on 0G Galileo.


8 **Anyone can replay it**
The replay site downloads every batch, re-hashes it and checks every signature. Change one byte and it fails.

SIGNED ANSWER · CAMERA FRAME · SAVED RECORD · CHECKED · 0G

ROVER/HIRE

APPENDIX · STATION-A · ERC-8004 · X402 · HCS

Hedera

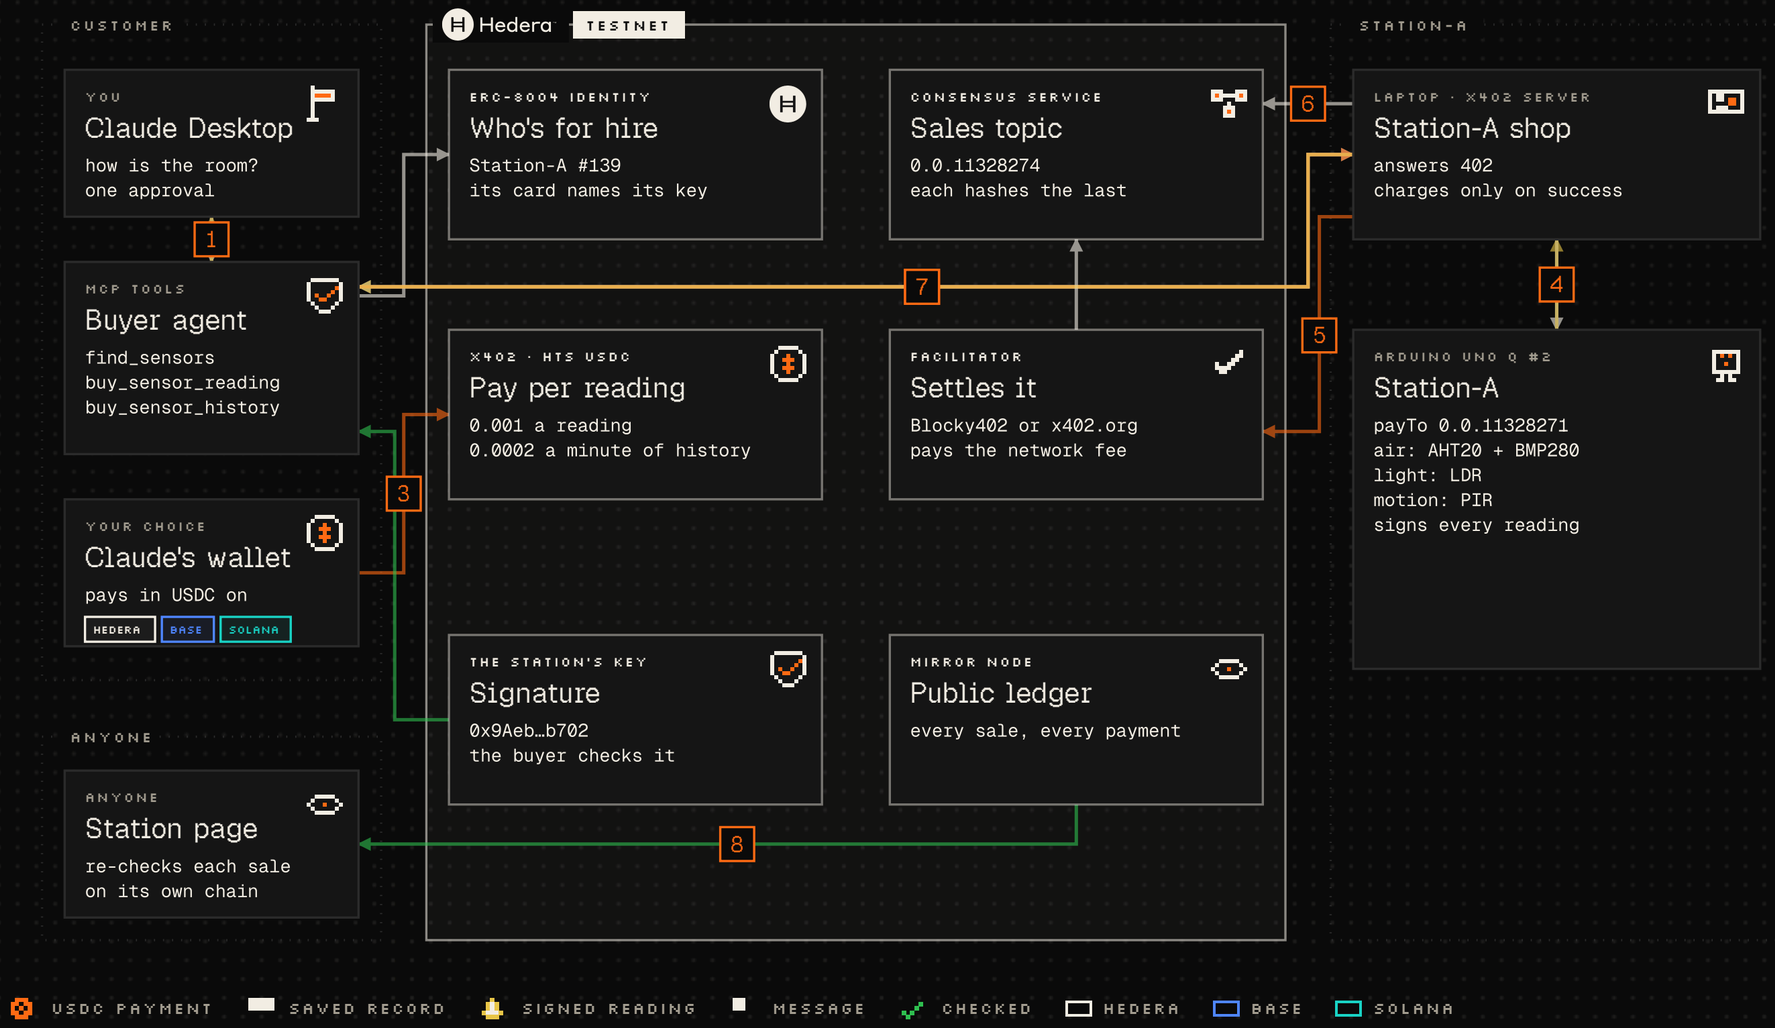

1. **Find Station-A on ERC-8004**
   Claude's buyer agent reads the ERC-8004 registry. Station-A (#139) sells climate, light and motion readings, and its card names the key that signs them.

2. **402: pay to read**
   The agent asks Station-A's shop for a reading. The shop answers HTTP 402 with the price: 0.001 USDC.

3. **x402 pays in USDC**
   The buyer signs a 0.001 USDC transfer from Claude's wallet, on the chain you chose (Hedera, Base or Solana), and sends it with the request.

4. **The station reads and signs**
   Only now does the shop ask the station. Station-A reads its sensors and signs the reading with its own key.

5. **Charged only on success**
   The reading came back, so the payment settles on its chain. A failed or stale read answers an error and is never charged.

6. **The sale on HCS**
   The sale goes on Station-A's public topic: the payment, the payer and the reading's hash. Each message carries the last one's hash.

7. **Checked, then delivered**
   The agent checks the signature against Station-A's key, that the reading is fresh and possible, then shows it in Claude's chat.

8. **Anyone can check**
   Every sale is public on the mirror node. The Station-A page re-checks the chain of sales, and each payment on the chain that paid it, in your browser.