



**CTU**

**CZECH TECHNICAL  
UNIVERSITY  
IN PRAGUE**

**CIIRC**

**CZECH INSTITUTE  
OF INFORMATICS  
ROBOTICS AND  
CYBERNETICS**

MASTER'S THESIS

# Semidefinite Programming for Geometric Problems in Computer Vision

Pavel Trutman

pavel.trutman@cvut.cz

November 9, 2017

Available at  
<http://cmp.felk.cvut.cz/~trutmpav/master-thesis/thesis/thesis.pdf>

**Thesis Advisor: Ing. Tomáš Pajdla, PhD.**

Czech Institute of Informatics, Robotics, and Cybernetics  
Czech Technical University in Prague  
Jugoslávských partyzánů 1580/3, 160 00 Prague 6, Czech Republic  
phone +420 723 309 712, www: <https://www.ciirc.cvut.cz>



## DIPLOMA THESIS ASSIGNMENT

**Student:** Bc. Pavel T r u t m a n

**Study programme:** Cybernetics and Robotics

**Specialisation:** Robotics

**Title of Diploma Thesis:** Semidefinite Programming for Geometric Problems in Computer Vision

### Guidelines:

1. Review the state of the art in semidefinite programming [1,2,3] and its use for solving variations of so called minimal problems in computer vision [4,5].
2. Suggest and develop a semidefinite solver for solving a variation of minimal problems.
3. Implement the solver, choose a relevant computer vision problem and investigate the performance of the solver in comparison to standard algebraic methods for solving the problem.

### Bibliography/Sources:

- [1] Y. Nesterov. Introductory lectures on convex optimization. Kluwer Academic Press, 2004.
- [2] M. Laurent. SUMS OF SQUARES, MOMENT MATRICES AND OPTIMIZATION OVER POLYNOMIALS (<http://homepages.cwi.nl/~monique/files/moment-ima-update-new.pdf>).
- [3] M. Laurent and P. Rostalski. The Approach of Moments for Polynomial Equations. In Handbook on Semidefinite, Conic and Polynomial Optimization, M. F. Anjos, J. B. Lasserre, eds., Springer 2012.
- [4] C. Aholt, S. Agarwal, R. Thomas. A QCQP Approach to Triangulation, Computer Vision – ECCV 2012, Lecture Notes in Computer Science 7572 (2012), 654-667.
- [5] F. Kahl, D. Henrion. Globally Optimal Estimates for Geometric Reconstruction Problems. ICCV 2005, (<http://www2.maths.lth.se/vision/publodb/reports/pdf/kahl-henrion-ijcv-07.pdf>).

**Diploma Thesis Supervisor:** Ing. Tomáš Pajdla, Ph.D.

**Valid until:** the end of the summer semester of academic year 2017/2018

L.S.

prof. Dr. Ing. Jan Kybic  
**Head of Department**

prof. Ing. Pavel Ripka, CSc.  
**Dean**

Prague, January 6, 2017



## Acknowledgements

I would like to express my thanks to my advisor Tomáš Pajdla for his guidance and valuable advices, which enabled me to finish this thesis. I would also like to thank Didier Herion for introducing me into semidefinite programming and polynomial optimization techniques and for his useful discussion and comments to my work. Special thanks go to my family for all their support.

# Author's declaration

I declare that the presented work was developed independently and that I have listed all sources of information used within it in accordance with the methodical instructions for observing the ethical principles in the preparation of university theses.

Prague, date .....  
Signature

# **Abstract**

**Keywords:**

# Abstrakt

Keywords:



# Contents

<b>1. Introduction</b>	<b>8</b>
<b>2. Semidefinite programming</b>	<b>9</b>
2.1. Preliminaries on semidefinite programs . . . . .	9
2.1.1. Symmetric matrices . . . . .	9
2.1.2. Semidefinite programs . . . . .	10
2.2. State of the art review . . . . .	11
2.3. Nesterov's approach . . . . .	12
2.3.1. Self-concordant functions . . . . .	12
2.3.2. Self-concordant barriers . . . . .	15
2.3.3. Barrier function for semidefinite programming . . . . .	19
2.4. Implementation details . . . . .	23
2.4.1. Package installation . . . . .	23
2.4.2. Usage . . . . .	24
2.5. Comparison with the state of the art methods . . . . .	26
2.5.1. Problem description . . . . .	26
2.5.2. Time measuring . . . . .	28
2.5.3. Results . . . . .	30
2.6. Speed-accuracy trade-off . . . . .	30
2.6.1. Precision based analysis . . . . .	30
2.6.2. Analysis based on the required distance from the solution . . . . .	31
<b>3. Optimization over polynomials</b>	<b>34</b>
3.1. Algebraic preliminaries . . . . .	34
3.1.1. The polynomial ring, ideals and varieties . . . . .	34
3.1.2. Solving systems of polynomial equations using multiplication matrices . . . . .	36
3.2. Moment matrices . . . . .	39
3.3. Polynomial optimization . . . . .	41
3.3.1. State of the art review . . . . .	41
3.3.2. Lasserre's LMI hierarchy . . . . .	42
3.3.3. Implementation details . . . . .	45
3.3.4. Comparison with the state of the art methods . . . . .	47
3.4. Solving systems of polynomial equations over the real numbers . . . . .	50
3.4.1. State of the art review . . . . .	51
3.4.2. The moment method . . . . .	51
Positive linear forms . . . . .	52
Truncated positive linear forms . . . . .	54
The moment matrix algorithm . . . . .	56
3.4.3. Implementation details . . . . .	58
Implementation in MATLAB with MOSEK toolbox . . . . .	58
Polyopt package implementation . . . . .	58
Usage . . . . .	59
3.4.4. Comparison with the state of the art methods . . . . .	60

<b>4. Minimal problems in computer vision geometry</b>	<b>61</b>
4.1. Dataset description . . . . .	61
4.2. Calibrated camera pose . . . . .	62
4.2.1. Performance of the polynomial solvers . . . . .	63
4.3. Calibrated camera pose with unknown focal length . . . . .	66
4.3.1. Performance of the polynomial solvers . . . . .	70
<b>5. Conclusion</b>	<b>75</b>
<b>A. Contents of the enclosed CD</b>	<b>76</b>
<b>Bibliography</b>	<b>77</b>

## List of Figures

2.1.	Example of a simple semidefinite problem for $y \in \mathbb{R}^2$ . Boundary of the feasible set $\{y \mid F(y) \succeq 0\}$ is shown as a black curve. The minimal value of the objective function $b^\top y$ is attained at $y^*$ . . . . .	11
2.2.	Illustration of the logarithmic barrier function for different values of $t$ . .	21
2.3.	Hyperbolic paraboloid $z = y_2^2 - y_1^2$ . . . . .	22
2.4.	Illustration of the sets $\text{Dom } F(y)$ and $\{y \mid X(y) \succeq 0\}$ . . . . .	23
2.5.	Graph of the semidefinite optimization problem stated in Example 2.6. .	26
2.6.	Graph of execution times based on the size of semidefinite problems solved by the selected toolboxes. . . . .	30
2.7.	Graph of numbers of iterations required to solve the semidefinite problems by Algorithm 2.3 for different values of problem size $k$ based on $\varepsilon$ using the implementation from the Polyopt package. . . . .	31
2.8.	Example of a simple semidefinite problem with steps of Algorithm 2.3. The algorithm starts from the analytic center $y_F^*$ and finishes at the optimal point $y^*$ . Selected fractions of the distance $\ y^* - y_F^*\ $ are represented by concentric circles. . . . .	32
2.9.	Graph of numbers of iterations required to get within the distance $\lambda\ y^* - y_F^*\ $ from the optimal solution $y^*$ using Algorithm 2.3 for different values of problem size $k$ based on $\lambda$ using the implementation from the Polyopt package. . . . .	33
3.1.	The intersection of the ellipse (3.21) and the hyperbola (3.22) with solutions found by the eigenvalue and the eigenvector methods using multiplication matrices. . . . .	37
3.2.	Feasible region and the expected global minima of the problem (3.67). .	44
3.3.	Graph of execution times of the polynomial optimization problems with the relaxation order $r = 1$ based on the number of variables solved by the selected toolboxes. . . . .	50
3.4.	Graph of execution times of the polynomial optimization problems in $n = 2$ variables based on the degree of the polynomial in the objective function solved by the selected toolboxes. . . . .	51
4.1.	Sculpture of Buddha head. Surface representing a point cloud reconstructed from the taken images. . . . .	61
4.2.	Scheme of the P3P problem. A pose of a calibrated camera can be computed from three known 3D points $X_1, X_2, X_3$ and their projections $x_1, x_2, x_3$ into the image plane $\pi$ . The camera projection center is denoted as $C$ . Distances $d_{12}, d_{23}, d_{13}$ denote the distances between the respective 3D points. . . . .	62
4.3.	Histogram of the maximal reprojection errors of all correspondences in the image for the best camera positions and rotations estimated by the selected polynomial solvers for the P3P problem compared to the maximal reprojection errors computed for the ground truth camera positions and rotations. . . . .	65

4.4. Histogram of the errors in estimated camera positions computed by the selected polynomial solvers for the P3P problem with respect to the ground truth camera positions. . . . .	66
4.5. Histogram of the errors in rotation angles computed by the selected polynomial solvers for the P3P problem with respect to the ground truth camera rotations. . . . .	67
4.6. Histogram of the execution times required to compute the P3P problem by the selected polynomial solvers. . . . .	68
4.7. Histogram of maximal degrees of relaxed monomials of the P3P problem. It corresponds to the value of variable $t$ in the last iteration of Algorithm 3.4 for the Polyopt package and the MATLAB with MOSEK implementation. For the Gloptipoly toolbox it corresponds to two times the given relaxation order. . . . .	69
4.8. Scheme of the P3.5Pf problem. A pose of a calibrated camera with unknown focal length can be computed from four known 3D points $X_1, X_2, X_3, X_4$ and their projections $x_1, x_2, x_3, x_4$ into the image plane $\pi$ . The camera projection center is denoted as $C$ . . . . .	70
4.9. Histogram of the maximal reprojection errors of all correspondences in the image for the best camera positions and rotations estimated by the selected polynomial solvers for the P3.5Pf problem compared to the maximal reprojection errors computed for the ground truth camera positions and rotations. . . . .	71
4.10. Histogram of the relative focal length errors computed by the selected polynomial solvers for the P3.5Pf problem with respect to the ground truth focal lengths. . . . .	72
4.11. Histogram of the errors in estimated camera positions computed by the selected polynomial solvers for the P3.5Pf problem with respect to the ground truth camera positions. . . . .	72
4.12. Histogram of the errors in rotation angles computed by the selected polynomial solvers for the P3.5Pf problem with respect to the ground truth camera rotations. . . . .	73
4.13. Histogram of the execution times required to compute the P3.5Pf problem by the selected polynomial solvers. . . . .	73
4.14. Histogram of maximal degrees of relaxed monomials of the P3.5Pf problem. It corresponds to the value of variable $t$ in the last iteration of Algorithm 3.4 for the Polyopt package and the MATLAB with MOSEK implementation. For the Gloptipoly toolbox it corresponds to two times the given relaxation order. . . . .	74

## List of Tables

2.1. Execution times of different sizes of semidefinite problems solved by the selected toolboxes. . . . .	29
3.1. Execution times of the polynomial optimization problems in different number of variables with the relaxation order $r = 1$ solved by the selected toolboxes. . . . .	49
3.2. Execution times of the polynomial optimization problems for different degrees of the polynomial in the objective function in $n = 2$ variables solved by the selected toolboxes. . . . .	50
4.1. Table of numbers of all real and complex solutions and of numbers of found real solutions by each of the selected polynomial solver for the P3P problem. . . . .	65
4.2. Table of numbers of all real and complex solutions and of numbers of found real solutions by each of the selected polynomial solver for the P3.5Pf problem. . . . .	74

## List of Algorithms

2.1. Newton method for minimization of the self-concordant functions. . . .	14
2.2. Damped Newton method for analytic centers. . . . .	17
2.3. Path following algorithm. . . . .	19
3.4. The moment matrix algorithm for computing real roots. . . . .	57

## List of Listings

2.1. Installation of the package Polyopt. . . . .	24
2.2. Typical usage of the class <code>SDPSolver</code> of the Polyopt package. . . . .	24
2.3. Code for solving semidefinite problem stated in Example 2.6. . . . .	27
3.1. Typical usage of the class <code>POPSolver</code> of the Polyopt package. . . . .	47
3.2. Code for solving polynomial optimization problem stated in Example 3.5	48
3.3. Typical usage of the class <code>PSSolver</code> of the Polyopt package. . . . .	60
3.4. Code for solving system of polynomial equations stated in Example 3.9 .	60

## List of Symbols and Abbreviations

$\mathbb{C}$	Set of complex numbers.
$\text{cl}(S)$	Closure of the set $S$ .
$\deg(p)$	Total degree of the polynomial $p$ .
$\text{diag}(x)$	Diagonal matrix with components of the vector $x$ on the diagonal.
$\text{dom } f$	Domain of the function $f$ .
$\text{Dom } f$	$\text{cl}(\text{dom } f)$ .
$f'(x)$	First derivative of the function $f(x)$ .
$f''(x)$	Second derivative of the function $f(x)$ .
G-J elimination	Gauss-Jordan elimination.
$\mathcal{I}(V)$	Vanishing ideal of the variety $V$ .
$\mathcal{I}^n$	Identity matrix of size $n \times n$ .
$\sqrt{I}$	Radical ideal of the ideal $I$ .
$\sqrt[\mathbb{R}]{I}$	Real radical ideal of the ideal $I$ .
$\langle f_1, f_2, \dots, f_n \rangle$	Ideal generated by the polynomials $f_1, f_2, \dots, f_n$ .
$\text{int } S$	Interior of the set $S$ .
$\ker(Q_\Lambda)$	Kernel of the quadratic form $Q_\Lambda$ .
$\ker(M)$	Kernel of the matrix $M$ .
$\{\lambda_i(A)\}_{i=1}^n$	Set of all eigenvalues of the matrix $A \in \mathbb{R}^{n \times n}$ .
LMI	Linear matrix inequality.
LP	Linear program.
$\mathbb{N}$	Set of natural numbers (including zero).
$\mathcal{N}_{\mathcal{B}}(f)$	Normal form of the polynomial $f$ modulo ideal $I$ with respect to the basis $\mathcal{B}$ .
$\mathcal{P}^n$	Cone of positive semidefinite $n \times n$ matrices.
P3P problem	The perspective-three-point problem.
P3.5Pf problem	The perspective-three-and-half-point problem with unknown focal length.
POP	Polynomial optimization.
QCQP	Quadratically constrained quadratic program.
$\mathbb{R}$	Set of real numbers.
$\mathbb{R}[x]$	Ring of polynomials with coefficients in $\mathbb{R}$ in $n$ variables $x \in \mathbb{R}^n$ .
$\mathbb{R}[x]^*$	Dual vector space to the ring of polynomials $\mathbb{R}[x]$ .
RANSAC	Random Sample Consensus.
$\mathcal{S}^n$	Space of $n \times n$ real symmetric matrices.
SDP	Semidefinite programming.
$SO(3)$	Group of all rotations about the origin of three-dimensional space.
SVD	Singular value decomposition.
$\text{tr}(A)$	Trace of the matrix $A$ .
$\text{vec}(p)$	Vector of the coefficients of the polynomial $p$ with respect to some monomial basis.

$V_{\mathbb{C}}(I)$	Algebraic variety of the ideal $I$ .
$V_{\mathbb{R}}(I)$	Real algebraic variety of the ideal $I$ .
$x^{(i)}$	$i$ -th element of the vector $x$ .
$x^{\top}$	Transpose of the vector $x$ .
$\lceil x \rceil$	$\min\{m \in \mathbb{Z} \mid m \geq x\}$ ; ceiling function.
$\lfloor x \rfloor$	$\max\{m \in \mathbb{Z} \mid m \leq x\}$ ; floor function.
$\mathcal{X}_f$	Multiplication matrix by the polynomial $f$ .
$\mathbb{Z}$	Set of integers.

## **1. Introduction**



## 2. Semidefinite programming

The goal of the semidefinite programming (SDP) is to optimize a linear function on a given set, which is an intersection of a cone of positive semidefinite matrices with an affine space. This set is called a spectrahedron and it is a convex set. As in SDP we are optimizing a convex function on a convex set, SDP is a special case of convex optimization.

Since SDP can be solved efficiently in polynomial time using interior-point methods, it has many applications in practise. For example, any linear program (LP) and quadratically constrained quadratic program (QCQP) can be written as a semidefinite program. However, this may be not the best idea to do as more efficient algorithms exist for solving LPs and QCQPs. On the other hand, there exist many useful applications of SDP, e.g. many NP-complete problems in combinatorial optimization can be approximated by semidefinite programs. One of the combinatorial problem worth mentioning is the MAX CUT problem (one of the Karp's original NP-complete problems [16]), for which M. Goemans and D. P. Williamson created the first approximation algorithm based on SDP [10]. Also in control theory, there are many problems based on linear matrix inequalities, which are solvable by SDP.

Special application of SDP comes from polynomial optimization since global solution of polynomial optimization problems can be found by hierarchies of semidefinite programs. Also systems of polynomial equations can be solved by hierarchies of semidefinite problems. This approach has the advantage that there exists a method, which allows us to compute real solutions only. Since in many applications, we are not interested in non-real solutions, this method may be the right tool for polynomial systems solving. We will focus in details on SDP application in polynomial optimization and polynomial systems solving in Chapter 3.

### 2.1. Preliminaries on semidefinite programs

In this section, we introduce some notation and preliminaries about symmetric matrices and semidefinite programs. We will introduce further notation and preliminaries later on in the text when needed.

At the beginning, let us denote the inner product for two vectors  $x, y \in \mathbb{R}^n$

$$\langle x, y \rangle = \sum_{i=1}^n x^{(i)} y^{(i)} \quad (2.1)$$

and the Frobenius inner product for two matrices  $X, Y \in \mathbb{R}^{n \times m}$ .

$$\langle X, Y \rangle = \sum_{i=1}^n \sum_{j=1}^m X^{(i,j)} Y^{(i,j)} \quad (2.2)$$

#### 2.1.1. Symmetric matrices

Let  $\mathcal{S}^n$  denotes the space of  $n \times n$  real symmetric matrices.

For a matrix  $M \in \mathcal{S}^n$ , the notation  $M \succeq 0$  means that  $M$  is positive semidefinite.  $M \succeq 0$  if and only if any of the following equivalent properties holds.

## 2. Semidefinite programming

1.  $x^\top Mx \geq 0$  for all  $x \in \mathbb{R}^n$ .
2. All eigenvalues of  $M$  are nonnegative.

The set of all positive semidefinite matrices is a cone. We will denote it as  $\mathcal{P}^n$  and it is called a cone of positive semidefinite matrices.

For a matrix  $M \in \mathcal{S}^n$ , the notation  $M \succ 0$  means that  $M$  is positive definite.  $M \succ 0$  if and only if any of the following equivalent properties holds.

1.  $M \succeq 0$  and  $\text{rank } M = n$ .
2.  $x^\top Mx > 0$  for all  $x \in \mathbb{R}^n$ .
3. All eigenvalues of  $M$  are positive.

### 2.1.2. Semidefinite programs

The standard (primal) form of a semidefinite program in variable  $X \in \mathcal{S}^n$  is defined as follows:

$$\begin{aligned} p^* = \sup_{X \in \mathcal{S}^n} \quad & \langle C, X \rangle \\ \text{s.t.} \quad & \langle A_i, X \rangle = b^{(i)} \quad (i = 1, \dots, m) \\ & X \succeq 0 \end{aligned} \quad (2.3)$$

where  $C, A_1, \dots, A_m \in \mathcal{S}^n$  and  $b \in \mathbb{R}^m$  are given.

The dual form of the primal form is the following program in variable  $y \in \mathbb{R}^m$ .

$$\begin{aligned} d^* = \inf_{y \in \mathbb{R}^m} \quad & b^\top y \\ \text{s.t.} \quad & \sum_{i=1}^m A_i y^{(i)} - C \succeq 0 \end{aligned} \quad (2.4)$$

The constraint

$$F(y) = \sum_{i=1}^m A_i y^{(i)} - C \succeq 0 \quad (2.5)$$


of the problem (2.4) is called a linear matrix inequality (LMI) in the variable  $y$ . The feasible region defined by LMI is called a spectrahedron. It can be shown, that this constraint is convex since if  $F(x) \succeq 0$  and  $F(y) \succeq 0$ , then  $\forall \alpha : 0 \leq \alpha \leq 1$  holds

$$F(\alpha x + (1 - \alpha)y) = \alpha F(x) + (1 - \alpha)F(y) \succeq 0. \quad (2.6)$$

The objective function of the problem (2.4) is linear, and therefore convex too. Because the semidefinite program (2.4) has convex objective function and convex constraint, it is a convex optimization problem and can be solved by standard convex optimization methods. To get a general picture, how a simple semidefinite problem may look like, see Figure 2.1.

The optimal solution  $y^*$  of any semidefinite program lies on the boundary of the feasible set, supposing the problem is feasible and the solution exists. The boundary of the feasible set is not smooth in general, but it is piecewise smooth as each piece is an algebraic surface.

**Example 2.1 (Linear programming).** Semidefinite programming can be seen as an extension to the linear programming since the componentwise inequalities between

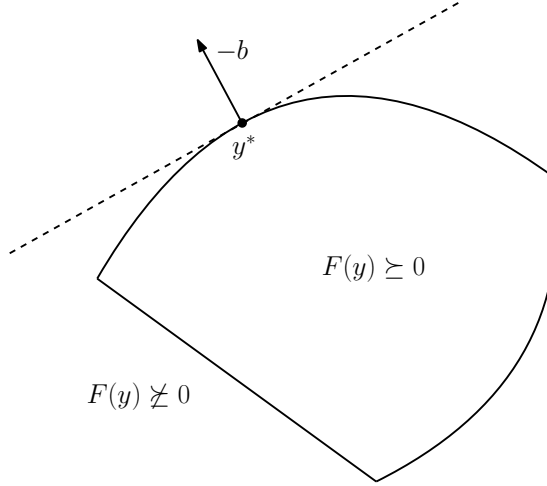

**Figure 2.1.** Example of a simple semidefinite problem for  $y \in \mathbb{R}^2$ . Boundary of the feasible set  $\{y \mid F(y) \succeq 0\}$  is shown as a black curve. The minimal value of the objective function  $b^\top y$  is attained at  $y^*$ .

vectors in linear programming can be replaced by LMI. Consider a linear program in a standard form

$$\begin{aligned} y^* = \arg \min_{y \in \mathbb{R}^m} & b^\top y \\ \text{s.t.} & Ay - c \geq 0 \end{aligned} \quad (2.7)$$

with  $b \in \mathbb{R}^m$ ,  $c \in \mathbb{R}^n$  and  $A = [a_1 \ \cdots \ a_m] \in \mathbb{R}^{n \times m}$ . This program can be transformed into the semidefinite program (2.4) by assigning

$$C = \text{diag}(c), \quad (2.8)$$

$$A_i = \text{diag}(a_i). \quad (2.9)$$

## 2.2. State of the art review

An early paper by R. Bellman and K. Fan about theoretical properties of semidefinite programs [3] was issued in 1963. Later on, many researchers worked on the problem of minimizing the maximal eigenvalue of a symmetric matrix, which can be done by solving a semidefinite program. Selecting a few from many: J. Cullum, W. Donath, P. Wolfe [6], M. Overton [31] and G. Pataki [32]. In 1984, the interior-point methods for LPs solving were introduced by N. Karmarkar [15]. It was the first reasonably efficient algorithm that solves LPs in polynomial time with excellent behavior in practise. The interior-point algorithms were then extended to be able to solve convex quadratic programs.

In 1988, Y. Nesterov and A. Nemirovski [29] did an important breakthrough. They showed that interior-point methods developed for LPs solving can be generalized to all convex optimization problems. All that is required, is the knowledge of a self-concordant barrier function for the feasible set of the problem. Y. Nesterov and A. Nemirovski have shown that a self-concordant barrier function exists for every convex set. However, their proposed universal self-concordant barrier function and its first and second derivatives are not easily computable. Fortunately for SDP, which is an important class of convex optimization programs, computable self-concordant barrier functions are known, and therefore the interior-point methods can be used.

## 2. Semidefinite programming

Nowadays, there are many libraries and toolboxes that one can use for solving semidefinite programs. They differ to each other in used methods and their implementations. Before starting solving a problem, one should know the details of the problem to solve and choose the library accordingly to it as not every method and its implementation is suitable for the given problem.

Most methods are based on interior-point methods, which are efficient and robust for general semidefinite programs. The main disadvantage of these methods is that they need to store and factorize usually large Hessian matrix. Most modern implementations of the interior-point methods do not need the knowledge of an interior feasible point in advance. SeDuMi [37] casts the standard semidefinite program into the homogeneous self-dual form, which has a trivial feasible point. SDPA [41] uses an infeasible interior-point method, which can be initialized by an infeasible point. Some of the libraries (e.g. MOSEK [26]) have started out as LPs solvers and were extended for QCQPs solving and convex optimization later on.

Another type of methods used in SDP are the first-order methods. They avoid storing and factorizing Hessian matrices, and therefore they are able to solve much larger problems than interior-point methods, but at some cost in accuracy. This method is implemented, for instance, in the SCS solver [30].

### 2.3. Nesterov's approach

In this section, we will follow Chapter 4 of [28] by Y. Nesterov, which is devoted to the convex optimization problems. This chapter describes the state of the art interior-point methods for solving convex optimization problems. We will extract from it the only minimum, just to be able to introduce an algorithm for semidefinite programs solving. We will present some basic definitions and theorems, but we will not prove them. For the proofs and more details look into [28].

#### 2.3.1. Self-concordant functions

**Definition 2.1 (Self-concordant function in  $\mathbb{R}$ ).** A closed convex function  $f : \mathbb{R} \mapsto \mathbb{R}$  is self-concordant if there exist a constant  $M_f \geq 0$  such that the inequality

$$|f'''(x)| \leq M_f f''(x)^{3/2} \quad (2.10)$$

holds for all  $x \in \text{dom } f$ .

For better understanding of the self-concordant functions, we provide several examples.

**Example 2.2.**

1. Linear and convex quadratic functions.

$$f'''(x) = 0 \quad \text{for all } x \quad (2.11)$$

Linear and convex quadratic functions are self-concordant with constant  $M_f = 0$ .

## 2. Negative logarithms.

$$f(x) = -\ln(x) \quad \text{for } x > 0 \quad (2.12)$$

$$f'(x) = -\frac{1}{x} \quad (2.13)$$

$$f''(x) = \frac{1}{x^2} \quad (2.14)$$

$$f'''(x) = -\frac{2}{x^3} \quad (2.15)$$

$$\frac{|f'''(x)|}{f''(x)^{3/2}} = 2 \quad (2.16)$$

Negative logarithms are self-concordant functions with constant  $M_f = 2$ .

## 3. Exponential functions.

$$f(x) = e^x \quad (2.17)$$

$$f''(x) = f'''(x) = e^x \quad (2.18)$$

$$\frac{|f'''(x)|}{f''(x)^{3/2}} = e^{-x/2} \rightarrow +\infty \text{ as } x \rightarrow -\infty \quad (2.19)$$

Exponential functions are not self-concordant functions.

**Definition 2.2 (Self-concordant function in  $\mathbb{R}^n$ ).** A closed convex function  $f : \mathbb{R}^n \mapsto \mathbb{R}$  is self-concordant if function  $g : \mathbb{R} \mapsto \mathbb{R}$

$$g(t) = f(x + tv) \quad (2.20)$$

is self-concordant for all  $x \in \text{dom } f$  and all  $v \in \mathbb{R}^n$ .

Now, let us focus on the main properties of the self-concordant functions.

**Theorem 2.1.** Let functions  $f_i$  be self-concordant with constants  $M_i$  and let  $\alpha_i > 0$ ,  $i = 1, 2$ . Then the function

$$f(x) = \alpha_1 f_1(x) + \alpha_2 f_2(x) \quad (2.21)$$

is self-concordant with constant

$$M_f = \max \left\{ \frac{1}{\sqrt{\alpha_1}} M_1; \frac{1}{\sqrt{\alpha_2}} M_2 \right\} \quad (2.22)$$

and

$$\text{dom } f = \text{dom } f_1 \cap \text{dom } f_2. \quad (2.23)$$

**Corollary 2.1.** Let function  $f$  be self-concordant with some constant  $M_f$  and  $\alpha > 0$ . Then the function  $\phi(x) = \alpha f(x)$  is also self-concordant with the constant  $M_\phi = \frac{1}{\sqrt{\alpha}} M_f$ .

We call function  $f(x)$  as the standard self-concordant function if  $f(x)$  is some self-concordant function with the constant  $M_f = 2$ . Using Corollary 2.1, we can see that any self-concordant function can be transformed into the standard self-concordant function by scaling.

**Theorem 2.2.** Let function  $f$  be self-concordant. If  $\text{dom } f$  contains no straight line, then the Hessian  $f''(x)$  is nondegenerate at any  $x$  from  $\text{dom } f$ .

## 2. Semidefinite programming

For some self-concordant function  $f(x)$ , for which we assume, that  $\text{dom } f$  contains no straight line (which implies that all  $f''(x)$  are nondegenerate, see Theorem 2.2), we denote two local norms as

$$\|u\|_x = \sqrt{u^\top f''(x)u}, \quad (2.24)$$

$$\|u\|_x^* = \sqrt{u^\top f''(x)^{-1}u}. \quad (2.25)$$

Consider minimization problem

$$x^* = \arg \min_{x \in \text{dom } f} f(x) \quad (2.26)$$

as the minimization of the self-concordant function  $f(x)$ . Algorithm 2.1 describes the iterative process of solving the optimization problem (2.26). The algorithm is divided into two stages by the value of  $\|f'(x_k)\|_{x_k}^*$ . The splitting parameter  $\beta$  guarantees quadratic convergence rate for the second part of the algorithm. The parameter  $\beta$  is chosen from interval  $(0, \bar{\lambda})$ , where

$$\bar{\lambda} = \frac{3 - \sqrt{5}}{2}, \quad (2.27)$$

which is a root of the equation

$$\frac{\lambda}{(1 - \lambda)^2} = 1. \quad (2.28)$$

---

**Algorithm 2.1.** Newton method for minimization of the self-concordant functions.

---

**Input:**

- $f$  a self-concordant function to minimize
- $x_0 \in \text{dom } f$  a starting point
- $\beta \in (0, \bar{\lambda})$  a parameter of size of the region of quadratic convergence
- $\varepsilon$  a precision

**Output:**

- $x^*$  an optimal solution to the minimization problem (2.26)

```

1:  $k \leftarrow 0$ 
2: while  $\|f'(x_k)\|_{x_k}^* \geq \beta$  do
3:    $x_{k+1} \leftarrow x_k - \frac{1}{1 + \|f'(x_k)\|_{x_k}^*} f''(x_k)^{-1} f'(x_k)$ 
4:    $k \leftarrow k + 1$ 
5: end while
6: while  $\|f'(x_k)\|_{x_k}^* > \varepsilon$  do
7:    $x_{k+1} \leftarrow x_k - f''(x_k)^{-1} f'(x_k)$ 
8:    $k \leftarrow k + 1$ 
9: end while
10: return  $x^* \leftarrow x_k$ 

```

---

The first while loop (lines 2 – 5) represents damped Newton method, where at each iteration we have

$$f(x_k) - f(x_{k+1}) \geq \beta - \ln(1 + \beta) \text{ for } k \geq 0, \quad (2.29)$$

where

$$\beta - \ln(1 + \beta) > 0 \text{ for } \beta > 0, \quad (2.30)$$

and therefore the global convergence of the algorithm is ensured. It can be shown that the local convergence rate of the damped Newton method is also quadratic, but the presented switching strategy is preferred as it gives better complexity bounds.

The second while loop of the algorithm (lines 6 – 9) is the standard Newton method with quadratic convergence rate.

The algorithm terminates when the required precision  $\varepsilon$  is reached.

### 2.3.2. Self-concordant barriers

To be able to introduce self-concordant barriers, let us denote  $\text{Dom } f = \text{cl}(\text{dom } f)$ .

**Definition 2.3 (Self-concordant barrier).** Let  $F(x)$  be a standard self-concordant function. We call it a  $\nu$ -self-concordant barrier for set  $\text{Dom } F$ , if

$$\sup_{u \in \mathbb{R}^n} (2u^\top F'(x) - u^\top F''(x)u) \leq \nu \quad (2.31)$$

for all  $x \in \text{dom } F$ . The value  $\nu$  is called the parameter of the barrier.

The inequality (2.31) can be rewritten into the following equivalent matrix notation:

$$F''(x) \succeq \frac{1}{\nu} F'(x) F'(x)^\top. \quad (2.32)$$

In Definition 2.3, the hessian  $F''(x)$  is not required to be nondegenerate. However, in case that  $F''(x)$  is nondegenerate, the inequality (2.31) is equivalent to

$$F'^\top(x) F''(x)^{-1} F'(x) \leq \nu. \quad (2.33)$$

Let us explore, which basic functions are self-concordant barriers.

#### Example 2.3.

1. Linear functions.

$$F(x) = \alpha + a^\top x, \text{ dom } F = \mathbb{R}^n \quad (2.34)$$

$$F''(x) = 0 \quad (2.35)$$

From (2.32) and for  $a \neq 0$  follows, that linear functions are not self-concordant barriers.

2. Convex quadratic functions.

For  $A = A^\top \succ 0$ :

$$F(x) = \alpha + a^\top x + \frac{1}{2} x^\top A x, \text{ dom } F = \mathbb{R}^n \quad (2.36)$$

$$F'(x) = a + A x \quad (2.37)$$

$$F''(x) = A \quad (2.38)$$

After substitution into (2.33) we obtain

$$(a + A x)^\top A^{-1} (a + A x) = a^\top A^{-1} a + 2a^\top x + x^\top A x, \quad (2.39)$$

which is unbounded from above on  $\mathbb{R}^n$ . Therefore, quadratic functions are not self-concordant barriers.

## 2. Semidefinite programming

### 3. Logarithmic barrier for a ray.

$$F(x) = -\ln x, \text{ dom } F = \{x \in \mathbb{R} \mid x > 0\} \quad (2.40)$$

$$F'(x) = -\frac{1}{x} \quad (2.41)$$

$$F''(x) = \frac{1}{x^2} \quad (2.42)$$

From (2.33), when  $F'(x)$  and  $F''(x)$  are both scalars, we get

$$\frac{F'(x)^2}{F''(x)} = \frac{x^2}{x^2} = 1. \quad (2.43)$$

Therefore, the logarithmic barrier for a ray is a self-concordant barrier with parameter  $\nu = 1$  on domain  $\{x \in \mathbb{R} \mid x > 0\}$ .

Now, let us focus on the main properties of the self-concordant barriers.

**Theorem 2.3.** Let  $F(x)$  be a self-concordant barrier. Then the function  $c^\top x + F(x)$  is a self-concordant function on  $\text{dom } F$ .

**Theorem 2.4.** Let  $F_i$  be a  $\nu_i$ -self-concordant barriers,  $i = 1, 2$ . Then the function

$$F(x) = F_1(x) + F_2(x) \quad (2.44)$$

is a self-concordant barrier for convex set

$$\text{Dom } F = \text{Dom } F_1 \cap \text{Dom } F_2 \quad (2.45)$$

with the parameter

$$\nu = \nu_1 + \nu_2. \quad (2.46)$$

**Theorem 2.5.** Let  $F(x)$  be a  $\nu$ -self-concordant barrier. Then for any  $x \in \text{Dom } F$  and  $y \in \text{Dom } F$  such that

$$(y - x)^\top F'(x) \geq 0, \quad (2.47)$$

we have

$$\|y - x\|_x \leq \nu + 2\sqrt{\nu}. \quad (2.48)$$

There is one special point of convex set, which is important for solving convex minimization problems. It is called the analytic center of convex set and we will focus on its properties.

**Definition 2.4.** Let  $F(x)$  be a  $\nu$ -self-concordant barrier for the set  $\text{Dom } F$ . The point

$$x_F^* = \arg \min_{x \in \text{Dom } F} F(x) \quad (2.49)$$

is called the analytic center of convex set  $\text{Dom } F$ , generated by the barrier  $F(x)$ .

**Theorem 2.6.** Assume that the analytic center of a  $\nu$ -self-concordant barrier  $F(x)$  exists. Then for any  $x \in \text{Dom } F$  we have

$$\|x - x_F^*\|_{x_F^*} \leq \nu + 2\sqrt{\nu}. \quad (2.50)$$



This property clearly follows from Theorem 2.5 and the fact that  $F'(x_F^*) = 0$ .

Thus, if  $\text{Dom } F$  contains no straight line, then the existence of  $x_F^*$  (which leads to nondegenerate  $F''(x_F^*)$ ) implies that the set  $\text{Dom } F$  is bounded.

Now, we describe the algorithm and its properties for obtaining an approximation to the analytic center. To find the analytic center, we need to solve the minimization problem (2.49). For that, we will use the standard implementation of the damped Newton method with a termination condition

$$\|F'(x_k)\|_{x_k}^* \leq \beta \text{ for } \beta \in (0, 1). \quad (2.51)$$

The pseudocode of the whole minimization process is shown in Algorithm 2.2.

---

**Algorithm 2.2.** Damped Newton method for analytic centers.

---

**Input:**

- $F$  a  $\nu$ -self-concordant barrier
- $x_0 \in \text{Dom } F$  a starting point
- $\beta \in (0, 1)$  a centering parameter

**Output:**

- $x_F^*$  an approximation of the analytic center of the set  $\text{Dom } F$

---

```

1:  $k \leftarrow 0$ 
2: while  $\|F'(x_k)\|_{x_k}^* > \beta$  do
3:    $x_{k+1} \leftarrow x_k - \frac{1}{1 + \|F'(x_k)\|_{x_k}^*} F''(x_k)^{-1} F'(x_k)$ 
4:    $k \leftarrow k + 1$ 
5: end while
6: return  $x_F^* \leftarrow x_k$ 

```

---

**Theorem 2.7.** Algorithm 2.2 terminates no later than after  $N$  steps, where

$$N = \frac{1}{\beta - \ln(1 + \beta)} (F(x_0) - F(x_F^*)). \quad (2.52)$$

The knowledge of the analytic center allows us to solve the standard minimization problem

$$x^* = \arg \min_{x \in Q} c^\top x \quad (2.53)$$

with bounded closed convex set  $Q \equiv \text{Dom } F$ , which has nonempty interior, and which is endowed with a  $\nu$ -self-concordant barrier  $F(x)$ . Denote

$$f(t, x) = tc^\top x + F(x) \text{ for } t \geq 0 \quad (2.54)$$

as a parametric penalty function. Using Theorem 2.3 we can see that  $f(t, x)$  is self-concordant in  $x$ . Let us introduce new minimization problem using the parametric penalty function  $f(t, x)$

$$x^*(t) = \arg \min_{x \in \text{dom } F} f(t, x). \quad (2.55)$$

This trajectory is called the central path of the problem (2.53). We will reach the solution  $x^*(t) \rightarrow x^*$  as  $t \rightarrow +\infty$ . Moreover, since the set  $Q$  is bounded, the analytic center  $x_F^*$  of this set exists and

$$x^*(0) = x_F^*. \quad (2.56)$$

## 2. Semidefinite programming

From the first-order optimality condition, any point of the central path satisfies equation

$$tc + F'(x^*(t)) = 0. \quad (2.57)$$

Since the analytic center lies on the central path and can be found by Algorithm 2.2, all we have to do, to find the solution  $x^*$ , is to follow the central path. This enables us an approximate centering condition:

$$\|f'(t, x)\|_x^* = \|tc + F'(x)\|_x^* \leq \beta, \quad (2.58)$$

where the centering parameter  $\beta$  is small enough.

Assuming  $x \in \text{dom } F$ , one iteration of the path-following algorithm consists of two steps:

$$t_+ = t + \frac{\gamma}{\|c\|_x^*}, \quad (2.59)$$

$$x_+ = x - F''(x)^{-1}(t_+c + F'(x)). \quad (2.60)$$

**Theorem 2.8.** Let  $x$  satisfy the approximate centering condition (2.58)

$$\|tc + F'(x)\|_x^* \leq \beta \quad (2.61)$$

with  $\beta < \bar{\lambda} = \frac{3-\sqrt{5}}{2}$ . Then for  $\gamma$ , such that

$$|\gamma| \leq \frac{\sqrt{\beta}}{1 + \sqrt{\beta}} - \beta, \quad (2.62)$$

we have again

$$\|t_+c + F'(x_+)\|_{x_+}^* \leq \beta. \quad (2.63)$$

This theorem ensures the correctness of the presented iteration of the path-following algorithm. For the whole description of the path-following algorithm please see Algorithm 2.3.

**Theorem 2.9.** Algorithm 2.3 terminates no more than after  $N$  steps, where

$$N \leq \mathcal{O}\left(\sqrt{\nu} \ln \frac{\nu \|c\|_{x_F^*}^*}{\varepsilon}\right). \quad (2.64)$$

The parameters  $\beta$  and  $\gamma$  in Algorithm 2.2 and Algorithm 2.3 can be fixed. The reasonable values are:

$$\beta = \frac{1}{9}, \quad (2.65)$$

$$\gamma = \frac{\sqrt{\beta}}{1 + \sqrt{\beta}} - \beta = \frac{5}{36}. \quad (2.66)$$

The union of Algorithm 2.2 and Algorithm 2.3 can be easily used to solve the standard minimization problem (2.53), supposing we have a feasible point  $x_0 \in Q$ .

---

**Algorithm 2.3.** Path following algorithm.

---

**Input:** $F$  a  $\nu$ -self-concordant barrier $x_0 \in \text{dom } F$  a starting point satisfying  $\|F'(x_0)\|_{x_0}^* \leq \beta$ , e.g. the analytic center  $x_F^*$  of the set  $\text{Dom } F$  $\beta \in (0, 1)$  a centering parameter $\gamma$  a parameter satisfying  $|\gamma| \leq \frac{\sqrt{\beta}}{1+\sqrt{\beta}} - \beta$  $\varepsilon > 0$  an accuracy**Output:** $x^*$  an optimal solution to the minimization problem (2.53)

---

```

1:  $t_0 \leftarrow 0$ 
2:  $k \leftarrow 0$ 
3: while  $\varepsilon t_k < \nu + \frac{(\beta + \sqrt{\nu})\beta}{1-\beta}$  do
4:    $t_{k+1} \leftarrow t_k + \frac{\gamma}{\|c\|_{x_k}^*}$ 
5:    $x_{k+1} \leftarrow x_k - F''(x_k)^{-1}(t_{k+1}c + F'(x_k))$ 
6:    $k \leftarrow k + 1$ 
7: end while
8: return  $x^* \leftarrow x_k$ 

```

---

### 2.3.3. Barrier function for semidefinite programming

In this section, we are going to show, how to find a self-concordant barrier for the semidefinite program (2.4), so that we can use Algorithm 2.2 and Algorithm 2.3 to solve it. For the purpose of this section, we are interested only in the constraints of the problem. The constraints are defining us the feasibility set  $Q$ :

$$Q = \left\{ y \in \mathbb{R}^m \mid A_0 + \sum_{i=1}^m A_i y^{(i)} \succeq 0 \right\}, \quad (2.67)$$

where  $A_0, \dots, A_m \in \mathcal{S}^n$ . Let us denote  $X(y) = A_0 + \sum_{i=1}^m A_i y^{(i)}$ . If the matrix  $X(y)$  is block diagonal

$$X(y) = \begin{bmatrix} X_1(y) & 0 & \dots & 0 \\ 0 & X_2(y) & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \dots & X_k(y) \end{bmatrix} \quad (2.68)$$

with  $X_j(y) \in \mathcal{S}^{n_j}$  for  $j = 1, \dots, k$  and  $\sum_{j=1}^k n_j = n$ , then the feasibility set  $Q$  can be expressed as

$$Q = \{ y \in \mathbb{R}^m \mid X_j(y) \succeq 0, \ j = 1, \dots, k \}. \quad (2.69)$$

This rule allows us to easily add or remove some constraints without touching the others and to keep the sizes of the used matrices small, which can significantly speed up the computation.

Instead of the set  $Q$ , which is parametrized by  $y$ , we can directly optimize over the set of positive semidefinite matrices. This set  $\mathcal{P}^n$  is defined as

$$\mathcal{P}^n = \{ X \in \mathcal{S}^n \mid X \succeq 0 \} \quad (2.70)$$

## 2. Semidefinite programming

and it is called the cone of positive semidefinite  $n \times n$  matrices. This cone is a closed convex set, which interior is formed by positive definite matrices and on its boundary lie matrices, which have at least one eigenvalue equal to zero.

Now, we are looking for a self-concordant barrier function, which will enable us to optimize over the cone  $\mathcal{P}^n$ . The domain of this function needs to contain the set  $\mathcal{P}^n$  and the values of the function have to be growing to  $+\infty$  as getting closer to the boundary of the set  $\mathcal{P}^n$ . This will create us a repelling force from the boundary of  $\mathcal{P}^n$ , when following the central path (2.55). Consider the function  $F(X)$  as the self-concordant barrier function for the set  $\mathcal{P}^n$ :

$$F(X) = -\ln \prod_{i=1}^n \lambda_i(X), \quad (2.71)$$

where  $X \in \text{int } \mathcal{P}^n$  and  $\{\lambda_i(X)\}_{i=1}^n$  is the set of eigenvalues of the matrix  $X$ . To avoid the computation of eigenvalues, the function  $F(X)$  can be also expressed as:

$$F(X) = -\ln \det(X). \quad (2.72)$$

**Theorem 2.10.** Function  $F(X)$  is an  $n$ -self-concordant barrier for  $\mathcal{P}^n$ .

**Example 2.4.** Consider one-dimensional problem with linear constraint  $x \geq 0$ . Then, the set  $Q$  is

$$Q = \{x \in \mathbb{R} \mid x \geq 0\} \quad (2.73)$$

and one of the barrier functions for this set  $Q$  is

$$F(x) = -\ln(x). \quad (2.74)$$

Then, when following the central path (2.55), the function  $F(x)$  allows us to reach the boundary of  $Q$  as  $t$  grows to  $+\infty$ . This situation is showed in Figure 2.2 for different values of  $t$ .

Note, that  $\text{Dom } F \supseteq \mathcal{P}^n$  because  $\det(X) \geq 0$  when the number of negative eigenvalues of  $X$  is even. Therefore, the set  $\text{Dom } F$  is made by disjoint subsets, which one of them is  $\mathcal{P}^n$ . As Algorithm 2.2 and Algorithm 2.3 are interior point algorithms, when the starting point is from  $\text{int } \mathcal{P}^n$ , then we never leave  $\mathcal{P}^n$  during the execution of the algorithms and the optimal solution is found.

Similarly, the self-concordant barrier function for the set  $Q$  is a function


$$F(y) = -\ln \det(X(y)). \quad (2.75)$$

**Example 2.5.** To make it clearer, what is the difference between the set  $Q$  and  $\text{Dom } F(y)$ , we have prepared this example. Let

$$X(y) = \begin{bmatrix} y_2 & y_1 \\ y_1 & y_2 \end{bmatrix}, \quad (2.76)$$

where  $y = [y_1 \ y_2]^\top$ . The equation

$$z = \det(X(y)) = y_2^2 - y_1^2 \quad (2.77)$$

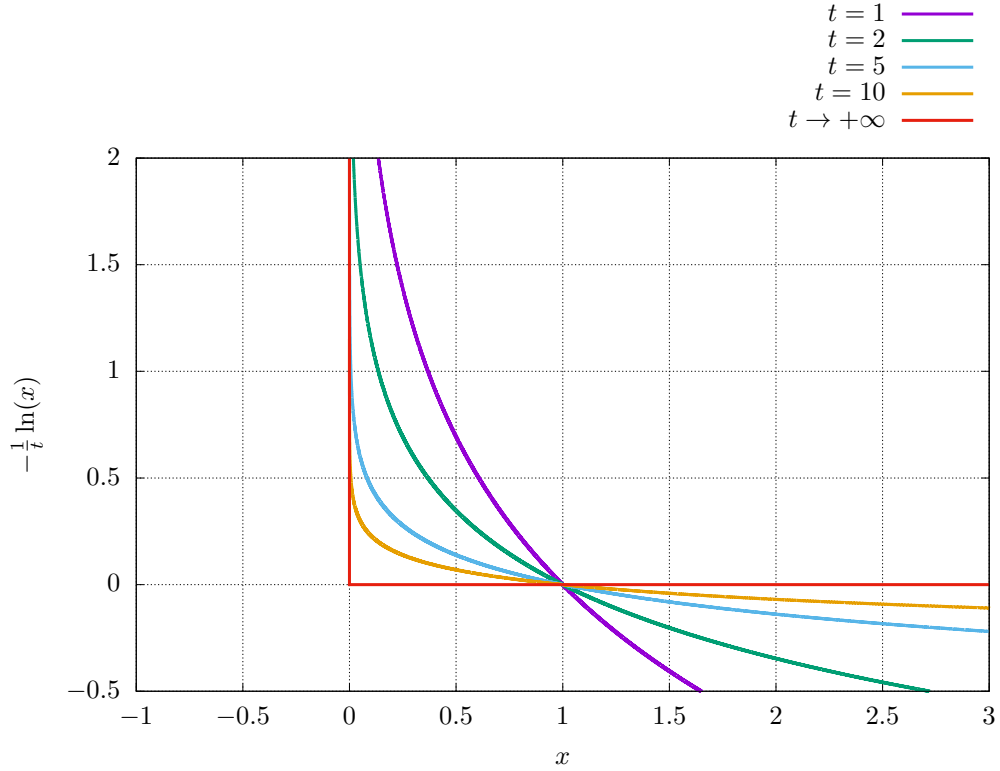

**Figure 2.2.** Illustration of the logarithmic barrier function for different values of  $t$ .

represents a hyperbolic paraboloid, which you can see in Figure 2.3. Therefore, the equation  $z = 0$  is a slice of it, denoted by the purple color in Figure 2.4. The domain of the self-concordant barrier function is

$$\text{Dom } F(y) = \{y \mid \det(X(y)) \geq 0\} \quad (2.78)$$

and is shaded by the blue color. We can see, that the set  $\text{Dom } F(y)$  consists of two disjoint parts. One of them is the set, where  $X(y) \succeq 0$  (denoted by the orange color) and the second part is an area, where both eigenvalues of  $X(y)$  are negative. Therefore, one has to pick his starting point  $x_0$  from the interior of the set  $Q = \{y \in \mathbb{R}^2 \mid X(y) \succeq 0\}$  to obtain the optimal solution from the set  $Q$ .


When the matrix  $X$  has the block diagonal form (2.68), we can rewrite the barrier function (2.75) into summation form

$$F(y) = - \sum_{j=1}^k \ln \det(X_j(y)). \quad (2.79)$$

For the purposes of Algorithm 2.2 and Algorithm 2.3, we need the first and the second partial derivatives of this function. Let us denote  $X_j(y) = A_{j,0} + \sum_{i=1}^m A_{j,i} y^{(i)}$  for  $j = 1, \dots, k$ , then the derivatives are:

$$\frac{\partial F}{\partial y^{(u)}}(y) = - \sum_{j=1}^k \text{tr}(X_j(y)^{-1} A_{j,u}), \quad (2.80)$$

$$\frac{\partial^2 F}{\partial y^{(u)} \partial y^{(v)}}(y) = \sum_{j=1}^k \text{tr}\left((X_j(y)^{-1} A_{j,u})(X_j(y)^{-1} A_{j,v})\right), \quad (2.81)$$

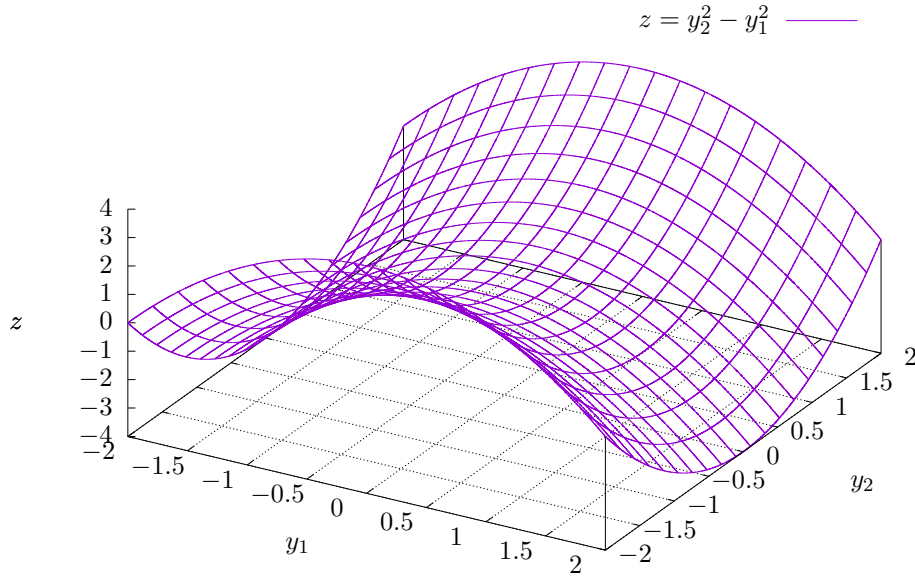

**Figure 2.3.** Hyperbolic paraboloid  $z = y_2^2 - y_1^2$ .

for  $u, v = 1, \dots, m$ .


The computation of the derivatives is the most expensive part of each step of Algorithm 2.2 and Algorithm 2.3. Therefore, the estimated number of arithmetic operations of computation of the derivatives is also the complexity of each step in the algorithms. The number of arithmetic operations for  $j$ -th constraint in form  $\{y \mid X_j(y) \succeq 0\}$  is:

- the computation of  $X_j(y) = A_{j,0} + \sum_{i=1}^m A_{j,i}y^{(i)}$  needs  $mn^2$  operations,
- the computation of the inversion  $X_j(y)^{-1}$  needs  $n^3$  operations,
- to compute all matrices  $X_j(y)^{-1}A_{j,u}$  for  $u = 1, \dots, m$  is needed  $mn^3$  operations,
- to compute  $\text{tr}(X_j(y)^{-1}A_{j,u})$  for  $u = 1, \dots, m$  is needed  $mn$  operations,
- the computation of  $\text{tr}\left((X_j(y)^{-1}A_{j,u})(X_j(y)^{-1}A_{j,v})\right)$  for  $u, v = 1, \dots, m$  needs  $m^2n^2$  operations.

The most expensive parts requires  $mn^3$  and  $m^2n^2$  arithmetic operations on each constraint. Typically, the value  $k$ , the number of constraints, is small and it keeps constant, when the semidefinite programs are generated as subproblems, when solving more complex problems, e.g. polynomial optimization. Therefore, we can say, that  $k$  is constant and we can omit it from the complexity estimation. To sum up, one step of Algorithm 2.2 and Algorithm 2.3 requires

$$\mathcal{O}(m(m+n)n^2) \tag{2.82}$$

arithmetic operations.

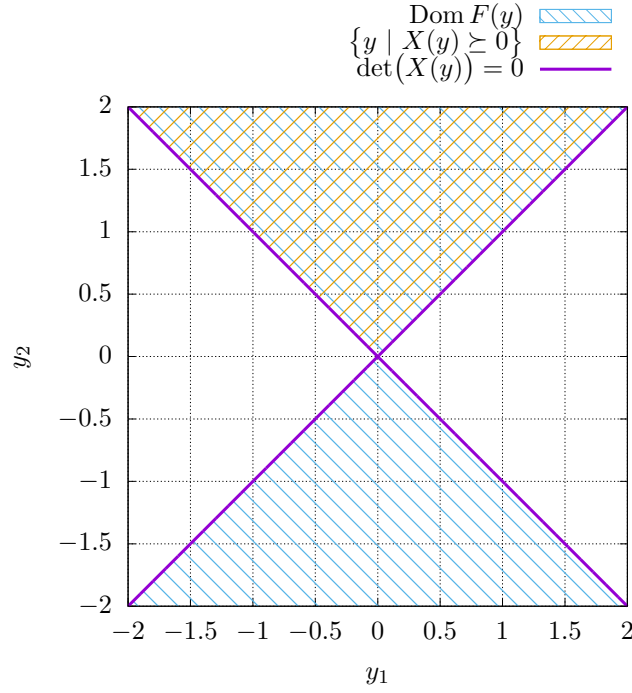

**Figure 2.4.** Illustration of the sets  $\text{Dom } F(y)$  and  $\{y \mid X(y) \succeq 0\}$ .

## 2.4. Implementation details

To be able to study the algorithms described previously in this section, we have implemented them in the programming language Python [38]. The full knowledge of the code allows us to trace the algorithms step by step and inspect their behaviors. Instead of using some state of the art toolboxes for semidefinite programming, e.g. SeDuMi [37] and MOSEK [26], which are more or less black boxes for us, the knowledge of the used algorithms allows us to decide, if the chosen algorithm is suitable for the given semidefinite problem or not. Moreover, if we would like to create some specialized solver for some class of semidefinite problems, we can easily reuse the code, edit it as required and build the solver very quickly. On the other hand, we can not expect that our implementation will be as fast as the implementation of some state of the art toolboxes, as much more time and people was used to develop them.

The implementation is compatible with Python version 3.5 and higher. The package NumPy is used for linear algebra computations. Please refer to the installation guide of NumPy for your system to ensure, that it is correctly set to use the linear algebra libraries, e.g. LAPACK [1], ATLAS [39] and BLAS [24]. The incorrect setting of these libraries causes significant drop of the performance. Other Python packages are required as well, e.g. SymPy and SciPy, but theirs settings are not so crucial for the performance of this implementation.

### 2.4.1. Package installation

The package with implementation of Algorithm 2.2 and Algorithm 2.3 is named Polyopt, as the semidefinite programming part of this package is only a tool, which is used for polynomial optimization and polynomial systems solving, which will be described in Chapter 3. The newest version of the package is available at <http://cmp.felk.cvut.cz/~trutmpav/master-thesis/polyopt/>. To install the package on your

## 2. Semidefinite programming

system, you have to clone and checkout the Git repository with the source codes of the package. To install other packages that are required, the preferred way is to use the `pip`<sup>1</sup> installer. The required packages are listed in the `requirements.txt` file. Then, install the package using the script `setup.py`. For the exact commands for the whole installation process please see Listing 2.1.

---

**Listing 2.1.** Installation of the package Polyopt.

---

```
1: git clone https://github.com/PavelTrutman/polyopt.git
2: cd polyopt
3: python3 setup.py install
```

---

To check, whether the installation was successful, run command `python3 setup.py test`, which will execute the predefined tests. If no error emerges, then the package is installed and ready to use.

### 2.4.2. Usage

The Polyopt package is created to be able to solve semidefinite programs in a form

$$\begin{aligned} y^* = \arg \min_{y \in \mathbb{R}^m} c^\top y \\ \text{s.t.} \quad A_{j,0} + \sum_{i=1}^m A_{j,i} y^{(i)} \succeq 0 \quad \text{for } j = 1, \dots, k, \end{aligned} \quad (2.83)$$

where  $A_{j,i} \in \mathcal{S}^{n_j}$  for  $i = 0, \dots, m$  and  $j = 1, \dots, k$ ,  $c \in \mathbb{R}^m$  and  $k$  is the number of constraints. In addition, a strictly feasible point  $y_0 \in \mathbb{R}^m$  must be given.

The semidefinite program solver is implemented in the class `SDPSolver` of the Polyopt package. Firstly, the problem is initialized by the matrices  $A_{j,i}$  and the vector  $c$ . Then, the function `solve` is called with parameter  $y_0$  as the starting point and with the method for the analytic center estimation. A choice from two methods is available, firstly, the method `dampedNewton`, which corresponds to Algorithm 2.2, and secondly, the method `auxFollow`, which is the implementation of the Auxiliary path-following scheme [28]. However, the `auxFollow` method is unstable and it fails in some cases, and therefore it is not recommended to use. The function `solve` returns the optimal solution  $y^*$ . The minimal working example is shown in Listing 2.2.

---

**Listing 2.2.** Typical usage of the class `SDPSolver` of the Polyopt package.

---

```
1: import polyopt
2:
3: # supposing the matrices Aij and the vectors c and y0 are already
   defined
4: problem = polyopt.SDPSolver(c, [[A10, A11, ..., A1m], ..., [Ak0,
   Ak1, ..., Akm]])
5: yStar = problem.solve(y0, problem.dampedNewton)
```

---

Detailed information can be printed out during the execution of the algorithm. This option can be set by `problem.setPrintOutput(True)`. Then, in each iteration of Algorithm 2.2 and Algorithm 2.3, the values  $k$ ,  $x_k$  and eigenvalues of  $X_j(x_k)$  are printed to the terminal.

---

<sup>1</sup>The PyPA recommended tool for installing Python packages. See <https://pip.pypa.io>.



If  $n$ , the dimension of the problem, is equal to 2, boundary of the set  $\text{Dom } F$  (2.78) and all intermediate points  $x_k$  can be plotted. This can be enabled by setting `problem.setDrawPlot(True)`. An example of such a graph is shown in Figure 2.5.

The parameters  $\beta$  and  $\gamma$  are predefined to the same values as in (2.65) and (2.66). These parameters can be set to different values by assigning to the variables `problem.beta` and `problem.gamma` respectively. The default value for the accuracy parameter  $\varepsilon$  is  $10^{-3}$ . This value can be changed by overwriting the variable `problem.eps`.

The function `problem.getNu()` returns the  $\nu$  parameter of the self-concordant barrier function used for the problem according to Theorem 2.10. When the problem is solved, we can obtain the eigenvalues of  $X(y^*)$  by calling `problem.eigenvalues()`. We should observe, that some of them are positive and some of them are zero (up to the numerical precision). The zero eigenvalues mean, that we have reached the boundary of the set  $Q$ , because the optimal solution lies always on the boundary of the set  $Q$ .

It may happen, that the set  $\text{Dom } F$  is not bounded, but the optimal solution can be attained. In this case, the analytic center does not exist and the proposed algorithms can not be used. By adding a constraint

$$X_{k+1}(y) = \begin{bmatrix} R^2 & y^{(1)} & y^{(2)} & \dots & y^{(m)} \\ y^{(1)} & 1 & 0 & \dots & 0 \\ y^{(2)} & 0 & 1 & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ y^{(m)} & 0 & 0 & \dots & 1 \end{bmatrix} \quad \text{for } R \in \mathbb{R}, \quad (2.84)$$

we bound the set by a ball with radius  $R$ . The constraint (2.84) is equivalent to

$$\|y\|_2^2 \leq R^2. \quad (2.85)$$

This will make the set  $\text{Dom } F$  bounded and the analytic center can be found in the standard way by Algorithm 2.2. When optimizing the linear function by Algorithm 2.3, the radius  $R$  may be set too small and the optimum may be found on the boundary of the constraint (2.84). Then, the found optimum is not the solution to the original problem and the algorithm has to be run again with bigger value of  $R$ . The optimum is found on the boundary of the constraint (2.84), if at least one of the eigenvalues of  $X_{k+1}(y^*)$  is zero. In our implementation, the artificial bounding constraint (2.84) can be set by `problem.bound(R)`. When the problem is solved, we can list the eigenvalues of  $X_{k+1}(y^*)$  by the function `problem.eigenvalues('bounded')`.

**Example 2.6.** Let us present a simple example to show a detailed usage of the package Polyopt. Let us have semidefinite program in a form

$$\begin{aligned} y^* &= \arg \min_{y \in \mathbb{R}^2} y^{(1)} + y^{(2)} \\ \text{s.t.} \quad & \begin{bmatrix} 1 + y^{(1)} & y^{(2)} & 0 \\ y^{(2)} & 1 - y^{(1)} & y^{(2)} \\ 0 & y^{(2)} & 1 - y^{(1)} \end{bmatrix} \succeq 0 \end{aligned} \quad (2.86)$$

with starting point

$$y_0 = [0 \quad 0]^\top. \quad (2.87)$$

Listing 2.3 shows the Python code used to solve the given problem. The graph of the problem is showed in Figure 2.5. The analytic center of the feasible region of the problem is

$$y_F^* = [-0.317 \quad 0]^\top, \quad (2.88)$$


## 2. Semidefinite programming

the optimal solution is attained at

$$y^* = [-0.778 \quad -0.592]^\top \quad (2.89)$$

and the objective function has value  $-1.37$ . The eigenvalues of  $X(y^*)$  are

$$\left\{ \lambda_i(X(y^*)) \right\}_{i=1}^3 = \{2.32 \cdot 10^{-4}; 1.32; 2.45\}. \quad (2.90)$$

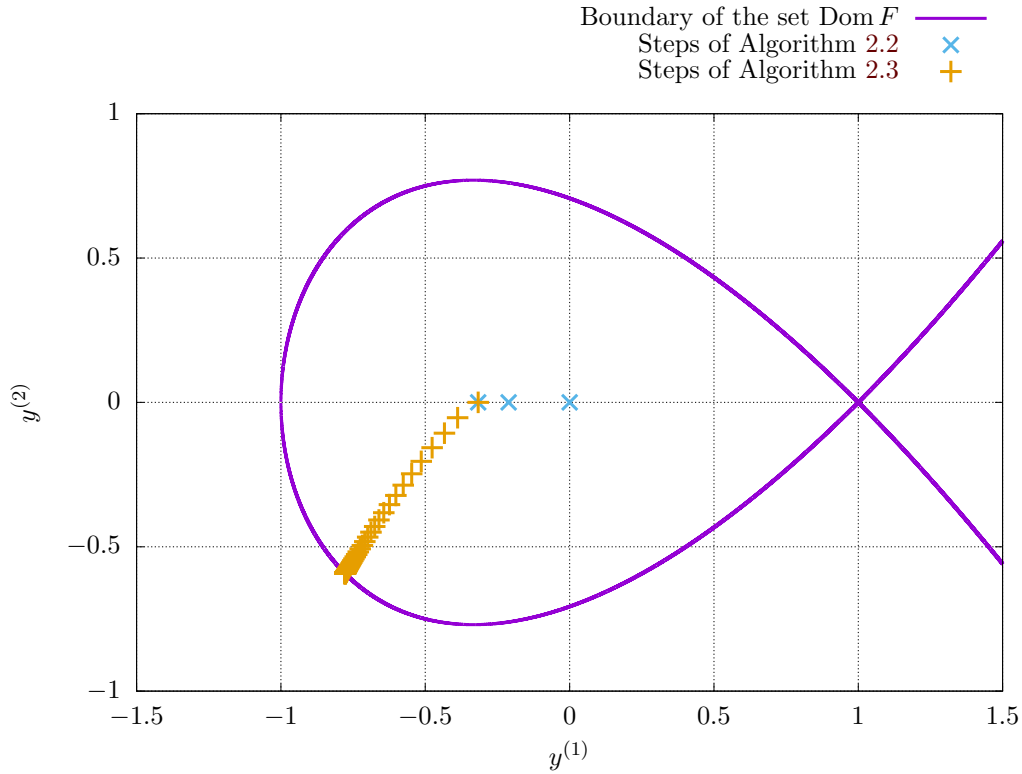

**Figure 2.5.** Graph of the semidefinite optimization problem stated in Example 2.6.

## 2.5. Comparison with the state of the art methods

Because a new implementation of a well-known algorithm was made, one should compare many properties of this implementation with the contemporary state of the art implementations. For that reason, we have generated some random instances of semidefinite problems. We have solved these problems by our implementation from the Polyopt package and by selected state of the art toolboxes, namely SeDuMi [37] and MOSEK [26]. Firstly, we have verified the correctness of the implementation by checking that the optimal solution is the same as the solution obtained by SeDuMi and MOSEK for each instance of data. We have also measured execution times of all three libraries and compared them in Table 2.1 and Figure 2.6.

### 2.5.1. Problem description

Now, let us describe, how the random instances of the semidefinite problems were generated. From (2.82) we know that each step of Algorithm 2.2 and Algorithm 2.3

**Listing 2.3.** Code for solving semidefinite problem stated in Example 2.6.

---

```

1: from numpy import *
2: import polyopt
3:
4: # Problem statement
5: # min c1*y1 + c2*y2
6: # s.t. A0 + A1*y1 + A2*y2 >= 0
7: c = array([[1], [1]])
8: A0 = array([[1, 0, 0],
9:             [0, 1, 0],
10:            [0, 0, 1]])
11: A1 = array([[1, 0, 0],
12:            [0, -1, 0],
13:            [0, 0, -1]])
14: A2 = array([[0, 1, 0],
15:            [1, 0, 1],
16:            [0, 1, 0]])
17:
18: # starting point
19: y0 = array([[0], [0]])
20:
21: # create the solver object
22: problem = polyopt.SDPSolver(c, [[A0, A1, A2]])
23:
24: # enable graphs
25: problem.setDrawPlot(True)
26:
27: # enable informative output
28: problem.setPrintOutput(True)
29:
30: # solve!
31: yStar = problem.solve(y0, problem.dampedNewton)
32:
33: # print eigenvalues of X(yStar)
34: print(problem.eigenvalues())

```

---

## 2. Semidefinite programming

requires  $m(m+n)n^2$  arithmetic operations, where  $m$  is the size of the matrices in the LMI constraint and  $n$  is the number of variables. Since in typical applications of SDP, the size of the matrices grows with the number of variables, we have set  $m = n$  to have just single parameter, which we call the size of the problem.

In our experiment, we have generated 30 unique LMI constraints for each size of the problem from 1 to 20. Each unique constraint has form

$$X_{k,l}(y) = \mathcal{I}^k + \sum_{i=1}^k A_{k,l,i} y^{(i)} \quad (2.91)$$

for the size of the problem  $k = 1, \dots, 20$  and unique LMI constraint  $l = 1, \dots, 30$ , where  $A_{k,l,i} \in \mathcal{S}^k$ . The matrices  $A_{k,l,i}$  were filled with random numbers from uniform distribution  $(-1; 1)$  with symmetricity of the matrices preserved. The package Polyopt requires the starting point  $y_0$  to be given by the user in advance. But from the structure of the constraint (2.91) we can see that  $y_0 \in \mathbb{R}^k$

$$y_0 = [0 \quad \dots \quad 0]^\top \quad (2.92)$$

is a feasible point. We used the point  $y_0$  to initialize problems for Polyopt package, but we have let SeDuMi and MOSEK use their own initialization process. However, since the LMI constraints were randomly generated, there is no guarantee that the sets, which they define, are bounded. Therefore, we have added constraint (2.84) for  $R = 10^3$ , which guarantees that we are optimizing over bounded sets.

The objective function of the problem is generated randomly too. For each unique instance, we have generated random vector  $r \in \mathbb{R}^n$  from uniform distribution  $(-1; 1)$ . Then, the objective function to minimize is  $r^\top y$ . The final generated problem denoted as  $P_{k,l}$  looks like

$$\begin{aligned} & \min_{y \in \mathbb{R}^k} r_{k,l}^\top y \\ & \text{s.t.} \quad \mathcal{I}^k + \sum_{i=1}^k A_{k,l,i} y^{(i)} \succeq 0 \\ & \quad \begin{bmatrix} R^2 & y^{(1)} & y^{(2)} & \dots & y^{(k)} \\ y^{(1)} & 1 & 0 & \dots & 0 \\ y^{(2)} & 0 & 1 & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ y^{(k)} & 0 & 0 & \dots & 1 \end{bmatrix} \succeq 0. \end{aligned} \quad (2.93)$$

### 2.5.2. Time measuring

To eliminate influences that negatively affect the execution times on CPU, such as other processes competing for the same CPU core, processor caching, data loading delays, etc., we have executed each problem  $P_{k,l}$  30 times. So, for each problem  $P_{k,l}$  we have obtained execution times  $\tau_{k,l,s}$  for  $s = 1, \dots, 30$ . Because the influences mentioned above can only prolong the execution times, we have selected minimum of  $\tau_{k,l,s}$  for each problem  $P_{k,l}$ .

$$\tau_{k,l} = \min_{s=1}^{30} \tau_{k,l,s} \quad (2.94)$$

Since the execution times of problems of the same sizes should be more or less the same, we have computed the average execution time  $\tau_k$  for each size of the problem.

$$\tau_k = \frac{1}{30} \sum_{l=1}^{30} \tau_{k,l} \quad (2.95)$$


These execution times  $\tau_k$ , where  $k$  is the size of the problem, were measured and computed separately for the Polyopt, SeDuMi and MOSEK toolboxes and are shown in Table 2.1 and Figure 2.6.

Problem size	Toolbox		
	Polyopt	SeDuMi [37]	MOSEK [26]
1	0.0212 s	0.0390 s	0.00307 s
2	0.0280 s	0.0567 s	0.00328 s
3	0.0329 s	0.0619 s	0.00348 s
4	0.0392 s	0.0690 s	0.00414 s
5	0.0451 s	0.0745 s	0.00424 s
6	0.0536 s	0.0839 s	0.00460 s
7	0.0677 s	0.0823 s	0.00488 s
8	0.0757 s	0.0799 s	0.00517 s
9	0.0910 s	0.0807 s	0.00578 s
10	0.111 s	0.0833 s	0.00678 s
11	0.135 s	0.0904 s	0.00765 s
12	0.154 s	0.0917 s	0.00805 s
13	0.179 s	0.0891 s	0.00901 s
14	0.212 s	0.0938 s	0.00937 s
15	0.241 s	0.0943 s	0.00993 s
16	0.280 s	0.0983 s	0.0101 s
17	0.299 s	0.102 s	0.0118 s
18	0.348 s	0.112 s	0.0122 s
19	0.392 s	0.113 s	0.0140 s
20	0.429 s	0.117 s	0.0148 s

**Table 2.1.** Execution times of different sizes of semidefinite problems solved by the selected toolboxes.

It has to be mentioned, that the Polyopt toolbox is implemented in Python, but the toolboxes SeDuMi and MOSEK were run from MATLAB with precompiled MEX files (compiled C, C++ or Fortran code) and therefore the execution times are not readily comparable. On the other side, the Python package NumPy uses common linear algebra libraries, like LAPACK [1], ATLAS [39] and BLAS [24], and we can presume that SeDuMi and MOSEK use them too.

Our intention was to measure only the execution time of the solving phase, not of the preparation time. In case of the Polyopt package, we measured the execution time of the function `solve()`. For SeDuMi and MOSEK, we have used MATLAB framework YALMIP [25] for defining the semidefinite programs and calling the solvers. The execution time of the YALMIP code is quite long, because YALMIP makes an analysis of the problem and compiles it into a standard form. Only after that, an external solver (SeDuMi or MOSEK) is called to solve the problem. Fortunately, YALMIP internally measures the execution time of the solver, so we have used this time in our statistics.

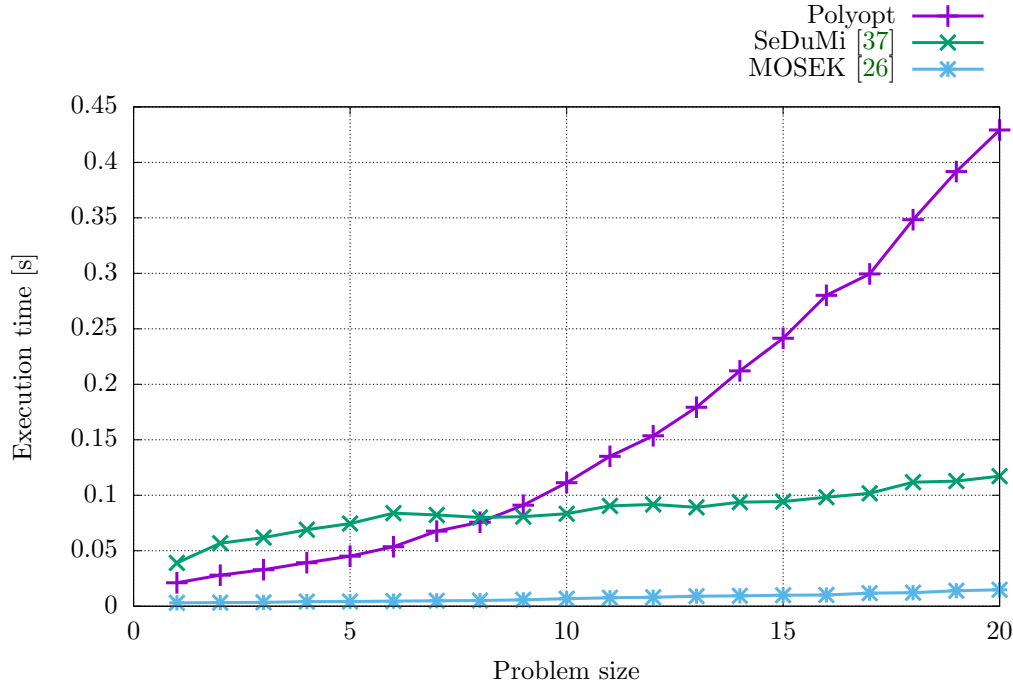

**Figure 2.6.** Graph of execution times based on the size of semidefinite problems solved by the selected toolboxes.

The experiments were executed on Intel Core i5-3210M CPU 2.50 GHz based computer with sufficient amount of free system memory. The installed version of Python was 3.5.3 and MATLAB R2016b 64-bit was used.

### 2.5.3. Results

By the look of the graph in Figure 2.6, we can see that the MOSEK toolbox totally wins. The SeDuMi toolbox seems to have some constant overhead, but the execution time grows slowly with the increasing size of the problem. The Polyopt package accomplishes quite bad results compared to SeDuMi and MOSEK, especially for large sizes of problems. But this behavior was expected, as we know that the execution time should be proportional to  $k^4$ , where  $k$  is the size of the problem. However, due to SeDuMi overhead, the Polyopt package is faster than SeDuMi for problem sizes up to 8.

## 2.6. Speed–accuracy trade-off

Obtaining a precise solution of a semidefinite program is quite time consuming, especially for problems with many unknowns, as we can see from Figure 2.6. However, in many applications we have no need for a precise solution. We only need a “good enough” solution, but obtained in a limited time period. Therefore one should be interested in a analysis describing this speed–accuracy trade-off.

### 2.6.1. Precision based analysis


The first experiment is an observation how many iterations, and therefore how much time, is required to find a solution based on the value of  $\varepsilon$  from Algorithm 2.3. This value of  $\varepsilon$  represents an accuracy of Algorithm 2.3 and sets up a threshold for the

termination condition. The bigger the value of  $\varepsilon$  the less iterations the algorithm needs to terminate, and therefore less computation time is spent.

To evaluate the dependency we have generated unique semidefinite programs  $P_{k,l}$  according to (2.93) for  $k = 5, 10, 15, 20$  and  $l = 1, \dots, 1000$ . For each of this problem and accuracy  $\varepsilon$  we have measured the number of iterations  $N_{k,l,\varepsilon}$  of Algorithm 2.3 required to find the solution. Then we have averaged the numbers across the unique problems.

$$N_{k,\varepsilon} = \frac{1}{1000} \sum_{l=1}^{1000} N_{k,l,\varepsilon} \quad (2.96)$$

The values of  $N_{k,\varepsilon}$  are plotted in Figure 2.7 for different values of  $k$  and  $\varepsilon$ .

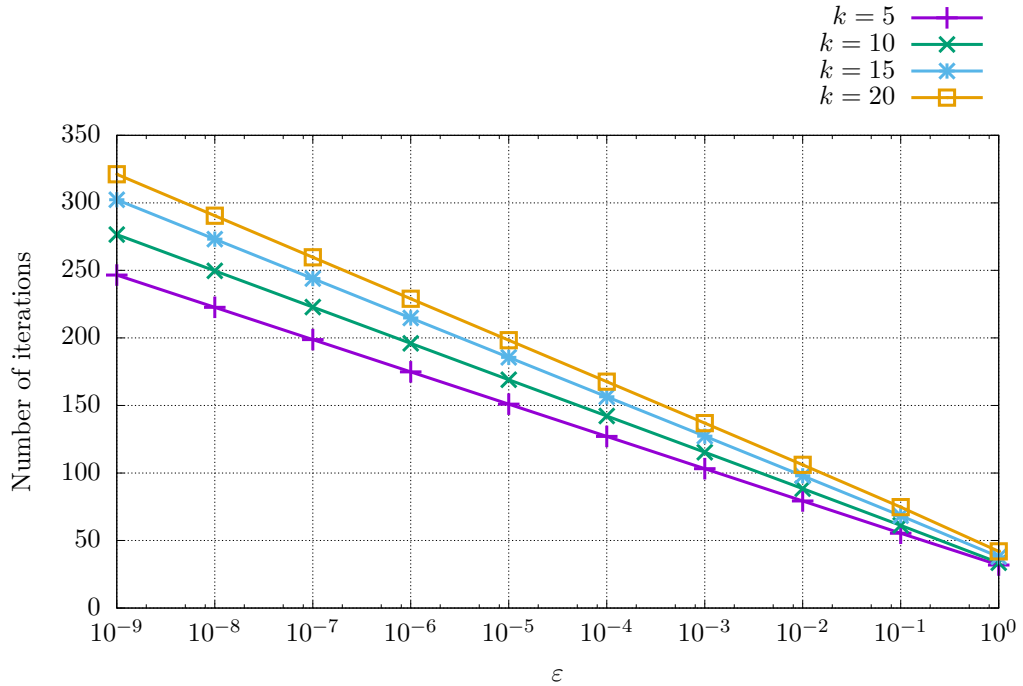


**Figure 2.7.** Graph of numbers of iterations required to solve the semidefinite problems by Algorithm 2.3 for different values of problem size  $k$  based on  $\varepsilon$  using the implementation from the Polyopt package.

From the plot we can see that the number of iterations, and therefore the execution time, required to solve a given problem of fixed problem size  $k$  is proportional to  $\log(\varepsilon)$ . This results is in accordance with the estimated number of steps from the equation (2.64).

### 2.6.2. Analysis based on the required distance from the solution

Algorithm 2.3 starts at the analytic center  $y_F^*$  of the feasible set of the problem and then follows the central path until it is sufficiently close to the optimal solution  $y^*$ . The sizes of the steps of the algorithm are decreasing as the algorithm is closing to the solution. Therefore, we need only few iterations to get within half the distance  $\|y^* - y_F^*\|$  from the solution, but many of them to be within 1 % of the distance  $\|y^* - y_F^*\|$  from the solution. The situation for a simple semidefinite problem is shown in Figure 2.8.

## 2. Semidefinite programming

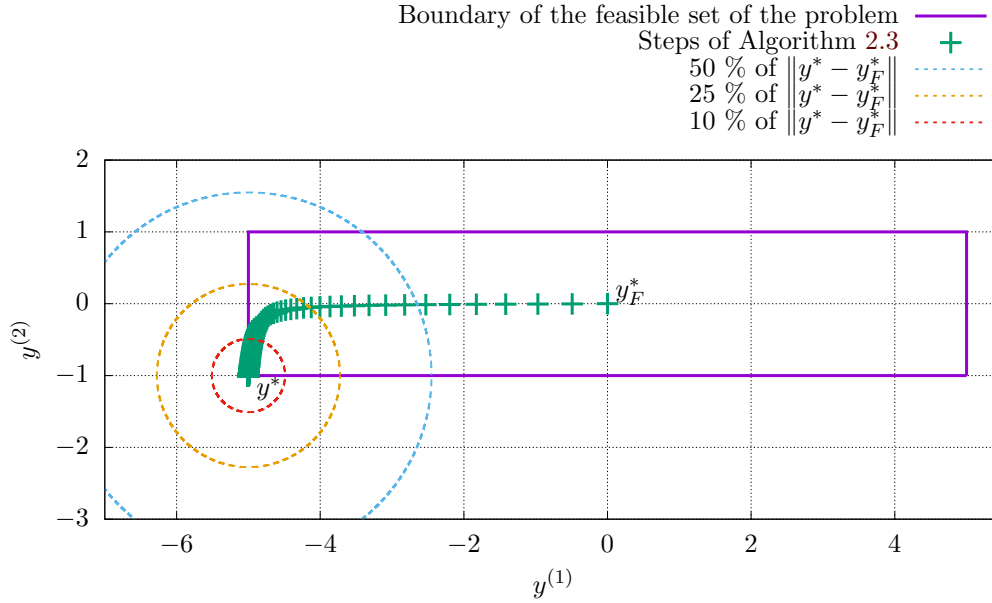

**Figure 2.8.** Example of a simple semidefinite problem with steps of Algorithm 2.3. The algorithm starts from the analytic center  $y_F^*$  and finishes at the optimal point  $y^*$ . Selected fractions of the distance  $\|y^* - y_F^*\|$  are represented by concentric circles.


To see how many iterations are needed to get within some fraction of the distance  $\|y^* - y_F^*\|$  from the optimal solution  $y^*$ , we have generated unique semidefinite problems  $P_{k,l}$  for the problem sizes  $k = 5, 10, 15, 20$  and  $l = 1, \dots, 1000$  according to (2.93). Then we have solved each problem with accuracy  $\varepsilon = 10^{-9}$  to obtain a precise approximation of the solution  $y^*$ . After that we have counted how many iterations  $N_{k,l,\lambda}$  are needed to get within the distance  $\lambda\|y^* - y_F^*\|$  from the solution  $y^*$  for the given problem and for selected values of  $\lambda$ . Then we have averaged the numbers across the unique problems.

$$N_{k,\lambda} = \frac{1}{1000} \sum_{l=1}^{1000} N_{k,l,\lambda} \quad (2.97)$$

The values of  $N_{k,\lambda}$  are plotted in Figure 2.9 for different values of  $k$  and  $\lambda$ .

From the experiments we can see that the number of iterations, and therefore the execution time, of Algorithm 2.3 required to get within some fraction  $\lambda$  of the distance  $\|y^* - y_F^*\|$  for a given problem with fixed problem size  $k$  is proportional to  $\log(\lambda)$ .



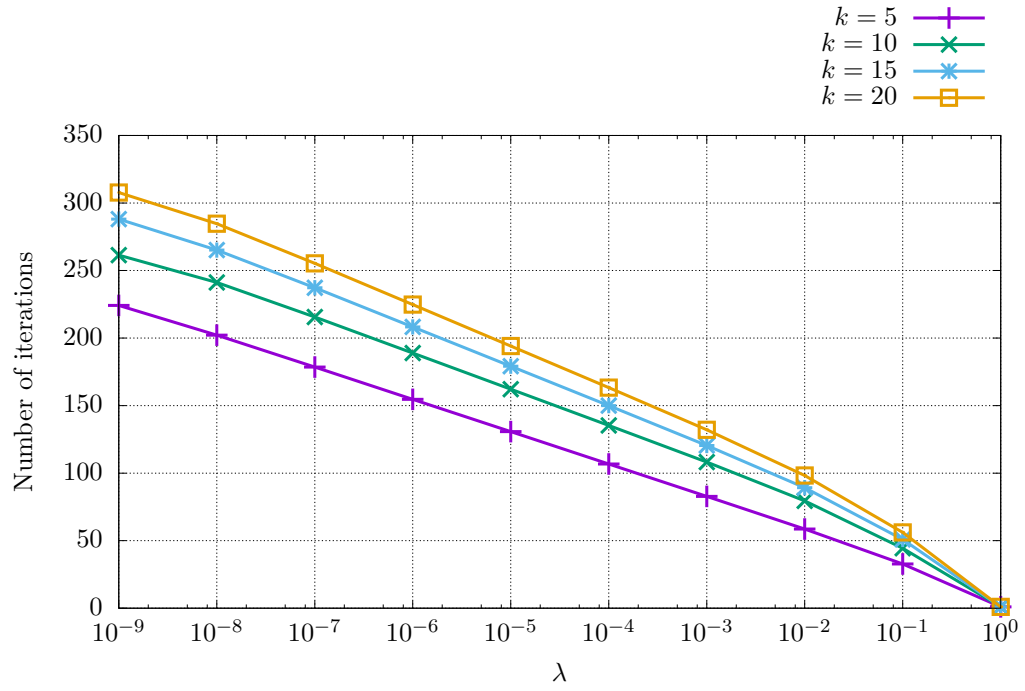

**Figure 2.9.** Graph of numbers of iterations required to get within the distance  $\lambda\|y^* - y_F^*\|$  from the optimal solution  $y^*$  using Algorithm 2.3 for different values of problem size  $k$  based on  $\lambda$  using the implementation from the Polyopt package.

### 3. Optimization over polynomials

This chapter is devoted to the application of semidefinite programming in polynomial algebra. Firstly, we introduce basic notation from the polynomial algebra and the state of the art method for solving systems of polynomial equations using so called multiplication matrices. Then we introduce the theory of moment matrices, since moment matrices will be used to relax the polynomial problems into the semidefinite ones. After that, we will focus on polynomial optimization, i.e. optimizing a polynomial function given polynomial constraints. We will present a method, how to use hierarchies of semidefinite problems to solve a polynomial optimization problem. We implement this method and compare it to the state of the art optimization toolboxes. In the last section of this chapter, we will introduce the moment method for polynomial systems solving. This method also uses hierarchies of semidefinite problems to solve the polynomial systems with the advantage that only real solutions are found. Since when solving polynomial systems arisen from computer vision geometry, we are typically interested only in the real solutions, this method may prove to be a useful tool to eliminate the non-real solutions.

#### 3.1. Algebraic preliminaries

In this whole chapter focused on polynomial optimization and polynomial systems solving, we will follow the notation from [5]. Just to keep this chapter self-contained, we will recall some basics of polynomial algebra.

##### 3.1.1. The polynomial ring, ideals and varieties

Firstly, the ring of multivariate polynomials in  $n$  variables with coefficients in  $\mathbb{R}$  is denoted as  $\mathbb{R}[x]$ , where  $x = [x_1 \ x_2 \ \cdots \ x_n]^\top$ . For  $\alpha_1, \alpha_2, \dots, \alpha_n \in \mathbb{N}$ ,  $x^\alpha$  denotes the monomial  $x_1^{\alpha_1} \cdot x_2^{\alpha_2} \cdot \dots \cdot x_n^{\alpha_n}$ , with a total degree  $|\alpha| = \sum_{i=1}^n \alpha_i$ , where  $\alpha = [\alpha_1 \ \alpha_2 \ \cdots \ \alpha_n]^\top$ . A polynomial  $p \in \mathbb{R}[x]$  can be written as

$$p = \sum_{\alpha \in \mathbb{N}^n} p_\alpha x^\alpha \quad (3.1)$$

with a total degree  $\deg(p) = \max_{\alpha \in \mathbb{N}^n} |\alpha|$  for non-zero coefficients  $p_\alpha \in \mathbb{R}$ .

A linear subspace  $I \subseteq \mathbb{R}[x]$  is an ideal if  $p \in I$  and  $q \in \mathbb{R}[x]$  implies  $pq \in I$ . Let  $f_1, f_2, \dots, f_m$  be polynomials in  $\mathbb{R}[x]$ . Then the set

$$\langle f_1, f_2, \dots, f_m \rangle = \left\{ \sum_{j=1}^m h_j f_j \mid h_1, h_2, \dots, h_m \in \mathbb{R}[x] \right\} \quad (3.2)$$

is called the ideal generated by  $f_1, f_2, \dots, f_m$ . Given the ideal  $I \in \mathbb{R}[x]$ , the algebraic variety of  $I$  is the set

$$V_{\mathbb{C}}(I) = \{x \in \mathbb{C}^n \mid f(x) = 0 \text{ for all } f \in I\} \quad (3.3)$$

and its real variety is

$$V_{\mathbb{R}}(I) = V_{\mathbb{C}}(I) \cap \mathbb{R}^n. \quad (3.4)$$

The ideal  $I$  is said to be zero-dimensional when its complex variety  $V_{\mathbb{C}}(I)$  is finite. The vanishing ideal of a subset  $V \subseteq \mathbb{C}^n$  is the ideal

$$\mathcal{I}(V) = \{f \in \mathbb{R}[x] \mid f(x) = 0 \text{ for all } x \in V\}. \quad (3.5)$$

The radical ideal of the ideal  $I \subseteq \mathbb{R}[x]$  is the ideal

$$\sqrt{I} = \{f \in \mathbb{R}[x] \mid f^m \in I \text{ for some } m \in \mathbb{Z}^+\}. \quad (3.6)$$

The real radical ideal of the ideal  $I \subseteq \mathbb{R}[x]$  is the ideal

$$\sqrt[\mathbb{R}]{I} = \{f \in \mathbb{R}[x] \mid f^{2m} + \sum_j h_j^2 \in I \text{ for some } h_j \in \mathbb{R}[x], m \in \mathbb{Z}^+\}. \quad (3.7)$$

The following two theorems are stating the relations between the vanishing and (real) radical ideals.

**Theorem 3.1 (Hilbert's Nullstellensatz).** Let  $I \in \mathbb{R}[x]$  be an ideal. The radical ideal of  $I$  is equal to the vanishing ideal of its variety, i.e.

$$\sqrt{I} = \mathcal{I}(V_{\mathbb{C}}(I)). \quad (3.8)$$

**Theorem 3.2 (Real Nullstellensatz).** Let  $I \in \mathbb{R}[x]$  be an ideal. The real radical ideal of  $I$  is equal to the vanishing ideal of its real variety, i.e.

$$\sqrt[\mathbb{R}]{I} = \mathcal{I}(V_{\mathbb{R}}(I)). \quad (3.9)$$

The quotient ring  $\mathbb{R}[x]/I$  is the set of all equivalence classes of polynomials in  $\mathbb{R}[x]$  for congruence modulo ideal  $I$

$$\mathbb{R}[x]/I = \{[f] \mid f \in \mathbb{R}[x]\}, \quad (3.10)$$

where the equivalence class  $[f]$  is

$$[f] = \{f + g \mid g \in I\}. \quad (3.11)$$

Because  $\mathbb{R}[x]/I$  is a ring, it is equipped with addition and multiplication on the equivalence classes:

$$[f] + [g] = [f + g], \quad (3.12)$$

$$[f][g] = [fg] \quad (3.13)$$

for  $f, g \in \mathbb{R}[x]$ .

For zero-dimensional ideal  $I$ , there is a relation between the dimension of  $\mathbb{R}[x]/I$  and the cardinality of the variety  $V_{\mathbb{C}}(I)$ :

$$|V_{\mathbb{C}}(I)| \leq \dim(\mathbb{R}[x]/I). \quad (3.14)$$

Moreover, if  $I$  is a radical ideal, then

$$|V_{\mathbb{C}}(I)| = \dim(\mathbb{R}[x]/I). \quad (3.15)$$

### 3. Optimization over polynomials

Assume that the number of complex roots is finite and let  $N = \dim(\mathbb{R}[x]/I)$ , and therefore  $|V_{\mathbb{C}}(I)| \leq N$ . Consider a set  $\mathcal{B} = \{b_1, b_2, \dots, b_N\} \subseteq \mathbb{R}[x]$  for which the equivalence classes  $[b_1], [b_2], \dots, [b_N]$  are pairwise distinct and  $\{[b_1], [b_2], \dots, [b_N]\}$  is a basis of  $\mathbb{R}[x]/I$ . Then every polynomial  $f \in \mathbb{R}[x]$  can be written in a unique way as

$$f = \sum_{i=1}^N c_i b_i + p, \quad (3.16)$$

where  $c_i \in \mathbb{R}$  and  $p \in I$ . The normal form of the polynomial  $f$  modulo  $I$  with respect to the basis  $\mathcal{B}$  is the polynomial

$$\mathcal{N}_{\mathcal{B}}(f) = \sum_{i=1}^N c_i b_i. \quad (3.17)$$

#### 3.1.2. Solving systems of polynomial equations using multiplication matrices

Systems of polynomial equations can be solved by computing eigenvalues and eigenvectors of so called multiplication matrices. Given  $f \in \mathbb{R}[x]$ , we define the multiplication operator (by  $f$ )  $\mathcal{X}_f : \mathbb{R}[x]/I \rightarrow \mathbb{R}[x]/I$  as

$$\mathcal{X}_f([g]) = [f][g] = [fg]. \quad (3.18)$$

It can be shown that  $\mathcal{X}_f$  is a linear mapping, and therefore can be represented by its matrix with respect to the basis  $\mathcal{B}$  of  $\mathbb{R}[x]/I$ . For simplicity, we again denote this matrix  $\mathcal{X}_f$  and it is called the multiplication matrix by  $f$ . When  $\mathcal{B} = \{b_1, b_2, \dots, b_N\}$  and we set  $\mathcal{N}_{\mathcal{B}}(fb_j) = \sum_{i=1}^N a_{i,j} b_i$  for  $a_{i,j} \in \mathbb{R}$ , then the multiplication matrix is

$$\mathcal{X}_f = \begin{bmatrix} a_{1,1} & a_{1,2} & \cdots & a_{1,N} \\ a_{2,1} & a_{2,2} & \cdots & a_{2,N} \\ \vdots & \vdots & \ddots & \vdots \\ a_{N,1} & a_{N,2} & \cdots & a_{N,N} \end{bmatrix}. \quad (3.19)$$

**Theorem 3.3 (Stickelberger theorem).** Let  $I$  be a zero-dimensional ideal in  $\mathbb{R}[x]$ , let  $\mathcal{B} = \{b_1, b_2, \dots, b_N\}$  be a basis of  $\mathbb{R}[x]/I$ , and let  $f \in \mathbb{R}[x]$ . The eigenvalues of the multiplication matrix  $\mathcal{X}_f$  are the evaluations  $f(v)$  of the polynomial  $f$  at the points  $v \in V_{\mathbb{C}}(I)$ . Moreover, for all  $v \in V_{\mathbb{C}}(I)$ ,

$$(\mathcal{X}_f)^{\top} [v]_{\mathcal{B}} = f(v) [v]_{\mathcal{B}}, \quad (3.20)$$

setting  $[v]_{\mathcal{B}} = [b_1(v) \ b_2(v) \ \cdots \ b_N(v)]^{\top}$ ; that is, the vector  $[v]_{\mathcal{B}}$  is a left eigenvector with eigenvalue  $f(v)$  of the multiplication matrix  $\mathcal{X}_f$ .

Therefore, we can create the multiplication matrix  $\mathcal{X}_{x_i}$  for the variable  $x_i$  and then the eigenvalues of  $\mathcal{X}_{x_i}$  correspond to the  $x_i$ -coordinates of the points  $V_{\mathbb{C}}(I)$ . This means that the solutions of the whole system can be found by computing eigenvalues  $\lambda_{x_i} = \{\lambda_j(\mathcal{X}_{x_i})\}_{j=1}^N$  of the multiplication matrix  $\mathcal{X}_{x_i}$  for all variables  $x_i$ . Then  $V_{\mathbb{C}}(I)$  is a subset of the Cartesian product  $\lambda_{x_1} \times \lambda_{x_2} \times \cdots \times \lambda_{x_n}$  and one has to select only the points that are solutions. However, this method becomes inefficient for large  $n$ , the number of variables, since  $n$  multiplication matrices have to be constructed and their eigenvalues computed.


For this reason, the second property of multiplication matrices is used. The roots can be recovered from the left eigenvectors of  $\mathcal{X}_f$ , when all left eigenspaces of  $\mathcal{X}_f$  have dimension one. This is the case, when the values  $f(v)$  for  $v \in V_{\mathbb{C}}(I)$  are pairwise distinct and when the ideal  $I$  is radical. In that case, each left eigenvector of  $\mathcal{X}_f$  corresponds to one solution  $v \in V_{\mathbb{C}}(I)$  and the values of the eigenvectors are the evaluations  $b_i(v)$  for  $b_i \in \mathcal{B}$ , and therefore when the variable  $x_i \in \mathcal{B}$ , we can readily obtain its value.

**Example 3.1.** Let us have a system of two polynomial equations.

$$-20x^2 + xy - 12y^2 - 16x - y + 48 = 0 \quad (3.21)$$

$$12x^2 - 58xy + 3y^2 + 46x - 47y + 44 = 0 \quad (3.22)$$

The first equation represents an ellipse and the second one a hyperbola as you can see in Figure 3.1. Let us solve the system using multiplication matrices.

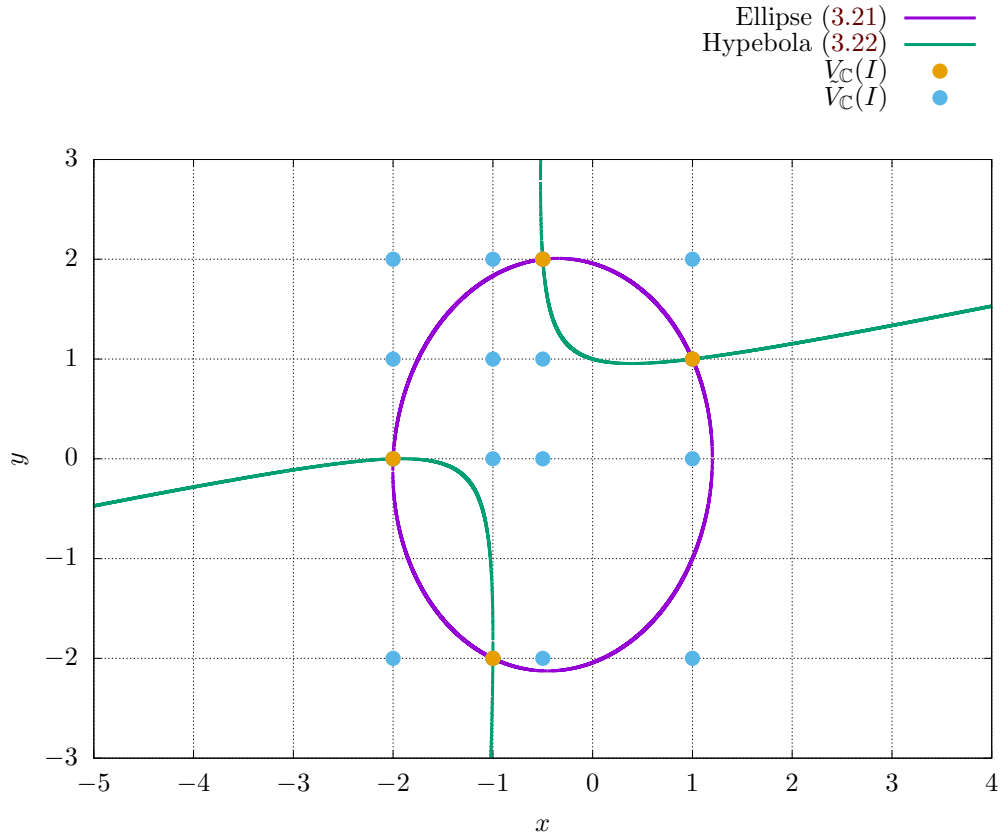

**Figure 3.1.** The intersection of the ellipse (3.21) and the hyperbola (3.22) with solutions found by the eigenvalue and the eigenvector methods using multiplication matrices.

First of all, we have to compute the Gröbner basis [2] of the ideal, for example using the  $F_4$  Algorithm [7]. We have got the following basis:

$$164x^2 + 99y^2 + 126x + 15y - 404, \quad (3.23)$$

$$41xy + 3y^2 - 16x + 34y - 52, \quad (3.24)$$

$$41y^3 - 15y^2 + 48x - 170y + 96. \quad (3.25)$$

Now, we can select the monomial basis  $\mathcal{B}$

$$\mathcal{B} = [1 \quad y \quad x \quad y^2]^\top \quad (3.26)$$

### 3. Optimization over polynomials

and construct the multiplication matrices  $\mathcal{X}_x$  and  $\mathcal{X}_y$  accordingly, knowing that

$$\mathcal{X}_x([1]) = [x] = 1[x], \quad (3.27)$$

$$\mathcal{X}_x([y]) = [xy] = -\frac{3}{41}[y^2] + \frac{26}{41}[x] - \frac{34}{41}[y] + \frac{52}{41}[1], \quad (3.28)$$

$$\mathcal{X}_x([x^2]) = [x^2] = -\frac{99}{164}[y^2] - \frac{63}{82}[x] - \frac{15}{164}[y] + \frac{101}{41}[1], \quad (3.29)$$

$$\mathcal{X}_x([y^2]) = [xy^2] = -\frac{37}{41}[y^2] + \frac{20}{41}[x] + \frac{18}{41}[y] + \frac{40}{41}[1], \quad (3.30)$$

and

$$\mathcal{X}_y([1]) = [y] = 1[y], \quad (3.31)$$

$$\mathcal{X}_y([y]) = [y^2] = 1[y^2], \quad (3.32)$$

$$\mathcal{X}_y([x]) = [xy] = -\frac{3}{41}[y^2] + \frac{26}{41}[x] - \frac{34}{41}[y] + \frac{52}{41}[1], \quad (3.33)$$

$$\mathcal{X}_y([y^2]) = [y^3] = \frac{15}{41}[y^2] - \frac{48}{41}[x] + \frac{170}{41}[y] - \frac{96}{41}[1]. \quad (3.34)$$

Then, the multiplication matrices are:

$$\mathcal{X}_x = \begin{bmatrix} 0 & \frac{52}{41} & \frac{101}{41} & \frac{40}{41} \\ 0 & -\frac{34}{41} & -\frac{15}{164} & \frac{18}{41} \\ 1 & \frac{26}{41} & -\frac{63}{82} & \frac{20}{41} \\ 0 & -\frac{3}{41} & -\frac{99}{164} & -\frac{37}{41} \end{bmatrix}, \quad (3.35)$$

$$\mathcal{X}_y = \begin{bmatrix} 0 & 0 & \frac{52}{41} & -\frac{96}{41} \\ 1 & 0 & -\frac{34}{41} & \frac{170}{41} \\ 0 & 0 & \frac{26}{41} & -\frac{48}{41} \\ 0 & 1 & -\frac{3}{41} & \frac{15}{41} \end{bmatrix}. \quad (3.36)$$

The eigenvalues of  $\mathcal{X}_x$  and  $\mathcal{X}_y$  are

$$\{\lambda_i(\mathcal{X}_x)\}_{i=1}^4 = \left\{-2; -1; -\frac{1}{2}; 1\right\}, \quad (3.37)$$

$$\{\lambda_i(\mathcal{X}_y)\}_{i=1}^4 = \{-2; 0; 1; 2\}. \quad (3.38)$$

Therefore, there are  $4 \times 4 = 16$  possible solutions of the system and we must verify, which of them are true solutions. Let us denote the set of all possible solutions as  $\tilde{V}_{\mathbb{C}}(I)$ . These possible solutions are shown in Figure 3.1 by the blue color.

Secondly, we compute the left eigenvectors of the multiplication matrix  $\mathcal{X}_x$  such that their first coordinates are ones, as it corresponds to the constant polynomial  $b_1 = 1$ . We obtain following four eigenvectors corresponding to four different solutions:

$$\begin{bmatrix} 1 \\ 1 \\ 1 \\ 1 \end{bmatrix}, \begin{bmatrix} 1 \\ 0 \\ -2 \\ 0 \end{bmatrix}, \begin{bmatrix} 1 \\ 2 \\ -\frac{1}{2} \\ 4 \end{bmatrix}, \begin{bmatrix} 1 \\ -2 \\ -1 \\ 4 \end{bmatrix}. \quad (3.39)$$

Since the second and the third coordinate corresponds to  $b_2 = y$  and  $b_3 = x$  respectively, we have got four solutions to the system of polynomials (3.21) and (3.22):

$$V_{\mathbb{C}}(I) = \left\{ \begin{bmatrix} 1 \\ 1 \end{bmatrix}; \begin{bmatrix} -2 \\ 0 \end{bmatrix}; \begin{bmatrix} -\frac{1}{2} \\ 2 \end{bmatrix}; \begin{bmatrix} -1 \\ -2 \end{bmatrix} \right\}. \quad (3.40)$$

These solutions are shown by the orange color in Figure 3.1.

### 3.2. Moment matrices

Polynomial optimization and solving systems of polynomial equations via hierarchies of semidefinite programs is based on the theory of measures and moments. But to keep the scope simple, we will avoid to introduce this theory. However, since it provides better understanding of the matter, interested reader may look into [22]. Moreover, we will introduce the only minimal basics to be able to proceed with polynomial optimization and polynomial systems solving. More and detailed information can be found in [22] too.

Now, let us start with the theory about moment matrices, which are crucial for the application of SDP on polynomial optimization and polynomial systems solving. Recall that a polynomial has a form (3.1). Since such a polynomial may have infinite number of coefficients, let us introduce a polynomial  $p \in \mathbb{R}[x]$  of the degree  $d \in \mathbb{N}$ :

$$p(x) = \sum_{\alpha \in \mathbb{N}_d^n} p_\alpha x^\alpha, \quad (3.41)$$

where  $\mathbb{N}_d$  are natural numbers (including zero) up to the number  $d$ . This polynomial has at most  $\binom{n+d}{n}$  non-zero coefficients, since there are  $\binom{n+d}{n}$  monomials in  $n$  variables up to degree  $d$ . We will use the notation  $\text{vec}(p)$  for the vector of the coefficients of the polynomial  $p$  with respect to some monomial basis  $\mathcal{B}$ :

$$\text{vec}(p)^{(\alpha)} = p_\alpha \quad (3.42)$$

for  $\alpha \in \mathbb{N}_d^n$ .

**Definition 3.1 (Riesz functional).** Given a sequence  $y^{(\alpha)} = y_\alpha$  for  $\alpha \in \mathbb{N}^n$ , we define the Riesz linear functional  $\ell_y : \mathbb{R}[x] \rightarrow \mathbb{R}$  such that

$$\ell_y(x^\alpha) = y_\alpha \quad (3.43)$$

for all  $\alpha \in \mathbb{N}^n$ .

The linearity of the Riesz functional allows us to apply it on polynomials.

$$\ell_y(p(x)) = \ell_y\left(\sum_{\alpha \in \mathbb{N}_d^n} p_\alpha x^\alpha\right) = \sum_{\alpha \in \mathbb{N}_d^n} p_\alpha \ell_y(x^\alpha) = \sum_{\alpha \in \mathbb{N}_d^n} p_\alpha y_\alpha \quad (3.44)$$

From the equation above, we can see that Riesz functional substitutes a new variable  $y_\alpha$  for each monomial  $x^\alpha$ , and therefore we can interpret the Riesz functional as an operator that linearizes polynomials.

**Example 3.2.** Given polynomial  $p \in \mathbb{R}[x_1, x_2]$

$$p(x) = x_1^2 + 3x_1x_2 - 7x_2 + 9 \quad (3.45)$$

with  $\deg(p) = 2$ , the vector of its coefficients with respect to monomial basis

$$\mathcal{B} = [x_1^2 \quad x_1x_2 \quad x_2^2 \quad x_1 \quad x_2 \quad 1]^\top \quad (3.46)$$

is

$$\text{vec}(p) = [1 \quad 3 \quad 0 \quad 0 \quad -7 \quad 9]^\top. \quad (3.47)$$

The Riesz functional of  $p(x)$  is

$$\ell(p(x)) = y_{20} + 3y_{11} - 7y_{01} + 9y_{00}. \quad (3.48)$$

### 3. Optimization over polynomials

**Definition 3.2 (Moment matrix).** A symmetric matrix  $M$  indexed by  $\mathbb{N}^n$  is said to be a moment matrix (or generalized Hankel matrix) if its  $(\alpha, \beta)$ -entry depends only on the sum  $\alpha + \beta$  of the indices. Given sequence  $y^{(\alpha)} = y_\alpha$  for  $\alpha \in \mathbb{N}^n$ , the moment matrix  $M(y)$  has form

$$M(y)^{(\alpha, \beta)} = y_{\alpha + \beta} \quad (3.49)$$

for  $\alpha, \beta \in \mathbb{N}^n$ .

**Definition 3.3 (Truncated moment matrix).** Given sequence  $y^{(\alpha)} = y_\alpha$  for  $\alpha \in \mathbb{N}^n$ , the truncated moment matrix  $M_s(y)$  of order  $s \in \mathbb{N}$  has form

$$M_s(y)^{(\alpha, \beta)} = y_{\alpha + \beta} \quad (3.50)$$

for  $\alpha, \beta \in \mathbb{N}_s^n$ .

The moment matrices are linear in  $y$  and symmetric, we can see that

$$M_s(y) \in \mathcal{S}^{\binom{n+s}{n}} \quad (3.51)$$

since  $\binom{n+s}{n}$  is the number of monomials in  $n$  variables up to degree  $s$ .

**Example 3.3.** For  $n = 2$ , the moment matrices for different orders are:

$$M_0(y) = [y_{00}], \quad (3.52)$$

$$M_1(y) = \begin{bmatrix} y_{00} & y_{10} & y_{01} \\ y_{10} & y_{20} & y_{11} \\ y_{01} & y_{11} & y_{02} \end{bmatrix}, \quad (3.53)$$

$$M_2(y) = \begin{bmatrix} y_{00} & y_{10} & y_{01} & y_{20} & y_{11} & y_{02} \\ y_{10} & y_{20} & y_{11} & y_{30} & y_{21} & y_{12} \\ y_{01} & y_{11} & y_{02} & y_{21} & y_{12} & y_{03} \\ y_{20} & y_{30} & y_{21} & y_{40} & y_{31} & y_{22} \\ y_{11} & y_{21} & y_{12} & y_{31} & y_{22} & y_{13} \\ y_{02} & y_{12} & y_{03} & y_{22} & y_{13} & y_{04} \end{bmatrix}. \quad (3.54)$$

All the elements in the blocks separated by the dashed lines have the same degree. Moreover, we can see that the moment matrices of smaller order are nothing more than submatrices of the moment matrices of bigger order.

And just one example for  $n = 3$ :

$$M_1(y) = \begin{bmatrix} y_{000} & y_{100} & y_{010} & y_{001} \\ y_{100} & y_{200} & y_{110} & y_{101} \\ y_{010} & y_{110} & y_{020} & y_{011} \\ y_{001} & y_{101} & y_{011} & y_{002} \end{bmatrix}. \quad (3.55)$$

**Definition 3.4 (Localizing matrix).** Given sequence  $y^{(\alpha)} = y_\alpha$  for  $\alpha \in \mathbb{N}^n$  and polynomial  $q(x) \in \mathbb{R}[x]$ , its localizing matrix  $M_s(qy)$  of order  $s$  has form

$$M_s(qy)^{(\alpha, \beta)} = \sum_{\gamma} q_{\gamma} y_{\alpha + \beta + \gamma} \quad (3.56)$$

for  $\alpha, \beta \in \mathbb{N}_s^n$ .

Notation  $M_s(qy)$  emphasis that the localizing matrix is bilinear in  $q$  and  $y$ .



**Example 3.4.** For  $n = 2$  and a polynomial  $q(x) = x_1x_2 + 2x_1 + 3$ , the localizing matrix of order one is

$$M_1(qy) = \begin{bmatrix} y_{11} + 2y_{10} + 3y_{00} & y_{21} + 2y_{20} + 3y_{10} & y_{12} + 2y_{11} + 3y_{01} \\ y_{21} + 2y_{20} + 3y_{10} & y_{31} + 2y_{30} + 3y_{20} & y_{22} + 2y_{21} + 3y_{11} \\ y_{12} + 2y_{11} + 3y_{01} & y_{22} + 2y_{21} + 3y_{11} & y_{13} + 2y_{12} + 3y_{02} \end{bmatrix}. \quad (3.57)$$

### 3.3. Polynomial optimization

The task of the polynomial optimization (POP) is to optimize a polynomial function on a set, which is given by a set of polynomial inequalities. For given polynomials  $p_0, \dots, p_m \in \mathbb{R}[x]$ , we can define a standard polynomial optimization problem in a form (3.58).

$$\begin{aligned} p^* &= \min_{x \in \mathbb{R}^n} p_0(x) \\ \text{s.t. } & p_k(x) \geq 0 \quad (k = 1, \dots, m) \end{aligned} \quad (3.58)$$

Let the feasibility set  $P$  of the optimization problem (3.58) be a compact (closed and bounded) basic semialgebraic set, defined as

$$P = \{x \in \mathbb{R}^n \mid p_k(x) \geq 0, k = 1, \dots, m\}. \quad (3.59)$$

Since the set  $P$  is compact, the minimum  $p^*$  is attained at a point  $x^* \in P$ . On the other hand, we do not assume convexity of neither the polynomial  $p_0$  nor the set  $P$ , and therefore the problem (3.58) may have several local minima and several global minima in general case. We are, of course, interested in the global minima only.

#### 3.3.1. State of the art review

It is known that the polynomial optimization problem (3.58) is NP-hard, and therefore several authors have proposed to approximate the problem (3.58) by a hierarchy of semidefinite relaxations. The first idea of applying a convex optimization technique to minimize unconstrained polynomial is from [35] by N. Z. Shor. Then Y. Nesterov in [27] has shown a description of the cones of polynomials that are representable as a sum of squares and by exploitation of the duality between the moment cones and the cones of non-negative polynomials he has shown the characterization of a moment cone by LMIs when the non-negative polynomials can be written as sum of squares. A breakthrough in polynomial optimization was done by J. B. Lasserre [19], who by application of algebraic results by M. Putinar [34] showed that the polynomial optimization problems can be approximated by a sequence of semidefinite program relaxations, which optima converge to the optimum of the polynomial optimization problem. Nowadays, efficient algorithms and their implementations for solving semidefinite programs exists as described in Section 2.2, and therefore polynomial optimization problems in a form (3.58) can be solved efficiently.

In these days, many implementations of polynomial optimization problem solver exists. Probably the most common is the MATLAB toolbox Gloptipoly [14], which can use many different semidefinite program solvers to solve the SDP problem arising from the relaxations. Then there is the GpoSolver [12], which uses MATLAB to describe the problem and then generates C++ code, which solves the problem for given parameters and which can be included into an existing codebase. Also the SOSTOOLS [33] is a toolbox implemented in MATLAB, which can be used to solve the sum of squares optimization problems.

### 3.3.2. Lasserre's LMI hierarchy

The global minimum of a polynomial optimization problem in form (3.58) can be found by hierarchies of semidefinite programs. This was introduced by J. B. Lasserre in [19]. He has shown that the polynomial optimization problem can be equivalently written as the following semidefinite program (3.60).

$$\begin{aligned} p^* = \inf_{y \in \mathbb{R}^{\mathbb{N}^n}} \sum_{\alpha \in \mathbb{N}^n} p_{0\alpha} y_\alpha \\ \text{s.t.} \quad & y_0 = 1 \\ & M(y) \succeq 0 \\ & M(p_k y) \succeq 0 \quad (k = 1, \dots, m) \end{aligned} \quad (3.60)$$

This infinite-dimensional semidefinite program is not solvable by computers, and therefore consider Lasserre's LMI hierarchy (3.61) for a relaxation order  $r \in \mathbb{N}$ .

$$\begin{aligned} p_r^* = \inf_{y \in \mathbb{R}^{\mathbb{N}_{2r}^n}} \sum_{\alpha \in \mathbb{N}_{2r}^n} p_{0\alpha} y_\alpha \\ \text{s.t.} \quad & y_0 = 1 \\ & M_r(y) \succeq 0 \\ & M_{r-r_k}(p_k y) \succeq 0 \quad (k = 1, \dots, m) \end{aligned} \quad (3.61)$$

Where  $r_k = \left\lceil \frac{\deg(p_k)}{2} \right\rceil$  and  $r \geq \max\{r_1, \dots, r_m\}$ . The semidefinite program (3.61) is a relaxed version of the program (3.60) or of the initial polynomial optimization problem (3.58).

**Theorem 3.4 (Lasserre's LMI hierarchy converges [13]).** For  $r \in \mathbb{N}$  holds

$$p_r^* \leq p_{r+1}^* \leq p^* \quad (3.62)$$

and

$$\lim_{r \rightarrow +\infty} p_r^* = p^*. \quad (3.63)$$

The semidefinite program (3.61) can be solved by the state of the art semidefinite program solvers or by the Polyopt package as described in Section 2.4. Solving the relaxed semidefinite programs for increasing relaxation order  $r$  gives us tighter and tighter lower bounds on the global minimum of the original problem (3.58).

**Theorem 3.5 (Generic finite convergence [13]).** In the finite-dimensional space of coefficients of the polynomials  $p_k$ ,  $k = 0, 1, \dots, m$ , defining the problem (3.58), there is a low-dimensional algebraic set, which is such that if we choose an instance of the problem (3.58) outside of this set, the Lasserre's LMI relaxations have finite convergence, i.e. there exists a finite  $r^* \in \mathbb{N}$  such that  $p_r^* = p^*$  for all  $r \in \mathbb{N} : r \geq r^*$ .

This means that in general it is enough to compute one finite relaxed semidefinite program (3.61) of the relaxation order big enough to obtain the global optimum of the polynomial optimization problem (3.58). Only in some exceptional and somewhat degenerate problems the finite convergence does not occur and the optimum can not be obtained by computing finite-dimensional semidefinite program in the form (3.61).

From Theorem 3.5 we know that the finite convergence of the Lasserre's LMI hierarchy is ensured generically for some relaxation order  $r$ , which is a priori not known to us. The verification that the finite convergence occurred provides us the following theorem.

**Theorem 3.6 (Certificate of finite convergence [13]).** Let  $y^*$  be the solution of the problem (3.61) at a given relaxation order  $r > \max\{r_1, \dots, r_m\}$ . If

$$\text{rank } M_{r-\max\{r_1, \dots, r_m\}}(y^*) = \text{rank } M_r(y^*) \quad (3.64)$$

then  $p_r^* = p^*$ .

So when we find a relaxation order  $r$  big enough, for which Theorem 3.6 is satisfied, we know, we have finished and we can extract the global optimum. However, in practise another condition is checked.

**Theorem 3.7 (Rank-one moment matrix [13]).** The condition of Theorem 3.6 is satisfied if

$$\text{rank } M_r(y^*) = 1. \quad (3.65)$$

If the condition of Theorem 3.7 holds, the global optimum of the problem (3.58) can be easily recovered as

$$x^* = [y_{10\dots 0} \quad y_{01\dots 0} \quad \cdots \quad y_{00\dots 1}]^\top. \quad (3.66)$$

As usual, we are interested in the complexity estimation. Given the polynomial optimization problem (3.58) in  $n$  variables, we obtain a relaxed semidefinite program (3.61) for a relaxation order  $r$ . This program is in  $N = \binom{n+2r}{n}$  variables, which is equal to the number of monomials in  $n$  variables up to degree  $2r$ . If  $n$  is fixed, for example when solving given polynomial optimization problem, then  $N$  grows in  $\mathcal{O}(r^n)$ , that is polynomially in  $r$ . If the relaxation order  $r$  is fixed then  $N$  grows in  $\mathcal{O}(n^r)$ , that is polynomially in the number of variables  $n$ .

**Example 3.5.** Let us set up some polynomial optimization problem for demonstration purposes. We use the same ellipse and hyperbola from Example 3.1 to define us the feasible set, while minimizing the objective function  $-x_1 - \frac{3}{2}x_2$ .

$$\begin{aligned} p^* &= \min_{x \in \mathbb{R}^2} -x_1 - \frac{3}{2}x_2 \\ \text{s.t.} \quad &-20x_1^2 + x_1x_2 - 12x_2^2 - 16x_1 - x_2 + 48 \geq 0 \\ &12x_1^2 - 58x_1x_2 + 3x_2^2 + 46x_1 - 47x_2 + 44 \geq 0 \end{aligned} \quad (3.67)$$

We expect that the problem has two global optima attained at

$$\begin{bmatrix} x_1^* \\ x_2^* \end{bmatrix} = \left\{ \begin{bmatrix} -\frac{1}{2} \\ 2 \end{bmatrix}; \begin{bmatrix} 1 \\ 1 \end{bmatrix} \right\} \quad (3.68)$$

with value of the objective function


$$p^* = -2.5. \quad (3.69)$$

The illustration of the problem is depicted in Figure 3.2.

Firstly, we start with the relaxation order  $r = 1$ . The relaxed semidefinite problem is following.

$$\begin{aligned} p_1^* &= \min_{y \in \mathbb{R}^{\mathbb{N}_2^2}} -y_{10} - \frac{3}{2}y_{01} \\ \text{s.t.} \quad &y_{00} = 1 \\ &\begin{bmatrix} y_{00} & y_{10} & y_{01} \\ y_{10} & y_{20} & y_{11} \\ y_{01} & y_{11} & y_{02} \end{bmatrix} \succeq 0 \\ &\begin{bmatrix} -20y_{20} + y_{11} - 12y_{02} - 16y_{10} - y_{01} + 48y_{00} \\ 12y_{20} - 58y_{11} + 3y_{02} + 46y_{10} - 47y_{01} + 44y_{00} \end{bmatrix} \succeq 0 \end{aligned} \quad (3.70)$$

### 3. Optimization over polynomials

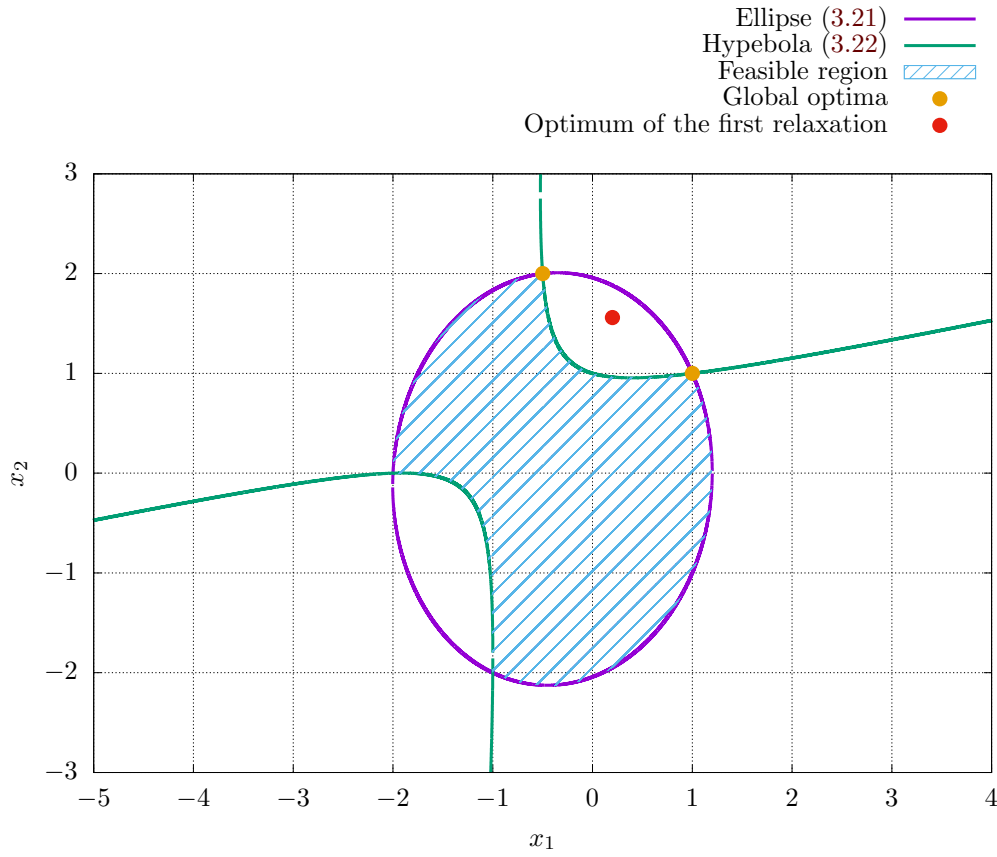

**Figure 3.2.** Feasible region and the expected global minima of the problem (3.67).

By solving this problem, we obtain a possible solution

$$\begin{bmatrix} x_1^* \\ x_2^* \end{bmatrix} = \begin{bmatrix} 0.20 \\ 1.56 \end{bmatrix}, \quad (3.71)$$

$$p_1^* = -2.54, \quad (3.72)$$

which is not feasible. The moment matrix has rank

$$\text{rank } M_1(y^*) = 2. \quad (3.73)$$

Since the condition of Theorem 3.7 is not satisfied, we continue with the second relaxation.

The second relaxation for  $r = 2$  is below.

$$\begin{aligned}
 p_2^* &= \min_{y \in \mathbb{R}^{N_4^2}} -y_{10} - \frac{3}{2}y_{01} \\
 \text{s.t.} \quad & y_{00} = 1 \\
 & \begin{bmatrix} y_{00} & y_{10} & y_{01} & y_{20} & y_{11} & y_{02} \\ y_{10} & y_{20} & y_{11} & y_{30} & y_{21} & y_{12} \\ y_{01} & y_{11} & y_{02} & y_{21} & y_{12} & y_{03} \\ y_{20} & y_{30} & y_{21} & y_{40} & y_{31} & y_{22} \\ y_{11} & y_{21} & y_{12} & y_{31} & y_{22} & y_{13} \\ y_{02} & y_{12} & y_{03} & y_{22} & y_{13} & y_{04} \end{bmatrix} \succeq 0 \quad (3.74) \\
 & \begin{bmatrix} -20y_{20} + y_{11} - 12y_{02} - 16y_{10} - y_{01} + 48y_{00} & -20y_{30} + y_{21} - 12y_{12} - 16y_{20} - y_{11} + 48y_{10} & -20y_{21} + y_{12} - 12y_{03} - 16y_{11} - y_{02} + 48y_{01} \\ -20y_{30} + y_{21} - 12y_{12} - 16y_{20} - y_{11} + 48y_{10} & -20y_{40} + y_{31} - 12y_{22} - 16y_{30} - y_{21} + 48y_{20} & -20y_{31} + y_{22} - 12y_{13} - 16y_{21} - y_{12} + 48y_{11} \\ -20y_{21} + y_{12} - 12y_{03} - 16y_{11} - y_{02} + 48y_{01} & -20y_{31} + y_{22} - 12y_{13} - 16y_{21} - y_{12} + 48y_{11} & -20y_{22} + y_{13} - 12y_{04} - 16y_{12} - y_{03} + 48y_{02} \\ 12y_{20} - 58y_{11} + 3y_{02} + 46y_{10} - 47y_{01} + 44y_{00} & 12y_{30} - 58y_{21} + 3y_{12} + 46y_{20} - 47y_{11} + 44y_{10} & 12y_{21} - 58y_{12} + 3y_{03} + 46y_{11} - 47y_{02} + 44y_{01} \\ 12y_{30} - 58y_{21} + 3y_{12} + 46y_{20} - 47y_{11} + 44y_{10} & 12y_{40} - 58y_{31} + 3y_{22} + 46y_{30} - 47y_{21} + 44y_{20} & 12y_{31} - 58y_{22} + 3y_{13} + 46y_{21} - 47y_{12} + 44y_{11} \\ 12y_{21} - 58y_{12} + 3y_{03} + 46y_{11} - 47y_{02} + 44y_{01} & 12y_{31} - 58y_{22} + 3y_{13} + 46y_{21} - 47y_{12} + 44y_{11} & 12y_{22} - 58y_{13} + 3y_{04} + 46y_{12} - 47y_{03} + 44y_{02} \end{bmatrix} \succeq 0
 \end{aligned}$$

The minimum of the problem is

$$p_2^* = -2.5, \quad (3.75)$$

which is in correspondence with the optimum points

$$\begin{bmatrix} x_1^* \\ x_2^* \end{bmatrix} = \left\{ \begin{bmatrix} -\frac{1}{2} \\ 2 \end{bmatrix}; \begin{bmatrix} 1 \\ 1 \end{bmatrix} \right\}. \quad (3.76)$$

They are the same as the minima of the original problem (3.67) and it depends on the iterative algorithm and the chosen starting point in which of these minima we end up. The moment matrix has rank

$$\text{rank } M_2(y^*) = 1, \quad (3.77)$$

and therefore the global optimum has been found and we do not have to continue with the next relaxation. At the end, we verify that Theorem 3.4 holds.

$$p_1^* \leq p_2^* \leq p^* \quad (3.78)$$

$$-2.54 \leq -2.5 \leq -2.5 \quad (3.79)$$

### 3.3.3. Implementation details

To verify and for better understanding of the Lasserre's LMI hierarchies, we have implemented the approach described in the previous section into the package Polyopt. More information about the Polyopt package and how to install it are in Section 2.4.1.

For solving the semidefinite programs (3.61) as proposed by Lasserre, we can use the interior-point algorithm as described in Section 2.3 and implemented in the Polyopt package. All we have to do is to construct the moment matrix and the localizing matrices from the polynomial constraints for a given relaxation order, which is quite straightforward.

What may be slightly complicated is, how to find the initial feasible point for the interior-point algorithm. The vector  $y$  of the semidefinite program (3.61) can be constructed from a vector  $x$  of the polynomial optimization problem (3.58) followingly:

$$y^{(\alpha)} = x^\alpha \quad (3.80)$$

### 3. Optimization over polynomials

for  $\alpha \in \mathbb{N}_{2r}^n$ . If  $x$  is from the feasible region  $P$  as stated in (3.59), then  $y$  is a feasible point of (3.61). Then the moment matrix  $M_r(y)$  has rank one, since

$$M_r(y) = \zeta \zeta^\top, \quad (3.81)$$

and therefore  $y$  is not strictly feasible point, as it is required by the `SDPSolver` class. Hence, we construct  $N$  feasible points  $y_i$  from  $N$  different feasible points  $x_i$  for  $N \geq \binom{n+r}{n}$  followingly:

$$y_i^{(\alpha)} = x_i^\alpha, \quad (3.82)$$

for  $i = 1, \dots, N$  and  $\alpha \in \mathbb{N}_{2r}^n$ . Then the strictly feasible point  $y$  can be constructed as

$$y = \frac{1}{N} \sum_{i=1}^N y_i \quad (3.83)$$

and then the moment matrix is

$$M_r(y) = \frac{1}{N} \sum_{i=1}^N \zeta_i \zeta_i^\top, \quad (3.84)$$

where  $\zeta_i$  are linearly independent, if  $x_i$  are pairwise different. Then  $M_r(y)$  has full rank if  $N$  is bigger or equal to the number of rows or columns of  $M_r(y)$ , which is  $\binom{n+r}{n}$ .

The polynomial optimization solver is implemented in the class `POPSolver` of the `Polyopt` package. This solver can solve polynomial problem in the form (3.58) for relaxation order  $r$  and with given strictly feasible points  $x_1, \dots, x_N$  of the polynomial optimization problem (3.58). Firstly, we initialize the problem with the objective function  $p_0$ , the constraining polynomials  $p_1, \dots, p_m$  and with the relaxation order  $r$ . Then a strictly feasible point  $y_0$  of the semidefinite problem is computed by the function `getFeasiblePoint()` from the strictly feasible points  $x_1, \dots, x_N$  of the polynomial optimization problem (3.58). Finally, the problem is solved by the function `solve()`, which returns the optimal point  $x^*$ . The minimal working example is shown in Listing 3.1. For the purpose of the `Polyopt` package, the polynomials in  $n$  variables are represented by dictionaries in Python. The values are the coefficients and the keys are  $n$ -tuples of integers, where each tuple represents the corresponding monomial and the integers represent the degrees of each variable of the monomial.

**Example 3.6.** For  $x \in \mathbb{R}^2$  the polynomial

$$p(x) = -20x_1^2 + x_1x_2 - 12x_2^2 - 16x_1 - x_2 + 48 \quad (3.85)$$

is represented in Python as a variable `p` in a following way.

```
p = {(2, 0): -20, (1, 1): 1, (0, 2): -12, (1, 0): -16, (0, 1): -1,
      (0, 0): 48}
```

The variable `p` is a dictionary indexed by tuples. The first integer in each tuple represents the degree of the variable  $x_1$  in the given monomial and the second integer represents the degree of the variable  $x_2$ .

**Listing 3.1.** Typical usage of the class `POPSolver` of the Polyopt package.

---

```

1: import polyopt
2:
3: # supposing the polynomials pi, the vectors xi and the relaxation
   order r is already defined
4: problem = polyopt.POPSolver(p0, [p1, ..., pm], r)
5: y0 = problem.getFeasiblePoint([x1, ..., xN])
6: xStar = problem.solve(y0)

```

---

Detailed information about the execution of the SDP solver can be printed out to the terminal by setting `problem.setPrintOutput(True)`. By calling of the function `problem.getFeasiblePoint(xs)` we obtain the feasible point  $y$  from the feasible points  $x_i$  stored in the list `xs`. If the feasible points  $x_i$  are not know, they can be generated randomly from a ball with radius  $R$  by calling `problem.getFeasiblePointFromRadius(R)`. When the polynomial problem is solved, the rank of the moment matrix can be obtained by calling `problem.momentMatrixRank()`.

**Example 3.7.** The Python code for the polynomial optimization problem (3.67) from Example 3.5 is shown in Listing 3.2.

### 3.3.4. Comparison with the state of the art methods

To get an idea, how the implementation from the Polyopt package is performing, we have compared it to the state of the art optimization toolbox Gloptipoly [14]. Gloptipoly is a MATLAB toolbox, which uses the Lasserre hierarchy to transform the polynomial optimization problem to the relaxed semidefinite program. This semidefinite program is then solved by some state of the art semidefinite program solver, by default by SeDuMi [37]. We have to point out that we are comparing a Python implementation with a MATLAB one.

We have generated random instances of a polynomial optimization problem  $P_{n,d,k}$  for  $k = 1, \dots, 30$  of a type:

$$\begin{aligned}
& \min_{x \in \mathbb{R}^n} p_{n,d,k}(x) \\
& \text{s.t.} \quad 1 - \sum_{i=1}^n x_i^2 \geq 0,
\end{aligned} \tag{3.86}$$

where  $n$  is the number of variables,  $d$  is the degree of the polynomial  $p_{n,d,k}$ . The generated instances differ in the coefficients of  $\text{vec}(p_{n,d,k})$ , which were generated randomly from uniform distribution  $(-1; 1)$ . Moreover, the Polyopt package requires the initial point of the generated semidefinite program, which was randomly generated by the function `getFeasiblePointFromRadius(1)` in advance for each problem  $P_{n,d,k}$ . Then the execution times of each problems were measured. One option was to measure only the execution times of the semidefinite programs solvers. But since this depends only on the size of the generated semidefinite program, the results would be similar to the experiments in Section 2.5. Therefore, we have measured the sum of times required to construct the semidefinite program and to solve the semidefinite program. For the Polyopt package we have measured the execution times of the functions `POPSolver()` and `solve()`. For the Gloptipoly toolbox the execution times of the functions `msdp()` and `msol()` were measured.

Firstly, we have fixed the degree of the polynomial  $d = 2$ , and therefore we have set the relaxation order  $r = 1$ . We have solved the problems  $P_{n,2,k}$  for the number of

---

**Listing 3.2.** Code for solving polynomial optimization problem stated in Example 3.5

---

```

1: from numpy import *
2: import polyopt
3:
4: # objective function
5: p0 = {(1, 0): -1, (0, 1): -3/2}
6:
7: # constraint functions
8: p1 = {(2, 0): -20, (1, 1): 1, (0, 2): -12, (1, 0): -16, (0, 1):
    -1, (0, 0): 48}
9: p2 = {(2, 0): 12, (1, 1): -58, (0, 2): 3, (1, 0): 46, (0, 1): -47,
    (0, 0): 44}
10:
11: # feasible points of the polynomial problem
12: x1 = array([[1], [1]])
13: x2 = array([[2], [2]])
14: x3 = array([[-1], [-1]])
15: x4 = array([[-2], [1]])
16: x5 = array([[1], [2]])
17: x6 = array([[0], [2]])
18:
19: # degree of the relaxation
20: r = 2
21:
22: # initialize the solver
23: problem = polyopt.POPSolver(p0, [p1, p2], r)
24:
25: # obtain a feasible point of the SDP problem from the feasible
    points of the polynomial problem
26: y0 = problem.getFeasiblePoint([x1, x2, x3, x4, x5, x6])
27:
28: # enable outputs
29: problem.setPrintOutput(True)
30:
31: # solve!
32: xStar = problem.solve(y0)

```

---



variables  $n = 1, \dots, 5$  repeatedly for  $s = 1, \dots, 30$  to eliminate some fluctuation in the time measuring. The measured times were saved as  $\tau_{n,k,s}$ . Because the influences in time measuring can only prolong the execution times, we have selected minimum of  $\tau_{n,k,s}$  for each problem  $P_{n,d,k}$ .

$$\tau_{n,k} = \min_{s=1}^{30} \tau_{n,k,s} \quad (3.87)$$

Since the execution times of the problems of the same sizes should be the same, the average of the computation times was computed for each number of variables  $n = 1, \dots, 5$ .

$$\tau_n = \frac{1}{30} \sum_{k=1}^{30} \tau_{n,k} \quad (3.88)$$

These execution times  $\tau_n$  were measured and computed separately for the Polyopt package and the Gloptipoly toolbox and are shown in Table 3.1 and Figure 3.3.

Number of variables	Dimension of the SDP	Toolbox	
		Polyopt	Gloptipoly [14]
1	3	0.0159 s	0.0340 s
2	6	0.0411 s	0.0348 s
3	10	0.0942 s	0.0348 s
4	15	0.207 s	0.0371 s
5	21	0.412 s	0.0394 s

**Table 3.1.** Execution times of the polynomial optimization problems in different number of variables with the relaxation order  $r = 1$  solved by the selected toolboxes.

Secondly, we have fixed the number of variables  $n = 2$  and let the degree  $d$  of the polynomial  $p_{n,d,k}$  vary. We have set the relaxation order as low as possible to  $r = \lceil \frac{d}{2} \rceil$ . We have solved the problems  $P_{2,d,k}$  for degrees  $d = 1, \dots, 5$  repeatedly for  $s = 1, \dots, 30$  to eliminate some fluctuation in the time measuring. The measured times were saved as  $\tau_{d,k,s}$ . For the same reasons as stated in the first case, we have processed the measured times followingly:

$$\tau_{d,k} = \min_{s=1}^{30} \tau_{d,k,s} \quad (3.89)$$


$$\tau_d = \frac{1}{30} \sum_{k=1}^{30} \tau_{d,k} \quad (3.90)$$

These execution times  $\tau_d$  were measured and computed separately for the Polyopt package and the Gloptipoly toolbox and are shown in Table 3.2 and Figure 3.4.

The experiments were executed on Intel Core i5-3210M CPU 2.50 GHz based computer with sufficient amount of free system memory. The installed version of Python was 3.5.3 and MATLAB R2016b 64-bit was used.

From the graphs we can see that the Polyopt package is not comparable with Gloptipoly for high dimensions of the generated semidefinite program. This is in accordance with the results of Section 2.5, since the semidefinite programs solver is the most expensive part in the polynomial optimization. On the other hand, for really small polynomial optimization problems, the execution times of the Polyopt package are similar to the Gloptipoly execution times.

### 3. Optimization over polynomials

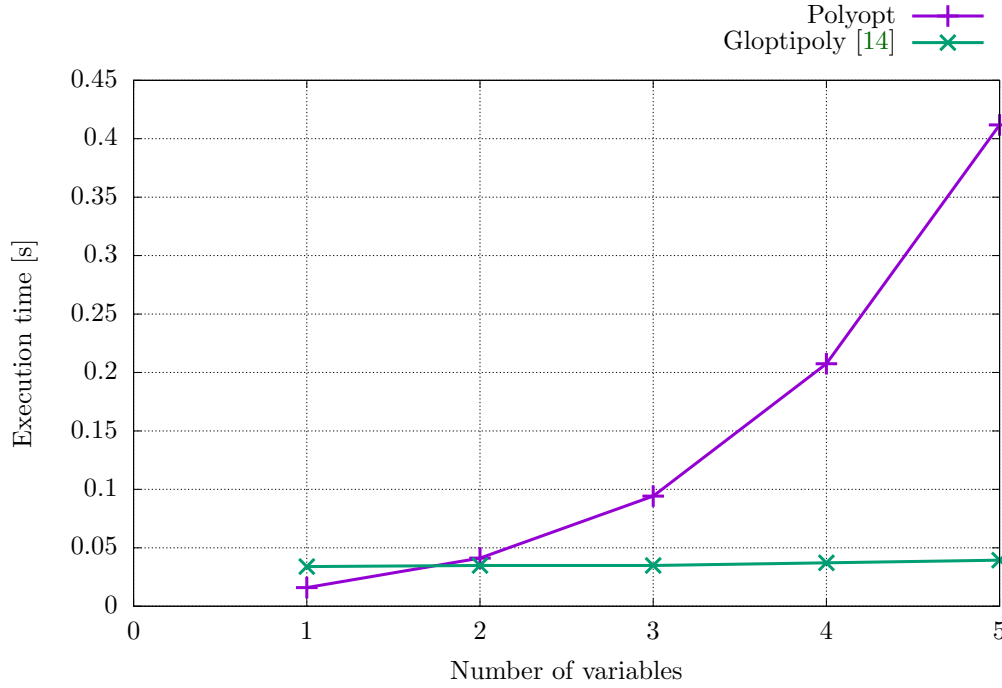

**Figure 3.3.** Graph of execution times of the polynomial optimization problems with the relaxation order  $r = 1$  based on the number of variables solved by the selected toolboxes.

Degree	Relaxation order	Dimension of the SDP	Toolbox	
			Polyopt	Gloptipoly [14]
1	1	6	0.0381 s	0.0356 s
2	1	6	0.0373 s	0.0341 s
3	2	15	0.217 s	0.0462 s
4	2	15	0.219 s	0.0491 s
5	3	28	0.919 s	0.0524 s


**Table 3.2.** Execution times of the polynomial optimization problems for different degrees of the polynomial in the objective function in  $n = 2$  variables solved by the selected toolboxes.

### 3.4. Solving systems of polynomial equations over the real numbers

The goal of this section is to solve the system of polynomial equations (3.91) without computation of the non-real solutions. Let  $x \in \mathbb{R}^n$  and  $f_1, f_2, \dots, f_m \in \mathbb{R}[x]$ .

$$\begin{aligned}
 f_1(x) &= 0 \\
 f_2(x) &= 0 \\
 &\vdots \\
 f_m(x) &= 0
 \end{aligned} \tag{3.91}$$

We will present and describe one of the state of the art method for solving polynomial systems over the real numbers. We will implement the method, so we will be able to apply it on some selected problems from computer vision geometry and compare it with the state of the art methods used in computer vision.

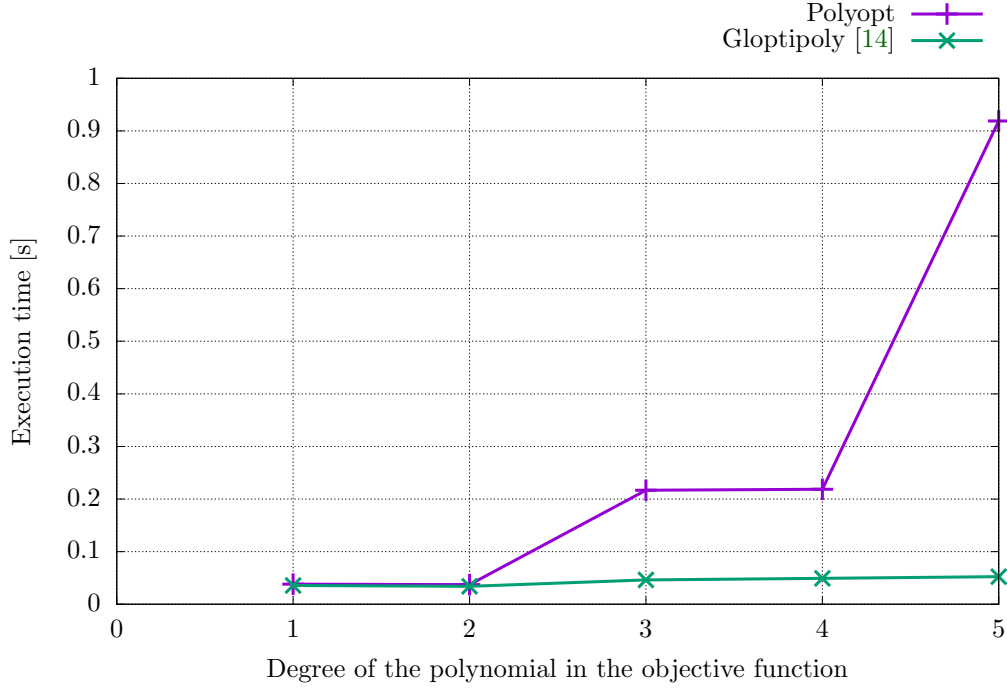

**Figure 3.4.** Graph of execution times of the polynomial optimization problems in  $n = 2$  variables based on the degree of the polynomial in the objective function solved by the selected toolboxes.

### 3.4.1. State of the art review

Solving polynomial equations efficiently is a key element in computer vision geometry. For this reason, specialized solvers are constructed for the most common geometry problems to make the solvers efficient and numerically stable. Previously, these solvers were handcrafted, then the process was automated using automatic generators [17]. These automatic generators are based on Gröbner bases [2], which are typically computed by the Buchberger Algorithm [4] or by its successor, by the  $F_4$  Algorithm [7]. When the Gröbner basis is found, the multiplication matrix is constructed and the solutions are found by the eigenvalue computation of the multiplication matrix. The disadvantage of this approach is that non-real solutions appear, which have no sense in the geometry point of view and are discarded in the end. In case that many non-real solutions are present and only few real solutions are obtained, the time consumed by computing the non-real solutions is much bigger than the time needed to compute the real solutions, in which we are interested.

Therefore, one should be interested in a method, which would solve the polynomial system over the real numbers only. One of the methods is the moment method introduced in [20] and extended to the complex numbers in [21] both by J. B. Lasserre, M. Laurent and P. Rostalski. The moment method is summarized and enriched with examples in [23], which we will follow in this section.

### 3.4.2. The moment method

The moment method is based on obtaining of the real radical ideal  $\sqrt[\mathbb{R}]{I}$  of the original ideal  $I$ . The real radical ideal is found by computing the kernel of a moment matrix, which is obtained by solving a hierarchy of semidefinite programs. Once the real radical

### 3. Optimization over polynomials

ideal is found, its Gröbner basis is constructed and the solutions can be extracted in a standard way.

Since the moment method is based on positive linear forms and real radical ideals, let us introduce some basics from the theory about positive linear forms and their connection to the real radical ideals.

#### Positive linear forms

Let the dual vector space of the polynomial ring  $\mathbb{R}[x]$  is denoted as  $\mathbb{R}[x]^*$ . Given a linear form  $\Lambda \in \mathbb{R}[x]^*$ , consider the quadratic form  $Q_\Lambda : \mathbb{R}[x] \mapsto \mathbb{R}$  such that

$$Q_\Lambda(f) = \Lambda(f^2) \quad (3.92)$$

with kernel

$$\ker(Q_\Lambda) = \{f \in \mathbb{R}[x] \mid \Lambda(fg) = 0 \ \forall g \in \mathbb{R}[x]\}. \quad (3.93)$$

**Definition 3.5 (Positivity).** Linear form  $\Lambda \in \mathbb{R}[x]^*$  is said to be positive if  $\Lambda(f^2) \geq 0$  for all  $f \in \mathbb{R}[x]$ , i.e. if the quadratic form  $Q_\Lambda$  is positive semidefinite.

How the positive linear forms are connected to real radical ideals shows the following theorem.

**Theorem 3.8.** Let  $\Lambda \in \mathbb{R}[x]^*$ . Then  $\ker(Q_\Lambda)$  is an ideal in  $\mathbb{R}[x]$ , which is real radical ideal when  $\Lambda$  is positive.

We need to extend the theory about moments and moment matrices introduced in Section 3.2 and apply it to the linear forms. Therefore, we create a new definition of the moment matrix, which is equivalent to Definition 3.2.

**Definition 3.6 (Moment matrix of  $\Lambda$ ).** A symmetric matrix  $M$  indexed by  $\mathbb{N}^n$  is said to be a moment matrix (or generalized Hankel matrix) if its  $(\alpha, \beta)$ -entry depends only on the sum  $\alpha + \beta$  of the indices. Given linear form  $\Lambda \in \mathbb{R}[x]^*$ , the moment matrix  $M(\Lambda)$  has form

$$M(\Lambda)^{(\alpha, \beta)} = \Lambda(x^\alpha x^\beta) \quad (3.94)$$

for  $\alpha, \beta \in \mathbb{N}^n$ .

The moment matrix  $M(\Lambda)$  has some interesting properties. For  $p \in \mathbb{R}[x]$  the equation

$$Q_\Lambda(p) = \Lambda(p^2) = \text{vec}(p)^\top M(\Lambda) \text{vec}(p) \quad (3.95)$$

holds, and therefore  $M(\Lambda)$  is the matrix of the quadratic form  $Q_\Lambda$  in some monomial basis. This concludes that  $\Lambda$  is positive if and only if  $M(\Lambda) \succeq 0$ .

Second interesting property is that a polynomial  $p$  is from  $\ker(Q_\Lambda)$  if and only if its coefficient vector  $\text{vec}(p)$  is from  $\ker(M(\Lambda))$ . Therefore, we identify both  $\ker(Q_\Lambda)$  and  $\ker(M(\Lambda))$  with a set of polynomials hereafter. Thus by Theorem 3.8,  $\ker(M(\Lambda))$  is an ideal, which is real radical ideal when  $M(\Lambda) \succeq 0$ .

**Example 3.8.** For  $n = 2$ , let us have the linear form  $\Lambda \in \mathbb{R}[x]^*$  defined by

$$\Lambda(1) = 1, \quad (3.96)$$

$$\Lambda(x_1 x_2) = 1, \quad (3.97)$$

$$\Lambda(x_1^{\alpha_1} x_2^{\alpha_2}) = 0 \text{ for all other monomials.} \quad (3.98)$$

### 3.4. Solving systems of polynomial equations over the real numbers

Then the moment matrix  $M(\Lambda)$  (rows and columns indexed by  $1, x_1, x_2, x_1^2, x_1x_2, x_2^2, \dots$ ) is

$$M(\Lambda) = \begin{bmatrix} 1 & 0 & 0 & 0 & 1 & 0 & \dots \\ 0 & 0 & 1 & 0 & 0 & 0 & \dots \\ 0 & 1 & 0 & 0 & 0 & 0 & \dots \\ 0 & 0 & 0 & 0 & 0 & 0 & \dots \\ 1 & 0 & 0 & 0 & 0 & 0 & \dots \\ 0 & 0 & 0 & 0 & 0 & 0 & \dots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{bmatrix} \quad (3.99)$$

with  $\text{rank } M(\Lambda) = 4$  and with kernel

$$\ker(M(\Lambda)) = \langle x_1^2, x_2^2, 1 - x_1x_2 \rangle. \quad (3.100)$$

Since the kernel is not a radical ideal,  $\Lambda$  is not positive.

**Theorem 3.9.** Let  $\Lambda \in \mathbb{R}[x]^*$  and let  $\mathcal{B}$  be a set of monomials. Then  $\mathcal{B}$  indexes a maximal linearly independent set of columns of  $M(\Lambda)$  if and only if  $\mathcal{B}$  corresponds to a basis of  $\mathbb{R}[x]/\ker(M(\Lambda))$ . That is,

$$\text{rank } M(\Lambda) = \dim(\mathbb{R}[x]/\ker(M(\Lambda))). \quad (3.101)$$

Which means that the monomial basis  $\mathcal{B}$  of the quotient ring  $\mathbb{R}[x]/\ker(M(\Lambda))$  can be selected by looking at the maximal linearly independent set of columns of  $M(\Lambda)$ .

Following theorem shows, how to construct linear form  $\Lambda$ , such that the kernel of its moment matrix  $\ker(M(\Lambda))$  is a vanishing ideal of some selected points from  $\mathbb{R}^n$ .

**Theorem 3.10.** Let  $\Lambda_{v_i} \in \mathbb{R}[x]^*$  is the evaluation at  $v_i \in \mathbb{R}^n$ . Let  $\mathcal{B}_\infty$  is monomial basis containing all monomials,  $\mathcal{B}_\infty^{(\alpha)} = x^\alpha$  for all  $\alpha \in \mathbb{N}^n$ . If  $\Lambda$  is a conic combination of evaluations at real points,

$$\Lambda = \sum_{i=1}^r \lambda_i \Lambda_{v_i}, \quad (3.102)$$

where  $\lambda_i > 0$  and  $v_i$  are pairwise distinct, then moment matrix constructed followingly

$$M(\Lambda) = \sum_{i=1}^r \lambda_i [v_i]_{\mathcal{B}_\infty} [v_i]_{\mathcal{B}_\infty}^\top \quad (3.103)$$

has  $\text{rank } M(\Lambda) = r$  and  $\ker(M(\Lambda)) = \mathcal{I}(v_1, v_2, \dots, v_r)$ .

Next theorem shows the converse implication to Theorem 3.10 so there is an equivalence in the end.

**Theorem 3.11 (Finite rank moment matrix theorem).** Assume that  $\Lambda \in \mathbb{R}[x]^*$  is positive with  $\text{rank } M(\Lambda) = r < \infty$ . Then

$$\Lambda = \sum_{i=1}^r \lambda_i \Lambda_{v_i} \quad (3.104)$$

for some distinct  $v_1, v_2, \dots, v_r \in \mathbb{R}^n$  and some scalars  $\lambda_i > 0$ . Moreover,  $\{v_1, v_2, \dots, v_r\} = V_{\mathbb{C}}(\ker(M(\Lambda)))$ .

### 3. Optimization over polynomials

Now, we create a semidefinite characterization of real radical ideals using positive linear forms. For that, we define the convex set

$$\mathcal{K} = \{\Lambda \in \mathbb{R}[x]^* \mid \Lambda(1) = 1, M(\Lambda) \succeq 0, \Lambda(p) = 0 \ \forall p \in I\}. \quad (3.105)$$

For any  $\Lambda \in \mathcal{K}$ ,  $\ker(M(\Lambda))$  is a real radical ideal, which contains  $I$ , and therefore its real radical ideal  $\sqrt[\mathbb{R}]{I}$ , which implies

$$\dim(\mathbb{R}[x]/\ker(M(\Lambda))) \leq \dim(\mathbb{R}[x]/\sqrt[\mathbb{R}]{I}). \quad (3.106)$$

When the real variety  $V_{\mathbb{R}}(I)$  is finite, then  $\ker(M(\Lambda))$  is zero-dimensional and

$$\text{rank } M(\Lambda) \leq |V_{\mathbb{R}}(I)|. \quad (3.107)$$

The equality holds only for special elements  $\Lambda \in \mathcal{K}$  named generic linear forms, which are described by the following definition.

**Definition 3.7 (Generic linear forms).** Let  $\mathcal{K}$  be defined as in (3.105) and assume  $|V_{\mathbb{R}}(I)| < \infty$ . A linear form  $\Lambda \in \mathcal{K}$  is said to be generic if  $M(\Lambda)$  has maximum rank, i.e. if  $\text{rank } M(\Lambda) = |V_{\mathbb{R}}(I)|$ .

The last theorem in this part is about equivalent condition on generic linear forms, which is crucial for computation of  $\sqrt[\mathbb{R}]{I}$  using linear forms.

**Theorem 3.12.** Assume  $|V_{\mathbb{R}}(I)| < \infty$ . An element  $\Lambda \in \mathcal{K}$  is a generic linear form if and only if  $\ker(M(\Lambda)) \subseteq \ker(M(\Lambda'))$  for all  $\Lambda' \in \mathcal{K}$ . Moreover,  $\ker(M(\Lambda)) = \sqrt[\mathbb{R}]{I}$  for all generic linear forms  $\Lambda \in \mathcal{K}$ .

#### Truncated positive linear forms

Using the results of the previous section, we should be able to solve any system of polynomial equations with finite number of real solutions. From the given polynomial system (3.91) generating an ideal  $I$  we construct the set  $\mathcal{K}$  (3.105), from which we find a generic linear form  $\Lambda$  (Definition 3.7). Then by Theorem 3.12, we find the real radical ideal  $\sqrt[\mathbb{R}]{I} = \ker(M(\Lambda))$ . Next, monomial basis  $\mathcal{B}$  of the quotient ring  $\mathbb{R}[x]/\sqrt[\mathbb{R}]{I}$  is found using Theorem 3.9. In the end, the multiplication matrices are obtained and the real solutions of (3.91) are found from their eigenvectors.

However, since we deal with infinite-dimensional spaces  $\mathbb{R}[x]$  and  $\mathbb{R}[x]^*$ , this method is not applicable computationally. Therefore, we restrict ourselves to the finite-dimensional subspaces  $\mathbb{R}[x]_s$  and  $(\mathbb{R}[x]_{2s})^*$ , where  $[x]_s$  denotes the vectors of all monomials up to degree  $s \in \mathbb{N}$ . Again we define the quadratic form  $Q_{\Lambda} : \mathbb{R}[x]_s \mapsto \mathbb{R}$  of the linear form  $\Lambda \in (\mathbb{R}[x]_{2s})^*$  such that

$$Q_{\Lambda}(f) = \Lambda(f^2) \quad (3.108)$$

with matrix  $M_s(\Lambda)$  denoted as truncated moment matrix of order  $s$  of  $\Lambda$  defined below.

**Definition 3.8 (Truncated moment matrix of  $\Lambda$ ).** Given linear form  $\Lambda \in (\mathbb{R}[x]_{2s})^*$ , the truncated moment matrix  $M_s(\Lambda)$  of order  $s \in \mathbb{N}$  has form

$$M_s(\Lambda)^{(\alpha, \beta)} = \Lambda(x^{\alpha} x^{\beta}) \quad (3.109)$$

for  $\alpha, \beta \in \mathbb{N}_s^n$ .

### 3.4. Solving systems of polynomial equations over the real numbers

Linear form  $\Lambda$  is positive if and only if  $\Lambda(f^2) \geq 0$  for all  $f \in \mathbb{R}[x]_s$ , which is equivalent to the condition  $M_s(\Lambda) \succeq 0$ . As before, we identify  $\ker Q_\Lambda$  and  $\ker(M_s(\Lambda))$  as a subset of  $\mathbb{R}[x]_s$ .

**Theorem 3.13 (Flat extension theorem).** Let  $\Lambda \in (\mathbb{R}[x]_{2s})^*$  and assume that  $M_s(\Lambda)$  is a flat extension of  $M_{s-1}(\Lambda)$ , i.e.

$$\text{rank } M_s(\Lambda) = \text{rank } M_{s-1}(\Lambda). \quad (3.110)$$

Then one can extend (uniquely)  $\Lambda$  to  $\tilde{\Lambda} \in (\mathbb{R}[x]_{2s+2})^*$  in such a way that  $M_{s+1}(\tilde{\Lambda})$  is a flat extension of  $M_s(\Lambda)$ , thus  $\text{rank } M_{s+1}(\tilde{\Lambda}) = \text{rank } M_s(\Lambda)$ .

This theorem is a crucial one for the moment method, since it allows to conclude information about the infinite moment matrix  $M(\Lambda)$  from its finite part  $M_s(\Lambda)$ . How this can be done describes the following theorem.

**Theorem 3.14.** Let  $\Lambda \in (\mathbb{R}[x]_{2s})^*$  and assume (3.110) holds. Then one can extend  $\Lambda$  to  $\tilde{\Lambda} \in \mathbb{R}[x]^*$  in such a way that  $M(\tilde{\Lambda})$  is a flat extension of  $M_s(\Lambda)$ , and the ideal  $\ker(M(\tilde{\Lambda}))$  is generated by the polynomials in  $\ker(M_s(\Lambda))$ , i.e.

$$\text{rank } M(\tilde{\Lambda}) = \text{rank } M_s(\Lambda), \quad (3.111)$$

$$\ker(M(\tilde{\Lambda})) = \langle \ker(M_s(\Lambda)) \rangle. \quad (3.112)$$

Moreover, any monomial set  $\mathcal{B}$  indexing a basis of the column space of  $M_{s-1}(\Lambda)$  is a basis of the quotient space  $\mathbb{R}[x]/\ker(M(\tilde{\Lambda}))$ . If, moreover,  $M_s(\Lambda) \succeq 0$ , then the ideal  $\langle \ker(M_s(\Lambda)) \rangle$  is real radical ideal and  $\Lambda$  is of the form

$$\Lambda = \sum_{i=1}^r \lambda_i \Lambda_{v_i}, \quad (3.113)$$

where  $\lambda_i > 0$  and  $\{v_1, v_2, \dots, v_r\} = V_{\mathbb{C}}(\ker(M_s(\Lambda))) \subseteq \mathbb{R}^n$ .

This result allows us to represent a real radical ideal  $\sqrt[\mathbb{R}]{I}$  (infinite set of polynomials) by a finite truncated moment matrix  $M_s(\Lambda)$ . Moreover, the monomial basis  $\mathcal{B}$  of the quotient ring  $\mathbb{R}[x]/\sqrt[\mathbb{R}]{I}$  can be readily obtained from it.

Now, the theory about positive linear forms and flat extensions of truncated moment matrices can be used to construct an algorithm for computing  $\sqrt[\mathbb{R}]{I}$  from the generators of an ideal  $I$  operating on finite-dimensional subspaces  $\mathbb{R}[x]_t$  only. Given  $\langle f_1, f_2, \dots, f_m \rangle = I$  from the polynomial system (3.91) to solve and  $t \in \mathbb{N}$ , we define the set

$$\mathcal{F}_t = \{f_i x^\alpha \mid i = 1, 2, \dots, m, |\alpha| \leq t - \deg(f_i)\} \quad (3.114)$$

of prolongations up to degree  $t$  of the polynomials  $f_i$ . The truncated analogue of the set  $\mathcal{K}$  is defined as

$$\mathcal{K}_t = \left\{ \Lambda \in (\mathbb{R}[x]_t)^* \mid \Lambda(1) = 1, M_{\lfloor t/2 \rfloor}(\Lambda) \succeq 0, \Lambda(f) = 0 \ \forall f \in \mathcal{F}_t \right\}. \quad (3.115)$$

Since the set  $\mathcal{K}_t$  is an intersection of a cone of positive semidefinite matrices with an affine space, the set is a spectrahedron. This property allows us to use a SDP solver to find an element of this set, named generic truncated linear form. The required properties of this element describes the following theorem, which is the truncated analogue of Theorem 3.12.

### 3. Optimization over polynomials

**Theorem 3.15 (Generic truncated linear forms).** The following assertions are equivalent for  $\Lambda \in (\mathbb{R}[x]_t)^*$ :

1.  $\text{rank } M_{\lfloor t/2 \rfloor}(\Lambda) \geq \text{rank } M_{\lfloor t/2 \rfloor}(\Lambda')$  for all  $\Lambda' \in \mathcal{K}_t$ .
2.  $\ker(M_{\lfloor t/2 \rfloor}(\Lambda)) \subseteq \ker(M_{\lfloor t/2 \rfloor}(\Lambda'))$  for all  $\Lambda' \in \mathcal{K}_t$ .
3. The linear form  $\Lambda$  lies in the relative interior of the convex set  $\mathcal{K}_t$ .

Then  $\Lambda$  is called a generic element of  $\mathcal{K}_t$  and the kernel  $\mathcal{N}_t = \ker(M_{\lfloor t/2 \rfloor}(\Lambda))$  is independent of the particular choice of the generic element  $\Lambda \in \mathcal{K}_t$ .

**Theorem 3.16.** We have

$$\mathcal{N}_t \subseteq \mathcal{N}_{t+1} \subseteq \dots \subseteq \sqrt[t]{I}, \quad (3.116)$$

with equality  $\sqrt[t]{I} = \langle \mathcal{N}_t \rangle$  for  $t$  large enough.

Now, we are almost ready to write down the algorithm, which will be described in the following section. All we need is the stopping criterion, which will describe Theorem 3.17 and the certificate of termination, which is ensured by Theorem 3.18.

**Theorem 3.17.** Let  $I = \langle f_1, f_2, \dots, f_m \rangle$  be an ideal in  $\mathbb{R}[x]$ ,  $D = \max_{i=1}^m \deg(f_i)$ , and  $d = \left\lfloor \frac{D}{2} \right\rfloor$ . Let  $\Lambda \in \mathcal{K}_t$  be a generic element and assume that at least one of the following two conditions holds:

$$\text{rank } M_s(\Lambda) = \text{rank } M_{s-1}(\Lambda) \text{ for some } D \leq s \leq \left\lfloor \frac{t}{2} \right\rfloor, \quad (3.117)$$

$$\text{rank } M_s(\Lambda) = \text{rank } M_{s-d}(\Lambda) \text{ for some } d \leq s \leq \left\lfloor \frac{t}{2} \right\rfloor. \quad (3.118)$$

Then  $\sqrt[t]{I} = \langle \ker(M_s(\Lambda)) \rangle$ , and any basis of the column space of  $M_{s-1}(\Lambda)$  is a basis of the quotient space  $\mathbb{R}[x]/\sqrt[t]{I}$ .

**Theorem 3.18.** Let  $I$  be an ideal in  $\mathbb{R}[x]$ .

1. If  $V_{\mathbb{R}}(I) = \emptyset$ , then  $\mathcal{K}_t = \emptyset$  for  $t$  large enough.
2. If  $1 \leq |V_{\mathbb{R}}(I)| < \infty$ , then for  $t$  large enough, there exists an integer  $s$  for which (3.118) holds for all  $\Lambda \in \mathcal{K}_t$ .

#### The moment matrix algorithm

Algorithm 3.4 describes the moment matrix algorithm for computing real solutions of the system of polynomial equations.

In each iteration of the algorithm, a generic element  $\Lambda$  of the set  $\mathcal{K}_t$  has to be found. As we mentioned above, we can view  $\mathcal{K}_t$  as a spectrahedron, and therefore we would like to use the knowledge of semidefinite programming to find  $\Lambda$ . Thus, we represent the set  $\mathcal{K}_t$  as the feasible region of a semidefinite program and then we can use any of the state of the art SDP solvers to find any relative interior point of the feasible region. Since we are interested in any feasible point of  $\mathcal{K}_t$ , we will optimize a constant function. The following semidefinite program (3.119) fulfils all our requirements and by solving it, we obtain a generic linear form  $\Lambda$ .

$$\begin{aligned} \min_{\Lambda \in (\mathbb{R}[x]_t)^*} \quad & 0 \\ \text{s.t.} \quad & \Lambda(1) = 1 \\ & M_{\lfloor t/2 \rfloor}(\Lambda) \succeq 0 \\ & \Lambda(f_i x^\alpha) = 0 \quad \forall i \quad \forall |\alpha| \leq t - \deg(f_i) \end{aligned} \quad (3.119)$$



---

**Algorithm 3.4.** The moment matrix algorithm for computing real roots.
 

---

**Input:**
 $f_1, f_2, \dots, f_m$  generators of an ideal  $I = \langle f_1, f_2, \dots, f_m \rangle$  with  $|V_{\mathbb{R}}(I)| < \infty$ 
**Output:**
 $V_{\mathbb{R}}(I)$  a set of real solutions

---

```

1:  $D \leftarrow \max_{i=1}^m \deg(f_i)$ 
2:  $d \leftarrow \left\lceil \frac{D}{2} \right\rceil$ 
3:  $t \leftarrow D$ 
4:  $done \leftarrow \text{false}$ 
5: while not  $done$  do
6:    $\mathcal{F}_t \leftarrow \{f_i x^\alpha \mid i = 1, 2, \dots, m, |\alpha| \leq t - \deg(f_i)\}$ 
7:    $\Lambda \leftarrow$  any generic element of the set  $\mathcal{K}_t = \left\{ \Lambda \in (\mathbb{R}[x]_t)^* \mid \Lambda(1) = 1, M_{\lfloor t/2 \rfloor}(\Lambda) \succeq 0, \Lambda(f) = 0 \ \forall f \in \mathcal{F}_t \right\}$ 
8:   if  $\text{rank } M_s(\Lambda) = \text{rank } M_{s-1}(\Lambda)$  for some  $D \leq s \leq \lfloor \frac{t}{2} \rfloor$  or
       $\text{rank } M_s(\Lambda) = \text{rank } M_{s-d}(\Lambda)$  for some  $d \leq s \leq \lfloor \frac{t}{2} \rfloor$  then
9:      $J \leftarrow \langle \ker(M_s(\Lambda)) \rangle$ 
10:     $\mathcal{B} \leftarrow$  a monomial set indexing a basis of the column space of  $M_{s-1}(\Lambda)$ 
11:     $G \leftarrow$  a basis of the ideal  $J$ 
12:     $\mathcal{X} \leftarrow$  a multiplication matrix (computed using  $\mathcal{B}$  and  $G$ )
13:     $V_{\mathbb{R}}(I) \leftarrow V_{\mathbb{C}}(J)$  (computed via the eigenvectors of  $\mathcal{X}$ )
14:     $done \leftarrow \text{true}$ 
15:   else
16:      $t \leftarrow t + 1$ 
17:   end if
18: end while
19: return  $V_{\mathbb{R}}(I)$ 

```

---

Given the linear form  $\Lambda$ , ranks of its moment matrices  $M_s(\Lambda)$  for many values of  $s$  have to be computed in order to check the stopping conditions (3.117) and (3.118). This may become very challenging task, since we need to compute ranks of matrices consisting of numerical values. This is typically done by singular values computation, but it has to be treated very carefully.

When one of the stopping conditions holds for some  $s$ , there are as many linear independent columns of  $M_{s-1}(\Lambda)$  as many real solutions there are. We select the monomials indexing these columns and they form the basis  $\mathcal{B}$  of the quotient ring  $\mathbb{R}[x]/\sqrt[I]{I}$ .

Then we select any variable  $x_i$ , for which we construct the multiplication matrix  $\mathcal{X}_{x_i}$ . For the construction, the polynomials from  $\ker(M_s(\Lambda))$  are used, since for each  $b \in \mathcal{B}$  the monomial  $bx_i$  can be rewritten as

$$bx_i = \sum_j \lambda_j b_j + q, \quad (3.120)$$

where  $b_j \in \mathcal{B}$ ,  $\lambda_j \in \mathbb{R}$  and  $q \in \ker(M_s(\Lambda))$ .

Having the multiplication matrix  $\mathcal{X}_{x_i}$  constructed, the real solutions of the polynomial system (3.91) are found by the eigenvectors computation.

#### 3.4.3. Implementation details

To understand Algorithm 3.4 and the theory behind deeply, we have decided to write our own implementation of the algorithm. Firstly, just to verify our understanding of the algorithm, we have implemented it in MATLAB using optimization toolbox YALMIP [25] in conjunction with the state of the art SDP solver MOSEK [26]. Secondly, to be able to use our own SDP solver from the Polyopt package, presented in Section 2.4, we have implemented Algorithm 3.4 in Python into the Polyopt package. Both implementations are described below.

##### Implementation in MATLAB with MOSEK toolbox

The implementation in MATLAB is quite straightforward. In each iteration over  $t$ , the set  $\mathcal{F}_t$  is extended with new polynomials of higher degree. Then the semidefinite program (3.119) is built. To avoid the notation of linear forms, the program can be rewritten into notation of moment matrices as known from Section 3.2 using LMI and affine constraints only. The fact that  $M_{\lfloor t/2 \rfloor}(y)$  is a moment matrix is implied by its structure. Using this, we get a equivalent semidefinite program (3.121).

$$\begin{aligned}
 y^* = \arg \min_{y \in \mathbb{R}^{N_t}} & 0 \\
 \text{s.t.} & \quad y_0 = 1 \\
 & \quad M_{\lfloor t/2 \rfloor}(y) \succeq 0 \\
 & \quad \text{vec}(f_i x^\alpha)^\top y = 0 \quad \forall i \quad \forall |\alpha| \leq t - \deg(f_i)
 \end{aligned} \tag{3.121}$$

This program is solved by MOSEK [26] using the YALMIP [25] toolbox as an interface. The result from MOSEK is the moment matrix  $M_{\lfloor t/2 \rfloor}(y^*)$ , since we are not really interested in the  $y^*$  values. Then if the stopping condition (3.117) or (3.118) holds for some  $s$ , we are ready to construct the multiplication matrix. Since  $M_s$  is a matrix of numerical values, we firstly impose its rank, which we have computed when checking the stopping conditions. This is done via the singular value decomposition (SVD) by annulling the singular values close to zero. We construct the basis  $\mathcal{B}$  by selecting the pivot columns of the Gauss-Jordan (G-J) elimination of the matrix  $M_{s-1}$ . Because we have the SVD computed already, we use it to compute  $\ker(M_s)$ . We perform the G-J elimination on it with columns indexed by  $\mathcal{B}$  permuted to the rightmost side. By this we have all required monomials expressed in terms of linear combinations of the monomials from  $\mathcal{B}$  as stated in (3.120). Finally, the multiplication matrix is constructed and the solutions are extracted via eigenvectors computation. In case that some variable is not present in  $\mathcal{B}$  and can not be read directly from the eigenvectors, it can be computed easily by substituting  $\mathcal{B}$  into the eliminated version of  $\ker(M_s)$ .

##### Polyopt package implementation

The implementation from the Polyopt package follows the implementation in MATLAB. The part where they differ is, how to solve the semidefinite program, which is in a form (3.121). Because the SDP solver from the Polyopt package is able to solve only semidefinite programs with LMI constraints as stated in (2.83), we need to eliminate the affine constraints. We use these affine constraints to eliminate as much variables as possible, so only the LMI constraints remain. The new equivalent semidefinite program

has form (3.122).

$$\begin{aligned} \bar{y}^* &= \arg \min_{\bar{y} \in \mathbb{R}^m} 0 \\ \text{s.t.} \quad & A_0 + \sum_{i=1}^m A_i \bar{y}^{(i)} \succeq 0 \end{aligned} \quad (3.122)$$

This problem should be now easily solved by the SDP solver from the Polyopt package as presented in Section 2.4.

Unfortunately, since we lowered the dimension of the semidefinite problem by elimination of some variables, the size  $r = \binom{n+t}{n}$  of the matrix  $A(\bar{y})$

$$A(\bar{y}) = A_0 + \sum_{i=1}^m A_i \bar{y}^{(i)} \quad (3.123)$$

from the LMI constraint stayed the same as before the elimination. This causes that  $A(\bar{y})$  is singular never the less the values of  $\bar{y}$ . Therefore, for each value of  $\bar{y}$  there is at least one eigenvalue of  $A(\bar{y})$  zero, and thus there is no interior point of the feasible region of the problem (3.122). This is no problem for the moment method algorithm, because we are looking for a point from its relative interior. But since the SDP solver from the Polyopt package is an interior-point method, it can not solve a problem, which has no feasible strictly interior point. This issue can be solved by a method called facial reduction, which shrinks the matrix  $A(\bar{y})$  and removes the superfluous dimensions so that there will be interior points in the feasible region. However, we did not implemented this method, but it may be a possible improvement to this implementation. Instead of this, we have constructed new semidefinite program (3.124).

$$\begin{aligned} \tau^*, \bar{y}^* &= \arg \min_{\tau \in \mathbb{R}, \bar{y} \in \mathbb{R}^m} \tau \\ \text{s.t.} \quad & A_0 + \sum_{i=1}^m A_i \bar{y}^{(i)} + \mathcal{I}^r \tau \succeq 0 \\ & \tau \geq 0 \end{aligned} \quad (3.124)$$

Feasible region of this problem has strictly interior points, since pro each value of  $\bar{y}$  we can find  $\tau$  large enough that  $A(\bar{y}) + \mathcal{I}^r \tau$  has all eigenvalues positive. Moreover, we can easily find a starting point for the SDP solver, for example when fixing  $\bar{y}_0 = [0 \ 0 \ \dots \ 0]^\top$ , any

$$\tau_0 > -\min \left\{ \left\{ \lambda_i(A(\bar{y}_0)) \right\}_{i=1}^r; 0 \right\} \quad (3.125)$$

is suitable starting point for the algorithm.

When we apply the Polyopt SDP solver on the program (3.124), we obtain some optimal  $\tau^*$ . If  $\tau^*$  is zero up to the numerical precision, we recover  $y^*$  from  $\bar{y}^*$  by back substitution. Then the moment matrix  $M_{\lfloor t/2 \rfloor}(y^*)$  is reconstructed and the solutions are computed in similar way as in the MATLAB implementation. If  $\tau^*$  is not zero, then the semidefinite program (3.121) has empty feasible region, which means that the original polynomial system (3.91) has no real solutions.

## Usage

The class `PSSolver` from from the Polyopt package provides Python implementation of the polynomial solver using the moment method. The class method `solve()`

### 3. Optimization over polynomials

finds the real solutions of the polynomial system (3.91). Minimal working example provides Listing 3.3. Detailed information about the execution can be enabled by setting `problem.setPrintOutput(True)`.

---

**Listing 3.3.** Typical usage of the class PSSolver of the Polyopt package.

---

```
1: import polyopt
2:
3: # supposing the polynomials fi are already defined
4: problem = polyopt.PSSolver([f1, ..., fm])
5: solution = problem.solve()
```

---

**Example 3.9.** The Python code solving the system of polynomial equations consisting of equation (3.21) and (3.22) from Example 3.1 is shown in Listing 3.4.

---

**Listing 3.4.** Code for solving system of polynomial equations stated in Example 3.9

---

```
1: import polyopt
2:
3: # polynomials of the system
4: f1 = {(0, 0): 48, (1, 0): -16, (2, 0): -20, (1, 1): 1, (0, 1): -1,
        (0, 2): -12}
5: f2 = {(0, 0): 44, (1, 0): 46, (2, 0): 12, (1, 1): -58, (0, 1): -47,
        (0, 2): 3}
6:
7: # initialize the solver
8: problem = polyopt.PSSolver([f1, f2])
9:
10: # enable outputs
11: problem.setPrintOutput(True)
12:
13: # solve!
14: solution = problem.solve()
```

---

#### 3.4.4. Comparison with the state of the art methods

Efficiency and numerical stability of the new algorithm implementations should be compared to the contemporary state of the art implementations. We would like to compare our implementation with another implementations of the moment method. A MATLAB toolbox called Bermeja should use this method as mentioned in [23], however we were unable to obtain it despite the provided link. Different, but still on moment matrices and SDP solvers built, algorithm uses the MATLAB toolbox Gloptipoly [14]. Then there are polynomial system solvers based on the Gröbner bases computations, e.g. the  $F_4$  Algorithm [7], which compute all complex solutions. The most challenging will probably be the comparison with solvers specialized for the given task, for example generated by some automatic generator [17].

To compare these solvers in general, one would generate random polynomial systems, solve them by the selected solvers and compare their results and computational times. But in the end, we are interested in performance on real geometric problems from computer vision computed on data captured from real 3D scenes, and therefore we skip these random polynomial system experiments and refer to the experiments on real geometric problems performed in Chapter 4.


## 4. Minimal problems in computer vision geometry

Many problems from computer vision geometry can be modeled by systems of polynomial equations. A problem that requires only the minimal subset of data points to solve the problem is called a minimal problem. A typical example is the 5-point algorithm [36] for relative pose estimation between two cameras given five image correspondences only. In many applications, solvers of these minimal problems are used in the Random Sample Consensus (RANSAC) algorithm [8], where the minimal problems has to be solved repeatedly for a large amount of input data. Thus, these solvers are required to be fast and efficient. The state of the art method is to generate these solvers by automatic generators [17], which are based on Gröbner bases construction and eigenvectors of multiplication matrices computation. In these solvers both real and non-real solutions are computed, but the non-real solutions are discarded, since they have no geometric meaning.

In Section 3.4, we have proposed and implemented an algorithm, which does not need to compute the superfluous non-real solutions, and therefore may be faster than the standard solvers generated by the automatic generators. In this section, we compare the speed and the numerical stability of the state of the art solvers with our implementations of the moment method algorithm for polynomial system solving. For this reason, we have selected few minimal problems from computer vision geometry, on which we will compare the selected solvers.

### 4.1. Dataset description


First of all, we describe the scene, which we have chosen for our experiments. It is a real scene of a sculpture of Buddha head taken for the LADIO [?] experiments. The reconstructed surface of the sculpture can be seen in Figure 4.1. There are 67 taken images of the sculpture, from which 145 001 spatial points were reconstructed using a scene reconstruction pipeline including ..., on outliers

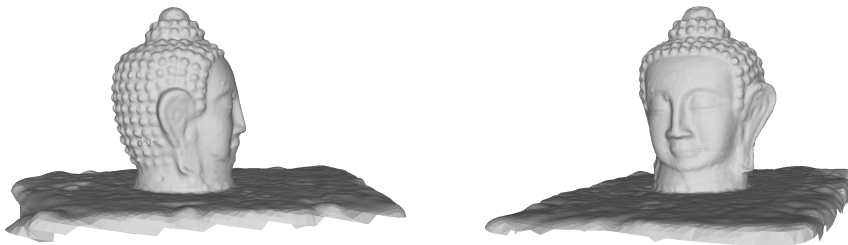

**Figure 4.1.** Sculpture of Buddha head. Surface representing a point cloud reconstructed from the taken images.

## 4.2. Calibrated camera pose

Computation of calibrated camera pose (its rotation and location with respect to the global coordinate system) is one of the typical problems in computer vision. The pose can be computed from at least three known 3D points and their perspective projection into the image plane, thus the problem is called the perspective-three-point (P3P) problem and it is known since 1841 from [11], but its modern and complete description can be found in [9].

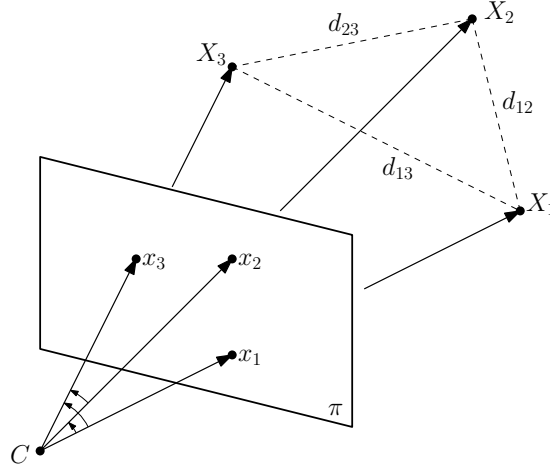

**Figure 4.2.** Scheme of the P3P problem. A pose of a calibrated camera can be computed from three known 3D points  $X_1, X_2, X_3$  and their projections  $x_1, x_2, x_3$  into the image plane  $\pi$ . The camera projection center is denoted as  $C$ . Distances  $d_{12}, d_{23}, d_{13}$  denote the distances between the respective 3D points.

The problem is stated followingly: Given three 3D points  $X_1, X_2, X_3 \in \mathbb{R}^3$  in the global coordinate system and their projections  $x_1, x_2, x_3 \in \mathbb{R}^2$  respectively into the image plane in the image coordinate system, we are looking for a camera projection center position  $C \in \mathbb{R}^3$  and a camera rotation matrix  $R \in SO(3)$  – all rotations in 3D space around the origin, such that the projection equation

$$\lambda_i \begin{bmatrix} x_i \\ 1 \end{bmatrix} = K \begin{bmatrix} R & -RC \end{bmatrix} \begin{bmatrix} X_i \\ 1 \end{bmatrix} \quad (4.1)$$

holds for  $i = 1, 2, 3$  and  $\lambda_i \in \mathbb{R}/\{0\}$ , where  $K \in \mathbb{R}^{3 \times 3}$  is known calibration matrix of the camera. The situation is depicted in Figure 4.2.

It has been shown that for a general case this problem can be solved by finding roots of a quartic equation in variable  $\xi \in \mathbb{R}$

$$a_4 \xi^4 + a_3 \xi^3 + a_2 \xi^2 + a_1 \xi + a_0 = 0 \quad (4.2)$$

with coefficients  $a_0, \dots, a_4 \in \mathbb{R}$ , which can be computed by the formulae below.

$$a_4 = -4d_{23}^4 d_{12}^2 d_{13}^2 c_{23}^2 + d_{23}^8 - 2d_{23}^6 d_{12}^2 - 2d_{23}^6 d_{13}^2 + d_{23}^4 d_{12}^4 + 2d_{23}^4 d_{12}^2 d_{13}^2 + d_{23}^4 d_{13}^4 \quad (4.3)$$

$$a_3 = 8d_{23}^4 d_{12}^2 d_{13}^2 c_{12} c_{23}^2 + 4d_{23}^6 d_{12}^2 c_{13} c_{23} - 4d_{23}^4 d_{12}^4 c_{13} c_{23} + 4d_{23}^4 d_{12}^2 d_{13}^2 c_{13} c_{23} - 4d_{23}^8 c_{12} + 4d_{23}^6 d_{12}^2 c_{12} + 8d_{23}^6 d_{13}^2 c_{12} - 4d_{23}^4 d_{12}^2 d_{13}^2 c_{12} - 4d_{23}^4 d_{13}^4 c_{12} \quad (4.4)$$

$$\begin{aligned}
a_2 = & -8d_{23}^6 d_{12}^2 c_{13} c_{12} c_{23} - 8d_{23}^4 d_{12}^2 d_{13}^2 c_{13} c_{12} c_{23} + 4d_{23}^8 c_{12}^2 - 4d_{23}^6 d_{12}^2 c_{13}^2 \\
& - 8d_{23}^6 d_{13}^2 c_{12}^2 + 4d_{23}^4 d_{12}^4 c_{13}^2 + 4d_{23}^4 d_{12}^4 c_{23}^2 - 4d_{23}^4 d_{12}^2 d_{13}^2 c_{23}^2 + 4d_{23}^4 d_{13}^4 c_{12}^2 + 2d_{23}^8 \\
& - 4d_{23}^6 d_{13}^2 - 2d_{23}^4 d_{12}^4 + 2d_{23}^4 d_{13}^4
\end{aligned} \tag{4.5}$$

$$\begin{aligned}
a_1 = & 8d_{23}^6 d_{12}^2 c_{13}^2 c_{12} + 4d_{23}^6 d_{12}^2 c_{13} c_{23} - 4d_{23}^4 d_{12}^4 c_{13} c_{23} + 4d_{23}^4 d_{12}^2 d_{13}^2 c_{13} c_{23} - 4d_{23}^8 c_{12} \\
& - 4d_{23}^6 d_{12}^2 c_{12} + 8d_{23}^6 d_{13}^2 c_{12} + 4d_{23}^4 d_{12}^2 d_{13}^2 c_{12} - 4d_{23}^4 d_{13}^4 c_{12}
\end{aligned} \tag{4.6}$$

$$a_0 = -4d_{23}^6 d_{12}^2 c_{13}^2 + d_{23}^8 - 2d_{23}^4 d_{12}^2 d_{13}^2 + 2d_{23}^6 d_{12}^2 + d_{23}^4 d_{13}^4 + d_{23}^4 d_{12}^4 - 2d_{23}^6 d_{13}^2 \tag{4.7}$$

Where the distances  $d_{12}$ ,  $d_{23}$  and  $d_{13}$  are

$$d_{12} = \|X_1 - X_2\|, \tag{4.8}$$

$$d_{23} = \|X_2 - X_3\|, \tag{4.9}$$

$$d_{13} = \|X_1 - X_3\| \tag{4.10}$$

and the coefficients  $c_{12}$ ,  $c_{23}$  and  $c_{13}$  are cosines of the angles between the respective projection rays, and they can be directly computed from the projected points coordinates.

$$c_{12} = \frac{x_1^\top K^{-\top} K^{-1} x_2}{\|K^{-1} x_1\| \|K^{-1} x_2\|} \tag{4.11}$$

$$c_{23} = \frac{x_2^\top K^{-\top} K^{-1} x_3}{\|K^{-1} x_2\| \|K^{-1} x_3\|} \tag{4.12}$$

$$c_{13} = \frac{x_1^\top K^{-\top} K^{-1} x_3}{\|K^{-1} x_1\| \|K^{-1} x_3\|} \tag{4.13}$$

The equation (4.2) may have zero, two or four real roots, but some of them are discarded by checking three polynomial equations, that the law of cosines holds up to some numerical precision in triangles  $\triangle(CX_i X_j)$  for  $i, j = 1, 2, 3$  and  $i \neq j$ , i.e.

$$d_{12}^2 = \|X_1 - C\|^2 + \|X_2 - C\|^2 - 2c_{12}\|X_1 - C\|\|X_2 - C\|, \tag{4.14}$$

$$d_{23}^2 = \|X_2 - C\|^2 + \|X_3 - C\|^2 - 2c_{23}\|X_2 - C\|\|X_3 - C\|, \tag{4.15}$$

$$d_{13}^2 = \|X_1 - C\|^2 + \|X_3 - C\|^2 - 2c_{13}\|X_1 - C\|\|X_3 - C\|. \tag{4.16}$$

The camera pose ( $C$  and  $R$ ) is then computed from each of the remaining solutions.

The P3P problem is probably the simplest problem, which could be chosen from the computer vision geometry for comparison of the polynomial systems solvers, since only one polynomial of degree four in one variable is given.

In the experiment, we have randomly selected 67 cameras, for each of them 1000 triplets of 2D-to-3D correspondences has been randomly chosen. For each triplet, the coefficients  $a_0, a_1, a_2, a_3, a_4$  of the equation (4.2) has been precomputed. Then the real roots  $\xi$  of the equation (4.2) has been found by the selected polynomial solvers. From  $\xi$  the camera location  $C$  and rotation  $R$  has been computed in a standard way. Then the best tuple  $C$  and  $R$  minimizing the maximal reprojection error on all correspondences in the image for each camera and solver has been selected.

#### 4.2.1. Performance of the polynomial solvers

We used the described P3P minimal problem to compare following polynomial systems solvers. Firstly, we would like to see the performance of some state of the art purely algebraic solver. A possible candidate is a solver generated by the automatic generator [17], which in case of one degree four polynomial equation in one variable is

#### 4. Minimal problems in computer vision geometry

reduced to eigenvectors computation of multiplication matrix of size  $4 \times 4$ . Secondly, the implementation of the moment method from the Polyopt package has been tested. Thirdly, to be able to compare different implementations of the moment method with different implementation of the SDP solver, we have run the MATLAB implementation with MOSEK toolbox as described in Section 3.4.3. Lastly, the MATLAB toolbox Gloptipoly [14] was used to compare the solvers with another method with built-in optimization.

The histograms of the maximal reprojection errors for the selected tuples of  $C$  and  $R$  for each polynomial solver can be seen in Figure 4.3. For each estimated camera center position  $C$ , we have computed the error  $e_C$  of the camera position compared to the ground truth values

$$e_C = \|C - C_{GT}\|, \quad (4.17)$$


i.e. the distance of the estimated camera position to the ground truth position. The histograms of these position errors for each polynomial solver are in Figure 4.4. For each estimated camera rotation  $R$ , we have computed the residual rotation to the ground truth camera rotation and computed the angle  $e_R$  of this residual rotation as

$$e_R = \arccos \left( \frac{1}{2} \left( \text{tr}(R_{GT}^{-1} R) - 1 \right) \right). \quad (4.18)$$

The histograms of the angles of residual rotations for each polynomial solver are in Figure 4.5. We have also measured the execution time required to solve each instance of the equation (4.2) by each polynomial solver and histogram of these times can be found in Figure 4.6. The performance of our implemented polynomial solvers depends on the number of iterations of Algorithm 3.4. This represents the variable  $t$  from the algorithm, which is the degree of monomials, which are relaxed. The values of  $t$  at which the algorithm terminated are shown as histograms in Figure 4.7. For the Gloptipoly toolbox we have shown the values of two times the relaxation order, which has to be provided for the toolbox in advance. This value is equivalent to the final value of the variable  $t$ .

Further off, we are interested in the number of real solutions found by the polynomial solvers. Since the algebraic solver computes all complex solutions first and then the non-real filters out, we are sure that this solver finds all real solutions. On the other hand, given our observation, the methods based on optimization do not recover all real solutions, despite the theory. The implementation from the Polyopt package has some numerical issues, which we were unable to remove in the time of writing this thesis, and therefore there is a small chance that the SDP solver fails in its computation and the solution is not found. Moreover, the number of real solutions is related to the rank of the moment matrix found by the SDP solver, which numerically depend on how good representative of the set  $\mathcal{K}$  we have obtained. This issue is common for both Polyopt implementation and the MATLAB with MOSEK implementation. In case of the Gloptipoly toolbox, which is in the first case a polynomial optimization toolbox and not a polynomial system solver, the relaxation order has to be given in advance. If the relaxation order is not high enough, no solution is found without distinguishing the cases when there is no solution or just the relaxation order is not high enough. Surprisingly, when the relaxation order is too high, there are not found all the real solutions (typically one or none solution is found), because of reasons not known to us. Therefore, we have set the relaxation order for Gloptipoly to one fixed value, in this case to three, which is the most common relaxation order from all runs of the



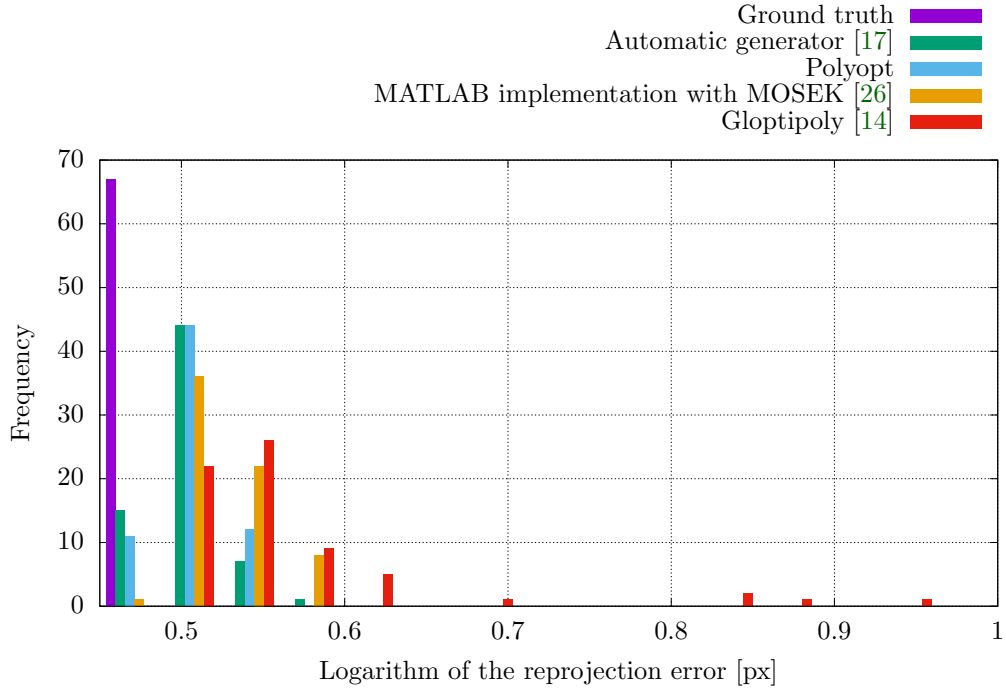

**Figure 4.3.** Histogram of the maximal reprojection errors of all correspondences in the image for the best camera positions and rotations estimated by the selected polynomial solvers for the P3P problem compared to the maximal reprojection errors computed for the ground truth camera positions and rotations.

Polyopt package and the MATLAB with MOSEK implementation, as you can see from Figure 4.7. Since these solvers are typically used in RANSAC-like [8] algorithms, it may not be a big issue, when some of the real solutions are not found, of course depending the application. For the reasons stated above we present in Table 4.1 number of all complex solutions and number of real solutions found by each of the polynomial solvers.


Polynomial solver	Number of found real solutions	Percent of found real solutions
Automatic generator [17]	158 850	100.0 %
Polyopt	129 421	81.5 %
MATLAB implementation with MOSEK [26]	141 702	89.2 %
Gloptipoly [14]	71 934	45.3 %

Number of all complex solutions is 268 000.

Number of all real solutions is 158 850, which is 59.3 % of all complex solutions.

**Table 4.1.** Table of numbers of all real and complex solutions and of numbers of found real solutions by each of the selected polynomial solver for the P3P problem.

We can see that for the P3P problem there is about 40 % of non-real solutions, which need not be computed. We observe that in practice the moment method based implementations do not found all of the real solutions. The Polyopt implementation found only 80 % of the solutions, but we believe that this can be improved up to 90 % success rate, which shows the MATLAB implementation. Very poor results performed the Gloptipoly toolbox, but they can be probably improved by correct setting of the

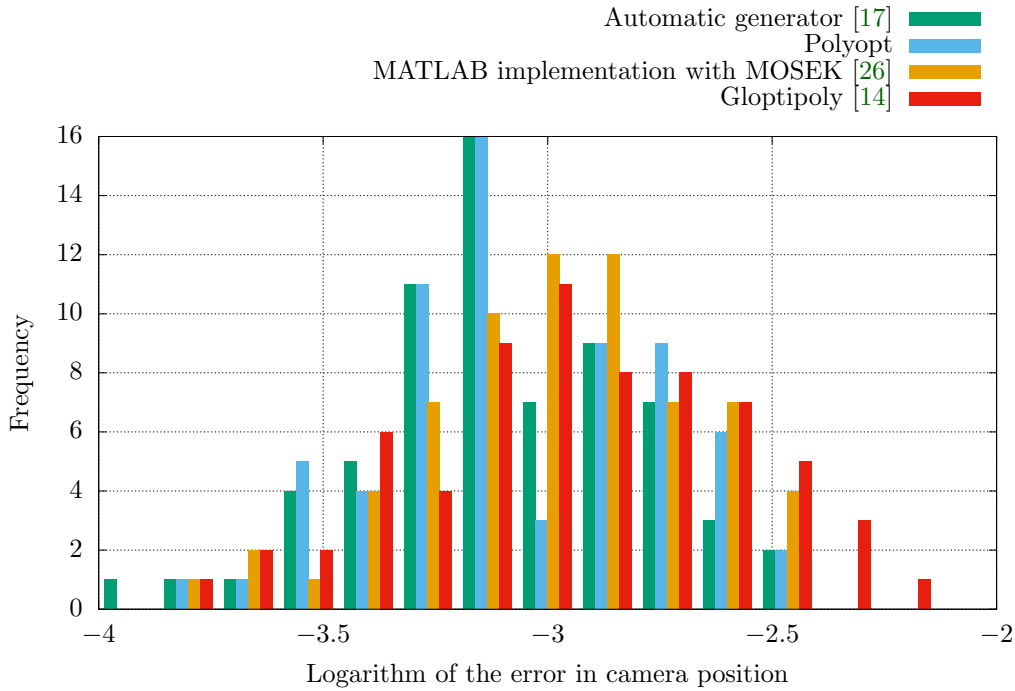


**Figure 4.4.** Histogram of the errors in estimated camera positions computed by the selected polynomial solvers for the P3P problem with respect to the ground truth camera positions.

relaxation order. On the other hand, from the histograms in Figures 4.3, 4.4, 4.5 we can see that the overall results for the P3P problem of the Polyopt implementation and the MATLAB implementation are comparable to the purely algebraic solver, despite they have not found all the real solutions. Regarding the computation times showed in Figure 4.6, we can see that the moment method based implementations are significantly slower than the pure algebraic solver. The best results from the moment method based solvers shows the Gloptipoly [14] toolbox, but note that we have set the relaxation order in advance, and therefore only one semidefinite program had to be solved for each instance.

### 4.3. Calibrated camera pose with unknown focal length

A computer vision problem slightly more complicated than the P3P problem is the calibrated camera pose estimation with unknown focal length. In this problem the pose and focal length of a calibrated camera is estimated from four known 2D-to-3D correspondences. This problem has seven degrees of freedom, and therefore is overconstrained with four points. A minimal solver for this problem has been presented by C. Wu in [40] using 3.5 points, i.e. ignoring one of the image coordinates for one of the points. Since then the problem is called the P3.5Pf problem. However, this representation contains a degeneracy, which has been removed in [18] by application of clever parametrization and clever elimination techniques. We use this representation to test our implementations of the moment method. The scheme of the problem geometry can be seen in Figure 4.8.

### 4.3. Calibrated camera pose with unknown focal length

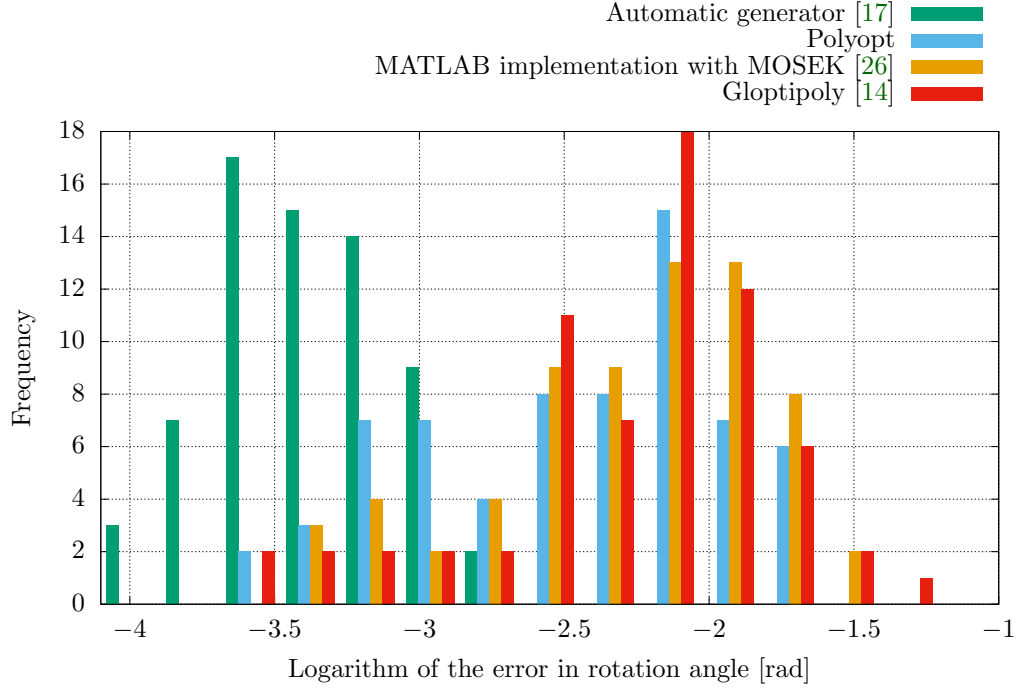

**Figure 4.5.** Histogram of the errors in rotation angles computed by the selected polynomial solvers for the P3P problem with respect to the ground truth camera rotations.

The solution of the P3.5Pf problem comes from the projection equation

$$\lambda_i \begin{bmatrix} x_i \\ 1 \end{bmatrix} = K_{known} K_f \begin{bmatrix} R & -RC \end{bmatrix} \begin{bmatrix} X_i \\ 1 \end{bmatrix} \quad (4.19)$$

for  $i = 1, 2, 3, 4$  and  $\lambda_i \in \mathbb{R}/\{0\}$ , where  $K_{known} \in \mathbb{R}^{3 \times 3}$  is the known calibration matrix up to the unknown focal length, which is stored in the matrix  $K_f = \text{diag} \left( \begin{bmatrix} f & f & 1 \end{bmatrix}^\top \right)$ . The matrix  $R \in SO(3)$  is the rotation matrix and the vector  $C \in \mathbb{R}^3$  is the projection centre of the camera. The 3D coordinates are given in vectors  $X_i$  and their projections in vectors  $x_i$ . We remove the known calibration matrix from the equation (4.19) by pre-calibrating of the image coordinates.

$$\tilde{x}_i = K_{known}^{-1} x_i \quad (4.20)$$

We group the unknowns  $f$ ,  $R$  and  $C$  into one camera projection matrix  $P \in \mathbb{R}^{3 \times 4}$  as follows:


$$K_f \begin{bmatrix} R & -RC \end{bmatrix} = P = \begin{bmatrix} P_1^\top \\ P_2^\top \\ P_3^\top \end{bmatrix} = \begin{bmatrix} p_{11} & p_{12} & p_{13} & p_{14} \\ p_{21} & p_{22} & p_{23} & p_{24} \\ p_{31} & p_{32} & p_{33} & p_{34} \end{bmatrix}. \quad (4.21)$$

Then the projection equation (4.19) is transformed into

$$\lambda_i \begin{bmatrix} \tilde{x}_i \\ 1 \end{bmatrix} = P \begin{bmatrix} X_i \\ 1 \end{bmatrix}. \quad (4.22)$$

Each 2D-to-3D correspondence gives us two linearly independent equations in the

#### 4. Minimal problems in computer vision geometry

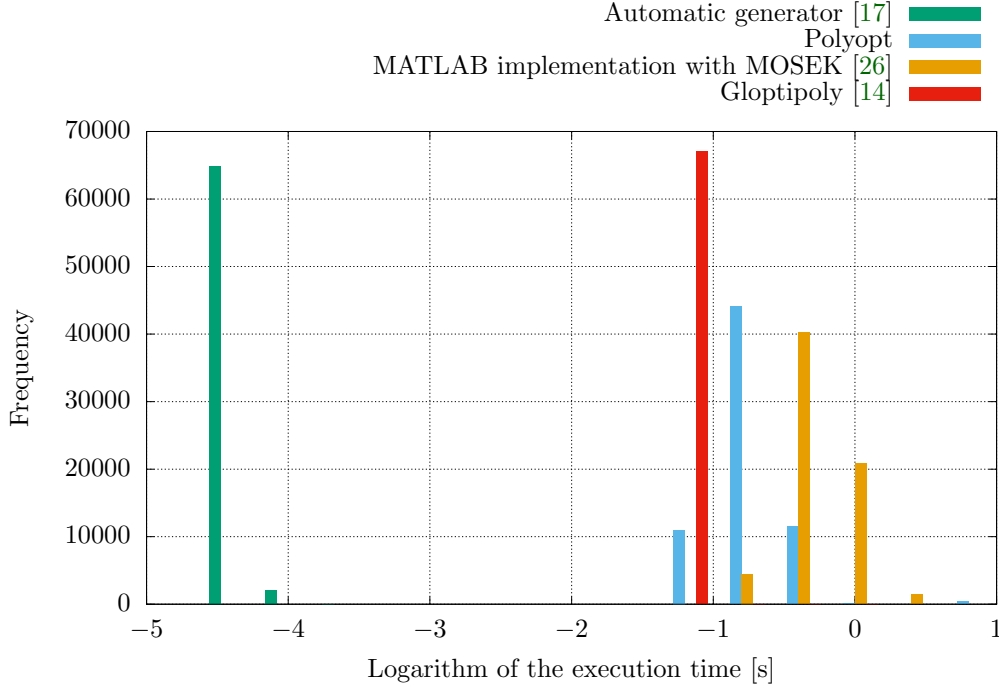

**Figure 4.6.** Histogram of the execution times required to compute the P3P problem by the selected polynomial solvers.

camera matrix.

$$P_1^\top \begin{bmatrix} X_i \\ 1 \end{bmatrix} - \tilde{x}_i^{(1)} P_3^\top \begin{bmatrix} X_i \\ 1 \end{bmatrix} = 0 \quad (4.23)$$

$$P_2^\top \begin{bmatrix} X_i \\ 1 \end{bmatrix} - \tilde{x}_i^{(2)} P_3^\top \begin{bmatrix} X_i \\ 1 \end{bmatrix} = 0 \quad (4.24)$$

That gives us eight linearly independent equations and by ignoring one of them we get a minimal problem. To fix the scale we add one additional equation


$$P_3^\top \begin{bmatrix} X_1 \\ 1 \end{bmatrix} = 1. \quad (4.25)$$

These eight equations can be written in a matrix form

$$\begin{bmatrix} -X_1^\top & -1 & 0 & 0 & \tilde{x}_1^{(1)} X_1 & \tilde{x}_1^{(1)} \\ 0 & 0 & -X_1^\top & -1 & \tilde{x}_1^{(2)} X_1 & \tilde{x}_1^{(2)} \\ -X_2^\top & -1 & 0 & 0 & \tilde{x}_2^{(1)} X_2 & \tilde{x}_2^{(1)} \\ 0 & 0 & -X_2^\top & -1 & \tilde{x}_2^{(2)} X_2 & \tilde{x}_2^{(2)} \\ -X_3^\top & -1 & 0 & 0 & \tilde{x}_3^{(1)} X_3 & \tilde{x}_3^{(1)} \\ 0 & 0 & -X_3^\top & -1 & \tilde{x}_3^{(2)} X_3 & \tilde{x}_3^{(2)} \\ -X_4^\top & -1 & 0 & 0 & \tilde{x}_4^{(1)} X_4 & \tilde{x}_4^{(1)} \\ 0 & 0 & 0 & 0 & X_1^\top & 1 \end{bmatrix} \begin{bmatrix} P_1 \\ P_2 \\ P_3 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 1 \end{bmatrix} \quad (4.26)$$

$$Ap = b \quad (4.27)$$

with coefficient matrix  $A \in \mathbb{R}^{8 \times 12}$  and vector  $b \in \mathbb{R}^8$ . Then we can parametrize the problem only by four unknowns using the vectors  $p_1, p_2, p_3, p_4$  representing the nullspace

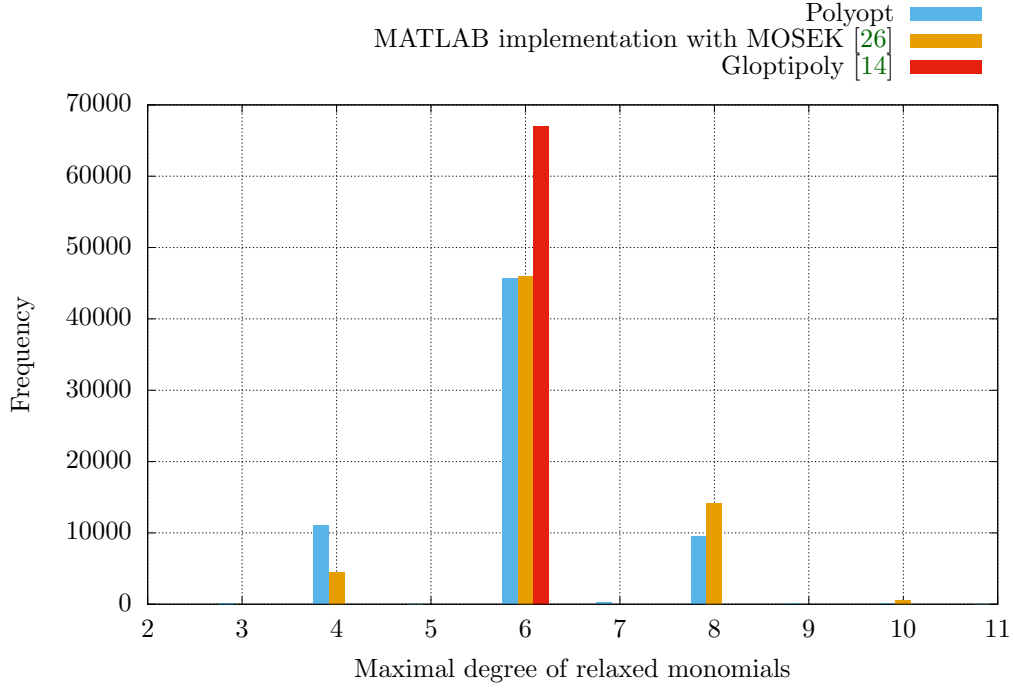

**Figure 4.7.** Histogram of maximal degrees of relaxed monomials of the P3P problem. It corresponds to the value of variable  $t$  in the last iteration of Algorithm 3.4 for the Polyopt package and the MATLAB with MOSEK implementation. For the Gloptipoly toolbox it corresponds to two times the given relaxation order.

of  $A$  and particular solution  $p_0$  of the equation (4.27).

$$p = p_0 + \xi_1 p_1 + \xi_2 p_2 + \xi_3 p_3 + \xi_4 p_4 \quad (4.28)$$

To ensure that the camera projection matrix  $P$  can be decomposed to  $K_f$ ,  $R$  and  $C$  as stated in the equation (4.21) we need to introduce next nine polynomial equations on  $P$ .

$$p_{21}p_{31} + p_{22}p_{32} + p_{23}p_{33} = 0 \quad (4.29)$$

$$p_{11}p_{31} + p_{12}p_{32} + p_{13}p_{33} = 0 \quad (4.30)$$

$$p_{11}p_{21} + p_{12}p_{22} + p_{13}p_{23} = 0 \quad (4.31)$$

$$p_{11}^2 + p_{12}^2 + p_{13}^2 - p_{21}^2 - p_{22}^2 - p_{23}^2 = 0 \quad (4.32)$$

$$p_{13}^2 p_{32} - p_{21}^2 p_{32} - p_{22}^2 p_{32} - p_{12} p_{13} p_{33} - p_{22} p_{23} p_{33} = 0 \quad (4.33)$$

$$p_{12} p_{13} p_{32} + p_{22} p_{23} p_{32} - p_{12}^2 p_{33} + p_{21}^2 p_{33} + p_{23}^2 p_{33} = 0 \quad (4.34)$$


$$p_{11} p_{13} p_{32} + p_{21} p_{23} p_{32} - p_{11} p_{12} p_{33} - p_{21} p_{22} p_{33} = 0 \quad (4.35)$$

$$p_{13}^2 p_{31} - p_{22}^2 p_{31} + p_{21} p_{22} p_{32} - p_{11} p_{13} p_{33} = 0 \quad (4.36)$$

$$p_{12} p_{13} p_{31} + p_{22} p_{23} p_{31} - p_{11} p_{21} p_{33} - p_{21} p_{22} p_{33} = 0 \quad (4.37)$$

By solving these equations we obtain the unknowns  $\xi_1, \xi_2, \xi_3, \xi_4$ , from which we recover the projection matrix  $P$ , which we decompose by standard methods to  $K_f$ ,  $R$  and  $C$ . In general the system of equations has 10 complex solutions.

In the experiment, we have randomly selected 20 cameras, for each of them 100 quadruples of 2D-to-3D correspondences has been randomly chosen. For each quadruple, the coefficient vectors  $p_0, p_1, p_2, p_3, p_4$  of the equation (4.28) has been precomputed.

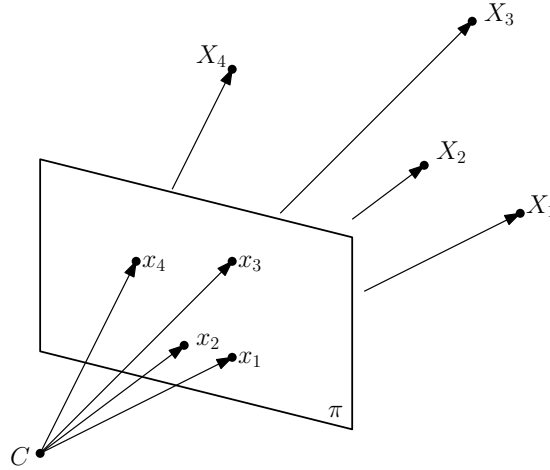

**Figure 4.8.** Scheme of the P3.5Pf problem. A pose of a calibrated camera with unknown focal length can be computed from four known 3D points  $X_1, X_2, X_3, X_4$  and their projections  $x_1, x_2, x_3, x_4$  into the image plane  $\pi$ . The camera projection center is denoted as  $C$ .

Then the real roots  $\xi_1, \xi_2, \xi_3, \xi_4$  of the equations (4.29) – (4.37) has been found by the selected polynomial solvers. The focal length  $f$ , the camera location  $C$  and the camera rotation  $R$  has been computed in a standard way from the solutions. Then the best triple  $f, C$  and  $R$  minimizing the maximal reprojection error on all correspondences in the images for each camera and solver has been selected.

#### 4.3.1. Performance of the polynomial solvers


We have tested our two implementations of the moment method, i.e. the Polyopt package and the MATLAB implementation with MOSEK semidefinite programming solver, on the previously described P3.5Pf problem. We compared them with the state of the art polynomial solver Gloptipoly with fixed relaxation order to three and with a pure algebraic solver generated by the automatic generator [17] as described in [18]. The generated solver consists of G-J elimination of a coefficient matrix of size  $25 \times 35$  and of eigenvector computation of a multiplication matrix of size  $10 \times 10$ .

The histograms of the maximal reprojection errors can be seen in Figure 4.9. To evaluate the estimated focal length, we computed the relative focal length error for each of the estimated camera using the following formula:

$$e_f = \left| \frac{f - f_{GT}}{f_{GT}} \right|. \quad (4.38)$$


The histograms of these relative focal length errors are shown in Figure 4.10. We have computed the errors in camera positions with respect to the ground truth values as described by the equation (4.17). These errors are presented as histograms in Figure 4.11. Histograms of the residual rotation angle for each estimated camera computed by the equation (4.18) are in Figure 4.12. Execution times required to solve each instance of the equations (4.29) – (4.37) have been measured and presented in a form of histograms in Figure 4.13. Also the values of the variable  $t$  from the last iteration of Algorithm 3.4 and the relaxation orders given to the Gloptipoly toolbox are shown as histograms in Figure 4.14. The numbers of all complex and real solutions as well as the numbers of found real solutions by each of the polynomial solver are written in Table 4.2.

From the results of the polynomial solvers applied on the P3.5Pf problem we can see that there is only 50 % of real solutions amongst all complex solutions. Given efficient

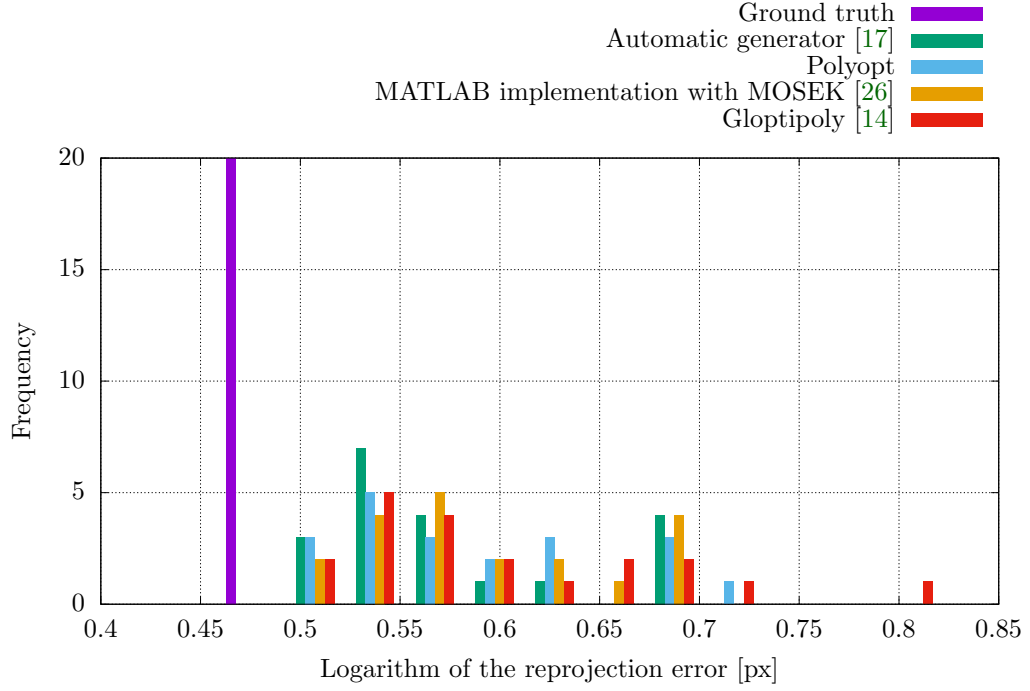


**Figure 4.9.** Histogram of the maximal reprojection errors of all correspondences in the image for the best camera positions and rotations estimated by the selected polynomial solvers for the P3.5Pf problem compared to the maximal reprojection errors computed for the ground truth camera positions and rotations.

polynomial solver computing only real solutions, in theory we would be able to reduce the computation time to half in contrary to the state of the art algebraic solvers, which compute all complex solutions. Although the moment based solvers did not recover all real solutions, the overall results are comparable to the algebraic solver as can be seen from the histograms. The only disadvantage of the moment method based solvers is the computation time, which is incomparable to the algebraic solver.

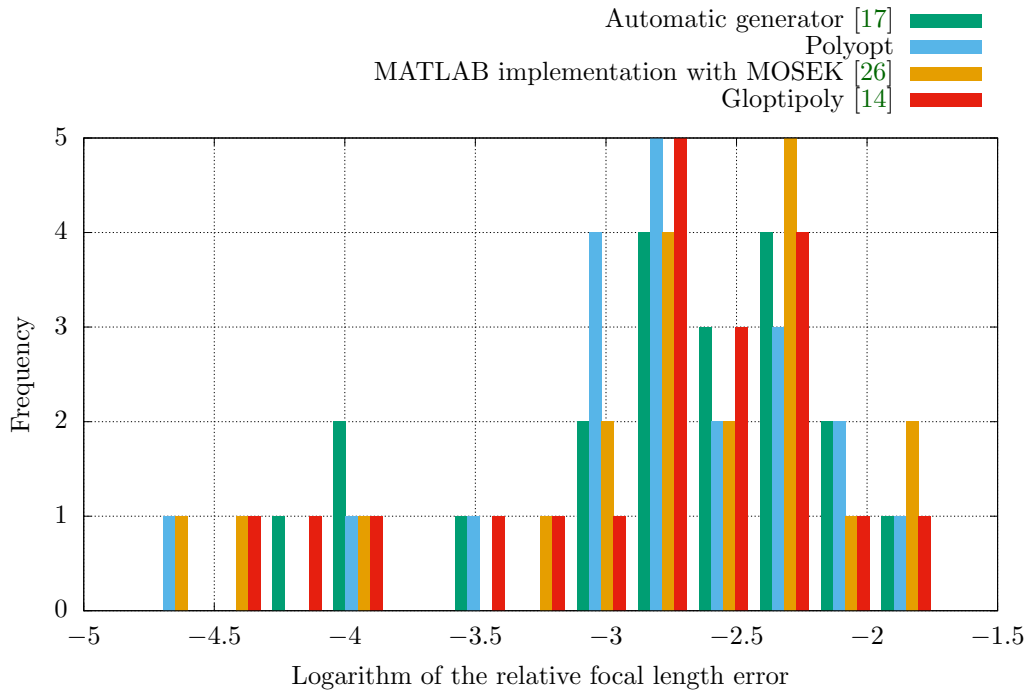


**Figure 4.10.** Histogram of the relative focal length errors computed by the selected polynomial solvers for the P3.5Pf problem with respect to the ground truth focal lengths.

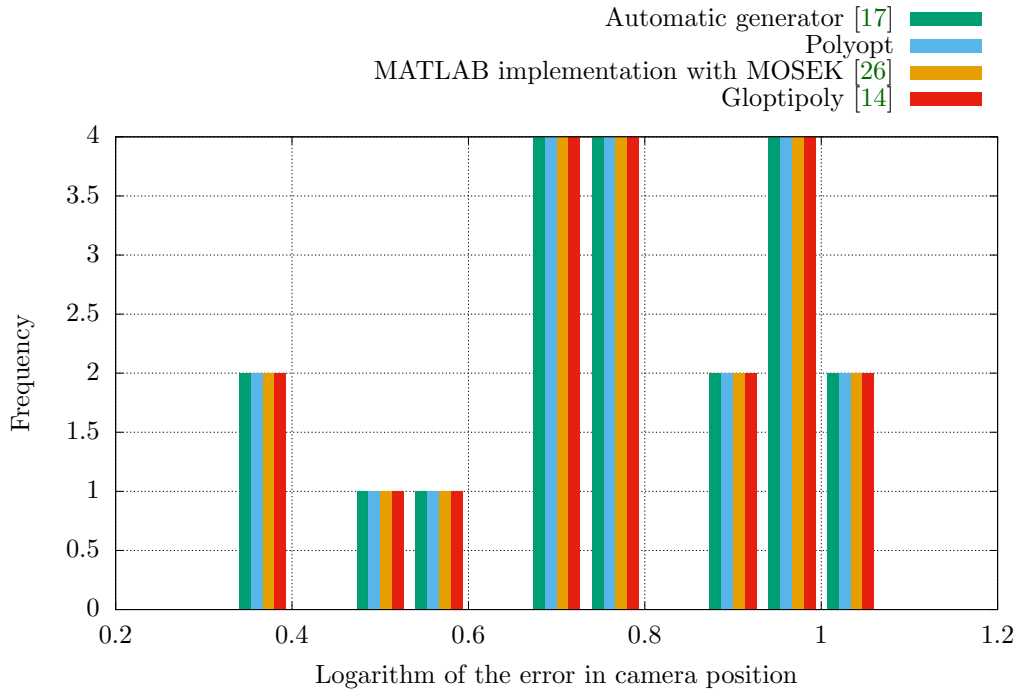


**Figure 4.11.** Histogram of the errors in estimated camera positions computed by the selected polynomial solvers for the P3.5Pf problem with respect to the ground truth camera positions.




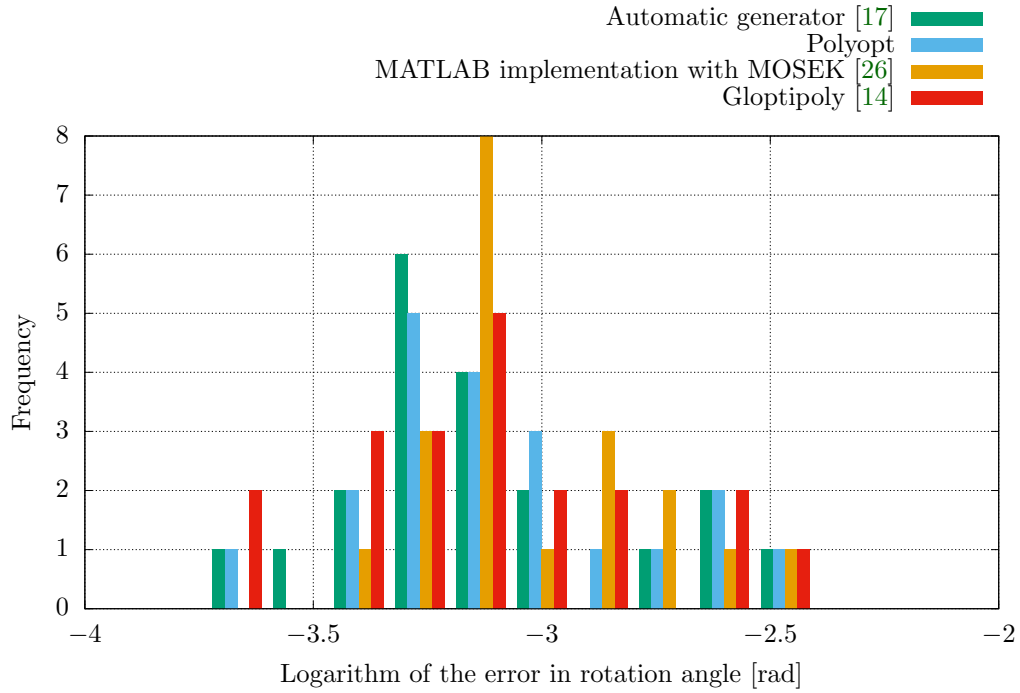

**Figure 4.12.** Histogram of the errors in rotation angles computed by the selected polynomial solvers for the P3.5Pf problem with respect to the ground truth camera rotations.

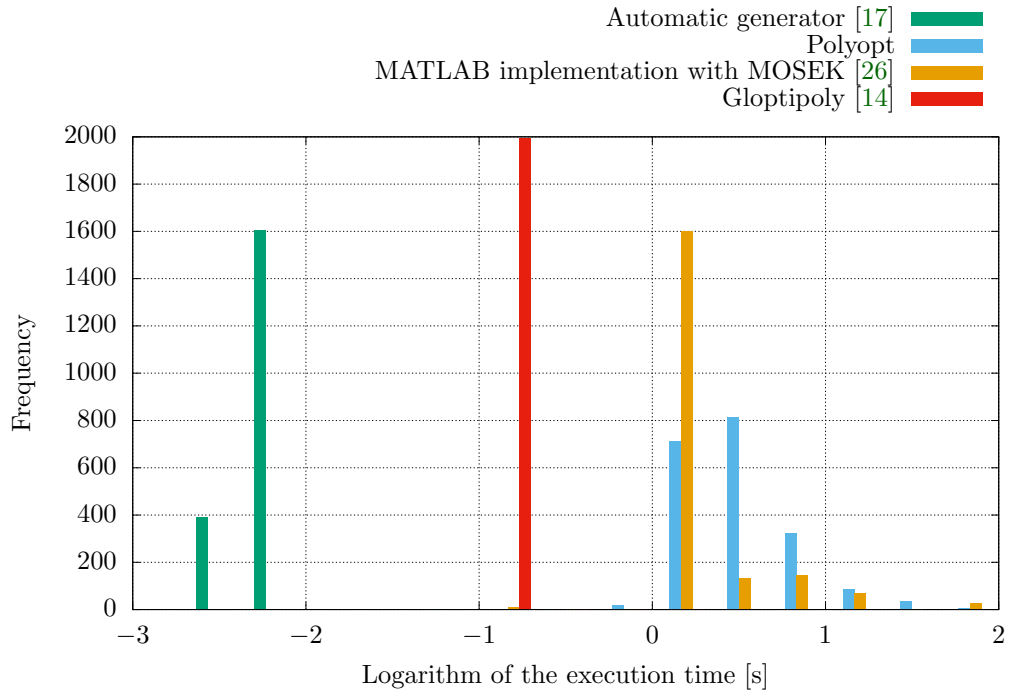

**Figure 4.13.** Histogram of the execution times required to compute the P3.5Pf problem by the selected polynomial solvers.

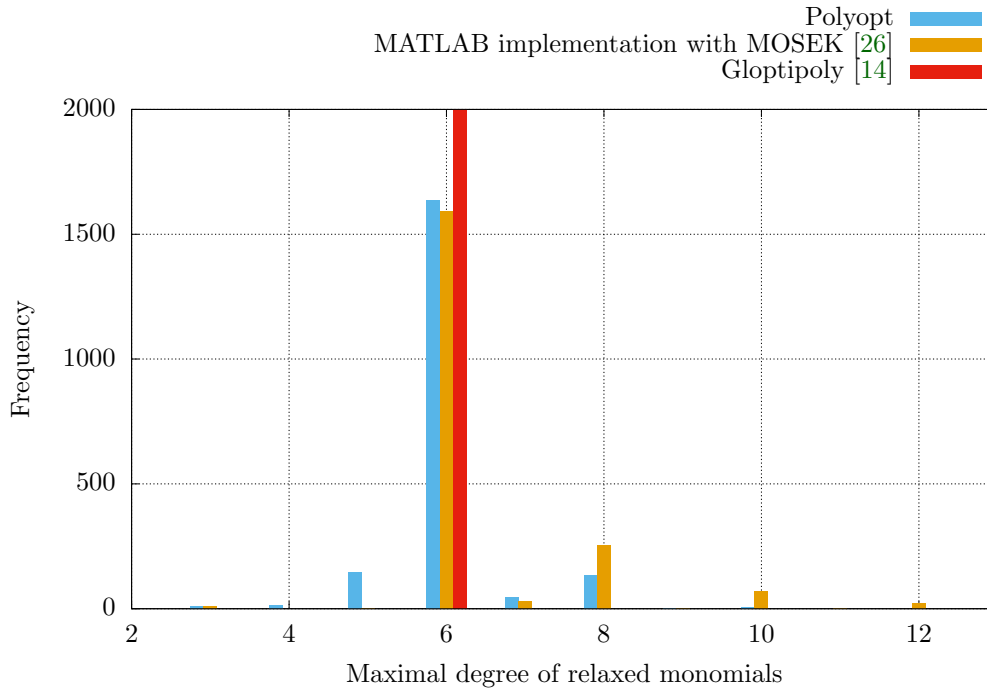

**Figure 4.14.** Histogram of maximal degrees of relaxed monomials of the P3.5Pf problem. It corresponds to the value of variable  $t$  in the last iteration of Algorithm 3.4 for the Polyopt package and the MATLAB with MOSEK implementation. For the Gloptipoly toolbox it corresponds to two times the given relaxation order.

Polynomial solver	Number of found real solutions	Percent of found real solutions
Automatic generator [17]	9608	100.0 %
Polyopt	8146	84.8 %
MATLAB implementation with MOSEK [26]	8698	90.5 %
Gloptipoly [14]	5907	61.5 %

Number of all complex solutions is 20 000.

Number of all real solutions is 9608, which is 48.0 % of all complex solutions.

**Table 4.2.** Table of numbers of all real and complex solutions and of numbers of found real solutions by each of the selected polynomial solver for the P3.5Pf problem.

## 5. Conclusion

## A. Contents of the enclosed CD

```
/
└─ thesis
    └─ thesis.pdf .....digital copy of this thesis
```

## Bibliography

- [1] E. Anderson, Z. Bai, C. Bischof, S. Blackford, J. Demmel, J. Dongarra, J. Du Croz, A. Greenbaum, S. Hammarling, A. McKenney, and D. Sorensen. *LAPACK Users' Guide*. Society for Industrial and Applied Mathematics, Philadelphia, PA, 3rd edition, 1999. 23, 29
- [2] Thomas Becker and Volker Weispfenning. *Gröbner Bases, A Computational Approach to Commutative Algebra*. Number 141 in Graduate Texts in Mathematics. Springer-Verlag, New York, NY, 1993. 37, 51
- [3] Richard Bellman and Ky Fan. On systems of linear inequalities in hermitian matrix variables. In *Convexity: Proceedings of Symposia in Pure Mathematics*, volume 7, pages 1–11. American Mathematical Society Providence, 1963. 11
- [4] Bruno Buchberger. *Ein Algorithmus zum Auffinden der Basiselemente des Restklassenringes nach einem nulldimensionalen Polynomideal*. PhD thesis, Mathematical Institute, University of Innsbruck, Austria, 1965. 51
- [5] David Cox, John Little, and Donald O'Shea. *Ideals, Varieties, and Algorithms : An Introduction to Computational Algebraic Geometry and Commutative Algebra*. Undergraduate Texts in Mathematics. Springer, New York, USA, 2nd edition, 1997. 34
- [6] Jane Cullum, W. E. Donath, and P. Wolfe. The minimization of certain nondifferentiable sums of eigenvalues of symmetric matrices. In *Nondifferentiable Optimization*, pages 35–55. Springer Berlin Heidelberg, Berlin, Heidelberg, 1975. 11
- [7] Jean-Charles Faugère. A new efficient algorithm for computing gröbner bases ( $f_4$ ). *Journal of pure and applied algebra*, 139(1–3):61–88, July 1999. 37, 51, 60
- [8] Martin A. Fischler and Robert C. Bolles. Random sample consensus: A paradigm for model fitting with applications to image analysis and automated cartography. *Communications of the ACM*, 24(6):381–395, June 1981. 61, 65
- [9] Xiao-Shan Gao, Xiao-Rong Hou, Jianliang Tang, and Hang-Fei Cheng. Complete solution classification for the perspective-three-point problem. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 25(8):930–943, August 2003. 62
- [10] Michel X. Goemans and David P. Williamson. Improved approximation algorithms for maximum cut and satisfiability problems using semidefinite programming. *Journal of the ACM*, 42(6):1115–1145, November 1995. 9
- [11] Johann August Grunert. Das pothenotische problem in erweiterter gestalt nebst über seine anwendungen in der geodäsie. *Grunerts Archiv für Mathematik und Physik*, 1:238–248, 1841. 62
- [12] Jan Heller and Tomas Pajdla. Gposolver: A matlab/c++ toolbox for global polynomial optimization. *Optimization Methods Software*, 31(2):405–434, March 2016. 41

- [13] Didier Henrion. Optimization on linear matrix inequalities for polynomial systems control, September 2014. 42, 43
- [14] Didier Henrion, Jean-Bernard Lasserre, and Johan Löfberg. Gloptipoly 3: Moments, optimization and semidefinite programming. *Optimization Methods Software*, 24(4–5):761–779, August 2009. 41, 47, 49, 50, 51, 60, 64, 65, 66, 67, 68, 69, 71, 72, 73, 74
- [15] Narendra Karmarkar. A new polynomial-time algorithm for linear programming. *Combinatorica*, 4:373–395, 1984. 11
- [16] Richard M. Karp. Reducibility among combinatorial problems. In *Complexity of Computer Computations*, pages 85–103. Springer US, Boston, MA, 1972. 9
- [17] Zuzana Kukelova, Martin Bujnak, and Tomas Pajdla. Automatic generator of minimal problem solvers. In *Proceedings of The 10th European Conference on Computer Vision*, ECCV 2008, October 12–18 2008. 51, 60, 61, 63, 65, 66, 67, 68, 70, 71, 72, 73, 74
- [18] Viktor Larsson, Zuzana Kukelova, and Yinqiang Zheng. Making minimal solvers for absolute pose estimation compact and robust. In *The IEEE International Conference on Computer Vision (ICCV)*, October 2017. 66, 70
- [19] Jean B. Lasserre. Global optimization with polynomials and the problem of moments. *Society for Industrial and Applied Mathematics Journal on Optimization*, 11:796–817, 2001. 41, 42
- [20] Jean Bernard Lasserre, Monique Laurent, and Philipp Rostalski. Semidefinite characterization and computation of zero-dimensional real radical ideals. *Foundations of Computational Mathematics*, 8(5):607–647, October 2008. 51
- [21] Jean Bernard Lasserre, Monique Laurent, and Philipp Rostalski. A unified approach to computing real and complex zeros of zero-dimensional ideals. In *Emerging Applications of Algebraic Geometry*, pages 125–155, New York, 2009. Springer New York. 51
- [22] Monique Laurent. Sums of squares, moment matrices and optimization over polynomials. In *Emerging Applications of Algebraic Geometry*, pages 157–270. Springer New York, 2009, Updated version from 2010. <http://homepages.cwi.nl/~monique/files/moment-ima-update-new.pdf> [Online; accessed 2017-05-05]. 39
- [23] Monique Laurent and Philipp Rostalski. The approach of moments for polynomial equations. In *Handbook on Semidefinite, Conic and Polynomial Optimization*, pages 25–60, Boston, MA, 2012. Springer US. 51, 60
- [24] C. L. Lawson, R. J. Hanson, D. R. Kincaid, and F. T. Krogh. Basic linear algebra subprograms for fortran usage. *ACM Trans. Math. Softw.*, 5(3):308–323, September 1979. 23, 29
- [25] J. Löfberg. YALMIP : A toolbox for modeling and optimization in MATLAB. In *Proceedings of the CACSD Conference*, Taipei, Taiwan, 2004. 29, 58

- [26] MOSEK ApS. *The MOSEK optimization toolbox for MATLAB manual. Version 7.1 (Revision 28)*, 2015. <http://docs.mosek.com/7.1/toolbox/index.html> [Online; accessed 2017-04-25]. 12, 23, 26, 29, 30, 58, 65, 66, 67, 68, 69, 71, 72, 73, 74
- [27] Yurii Nesterov. Squared functional systems and optimization problems. In *High Performance Optimization*, pages 405–440. Springer US, 2000. 41
- [28] Yurii Nesterov. *Introductory lectures on convex optimization : A basic course*. Springer, 2004. 12, 24
- [29] Yurii Nesterov and Arkadi Nemirovski. A general approach to polynomial-time algorithms design for convex programming. Technical report, Central Economical and Mathematical Institute, USSR Academy of Sciences, Moscow, USSR, 1988. 11
- [30] Brendan O’Donoghue, Eric Chu, Neal Parikh, and Stephen P. Boyd. SCS: Splitting conic solver, version 1.2.6. <https://github.com/cvxgrp/scs> [Online; accessed 2017-04-22], April 2016. 12
- [31] Michael Overton. On minimizing the maximum eigenvalue of a symmetric matrix. *SIAM Journal on Matrix Analysis and Applications*, 9:256–268, April 1988. 11
- [32] Gabor Pataki. *On the multiplicity of optimal eigenvalues*. University of Michigan, Ann Arbor, MI (United States), December 1994. 11
- [33] Stephen Prajna, Antonis Papachristodoulou, Peter Seiler, and Pablo A. Parrilo. Sostools: Sum of squares optimization toolbox for matlab, 2004. 41
- [34] Mihai Putinar. Positive polynomials on compact semi-algebraic sets. *Indiana University Mathematics Journal*, 42(3):969–984, 1993. 41
- [35] Naum Z. Shor. Class of global minimum bounds of polynomial functions. *Cybernetics*, 23(6):731–734, November 1987. 41
- [36] Henrik Stewenius, Christopher Engels, and David Nister. Recent developments on direct relative orientation. *ISPRS Journal of Photogrammetry and Remote Sensing*, 60(4):284–294, May 2006. 61
- [37] Jos F. Sturm. Using SeDuMi 1.02, a MATLAB toolbox for optimization over symmetric cones. *Optimization Methods and Software*, 11–12:625–653, 1999. 12, 23, 26, 29, 30, 47
- [38] Guido van Rossum and Fred L. Drake. *The Python Language Reference Manual*. Network Theory Ltd, 2011. 23
- [39] R. Clint Whaley and Antoine Petitet. Minimizing development and maintenance costs in supporting persistently optimized BLAS. *Software: Practice and Experience*, 35(2):101–121, February 2005. <http://www.cs.utsa.edu/~whaley/papers/spercw04.ps> [Online; accessed 2017-04-18]. 23, 29
- [40] Changchang Wu. P3.5p: Pose estimation with unknown focal length. In *The IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2015. 66

## *Bibliography*

- [41] Makoto Yamashita, Katsuki Fujisawa, Kazuhide Nakata, Maho Nakata, Mituhiro Fukuda, Kazuhiro Kobayashi, and Kazushige Goto. A high-performance software package for semidefinite programs: SDPA7. Technical report, Tokyo Japan, September 2010. [12](#)