

PROJECT TITLE: CREATE A CHATBOT IN PYTHON

PHASE 4: Development Part 2

Continue building the chatbot by integrating it into a web app using Flask.

INTRODUCTION:

- Flask is commonly used to create web-based chatbot applications.
- It provides the necessary tools and libraries to build a web-based interface for chatbots, making it easier to interact with users through a web-based messaging platform.
- Flask allows developers to create routes and handle HTTP requests, which can be essential for receiving user input and providing responses from a chatbot.
- You can integrate a chatbot developed with natural language processing capabilities into a Flask-based web application to create a user-friendly interface for users to interact with the chatbot via a web browser.

FLASK INTEGRATION:

```
from flask import Flask, render_template, request

from transformers import AutoModelForCausalLM, AutoTokenizer
import torch
```

- This line imports necessary modules from the Flask web framework.
- Flask is used to create a web application, and
 - **Flask** is the main class for that purpose.
 - **Render_template** is used for rendering HTML templates,
 - **request** is used for handling HTTP requests, and **jsonify** is used for returning JSON responses.
 - **AutoModelForCausalLM** and **AutoTokenizer** are commonly used for loading pre-trained language models and their corresponding tokenizers.
 - **AutoModel** is also imported, although it's not used in your provided code.
 - **import torch**: PyTorch is often used in conjunction with Hugging Face Transformers to work with neural networks and machine learning models.

```
app = Flask(__name__)
tokenizer = AutoTokenizer.from_pretrained("microsoft/DialogPT-medium")
model1 = AutoModelForCausalLM.from_pretrained("chatbot_model")

@app.route("/")
def index():
    return render_template('chatty.html')
```

- By calling **Flask(__name__)**, you are creating an instance of this class, which represents your web application.
- This line initializes a tokenizer using the Hugging Face Transformers library.
- **The AutoTokenizer:**
 - It is a convenient way to load a pre-trained tokenizer for a specific language model.

- Tokenizers are used to break down text into smaller units (tokens) that can be processed by a language model.
- **AutoModelForCausalLM:**
 - This class is used to load a pre-trained language model for causal language modeling.
 - Causal language models are often used for text generation tasks where the order of tokens is important, such as chatbots and text completion.
- **@app.route("/"):** This is a decorator in Flask that associates the URL route "/" (the root URL) with the following function, **index()**.
- **def index():** This is a Python function definition. It defines a function named **index** that will be called when a user accesses the root URL.
- **return render_template('chatty.html'):** Inside the **index** function, it returns the result of rendering a template called 'chatty.html'.

```
@app.route("/get", methods=["GET", "POST"])
def chat():
    msg = request.form["msg"]
    input = msg
    return get_chat_response(input)
```

- **@app.route("/get", methods=["GET", "POST"]):**
 - This is a decorator in Flask.
 - It associates the function below it (**chat**) with a specific URL route. In this case, it associates the **/get** route with the **chat** function, and it specifies

that this route can handle both GET and POST requests.

➤ **def chat():**

- This is a Python function definition. It defines a function named **chat** that will be executed when a user accesses the **/get** route of your web application.

➤ **msg = request.form["msg"]:**

- This line retrieves the value of the "msg" parameter from the form data in the request.
- It assumes that a user has submitted a form with a field named "msg" containing their input message.
- The value is stored in the **msg** variable.

➤ **input = msg:**

- The value of **msg** is assigned to a variable named **input**.
- This step is optional and not necessary; you could use **msg** directly in the following line.

➤ **return get_Chat_response(input):**

- This line calls the **get_Chat_response** function with the user's input (stored in the **input** variable) as an argument.
- The **get_Chat_response** function generates a response based on the user's input and returns it as an HTTP response.

```
def get_Chat_response(text):
    # Let's chat for 5 lines
    for step in range(3):
        # encode the new user input, add the eos_token and return a tensor in Pytorch
        new_user_input_ids = tokenizer.encode(str(text) + tokenizer.eos_token, return_tensors='pt')

        # append the new user input tokens to the chat history
        bot_input_ids = torch.cat([chat_history_ids, new_user_input_ids], dim=-1) if step > 0 else new_user_input_ids

        # generated a response while limiting the total chat history to 1000 tokens,
        chat_history_ids = model.generate(bot_input_ids, max_length=1000, pad_token_id=tokenizer.eos_token_id)

        # pretty print last output tokens from bot
        return tokenizer.decode(chat_history_ids[:, bot_input_ids.shape[-1]:][0], skip_special_tokens=True)

if __name__ == '__main__':
    app.run()
```

➤ **def get_Chat_response(text):** This is a Python function definition. It takes a **text** parameter, which presumably represents the user's input.

- For each iteration, it encodes the user's input, adds an end-of-sequence token (**eos_token**), and returns a PyTorch tensor.
- It appends the new user input tokens to the chat history.
- It generates a response while limiting the total chat history to 1000 tokens.
- Finally, it decodes the response and returns it.


➤ **if __name__ == '__main__':**

- This is a common Python idiom used to check if the script is being run as the main program.
- If it's the main program (not imported as a module in another script), the following code block is executed.


- **app.run()**: It starts the Flask development server, which allows your web application to listen for incoming HTTP requests and serve web pages.

APPERANCE OF CHATBOT:


1.GRETTINGS:

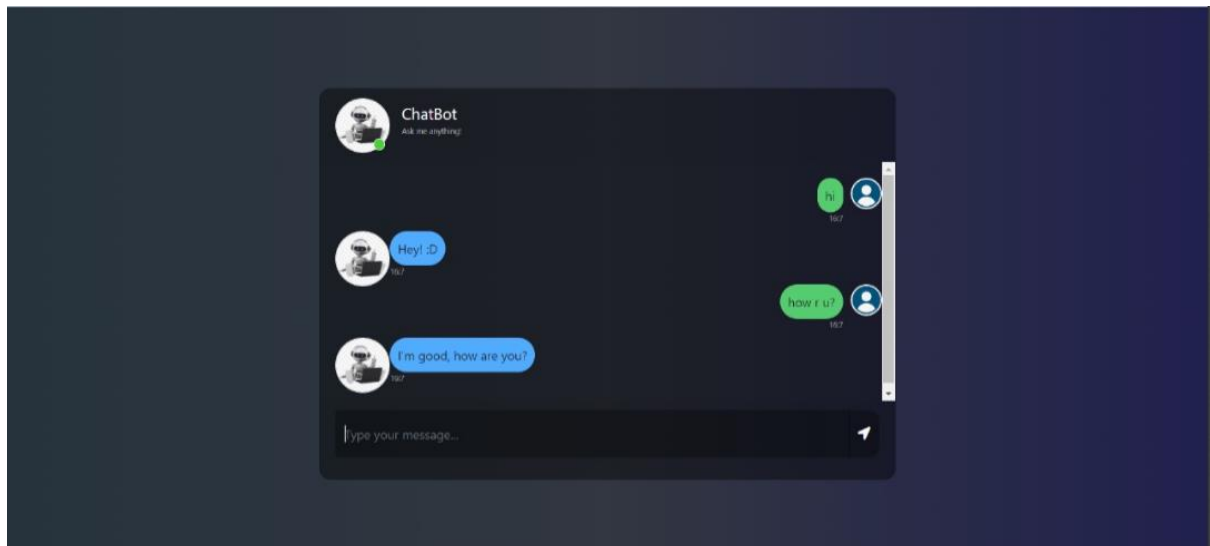


2. INFORMATION SHARING:

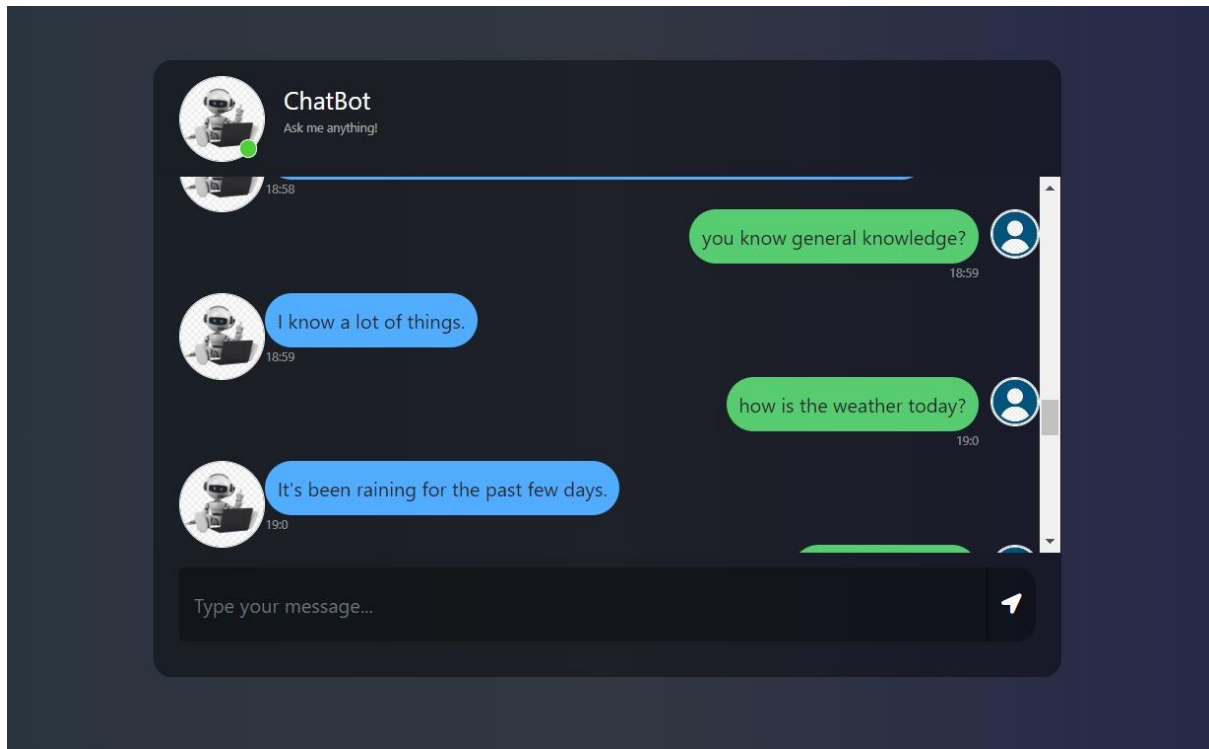


3. ENTERTAINMENT:

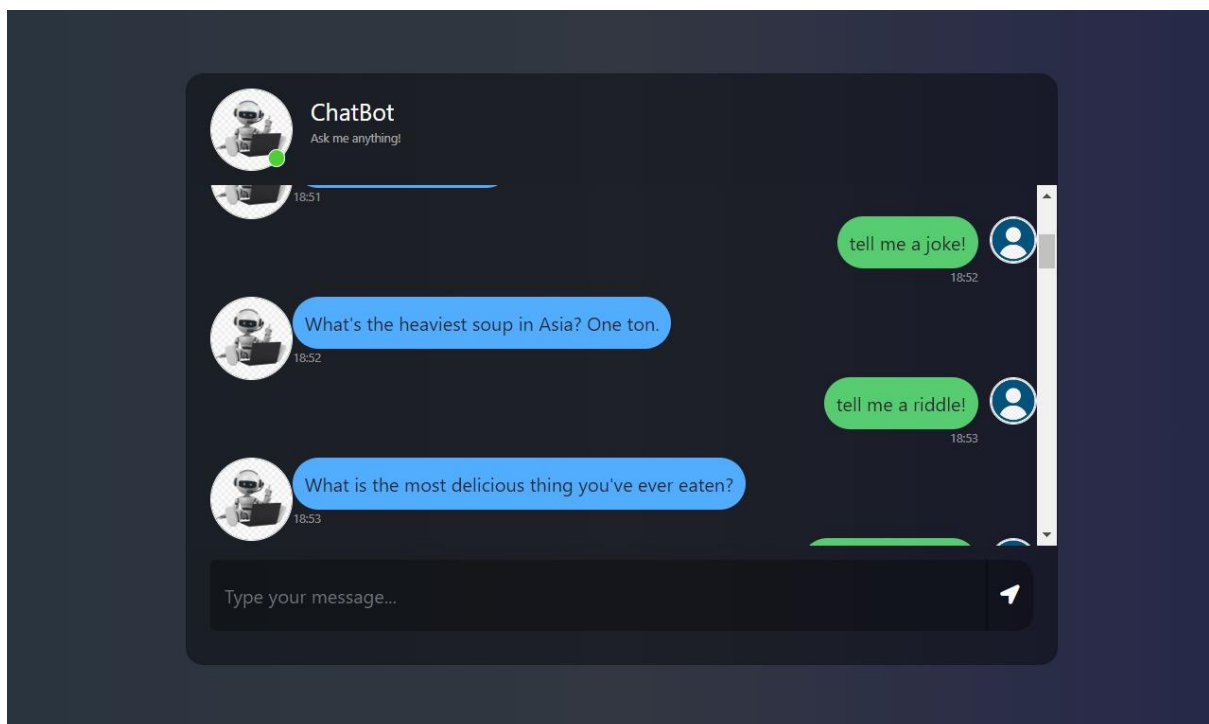


4.CAN ACT AS HUMAN INTELLIGENCE:

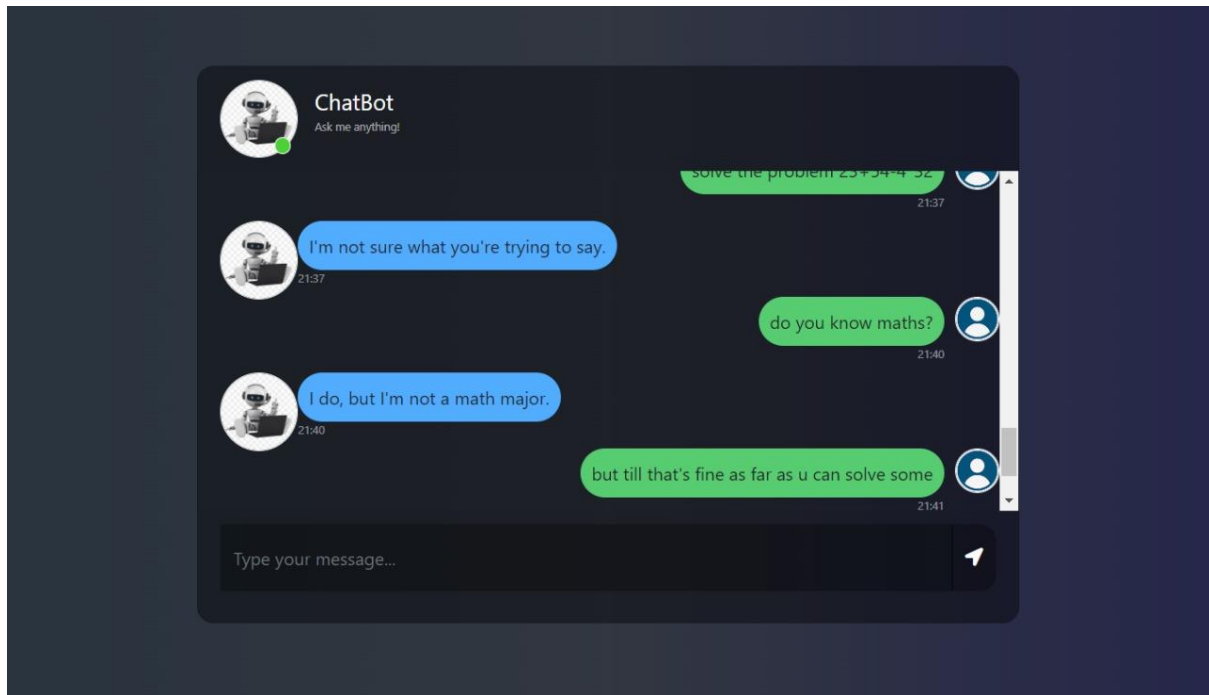

5.ERROR HANDLING:

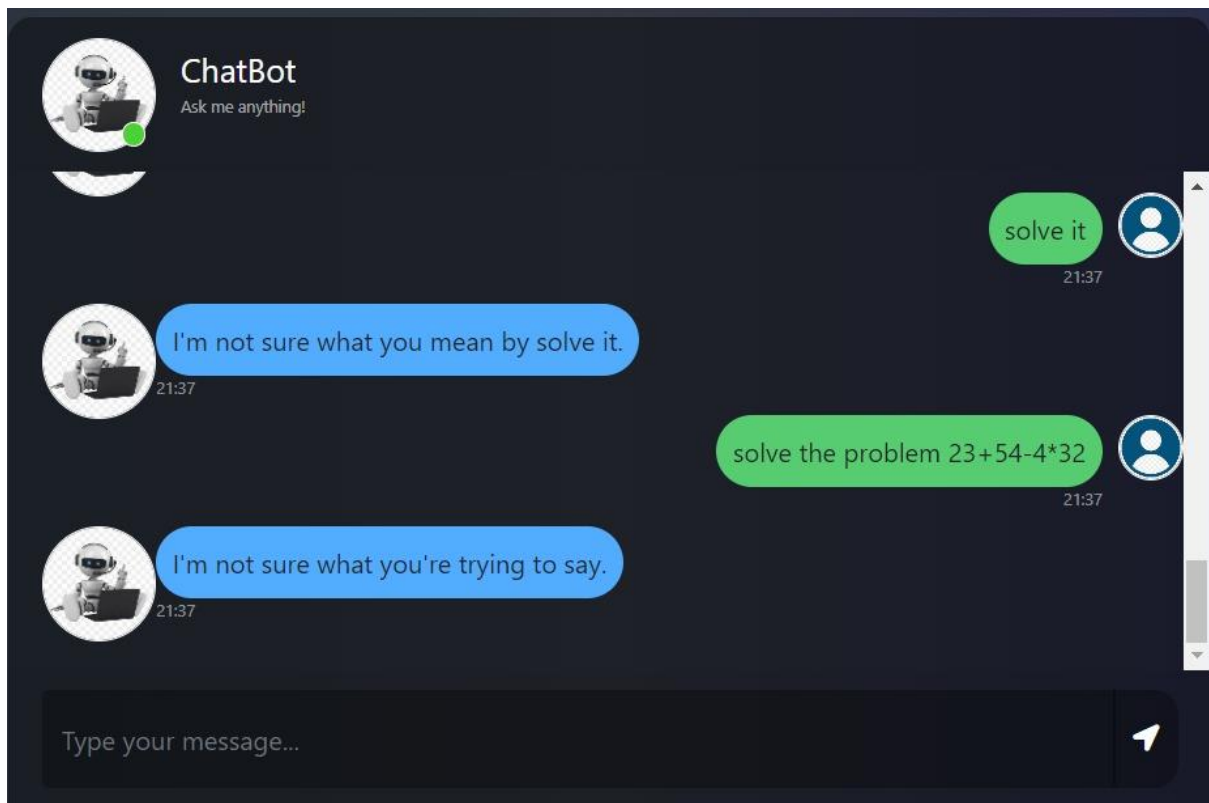

6.INNOVATION:

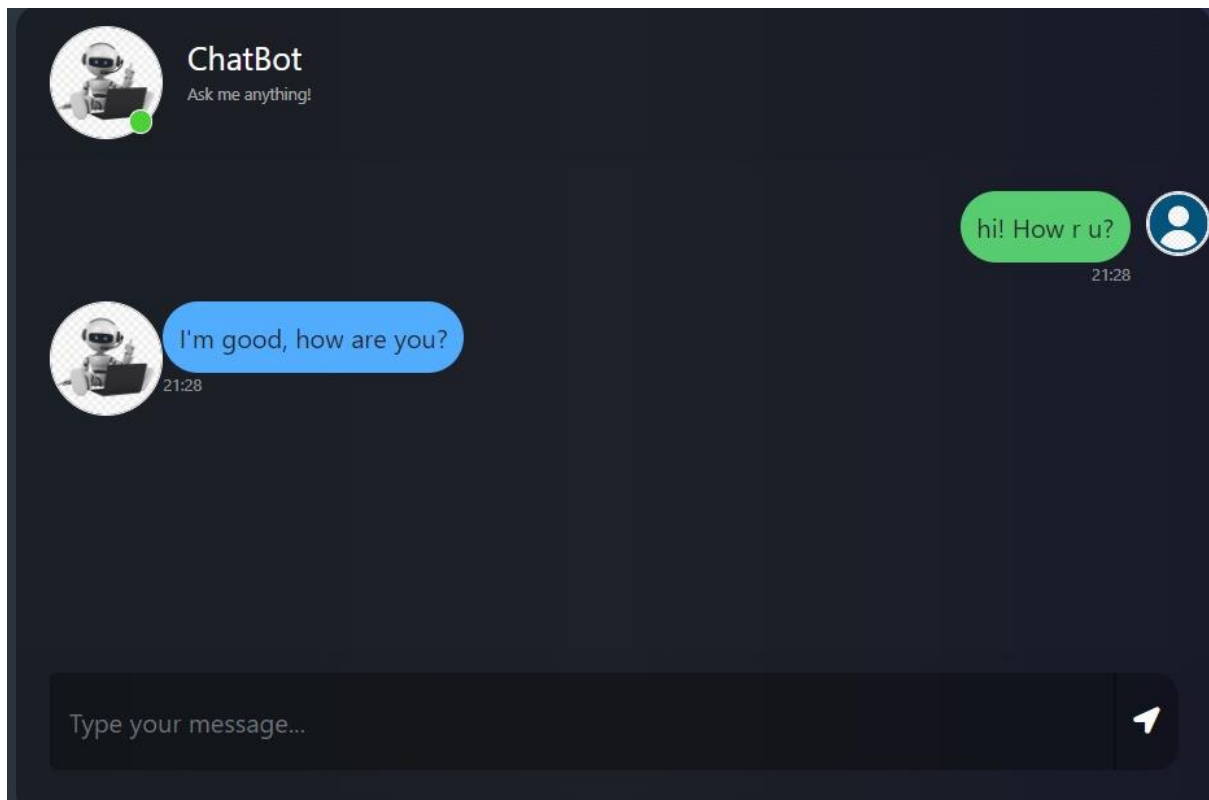

CONCLUSION:

The response provided earlier is a result of the capabilities of the pre-training model, which is a sophisticated artificial intelligence language model developed by Dialo-GPT. By utilizing this pre-training model, the chatbot can analyze and interpret natural language input, generating appropriate and contextually relevant responses based on the patterns and information it has learned during its training.