


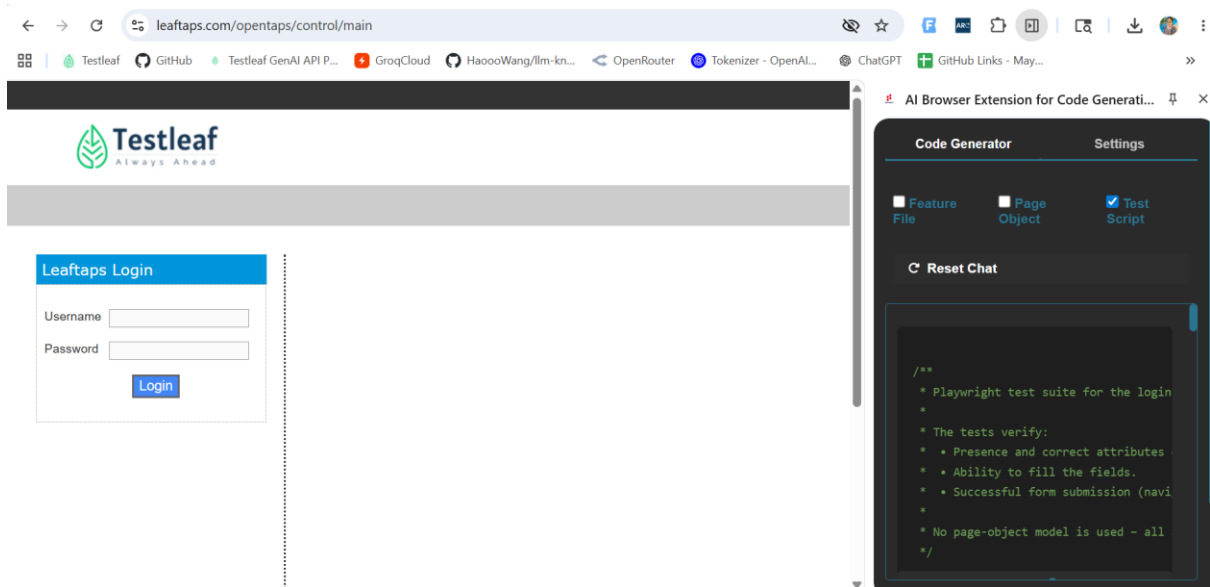

```
/**
```

```
* Playwright test suite for the login form on https://leaf taps.com/opentaps/control/main
```

```
*
```

```
* The tests verify:
```

```
* • Presence and correct attributes of the form and its fields.
```

```
* • Ability to fill the fields.
```

```
* • Successful form submission (navigation away from the login page).
```

```
*
```

```
* No page-object model is used – all actions are performed directly in the test.
```

```
*/
```

```
import { test, expect, Page } from '@playwright/test';
```

```
/**
```

```
* Fill the login form with the supplied credentials.
```

*

* @param page - Playwright Page instance.

* @param username - Username to type into the username field.

* @param password - Password to type into the password field.

*/

```
async function fillLoginForm(page: Page, username: string, password: string): Promise<void>
{
    await page.fill('#username', username);
    await page.fill('#password', password);
}
```

/**

* Submit the login form by clicking the submit button.

*

* @param page - Playwright Page instance.

*/

```
async function submitLoginForm(page: Page): Promise<void> {
    // The button is an <input type="submit"> – clicking it triggers form submission.
    await Promise.all([
        page.waitForNavigation({ waitUntil: 'domcontentloaded' }),
        page.click('input.decorativeSubmit[type="submit"]'),
    ]);
}
```

```
test.describe('Login Form Tests', () => {
```

```
    let page: Page;
```

```
    test.beforeAll(async ({ browser }) => {
```

```
    page = await browser.newPage();  
  });
```

```
test.afterAll(async () => {  
    await page.close();  
});
```

```
test.beforeEach(async () => {  
    // Navigate to the main page before each test.  
    await page.goto('https://leaftaps.com/opentaps/control/main', {  
        waitUntil: 'domcontentloaded',  
    });  
    // Ensure the login form is present.  
    await expect(page.locator('form#login')).toBeVisible();  
});
```

```
test('should display the login form with correct fields', async () => {  
    const form = page.locator('form#login');
```

```
    // Verify form attributes.  
    await expect(form).toHaveAttribute('method', 'post');  
    await expect(form).toHaveAttribute(  
        'action',  
        '/\Opentaps\control\login;jsessionId=.*\.jvm1$/  
    );
```

```
    // Username field checks.  
    const usernameInput = form.locator('input#username');
```

```

await expect(usernameInput).toBeVisible();
await expect(usernameInput).toHaveAttribute('type', 'text');
await expect(usernameInput).toHaveAttribute('name', 'USERNAME');
await expect(usernameInput).toHaveAttribute('size', '50');

// Password field checks.
const passwordInput = form.locator('input#password');
await expect(passwordInput).toBeVisible();
await expect(passwordInput).toHaveAttribute('type', 'password');
await expect(passwordInput).toHaveAttribute('name', 'PASSWORD');
await expect(passwordInput).toHaveAttribute('size', '50');

// Submit button checks.
const submitBtn = form.locator('input.decorativeSubmit[type="submit"]');
await expect(submitBtn).toBeVisible();
await expect(submitBtn).toHaveAttribute('value', 'Login');
});

test('should allow entering username and password', async () => {
  const testUsername = 'DemoUser';
  const testPassword = 'DemoPass123';

  await fillLoginForm(page, testUsername, testPassword);

  // Verify the entered values.
  await expect(page.locator('#username')).toHaveValue(testUsername);
  await expect(page.locator('#password')).toHaveValue(testPassword);
});

```

```

test('should submit the form and navigate away from the login page', async () => {
  const testUsername = 'DemoUser';
  const testPassword = 'DemoPass123';

  await fillLoginForm(page, testUsername, testPassword);
  await submitLoginForm(page);

  // After a successful login the URL should change (it will no longer contain "/main").
  await expect(page).not.toHaveURL(/\/opentaps\/control\/main$/);

  // Optionally, verify that a known element on the landing page appears.
  // Example: a header with text "Welcome" (adjust selector as needed for the real app).
  const welcomeHeader = page.locator('h1:has-text("Welcome")');
  await expect(welcomeHeader).toBeVisible({ timeout: 5000 });
});

test('should not submit when both fields are empty (client-side validation)', async () => {
  // Click the submit button without filling any fields.
  const submitBtn = page.locator('input.decorativeSubmit[type="submit"]');

  // Some browsers may still submit; we guard against navigation.
  const [response] = await Promise.all([
    page.waitForResponse(
      (resp) => resp.url().includes('/opentaps/control/login') && resp.status() === 200,
      { timeout: 3000 }
    ).catch(() => null), // ignore if no request is made
    submitBtn.click(),
  ]);

```

```
});
```

```
// If a request was made, the form was submitted – we expect none.
```

```
expect(response).toBeNull();
```

```
// Ensure we are still on the same page.
```

```
await expect(page).toHaveURL(/\/opentaps\/control\/main$/);
```

```
});
```

```
});
```