Description | Editorial | Solutions | Submissions

1672. Richest Customer Wealth

Solved

Easy | Topics | Companies | Hint

You are given an `m x n` integer grid `accounts` where `accounts[i][j]` is the amount of money the `i^th` customer has in the `j^th` bank. Return *the **wealth** that the richest customer has.*

A customer's **wealth** is the amount of money they have in all their bank accounts. The richest customer is the customer that has the maximum **wealth**.

Example 1:

```
Input: accounts = [[1,2,3],[3,2,1]]
Output: 6
Explanation:
1st customer has wealth = 1 + 2 + 3 = 6
2nd customer has wealth = 3 + 2 + 1 = 6
Both customers are considered the richest with a
wealth of 6 each, so return 6.
```

Example 2:

```
Input: accounts = [[1,5],[7,3],[3,5]]
Output: 10
Explanation:
1st customer has wealth = 6
2nd customer has wealth = 10
3rd customer has wealth = 8
The 2nd customer is the richest with a wealth of
10.
```

4.9K | 101 | 37 Online

Code

Java | Auto

```java
class Solution {
    public int maximumWealth(int[][] accounts) {
        int m=accounts.length;
        int n=accounts[0].length;
        int maz=0;
        for(int i=0;i<m;i++){
            int c=0;
            for(int j=0;j<n;j++){
            c+=accounts[i][j];
            }maz=Math.max(c,maz);
        }return maz;
    }
}
```

Saved | Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

accounts =
[[1,2,3],[3,2,1]]

Output

6

Expected

6

Leet | Accepted

All Submissions

Accepted 34 / 34 testcases passed

pavithra_e submitted at Mar 23, 2026 18:35

Runtime

0 ms | Beats 100.00%

Memory

44.94 MB | Beats 14.22%

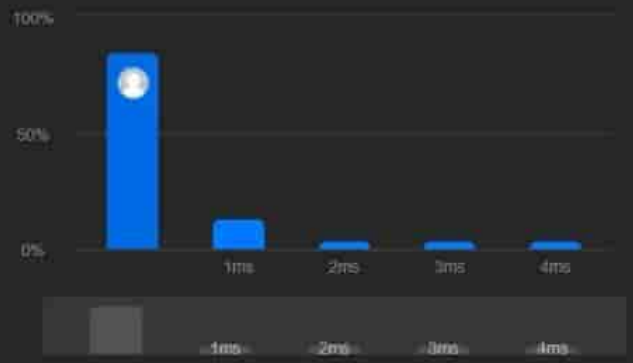

Code | Java

```java
class Solution {
    public int maximumWealth(int[][] accounts) {
        int m=accounts.length;
        int n=accounts[0].length;
        int maz=0;
        for(int i=0;i<m;i++){
```

Description | Editorial | Solutions | Submissions

292. Nim Game

Solved

Easy | Topics | Companies | Hint

You are playing the following Nim Game with your friend:

- Initially, there is a heap of stones on the table.
- You and your friend will alternate taking turns, and **you go first**.
- On each turn, the person whose turn it is will remove 1 to 3 stones from the heap.
- The one who removes the last stone is the winner.

Given `n`, the number of stones in the heap, return `true` *if you can win the game assuming both you and your friend play optimally, otherwise return* `false`.

Example 1:

```
Input: n = 4
Output: false
Explanation: These are the possible outcomes:
1. You remove 1 stone. Your friend removes 3
stones, including the last stone. Your friend wins.
2. You remove 2 stones. Your friend removes 2
stones, including the last stone. Your friend wins.
3. You remove 3 stones. Your friend removes the
last stone. Your friend wins.
In all outcomes, your friend wins.
```

Example 2:

2K | 110 | 8 Online

Code

Java | Auto

```java
class Solution {
    public boolean canWinNim(int n) {
        return (n%4!=0);

    }
}
```

Saved | Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

n =
4

Output

false

Expected

false

Leet | Accepted

All Submissions

Accepted 60 / 60 testcases passed

pavithra_e submitted at Mar 23, 2026 18:36

Runtime

0 ms | Beats 100.00%

Memory

42.02 MB | Beats 67.78%

Code | Java

```java
class Solution {
    public boolean canWinNim(int n) {
        return (n%4!=0);

    }
}
```

Description | Editorial | Solutions | Submissions

2481. Minimum Cuts to Divide a Circle

Solved

Easy | Topics | Companies | Hint

A **valid cut** in a circle can be:

- A cut that is represented by a straight line that touches two points on the edge of the circle and passes through its center, or
- A cut that is represented by a straight line that touches one point on the edge of the circle and its center.

Some valid and invalid cuts are shown in the figures below.

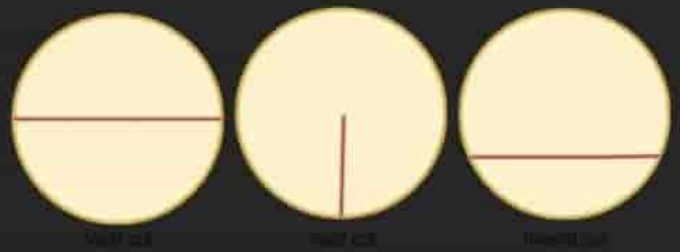

Given the integer `n`, return *the **minimum** number of cuts needed to divide a circle into* `n` *equal slices.*

Example 1:

327 | 28 | 2 Online

Code

Java | Auto

```java
class Solution {
    public int numberOfCuts(int n) {
    if (n==1) return 0;
    if (n%2==0) return n/2;
     else return n;
    }
}
```

Saved | Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

n =
4

Output

2

Expected

2

Leet | Accepted

All Submissions

Accepted 100 / 100 testcases passed

pavithra_e submitted at Mar 23, 2026 18:36

Runtime

0 ms Beats 100.00%

Memory

42.13 MB Beats 59.40%

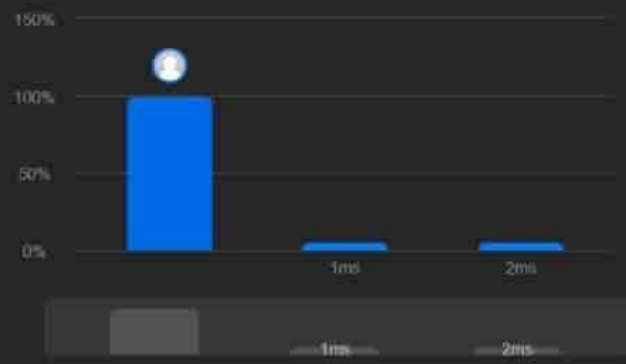

Code | Java

```java
class Solution {
    public int numberOfCuts(int n) {
    if (n==1) return 0;
    if (n%2==0) return n/2;
     else return n;
    }
```

Description | Editorial | Solutions | Submissions

1025. Divisor Game

Solved

Easy | Topics | Companies | Hint

Alice and Bob take turns playing a game, with Alice starting first.

Initially, there is a number `n` on the chalkboard. On each player's turn, that player makes a move consisting of:

- Choosing any integer `x` with `0 < x < n` and `n % x == 0`.
- Replacing the number `n` on the chalkboard with `n - x`.

Also, if a player cannot make a move, they lose the game.

Return `true` *if and only if Alice wins the game, assuming both players play optimally.*

Example 1:

```
Input: n = 2
Output: true
Explanation: Alice chooses 1, and Bob has no more moves.
```

Example 2:

```
Input: n = 3
Output: false
Explanation: Alice chooses 1, Bob chooses 1, and Alice has no more moves.
```

2.4K | 163 | 16 Online

Code

Java | Auto

```java
class Solution {
    public boolean divisorGame(int n) {
        if(n%2==0) return true;
        return false;
    }
}
```

Saved | Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

n =
2

Output

true

Expected

true

Leet | Accepted

All Submissions

Accepted 40 / 40 testcases passed

pavithra_e submitted at Mar 23, 2026 18:37

Runtime

0 ms | Beats 100.00%

Memory

41.86 MB | Beats 92.33%

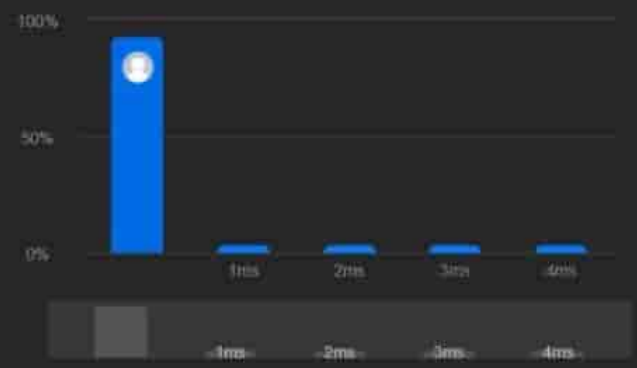

Code | Java

```java
class Solution {
    public boolean divisorGame(int n) {
        if(n%2==0) return true;
        return false;
    }
}
```

Description | Editorial | Solutions | Submissions

1688. Count of Matches in Tournament

Solved

Easy | Topics | Companies | Hint

You are given an integer `n`, the number of teams in a tournament that has strange rules:

- If the current number of teams is **even**, each team gets paired with another team. A total of `n / 2` matches are played, and `n / 2` teams advance to the next round.
- If the current number of teams is **odd**, one team randomly advances in the tournament, and the rest gets paired. A total of `(n - 1) / 2` matches are played, and `(n - 1) / 2 + 1` teams advance to the next round.

Return *the number of matches played in the tournament until a winner is decided.*

Example 1:

```
Input: n = 7
Output: 6
Explanation: Details of the tournament:
- 1st Round: Teams = 7, Matches = 3, and 4 teams advance.
- 2nd Round: Teams = 4, Matches = 2, and 2 teams advance.
- 3rd Round: Teams = 2, Matches = 1, and 1 team is declared the winner.
Total number of matches = 3 + 2 + 1 = 6.
```

1.9K | 128 | 3 Online

Code

Java | Auto

```java
class Solution {
    public int numberOfMatches(int n) {
        return n-1;
    }
}
```

Saved | Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

n =
7

Output

6

Expected

6

Leet | Accepted

All Submissions

Accepted 200 / 200 testcases passed

pavithra_e submitted at Mar 23, 2026 18:38

Runtime

0 ms | Beats 100.00%

Memory

42.01 MB | Beats 81.27%

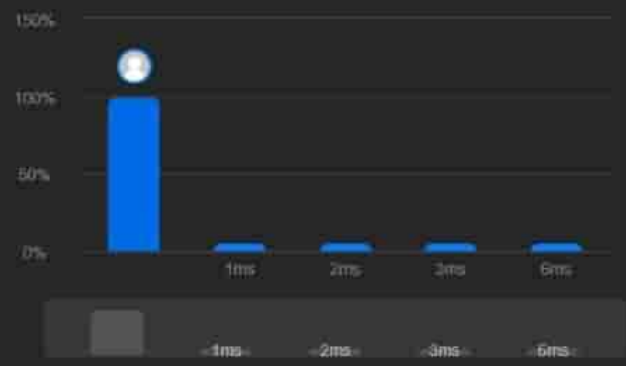

Code | Java

```java
class Solution {
    public int numberOfMatches(int n) {
        return n-1;
    }
}
```

Description | Editorial | Solutions | Submissions

1523. Count Odd Numbers in an Interval Range

Solved

Easy | Topics | Companies | Hint

Given two non-negative integers `low` and `high`. Return the *count of odd numbers between* `low` *and* `high` *(inclusive)*.

Example 1:

```
Input: low = 3, high = 7
Output: 3
Explanation: The odd numbers between 3 and 7 are [3,5,7].
```

Example 2:

```
Input: low = 8, high = 10
Output: 1
Explanation: The odd numbers between 8 and 10 are [9].
```

Constraints:

- `0 <= low <= high <= 10^9`

prove asaya

3.1K | 223 | 8 Online

Code

Java | Auto

```java
class Solution {
    public int countOdds(int low, int high) {
        int count=0;
        for(int i=low;i<=high;i++){
            count++;
        }
    if((low%2!=0)&&(high%2!=0)) return (count/2)+1;
    return count/2;
}
}
/*low=3, high =7
3 2 3 4 5 6 7(total odd = 4)
3 2 3(total odd=2)
```

Saved | Upgrade to Cloud Saving | Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

low =
3

high =
7

Output

3

Leet | Accepted

All Submissions

Accepted 84 / 84 testcases passed

pavithra_e submitted at Mar 23, 2026 18:40

Runtime

835 ms | Beats 5.02%

Memory

42.18 MB | Beats 55.49%

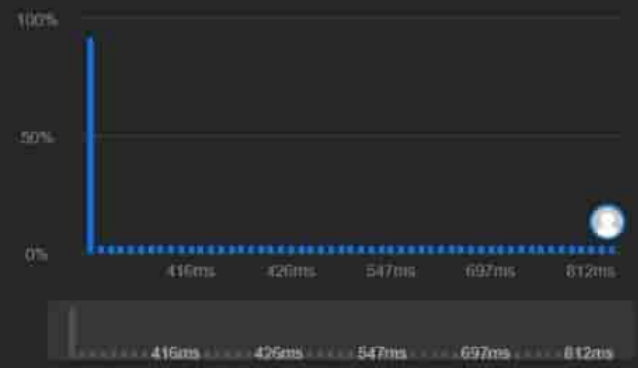

Code | Java

```java
class Solution {
    public int countOdds(int low, int high) {
        int count=0;
        for(int i=low;i<=high;i++){
            count++;
        }
```

Description | Editorial | Solutions | Submissions

231. Power of Two

Solved

Easy | Topics | Companies

Given an integer `n`, return `true` *if it is a power of two. Otherwise, return* `false`.

An integer `n` is a power of two, if there exists an integer `x` such that `n` $= 2^x$.

Example 1:

```
Input: n = 1
Output: true
Explanation: 2^0 = 1
```

Example 2:

```
Input: n = 16
Output: true
Explanation: 2^4 = 16
```

Example 3:

```
Input: n = 3
Output: false
```

Constraints:

- $-2^{31} <= n <= 2^{31} - 1$

8K | 352 | 59 Online

Code

Java | Auto

```java
class Solution {
    public boolean isPowerOfTwo(int n) {
        if(n>0&&(n&(n-1))==0){
         return true;
        } return false;
    }
}
/* if(n<=0) return false;
while(n%2==0){
    n=n/2;
}return n==1;
*/
/* if(n<=0) return false;
```

Saved | Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

n =
1

Output

true

Expected

true

Leet | Accepted

All Submissions

Accepted 1110 / 1110 testcases passed

pavithra_e submitted at Mar 23, 2026 18:40

Runtime

1 ms | Beats 96.27%

Memory

42.51 MB | Beats 69.36%

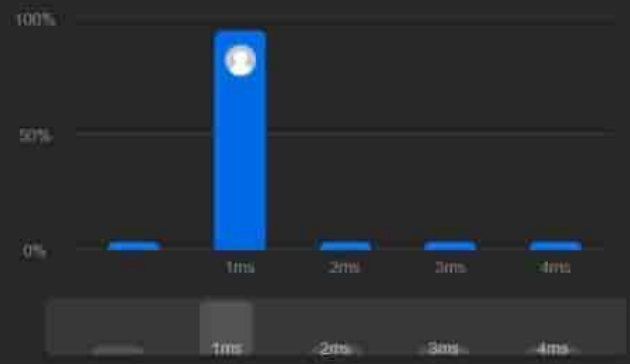

Code | Java

```java
class Solution {
    public boolean isPowerOfTwo(int n) {
        if(n>0&&(n&(n-1))==0){
         return true;
        } return false;
    }
```

Description | Editorial | Solutions | Submissions

136. Single Number

Solved

Easy | Topics | Companies | Hint

Given a **non-empty** array of integers `nums`, every element appears *twice* except for one. Find that single one.

You must implement a solution with a linear runtime complexity and use only constant extra space.

Example 1:

Input: nums = [2,2,1]

Output: 1

Example 2:

Input: nums = [4,1,2,1,2]

Output: 4

Example 3:

Input: nums = [1]

Output: 1

Constraints:

- $1 <= nums.length <= 3 * 10^4$

18.8K | 309 | 156 Online

Code

Java | Auto

```java
class Solution {
    public int singleNumber(int[] nums) {
        int ans=0;
        for(int i=0;i<nums.length;i++){
            ans^=nums[i];
        } return ans;
    }
}
```

Saved | Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

nums =
[2,2,1]

Output

1

Expected

1

Leet | Accepted

All Submissions

Accepted 61 / 61 testcases passed

pavithra_e submitted at Mar 23, 2026 18:41

Runtime

1 ms Beats 99.97%

Memory

46.84 MB Beats 78.01%

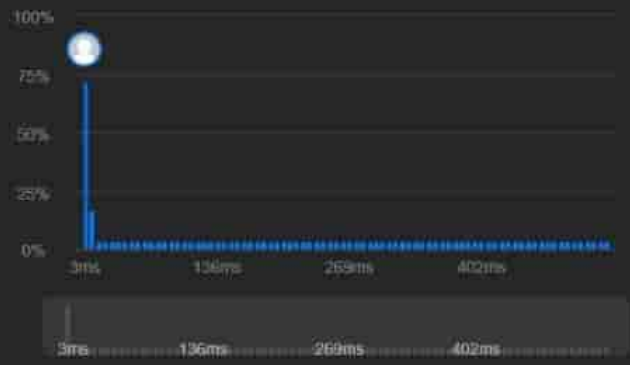

Code | Java

```java
class Solution {
    public int singleNumber(int[] nums) {
        int ans=0;
        for(int i=0;i<nums.length;i++){
            ans^=nums[i];
        } return ans;
```

Description | Editorial | Solutions | Submissions

268. Missing Number

Solved

Easy | Topics | Companies

Given an array `nums` containing `n` distinct numbers in the range `[0, n]`, return *the only number in the range that is missing from the array.*

Example 1:

> **Input:** `nums = [3,0,1]`
>
> **Output:** 2
>
> **Explanation:**
>
> `n = 3` since there are 3 numbers, so all numbers are in the range `[0,3]`. 2 is the missing number in the range since it does not appear in `nums`.

Example 2:

> **Input:** `nums = [0,1]`
>
> **Output:** 2
>
> **Explanation:**
>
> `n = 2` since there are 2 numbers, so all numbers are in the range `[0,2]`. 2 is the missing number in the range since it does not appear in `nums`.

Example 3:

> **Input:** `nums = [9,6,4,2,3,5,7,0,1]`

14.3K | 402 | 116 Online

Code

Java | Auto

```java
class Solution {
    public int missingNumber(int[] nums) {
        int n=nums.length;
        int total=n*(n+1)/2;
        int sum=0;
        for(int num:nums){
            sum+=num;
        }return total-sum;
    }
}
/* for(0 to n){
    res=res^i;
}
```

Saved | Ln 1, Col 1

Testcase | Test Result

Accepted 0 ms

Case 1 | Case 2 | Case 3

Input

nums =
[3,0,1]

Output

2

Expected

2

Accepted

All Submissions

Accepted 122 / 122 testcases passed

pavithra_e submitted at Mar 23, 2026 18:42

Runtime

0 ms | Beats 100.00%

Memory

47.44 MB | Beats 43.44%

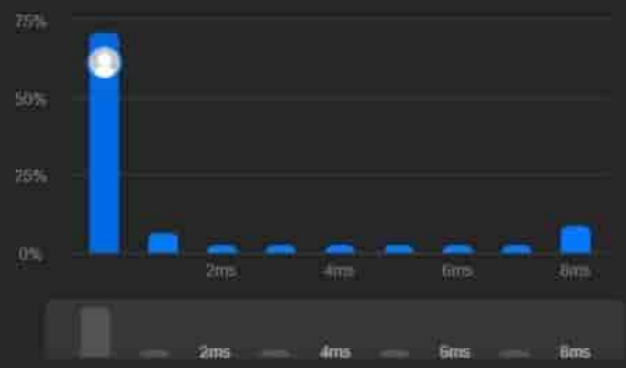

Code | Java

```java
class Solution {
    public int missingNumber(int[] nums) {
        int n=nums.length;
        int total=n*(n+1)/2;
        int sum=0;
        for(int num:nums){
```