

## 2.1 TC005

Edit Weight Class	1. Navigate to Systems section, returns Option 2. Choose Weight Class 3. Under action button of Weight Class, choose Edit 4. Fill all the details except weight unit	1. Click the save icon and verify it is on the same page 2. Try to get the tooltip message "Please fill out this fields." and assert the message Negative test case validation
-------------------	---	--

## 2.2 Coding

### AdminPage.java

```
package com.ibm.pages;
```

```
import org.openqa.selenium.WebDriver;  
import org.openqa.selenium.WebElement;  
import org.openqa.selenium.support.FindBy;  
import org.openqa.selenium.support.How;  
import org.openqa.selenium.support.PageFactory;  
import org.openqa.selenium.support.ui.WebDriverWait;
```

```
public class AdminPage {  
    @FindBy(how=How.NAME,using="email")WebElement emailEle;  
    @FindBy(how=How.NAME,using="pword")WebElement passEle;  
    @FindBy(how=How.XPATH,using="//button[@class='btn btn-labeled btn-info m-b-5']")WebElement loginEle;  
    WebDriverWait wait;  
    WebDriver driver;  
  
    public AdminPage(WebDriver driver,WebDriverWait wait) {  
        PageFactory.initElements(driver, this);  
    }  
}
```

```

        this.driver=driver;

        this.wait=wait;
    }

    public AdminPage enterEmailAddress(String uname)
    {
        emailEle.sendKeys(uname);

        return this;
    }

    public AdminPage enterPassword(String pwd)
    {
        passEle.sendKeys(pwd);

        return this;
    }

    public void clickOnLogin()
    {
        loginEle.click();
    }

}

```

## **SystemPage.java**

```

package com.ibm.pages;

import org.openqa.selenium.WebDriver;
import org.openqa.selenium.WebElement;
import org.openqa.selenium.support.FindBy;
import org.openqa.selenium.support.How;
import org.openqa.selenium.support.PageFactory;
import org.openqa.selenium.support.ui.WebDriverWait;

```

```

public class SystemPage {

    @FindBy(how=How.XPATH,using="//a[@class='material-ripple']][17]")WebElement system;

    @FindBy(how=How.XPATH,using="//a[@class='material-ripple']][26]")WebElement returns;

    @FindBy(how=How.XPATH,using="//a[@class='material-ripple']][27]")WebElement
returnsStatuses;

    @FindBy(how=How.XPATH,using="//a[@class='material-ripple']][25]")WebElement
weightClass;

    WebDriverWait wait;

    WebDriver driver;

    public SystemPage(WebDriver driver,WebDriverWait wait) {

        PageFactory.initElements(driver, this);

        this.driver=driver;

        this.wait=wait;

    }

    public void clickSystem()

    {

        system.click();

    }

    public void clickWeightClass()

    {

        weightClass.click();

    }

    public void clickReturns()

    {

        returns.click();

    }

    public void clickReturnStatuses()

    {

```

```

        returnsStatuses.click();
    }

}

```

## SystemWeightClass.java

```

package com.ibm.pages;

import org.openqa.selenium.By;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.WebElement;
import org.openqa.selenium.support.FindBy;
import org.openqa.selenium.support.How;
import org.openqa.selenium.support.PageFactory;
import org.openqa.selenium.support.ui.ExpectedConditions;
import org.openqa.selenium.support.ui.WebDriverWait;

public class SystemWeightClassPage {

    @FindBy(how=How.XPATH,using="//table[@id='dataTableExample2']/tbody/tr/td[5]")WebElement table;
    @FindBy(how=How.XPATH,using="//button[@class='btn dropdown-toggle btn-primary']")WebElement action;
    @FindBy(how=How.XPATH,using="//a[@title='Edit']")WebElement edit;
    @FindBy(how=How.XPATH,using="(//input[@class='form-control'])[2]")WebElement weightUnit;
    @FindBy(how=How.XPATH,using="//button[@title='Save']")WebElement save;
    @FindBy(how=How.XPATH,using="//*[@id=\"page-wrapper\"]/div/form/div[2]/div/div/div[1]/div/h4")WebElement verifyPage;

    //By validation =By.xpath("//*[@id=\"page-wrapper\"]/div/form/div[2]/div/div/div[1]/div/h4");
    WebDriver driver;
    WebDriverWait wait;

    public SystemWeightClassPage(WebDriver driver,WebDriverWait wait) {
        PageFactory.initElements(driver, this);
        this.driver=driver;
        this.wait=wait;
    }
    public void clickTable()
    {
        table.click();
    }
    public void clickActionButton()
    {
        action.click();
    }
    public void clickEdit()
    {
        edit.click();
    }
    public void clearWeightUnit()
    {
        weightUnit.clear();
    }
}

```

```

    }
    public void clickSave()
    {
        save.click();
    }
    public void getPageSrcttoVerifypage()
    {
        String text = verifyPage.getText();
        System.out.println("Verified it is on the same page :"+text);
    }
}

```

## TC005.java

```

package com.ibm.test;

import java.io.IOException;
import java.util.HashMap;
import java.util.concurrent.TimeUnit;

import org.openqa.selenium.WebDriver;
import org.openqa.selenium.chrome.ChromeDriver;
import org.openqa.selenium.support.ui.WebDriverWait;
import org.testng.annotations.AfterMethod;
import org.testng.annotations.BeforeMethod;
import org.testng.annotations.BeforeSuite;
import org.testng.annotations.Test;

import com.ibm.pages.AdminPage;
import com.ibm.pages.SystemPage;
import com.ibm.pages.SystemWeightClassPage;
import com.ibm.utilities.PropertiesFileHandler;

public class TC005 {

    WebDriver driver;
    WebDriverWait wait;
    PropertiesFileHandler propFileHandler;
    HashMap<String, String> data;

    @BeforeSuite
    public void preSetForTest() throws IOException {
        String file = "./TestData/data.properties";
        propFileHandler = new PropertiesFileHandler();
        data = propFileHandler.getPropertiesAsMap(file);
    }

    @BeforeMethod
    public void Initialization() {
        System.setProperty("webdriver.chrome.driver",
"./drivers/chromedriver.exe");
        driver = new ChromeDriver();
        wait = new WebDriverWait(driver, 60);
        driver.manage().window().maximize();
        driver.manage().timeouts().implicitlyWait(30, TimeUnit.SECONDS);
    }
}

```

```

    /*@AfterMethod
    public void closeBrowser() {
        driver.quit();
    }*/

    @Test(testName = "NegativeValidationReturnStatuses")
    public void testCase5() throws IOException, InterruptedException {

        String url = data.get("url");
        String userName = data.get("uname");
        String password = data.get("pwd");

        driver.get(url);

        AdminPage admin = new AdminPage(driver, wait);
        admin.enterEmailAddress(userName);
        admin.enterPassword(password);
        admin.clickOnLogin();

        SystemPage sp=new SystemPage(driver,wait);
        sp.clickSystem();
        sp.clickWeightClass();

        SystemWeightClassPage swcp=new
SystemWeightClassPage(driver,wait);
        swcp.clickTable();
        swcp.clickActionButton();
        swcp.clickEdit();
        swcp.clearWeightUnit();
        swcp.clickSave();
        swcp.getPageSrcttoVerifypage();

    }
}

```

## 2.3 Explanation of the code

1. Created a AdminLoginPage, SystemPage and SystemWeightClassPage using Page object model where implemented Page factory concept as well.
2. AdminLoginPage implemented the methods like uname, pwd and login
3. SystemPage clicking on System and WeightClass and navigating to the table. Navigating to the rows and clicked on edit button under the action tab.
4. SystemWeightClassPage clearing the existing name using clear() method and clicking on save without filling mandatory field.
6. Assert the page title to verify whether it is remains on the same page.
7. Values are sending from data.properties file using hashmap concept key and value pair.
8. Creating object for all the pages and calling all the methods in TC004.java file where implementing @Test.

9. Converting the project into testng.xml to execute all the codes at one run.

10. Finally attaching the result in htmlreporter.

## 2.4 Output

The image displays two screenshots of the EasyOrdering Admin Panel, demonstrating the output of the automated test software.

**Top Screenshot: Login Page**

The browser address bar shows the URL: `https://atozgroceries.com/admin?action=login&&45c48cce2e2d7fbdea1afc51c7c6ad26`. The page title is "Admin Panel | Powered By A&S". The login form is centered and contains the following fields and buttons:

- Email:** `demo@atozgroceries.com` (with a note: "Your unique email address to app")
- Password:** `*****` (with a note: "Your unique password to app")
- Login:** (button)
- Forgot Password:** (link)

At the bottom, it says "EasyOrdering © 2018 All Rights Reserved. Powered by A&S Technologies".

**Bottom Screenshot: Weight Class List Page**



The browser address bar shows the URL: `https://atozgroceries.com/admin/weightclass/tab?token=8f14e45fcee167a5a36dedd4bea2543`. The page title is "Weight Class | Admin Panel - P...". The page features a sidebar menu with the following items:

- Dashboard
- Catalog
- Sales
- Customers
- Marketing
- System
  - Settings
  - Users
  - Shipping
    - Shipping Methods
    - Shipping Locations
    - Shipping Pincode

The main content area is titled "Weight Class" and displays a "Weight Class List" table. The table has the following columns: #, Weight Name, Unit, Status, and Action. The table contains three entries:

#	Weight Name	Unit	Status	Action
1	test1	Maduvankar	Enabled	Action
2	test1234	15	Enabled	Action
3	test1234	abcd	Enabled	Action

Below the table, there are pagination controls: "Previous", "1", and "Next".

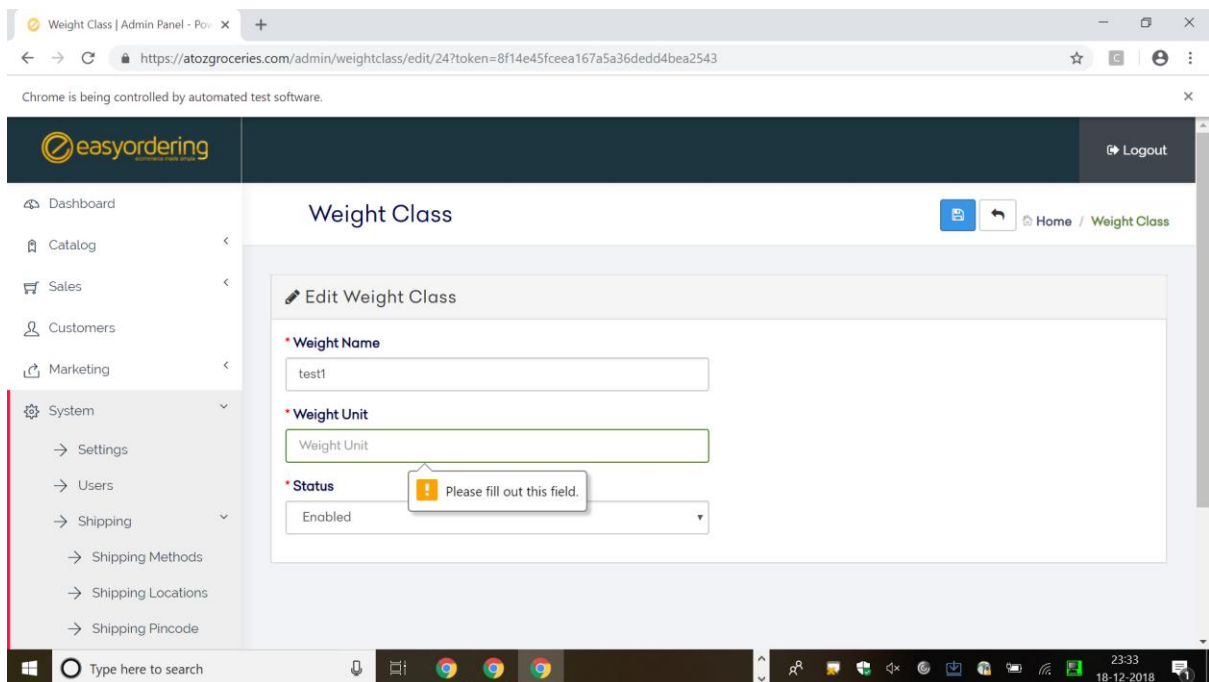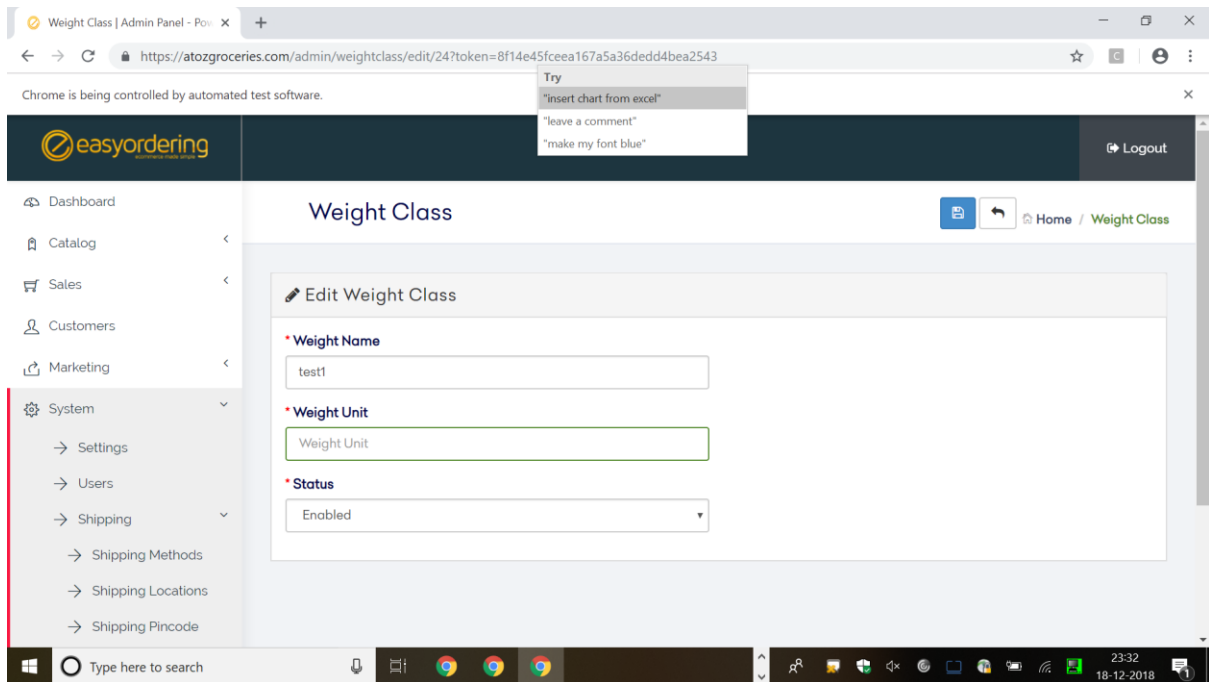

[RemoteTestNG] detected TestNG version 6.14.2

Starting ChromeDriver 2.44.609538 (b655c5a60b0b544917107a59d4153d4bf78e1b90) on port 37934

Only local connections are allowed.

Dec 18, 2018 11:31:52 PM org.openqa.selenium.remote.ProtocolHandshake createSession

INFO: Detected dialect: OSS

Verified it is on the same page :Edit Weight Class

PASSED: testCase5

Default test

Tests run: 1, Failures: 0, Skips: 0



```
=====
Default suite
Total tests run: 1, Failures: 0, Skips: 0
=====
```