

Exp-01


Ques

nums - 0-indexed

$$0 \leq \text{nums}[i] \leq 9$$

triangular sum:- (integer value)

1. $n == 1$ is end of process.
otherwise ~~set~~ create a new 0-indexed integer array newNums of length $n-1$.
2. For each index i , $0 \leq i < n-1$,
assign the value of $\text{newNums}[i] = (\text{nums}[i] + \text{nums}[i+1]) \% 10$
3. Replace nums with newNums.
4. Repeat entire process.

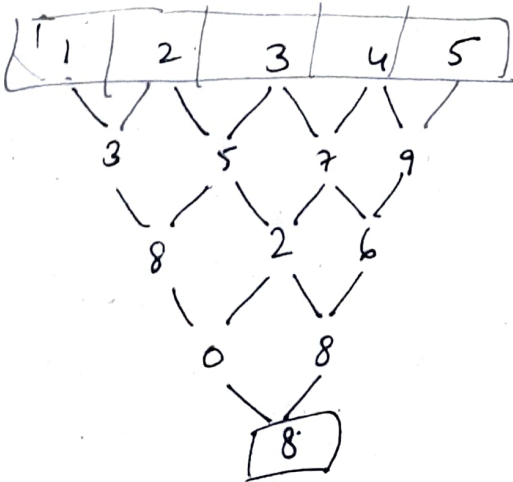

```

int triangularSum(vector<int> & nums) {
    int n = nums.size();
    while (n > 1) {
        for (int i = 0; i < n-1; i++) {
            nums[i] = (nums[i] + nums[i+1]) % 10;
        }
        n--;
    }
    return nums[0];
}

```

This can be optimized using combination -

Ques 26 Experiment 02