




TriFallNet: An AI System for Detecting Falls Early and Severity Assessment

Jiayu(Jerry) Liu¹, Dr. Nidhi Seethapathi²


¹Peddie School, Hightstown, NJ, ²The Seethapathi Lab, Massachusetts Institute of Technology

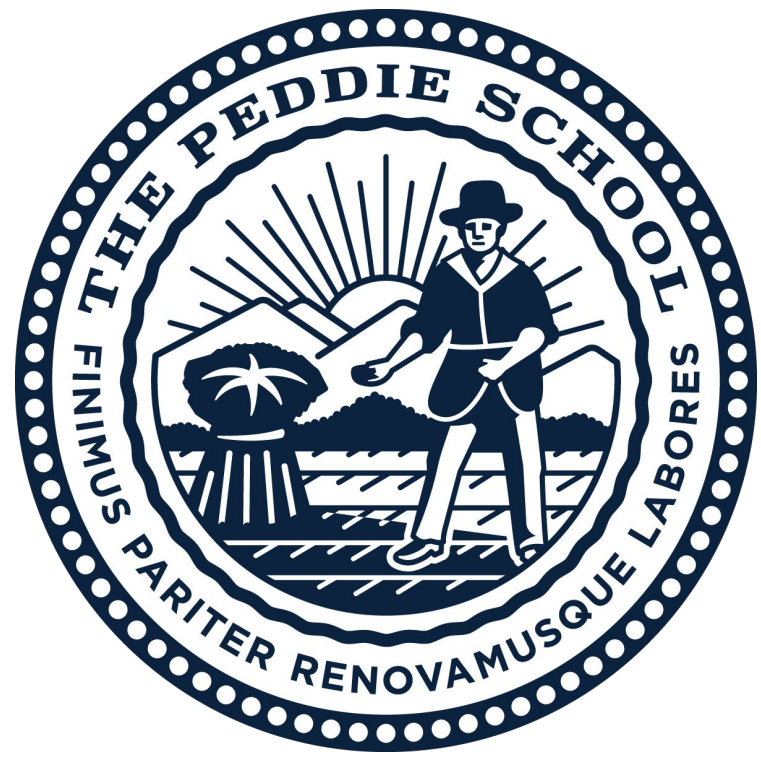

Abstract


- Motivation:** Falls are a major health risk for older adults, but current systems rarely detect them early enough to prevent injury.
- Approach:** **TriFallNet** uses 3D joint motion (MotionBERT) and kinematic features like center-of-mass velocity and torso inclination. A transformer architecture captures movement patterns to anticipate falls.
- Key Results:** The model achieved an **AUC of 0.850**, detecting **85% of falls before impact** with an average lead time of **0.60 seconds**. This outperformed a baseline SVM, which was accurate frame-by-frame but weak at predicting falls in advance.
- Future Work:** Generalize TriFallNet to alternative actions beyond falling to create a comprehensive framework to analyze **joint importance** in human mechanics.
- Impact:** TriFallNet has applications in **elder care and clinical monitoring** for real-time fall prevention. Also, joint importance info assist future advancement in studies involving investigation of human actions.

Introduction

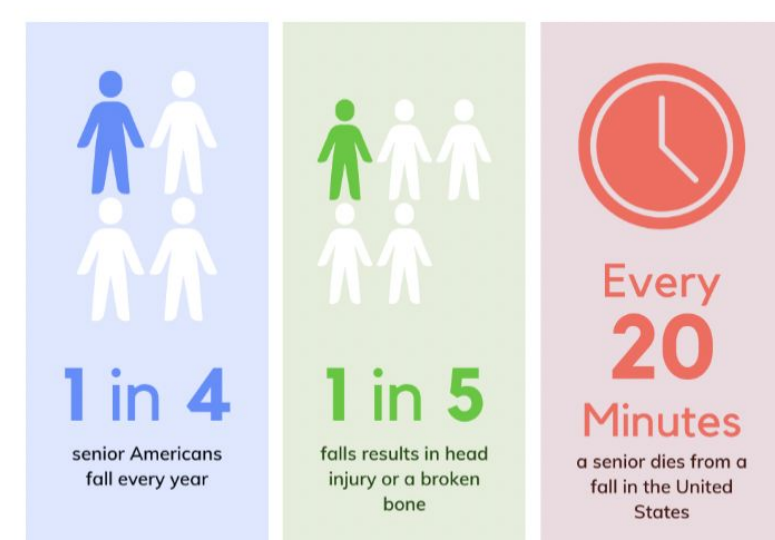

1. Early Fall Detection
2. Joint Analysis
3. Cause Classification
4. Injury Severity Assessment

Figure 1: Fall Statistics (Royal Oaks Home Care, 2021)

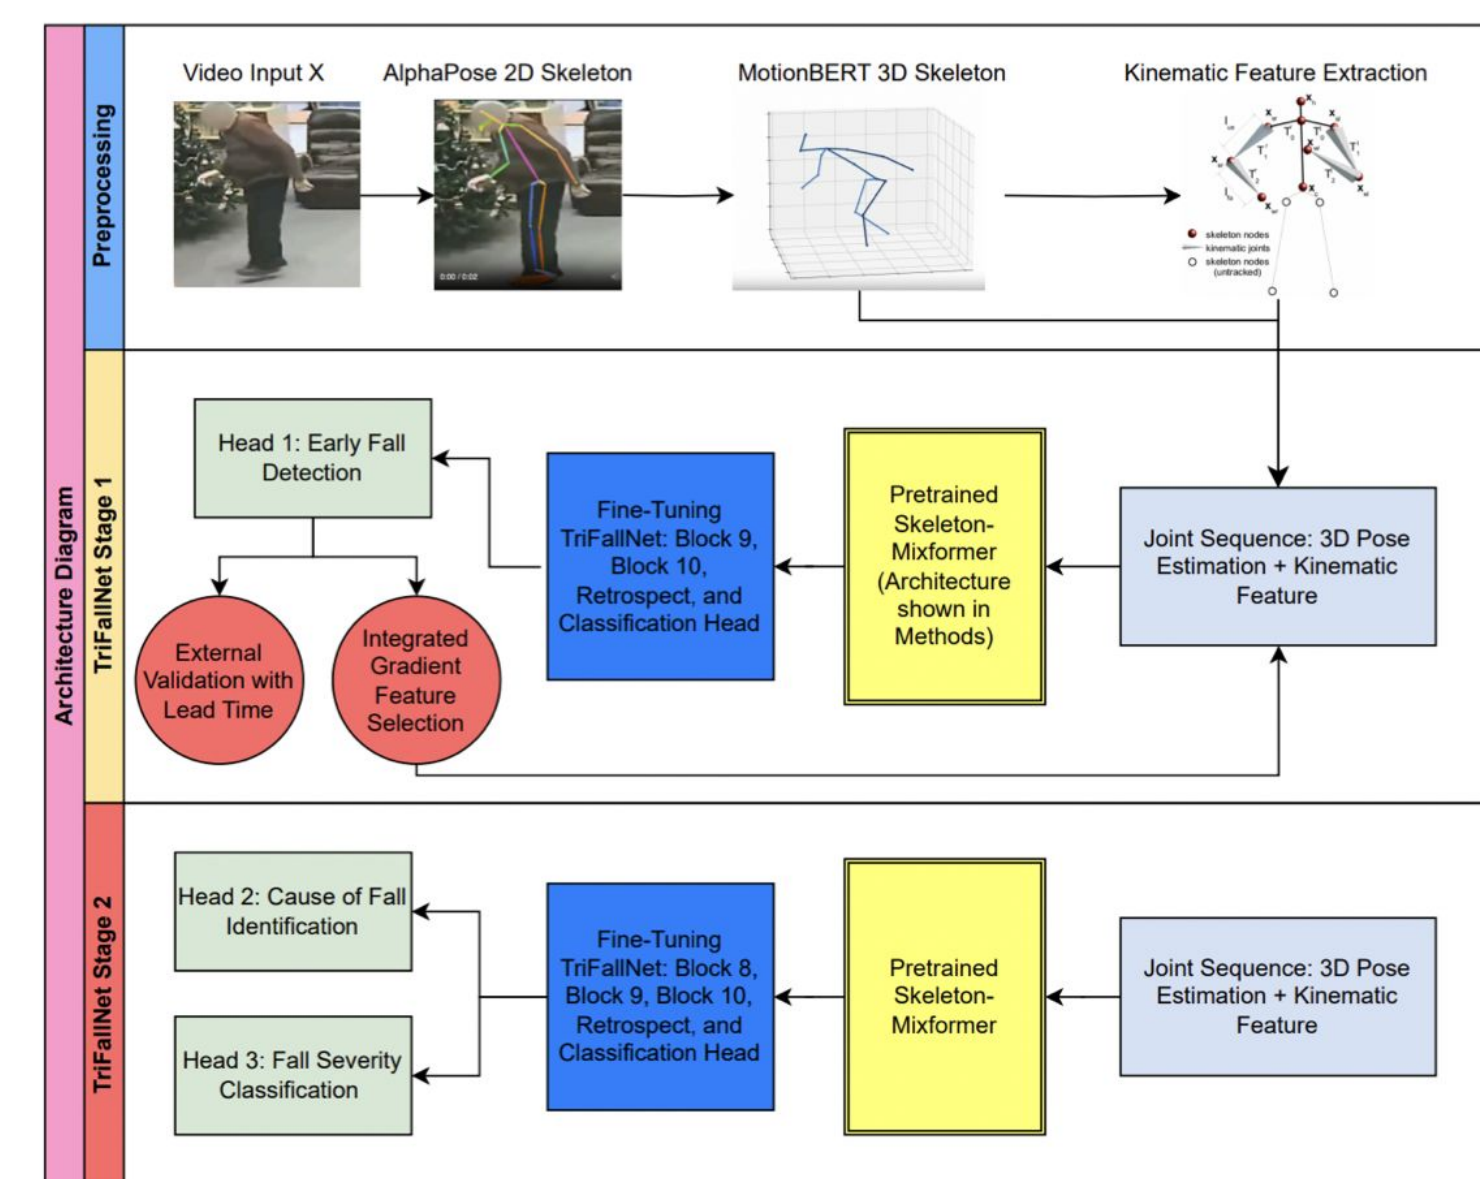

Methodologies

Preprocessing: 3D Pose Estimation

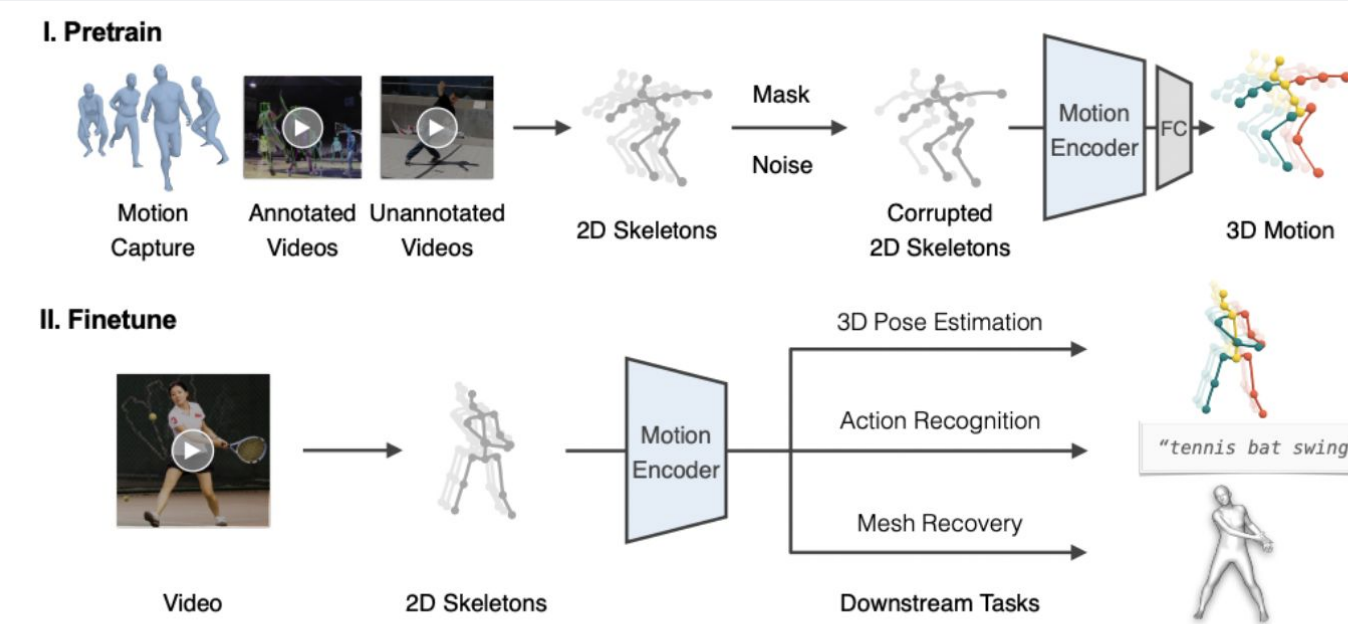


Figure 3: Framework of MotionBERT [9]

Baseline Model: SVM

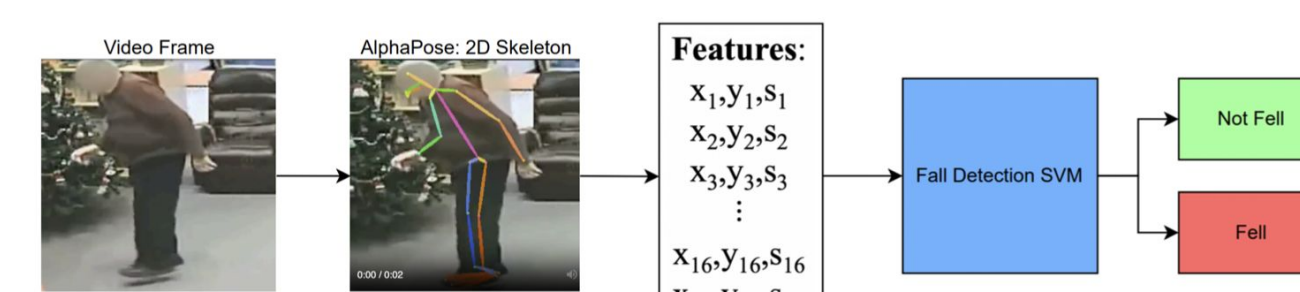


Figure 4: Workflow of the baseline support vector machine (SVM) fall detector. Each video frame is processed by AlphaPose to generate 2D joint coordinates and confidence scores, which form a 51-dimensional feature vector. Recursive feature elimination (RFE) is implemented to identifies the most informative joints for retraining.

TriFallNet: Skeleton-Mixformer

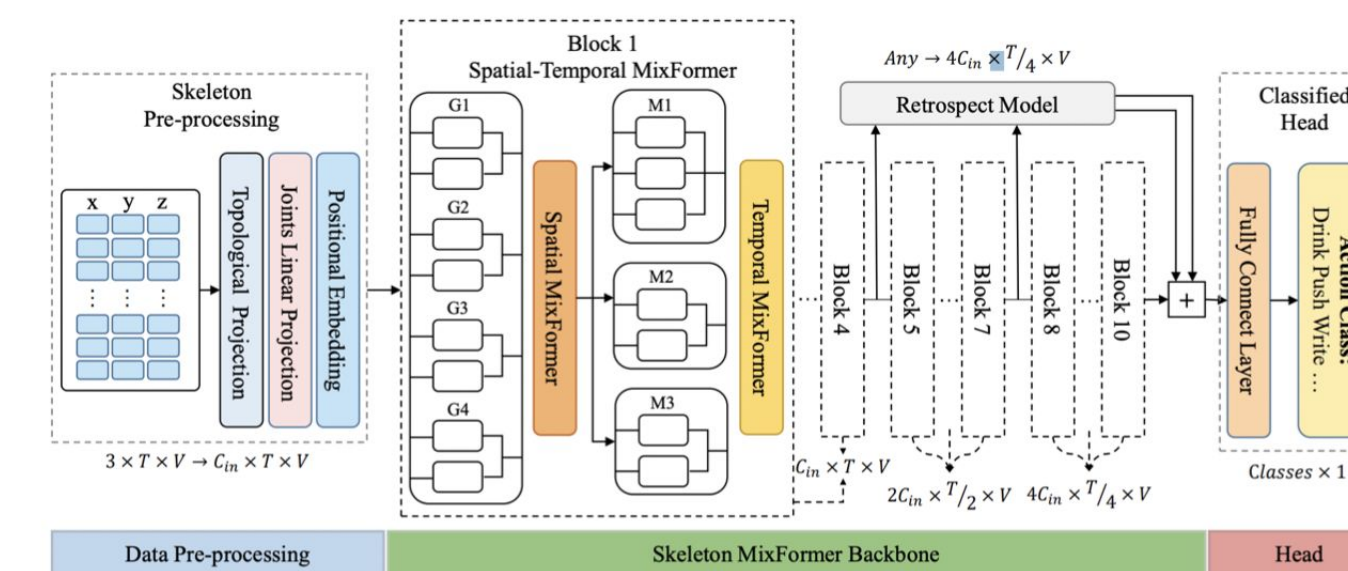


Figure 5: Overall Framework for Skeleton-MixFormer

Baseline Results

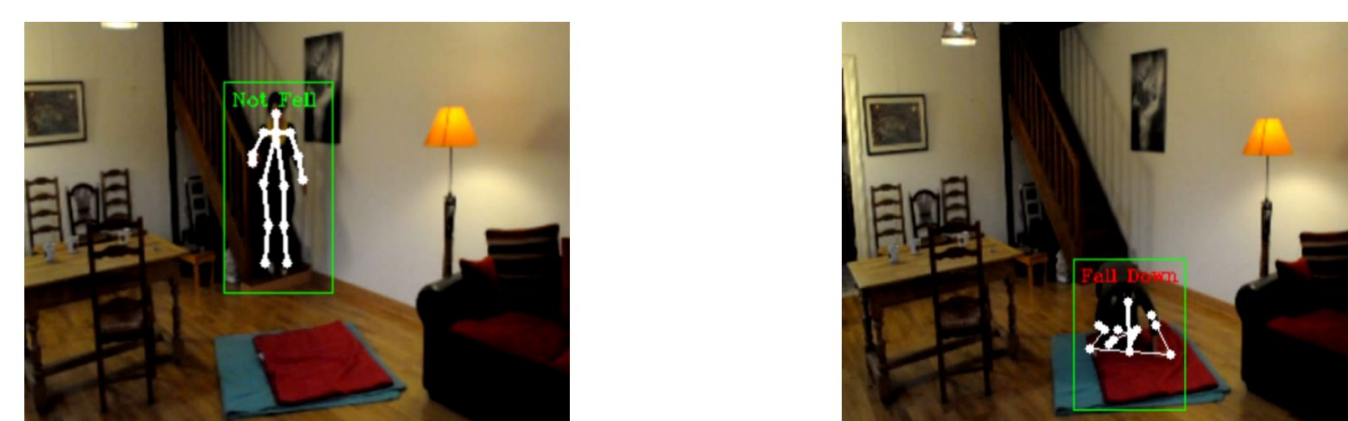


Figure 6: Example visualizations of the baseline SVM outputs on a Le2i video. Left: a non-fall frame correctly classified as "not fell". Right: a fall frame correctly classified as "fell".

SVM Models	Accuracy	Precision	Recall	F1-Score
Kernel: Linear	0.81	0.82	0.78	0.80
Kernel: Poly	0.88	0.98	0.77	0.87
Kernel: RBF	0.95	0.96	0.94	0.95
RBF-RFS	0.95	0.95	0.95	0.95

Table 2: The metrics evaluating the different version of the SVM trained on Le2i. The accuracy metric refers to the 5-fold cross validation accuracy. The not fell label corresponds to positive and fell corresponds to negative.

TriFallNet Result

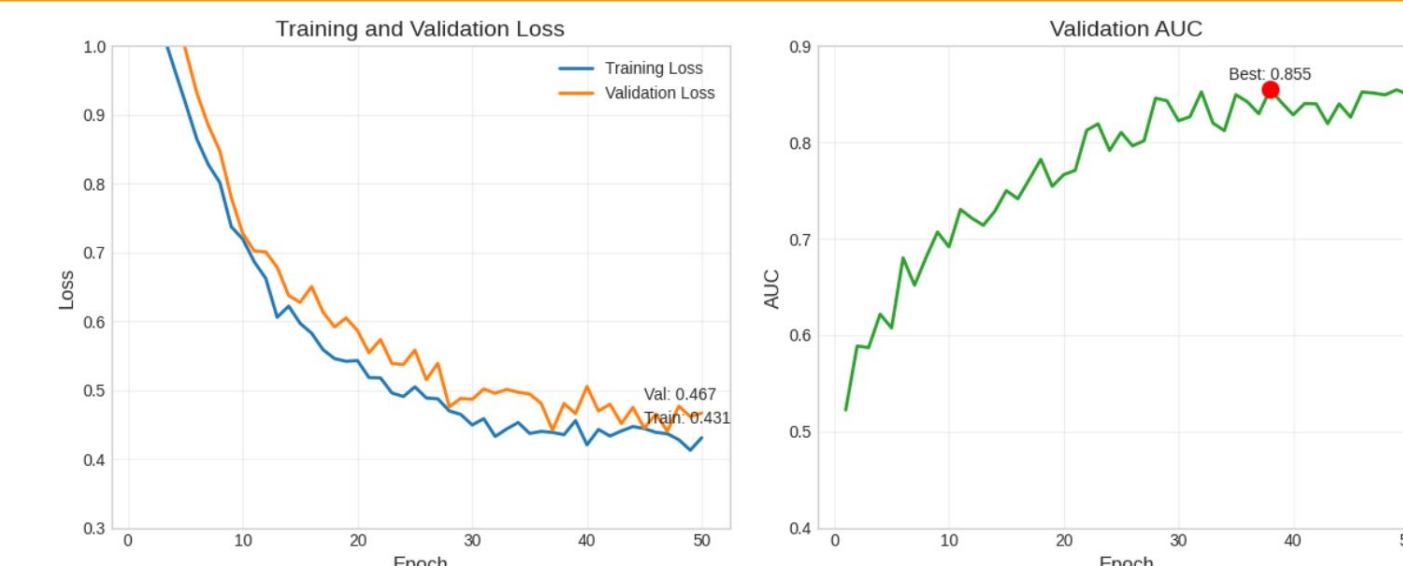


Figure 7: Training and validation loss and AUC curves for TriFallNet Stage 1 over 50 epochs. The best validation AUC attained is 0.855 during epoch 39 and the final validation loss is 0.467. Both curves converge smoothly and have a relatively small gap, indicating effective learning with minimal overfitting.

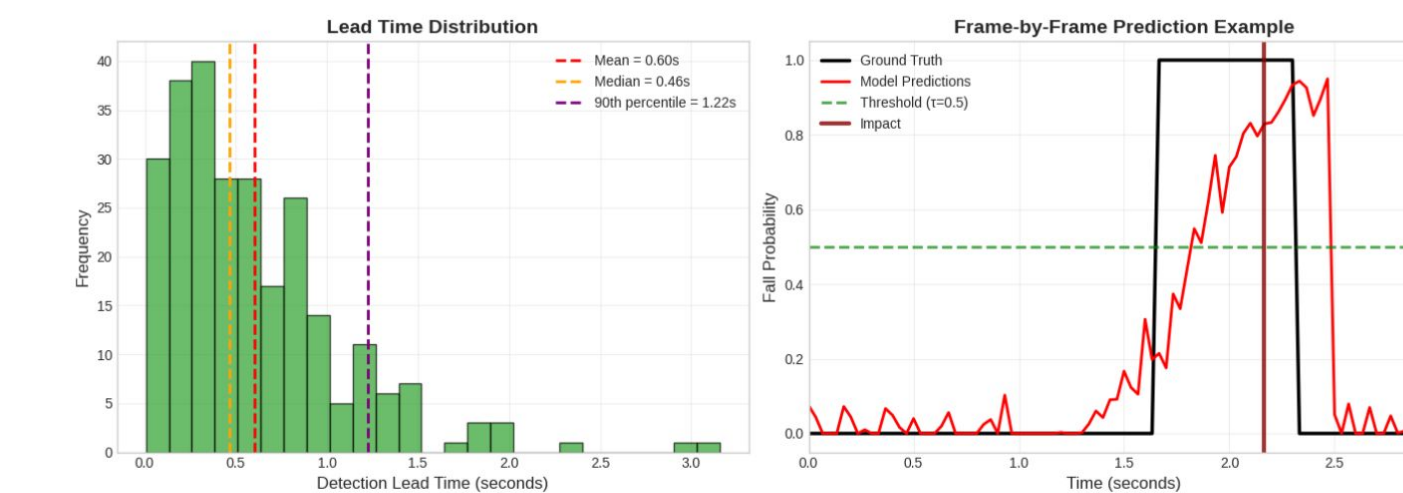


Figure 10: Temporal analysis of fall detection for successful events at $\tau = 0.5$. The left figure is a histogram of detection lead times across all clips in which the model signaled a fall before impact. The median lead time is 0.53 seconds and the 90th percentile is 1.18 seconds, demonstrating anticipatory detection. The right figure is an example of a per-frame fall-probability curve for one representative clip. The model's output hovers near 0.1 before impact, then rises sharply and crosses $\tau = 0.5$ around 0.4 seconds prior to ground contact, illustrating early prediction of the impending fall.

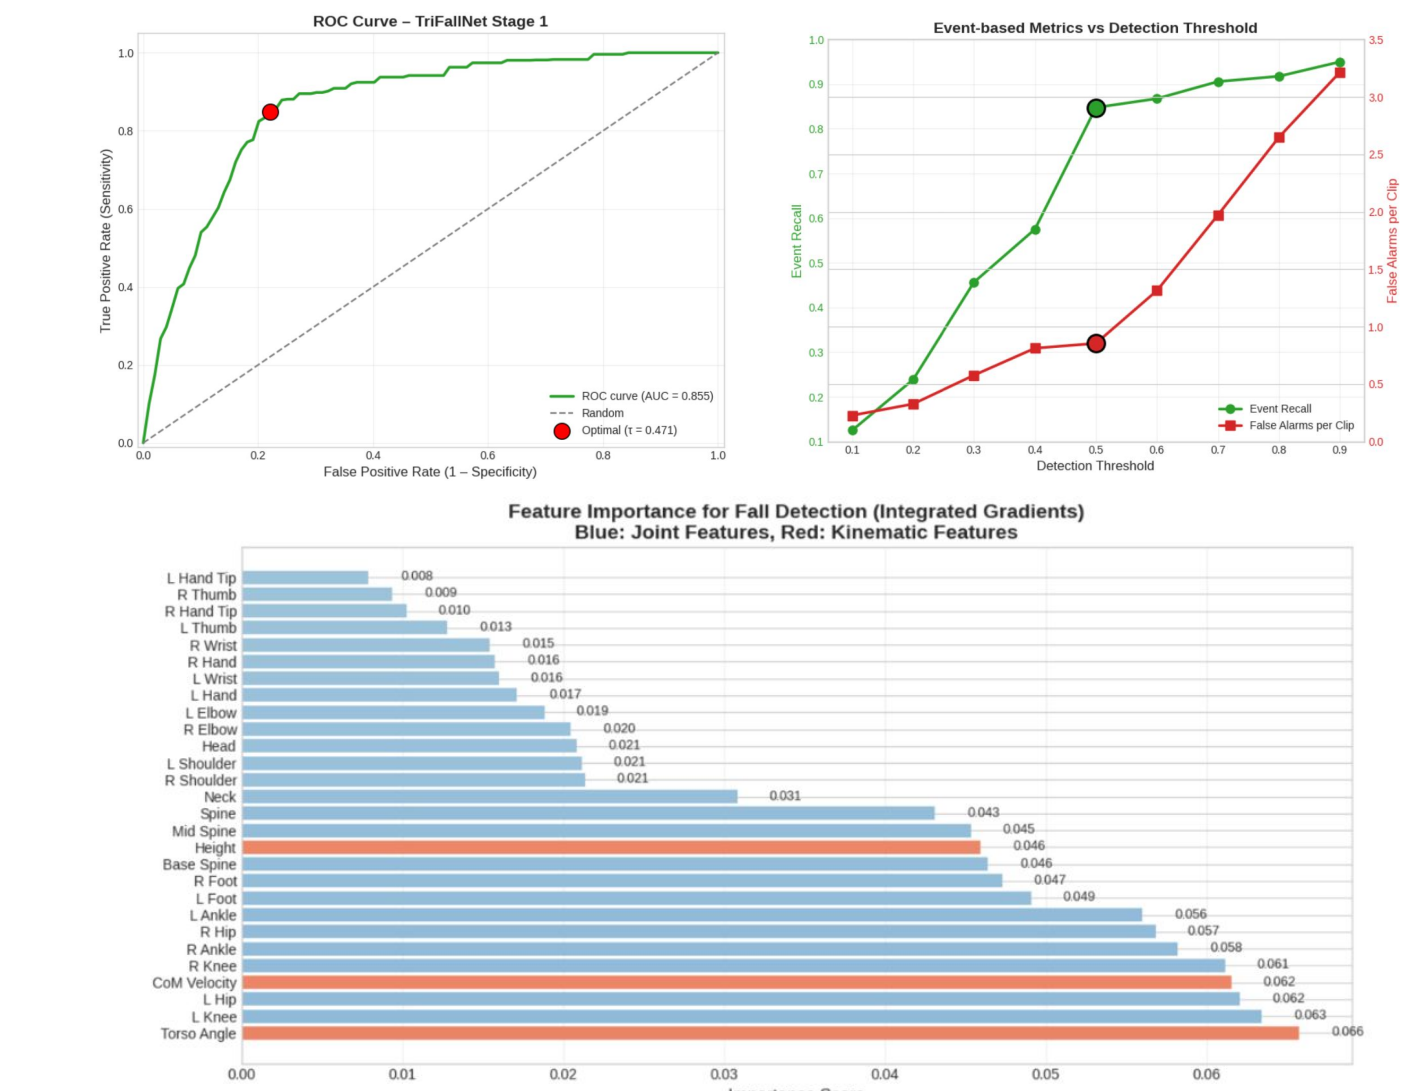


Figure 11: Integrated Gradients attribution for TriFallNet Stage 1. Reveals that lower body joints contributes more to fall detection compared to upper body joints. Also, kinematic features like CoM velocity and torso inclination angle serve as essential feature in TriFallNet.

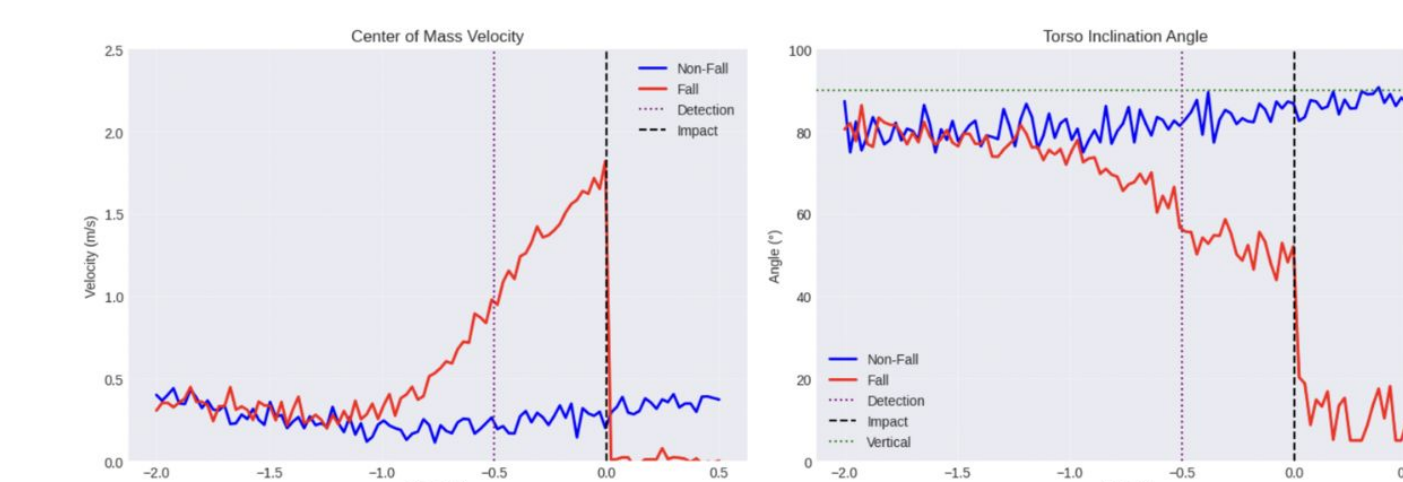


Figure 12: Visualization of two key kinematic features for fall detection: Center of Mass velocity and torso inclination angle. Fall instances show a steep rise in CoM velocity prior to ground impact followed by an abrupt drop post-impact. In contrast, non-fall instances maintain a relatively stable CoM velocity throughout. Likewise, the torso angle during a fall decreases significantly before impact and remains near zero afterward, while remaining near upright in non-fall events.

Discussion

- Performance:** TriFallNet outperformed the baseline SVM. It achieved an AUC of 0.855, recalled 85% of falls, and predicted events **0.6s before impact**, compared to the SVM's 65% recall and no lead time.
- Advances:** By combining **3D joint motion** with **kinematic features** (center-of-mass velocity, torso inclination), TriFallNet captured critical fall dynamics. Lower body joints and torso angle proved especially important for early detection.
- Limitations:** Precision remained moderate, showing a need to reduce false alarms. Current datasets are small, often simulated, and lack age diversity, which limits generalizability.
- Practicality:** The system runs at ~20 FPS (~50 ms latency), supporting real-time deployment. Balancing false alarms against missed falls remains key before clinical use.

Conclusion

- Future Work:** Complete TriFallNet Stage 2 and unify both stages for real world application
- Improved Prediction:** Fusion of 3D pose and kinematic features delivers accurate fall prediction and early warning
 - Mean lead time > 0.5 second enable rapid alerts and protective measures
- Fall Mechanics:** New insights into which joints are important in fall to guide prevention strategies

Acknowledgements

Thanks to Professor Nidhi Seethapathi, my mentor, for her sincere and continuous guidance for my project. Thanks to Jeonghwan Lee, the post-doc in the lab assisting me with my project, and also every other member of the Seethapathi lab for their support. Thanks to my tutor, Jeffrey Brown, for providing advice and ensuring my progress on my project. Thanks to my last week TA Todd Zhou and Amy Szczepanski for providing final feedback on my paper. Finally, thanks to the PrincetonNow Education Service, the Center of Excellence in Education, and MIT for sponsoring me this summer.