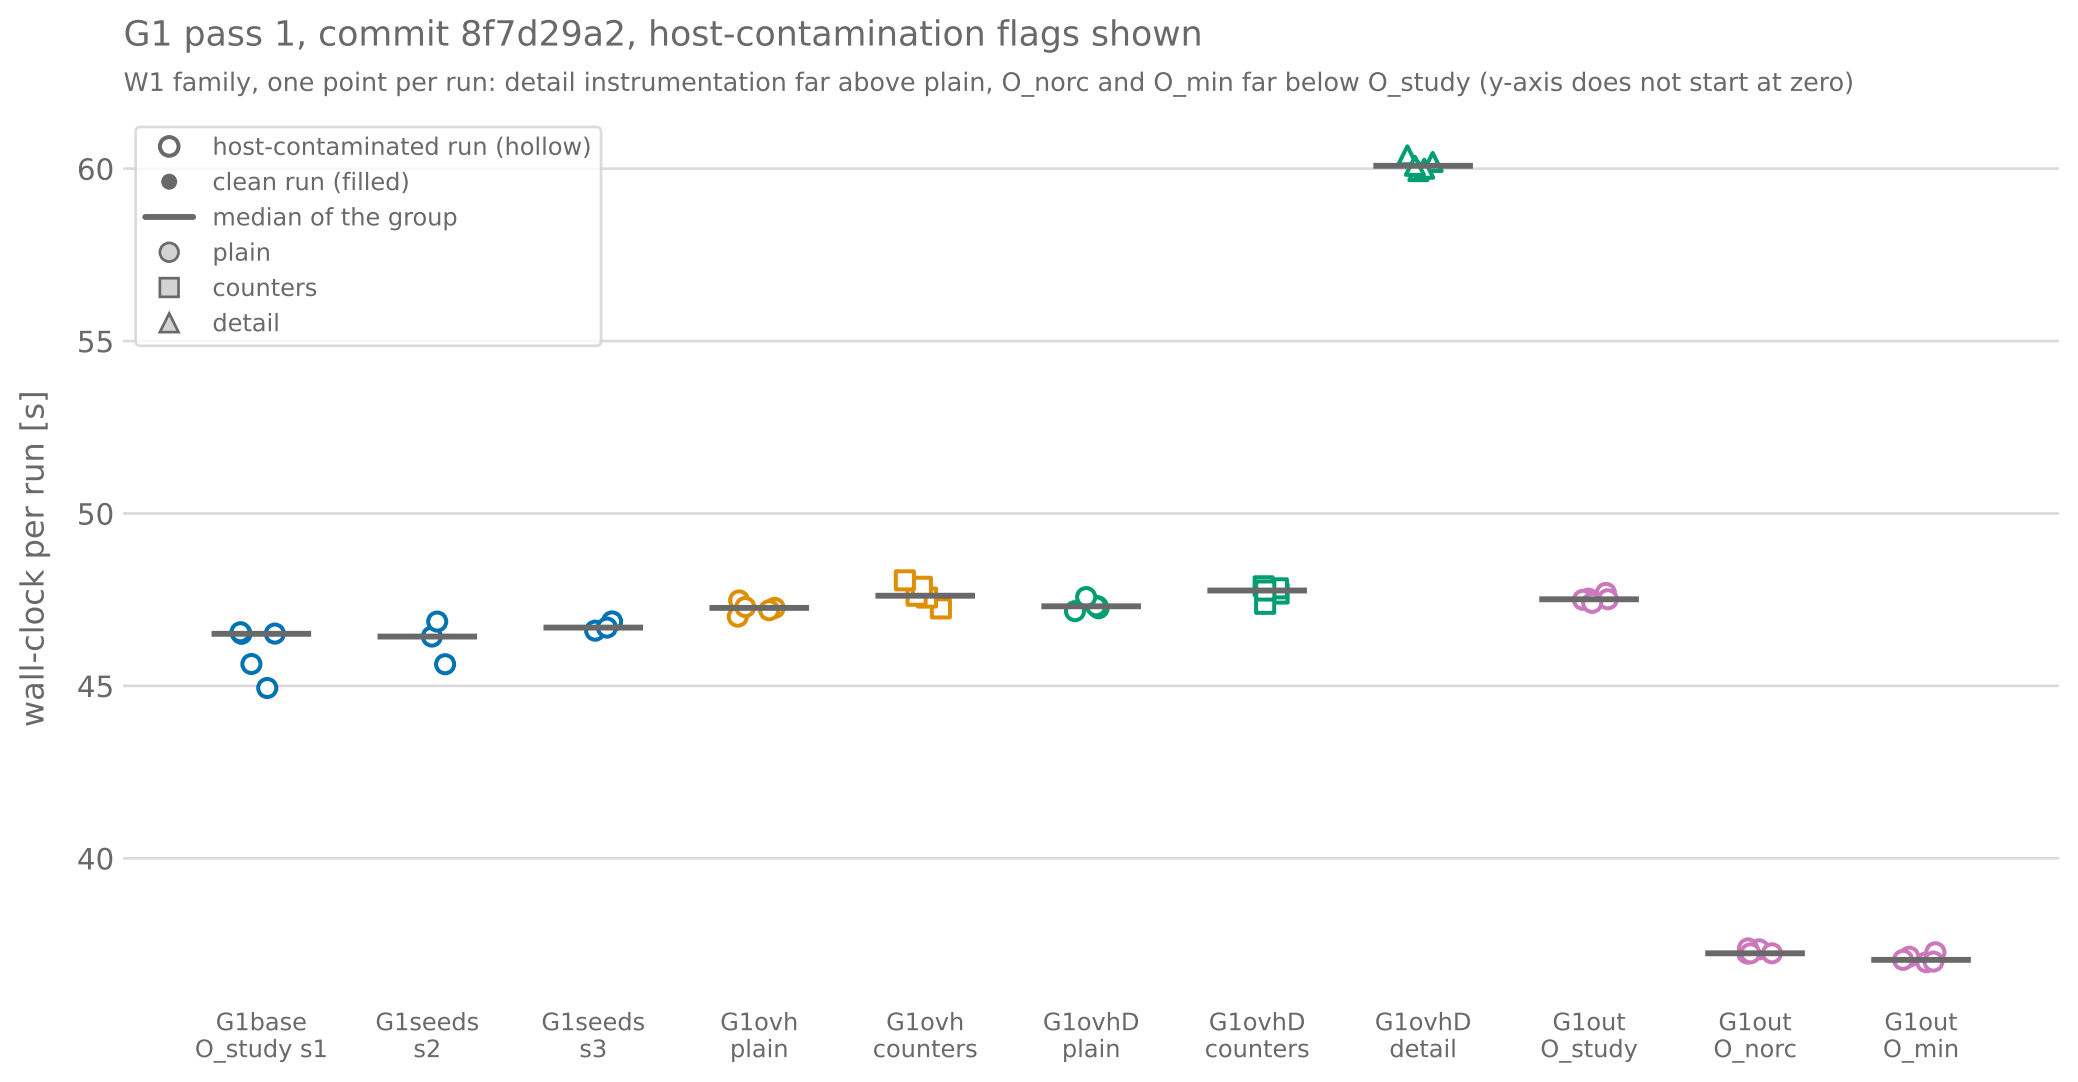
G1 pass 1, commit 8f7d29a2, host-contamination flags shown
W1 family, one point per run: detail instrumentation far above plain, O_norc and O_min far below O_study (y-axis does not start at zero)
host-contaminated run (hollow)
clean run (filled)
median of the group
plain
counters
detail
wall-clock per run [s]
60
55
50
45
40
G1base O_study s1
G1seeds s2
G1seeds s3
G1ovh plain
G1ovh counters
G1ovhD plain
G1ovhD counters
G1ovhD detail
G1out O_study
G1out O_norc
G1out O_min