


Configuração Ambiente

Criar um workspace com os ambientes:


- cloud
- dev - Desenvolvimento
- hmg - Homologação
- ppd - Pré Produção
- prd - Produção

Pastas de como devem ficar:

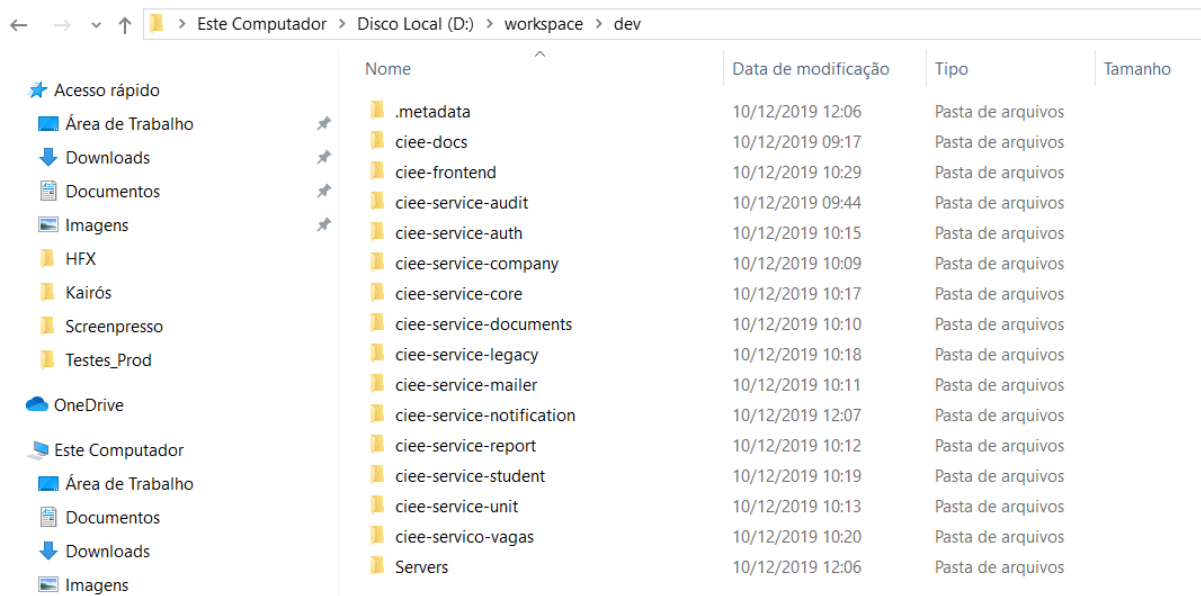

Nome	Data de modificação	Tipo	Tamanho
.metadata	10/12/2019 12:06	Pasta de arquivos	
ciee-docs	10/12/2019 09:17	Pasta de arquivos	
ciee-frontend	10/12/2019 10:29	Pasta de arquivos	
ciee-service-audit	10/12/2019 09:44	Pasta de arquivos	
ciee-service-auth	10/12/2019 10:15	Pasta de arquivos	
ciee-service-company	10/12/2019 10:09	Pasta de arquivos	
ciee-service-core	10/12/2019 10:17	Pasta de arquivos	
ciee-service-documents	10/12/2019 10:10	Pasta de arquivos	
ciee-service-legacy	10/12/2019 10:18	Pasta de arquivos	
ciee-service-mailer	10/12/2019 10:11	Pasta de arquivos	
ciee-service-notification	10/12/2019 12:07	Pasta de arquivos	
ciee-service-report	10/12/2019 10:12	Pasta de arquivos	
ciee-service-student	10/12/2019 10:19	Pasta de arquivos	
ciee-service-unit	10/12/2019 10:13	Pasta de arquivos	
ciee-servico-vagas	10/12/2019 10:20	Pasta de arquivos	
Servers	10/12/2019 12:06	Pasta de arquivos	

Onde pegar essas pastas:

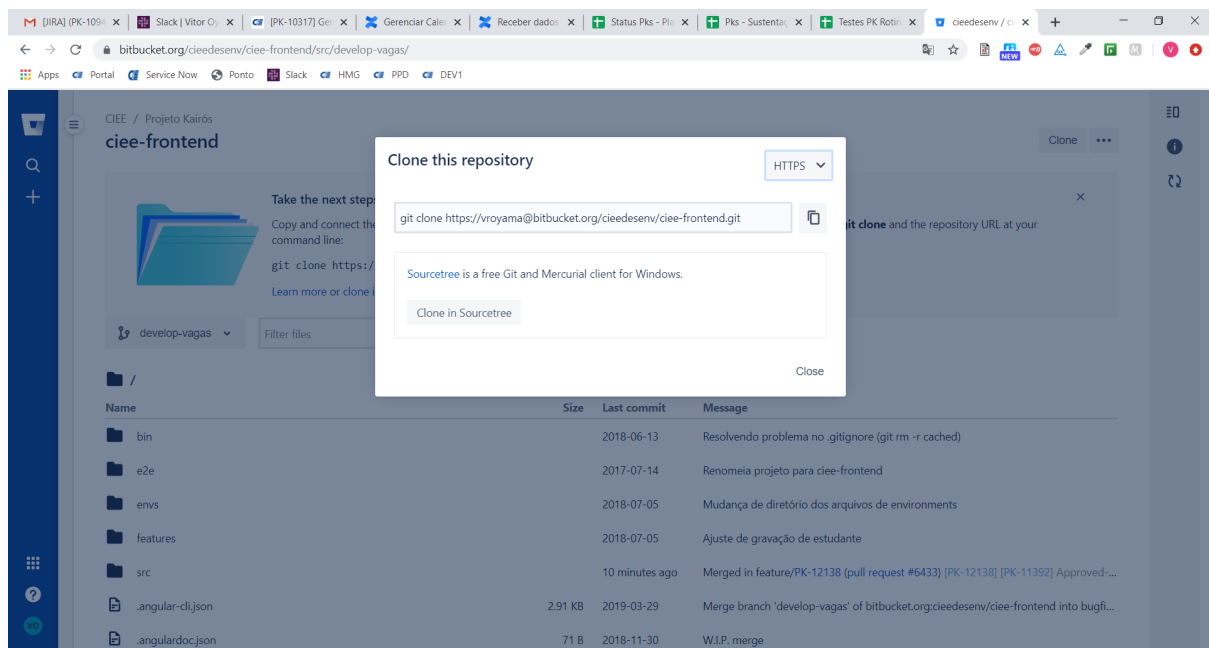

Como colocar no Git Bash para salvar na pasta:

```
122371SP@NOTE-METODO502 MINGW64 /d/workspace/hmg
$ git clone https://vroyama@bitbucket.org/cieedesenv/ciee-service-notification.git
Cloning into 'ciee-service-notification'...
```

Comandos do git:

https://github.github.com/training-kit/downloads/pt_BR/github-git-cheat-sheet.pdf

git status - listar todos os arquivos novos ou modificados para serem commitados;

git checkout [branch] - alterar a branch

git branch - lista as branch (muitas vezes não mostram todas)


git fetch - atualizar a árvore de origem da branch

git fetch -ap - atualizar as branch, deletando e sobrescrevendo o que foi atualizado.

git pull - puxar as atualizações

git diff - verificar alterações

O que ocorre por baixo dos panos:

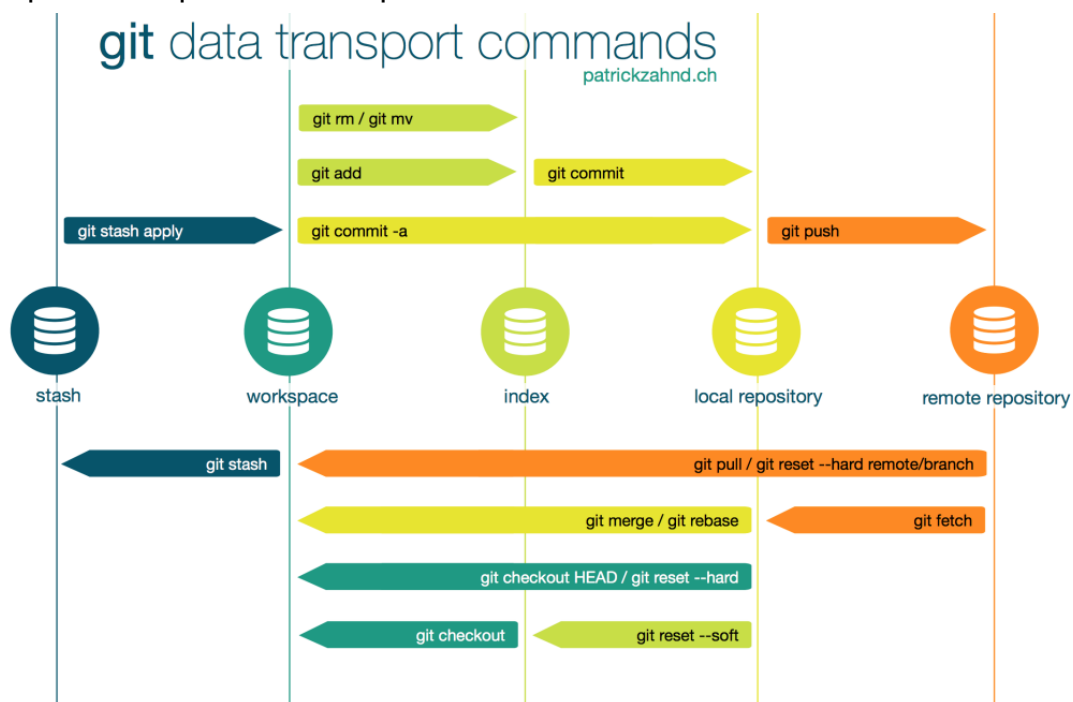

Exemplos:

1. git status

```

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/hmg/ciee-frontend (homolog)
$ git status
Refresh index: 100% (5432/5432), done.
On branch homolog
Your branch is up to date with 'origin/homolog'.

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        modified:   package-lock.json
        modified:   src/app/vagas/buscar-candidatos/paginas/listar-candidatos/listar-candidatos.component.ts
        modified:   src/environments/environment.ts

no changes added to commit (use "git add" and/or "git commit -a")

```

2. git fetch, git checkout, git pull

```

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/cloud/ciee-configuration-files (ellias)
$ git fetch
remote: Counting objects: 976, done.
remote: Compressing objects: 100% (309/309), done.
Receiving object: Total 976 (delta 722), reused 910 (delta 667)
Receiving objects: 100% (976/976), 166.50 KiB | 460.00 KiB/s, done.
Resolving deltas: 100% (722/722), completed with 41 local objects.
From https://bitbucket.org/cieedesenv/ciee-configuration-files
+ 09b5cee...3a157b7 ellias -> origin/ellias (forced update)
* [new branch] config-ellias -> origin/config-ellias
* 1f3235e..d8082f7 develop -> origin/develop
* 39556dc..aedd628 develop-02 -> origin/develop-02
* [new branch] feature/atualizacao-service-now -> origin/feature/atualizacao-service-now
* b7dc3d7..35968e6 feature/gabriel.silva -> origin/feature/gabriel.silva
* [new branch] feature/gabriel.silva-local -> origin/feature/gabriel.silva-local
* [new branch] feature/rest-template -> origin/feature/rest-template
* [new branch] hotfix/volta-banco -> origin/hotfix/volta-banco
* [new branch] local_atualizado -> origin/local_atualizado
* 6fef179..de6fa14 master -> origin/master
* [new branch] naelson -> origin/naelson
* [new branch] revert-pr-350 -> origin/revert-pr-350
* [new branch] revert-pr-350-1 -> origin/revert-pr-350-1
* [new branch] revert-pr-352 -> origin/revert-pr-352
* [new branch] victor -> origin/victor

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/cloud/ciee-configuration-files (ellias)
$ git checkout victor
Switched to a new branch 'victor'
Branch 'victor' set up to track remote branch 'victor' from 'origin'.

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/cloud/ciee-configuration-files (victor)
$ git pull
Already up to date.

```

```

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev
$ ls
ciee-docs/      ciee-service-audit/  ciee-service-company/  ciee-service-documents/  cie
ciee-frontend/  ciee-service-auth/   ciee-service-core/     ciee-service-legacy/     cie

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev
$ cd cieee-docs

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-docs (develop)
$ cd ..

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev
$ cd cieee-service-audit

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-audit (homolog)
$ git checkout develop
Switched to branch 'develop'
Your branch is behind 'origin/develop' by 4 commits, and can be fast-forwarded.
  (use "git pull" to update your local branch)

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-audit (develop)
$ git pull
Updating e233620..8c5ebf5
Fast-forward
 Jenkinsfile      | 4 ++++
 Jenkinsfileteste | 19 ++++++
 2 files changed, 23 insertions(+)
 create mode 100644 Jenkinsfileteste

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-audit (develop)
$ |

```

Branches:

- **dev** - develop
- **dev front** - develop-vagas
- **hmg** - homolog
- **ppd** - release
- **prod** - master

Depois de configurar os serviços e as branches, subir os container redis, zookeeper, kafka e rabbit.

```
PS C:\Users\122371sp> docker ps -a
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	NAMES
b04357f00ad3	rabbit:Dockerfile	"docker-entrypoint.s..."	4 months ago	Exited (255) 4 months ago	rabbit
69/tcp, 5671/tcp, 0.0.0.0:5672->5672/tcp, 15671/tcp, 25672/tcp, 0.0.0.0:15672->15672/tcp	wurstmeister/kafka	"start-kafka.sh"	4 months ago	Exited (1) 4 months ago	kafka
578d6951dbf9	wurstmeister/zookeeper	"/bin/sh -c '/usr/sb..."	4 months ago	Exited (255) 4 months ago	zookeeper
af74319e2a64	redis	"docker-entrypoint.s..."	4 months ago	Exited (255) 4 months ago	redis


```
PS C:\Users\122371sp> docker start redis zookeeper kafka rabbit
```

redis
zookeeper
kafka
rabbit




```
PS C:\Users\122371sp>
```

obs: sempre que reiniciar o note ou o docker, subir dessa forma os 4 container




Incluir o lombok na pasta do STS

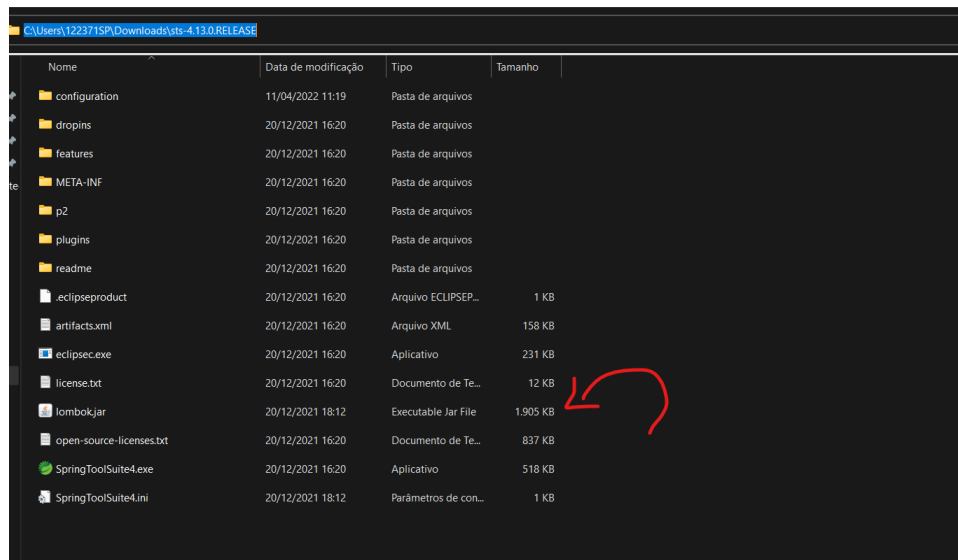


Configurar o STS

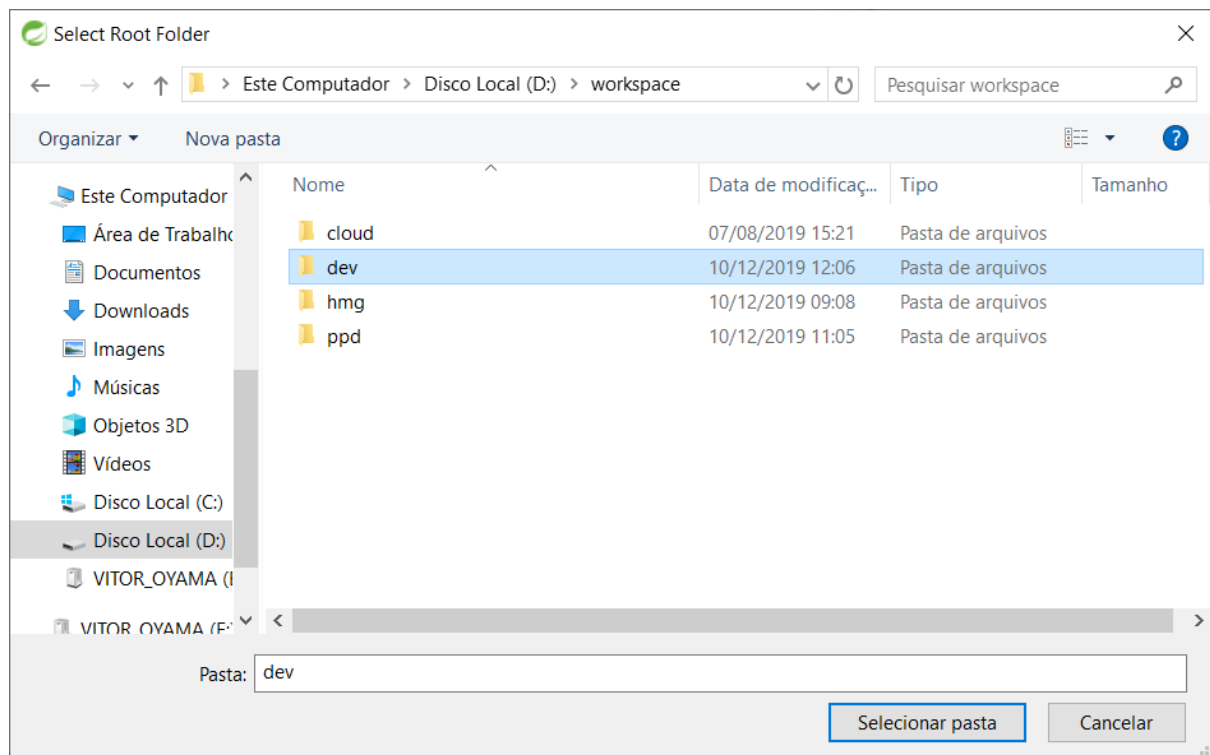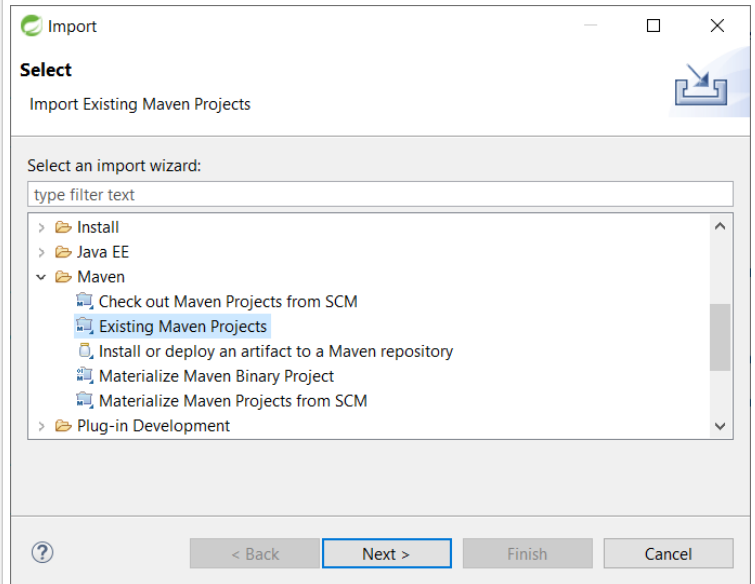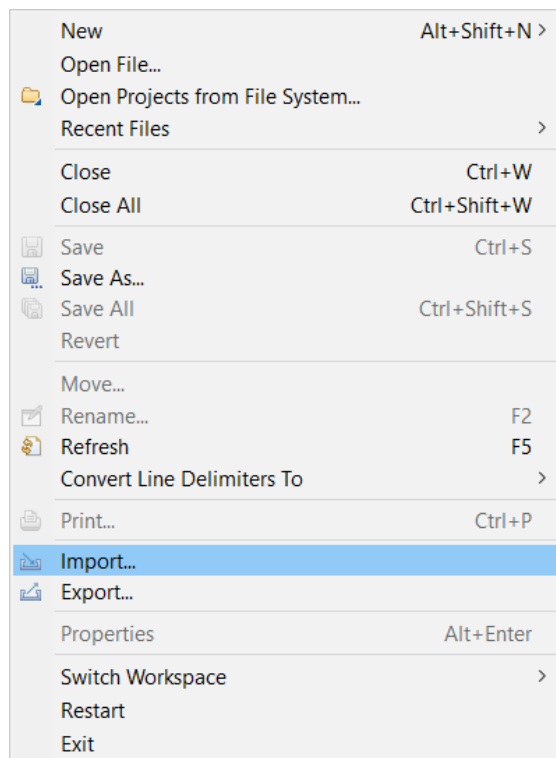



Também deve subir o cloud:

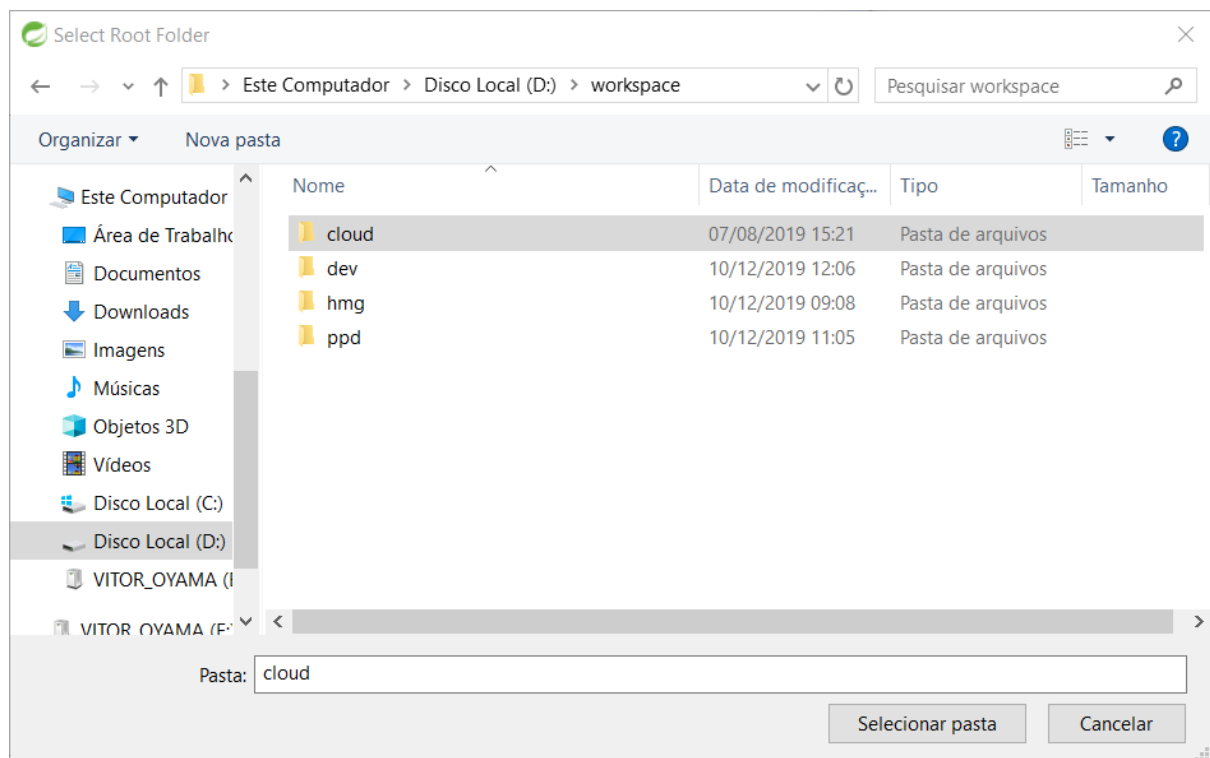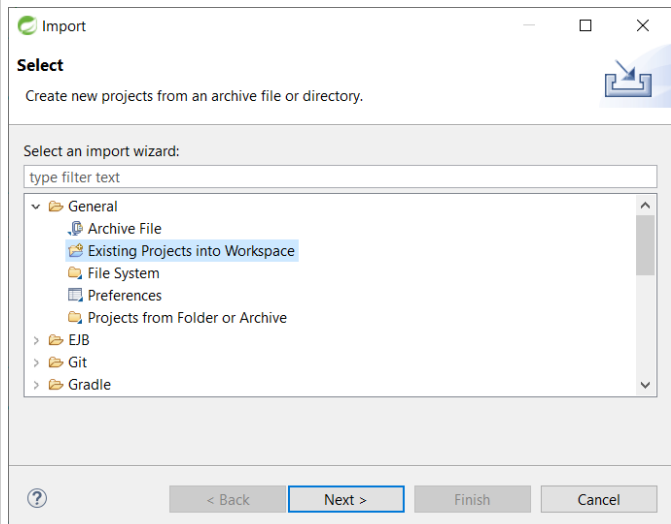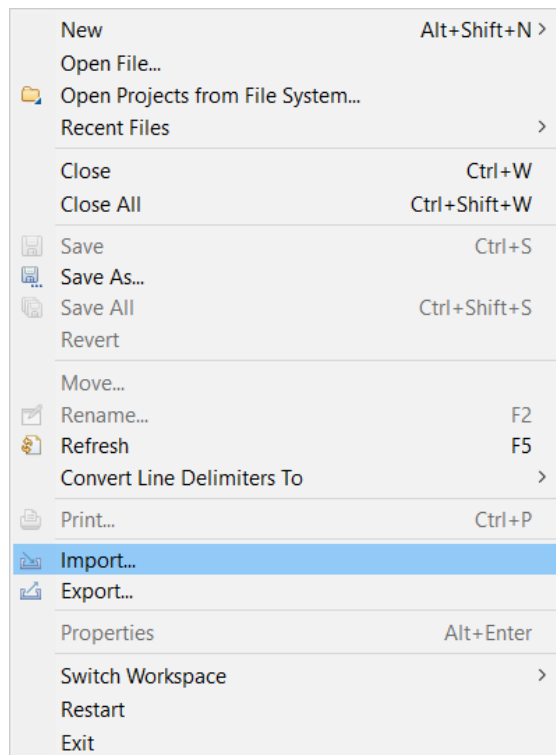


Atualizar o Maven (demora um tempo):

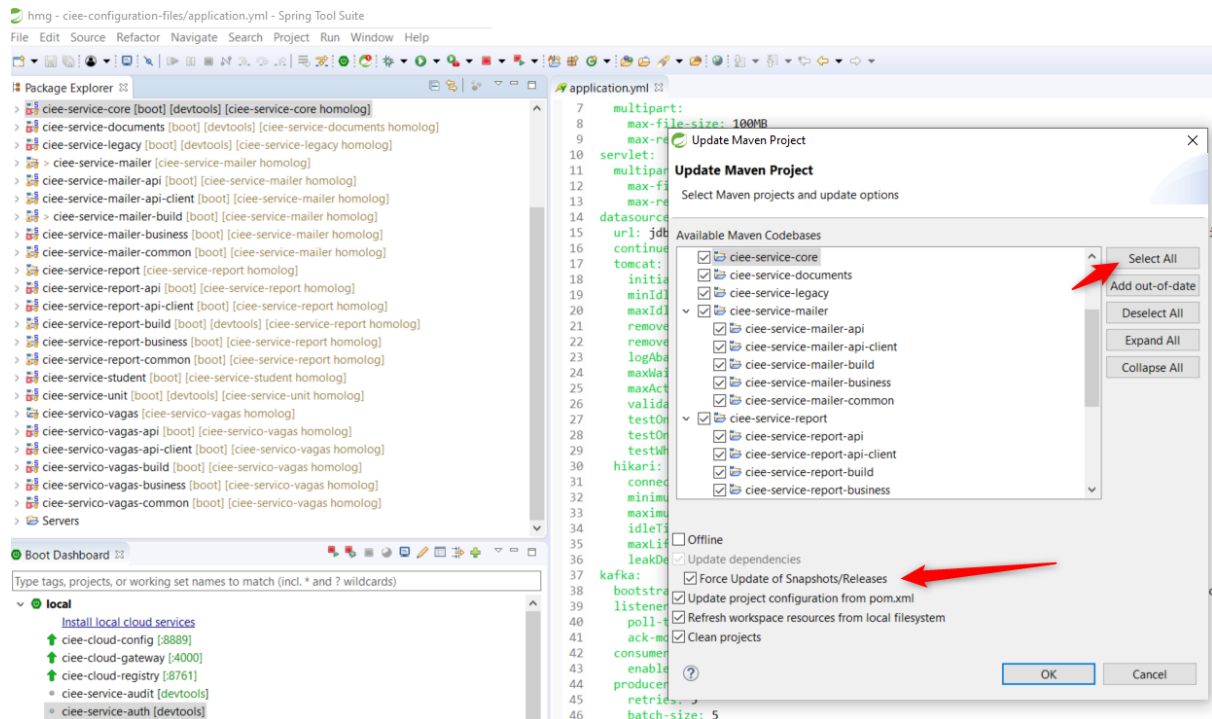


cloud-config:

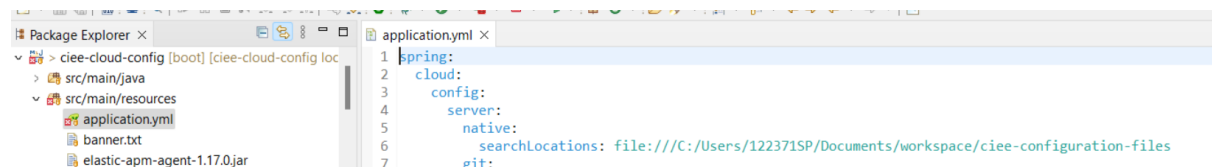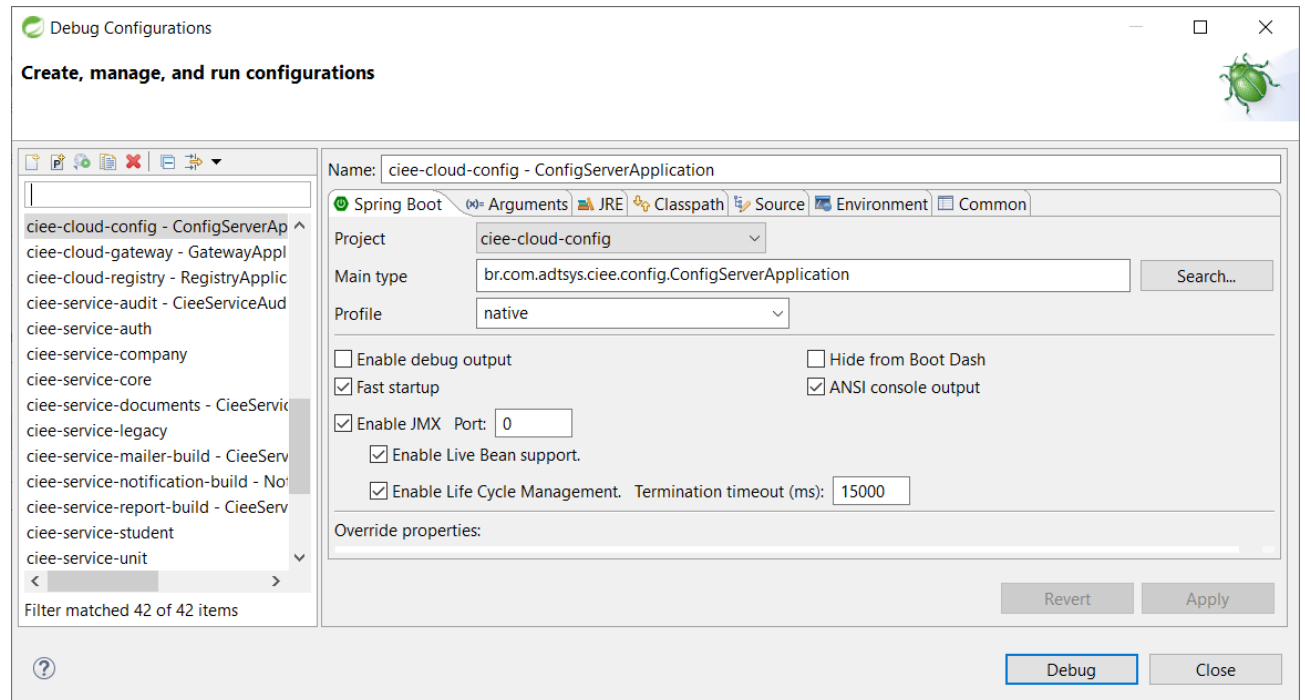

gateway e registry:

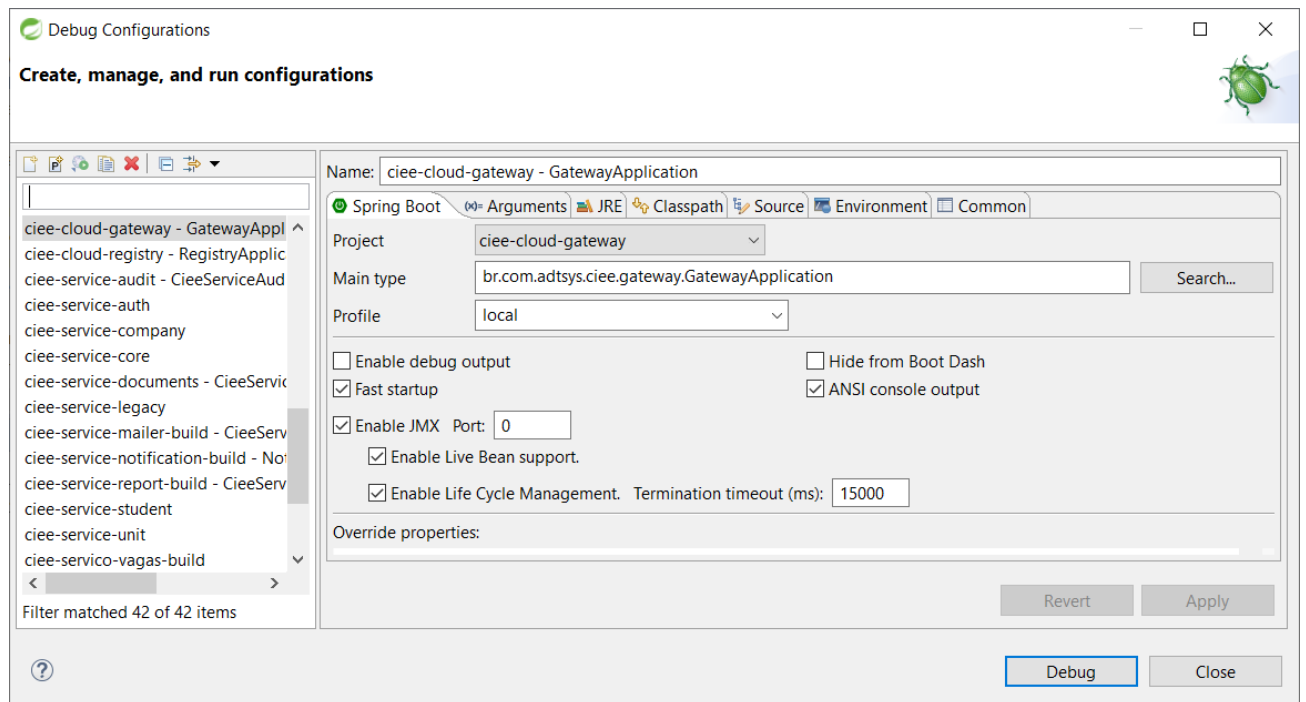


outros serviços:

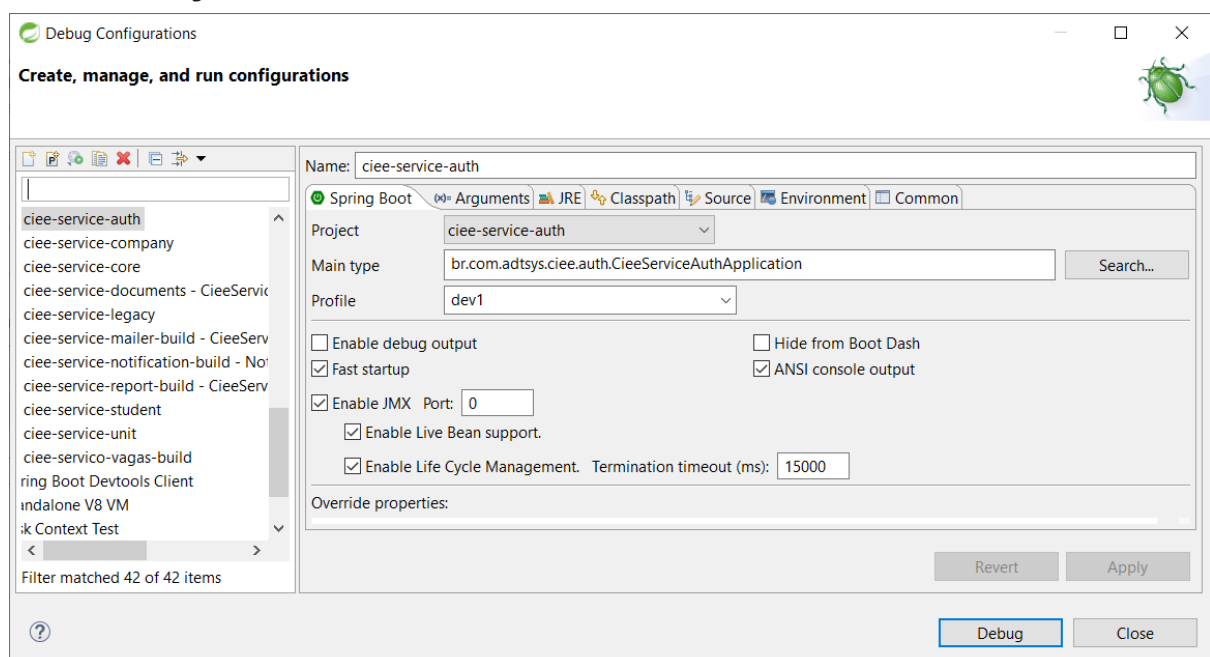

obs: os que tem mais de um, deve ser o "build", ex: vagas-build


OBS:

Não esquecer de configurar o java jdk no sts.

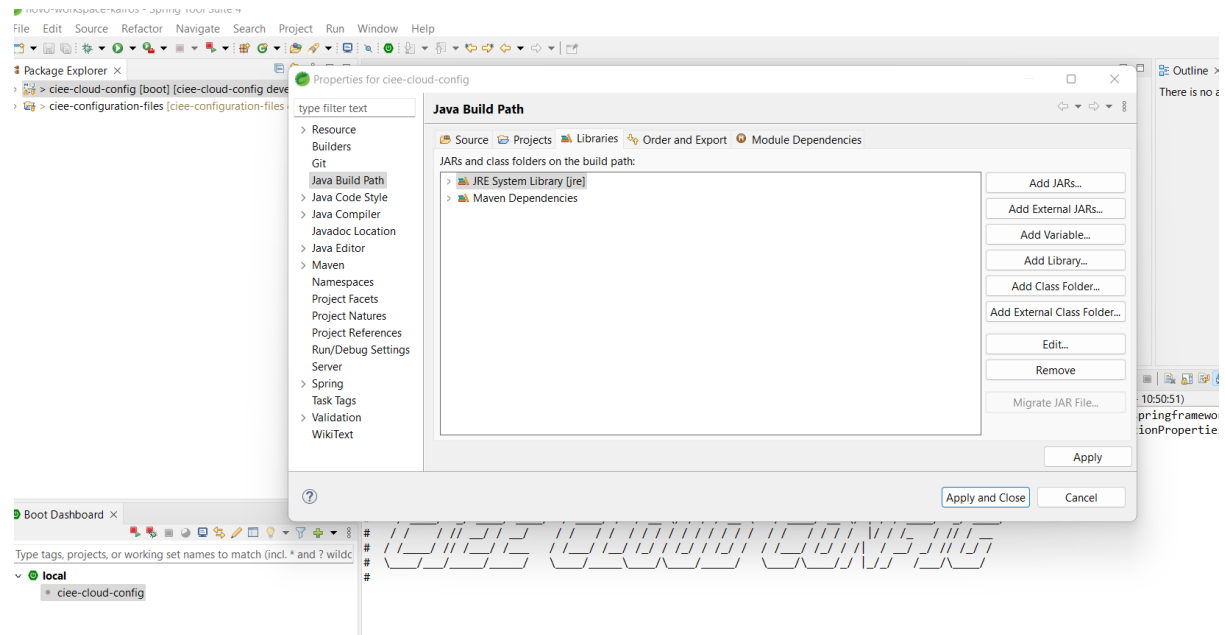


Selecionar JRE System Library e clicar em edit.


Na tela seguinte clicar em add.

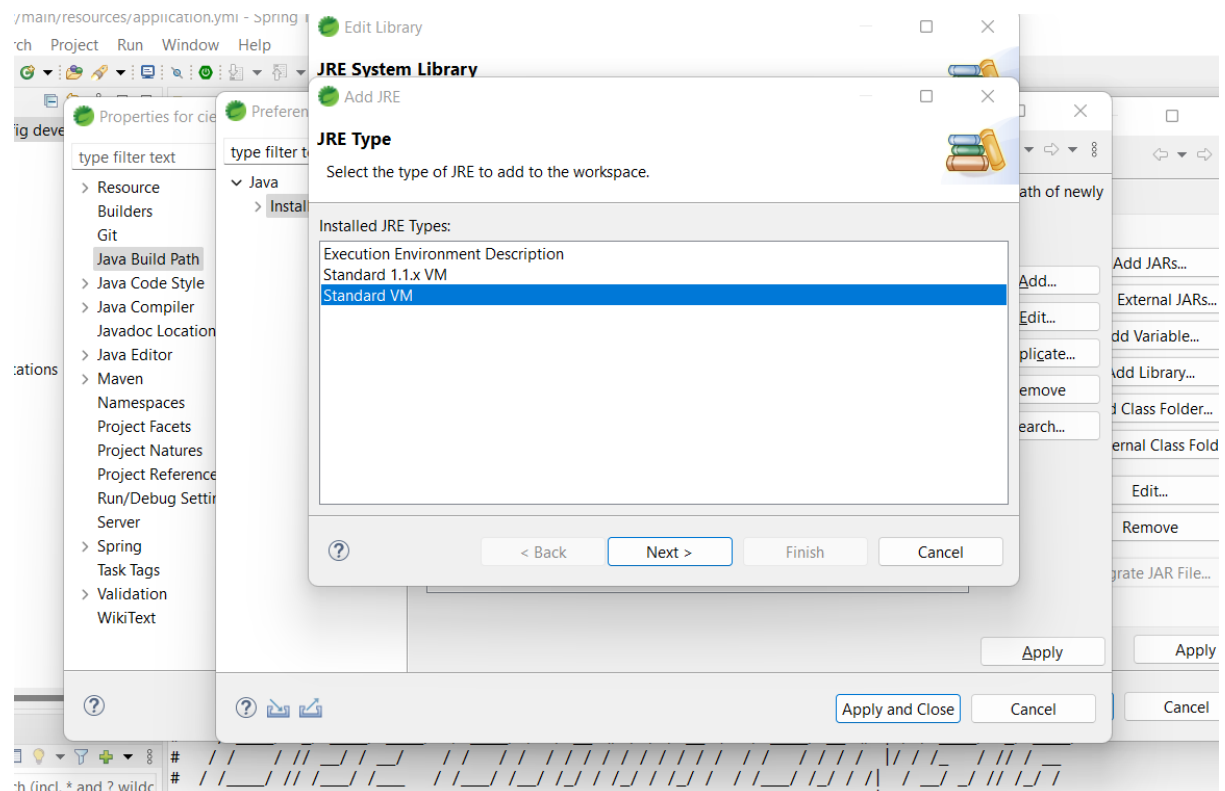

clicar em next, em seguida "directory" e escolher o jdk instalado normalmente é o jdk1.8_xxxx
marcar o jdk e clicar em apply and close

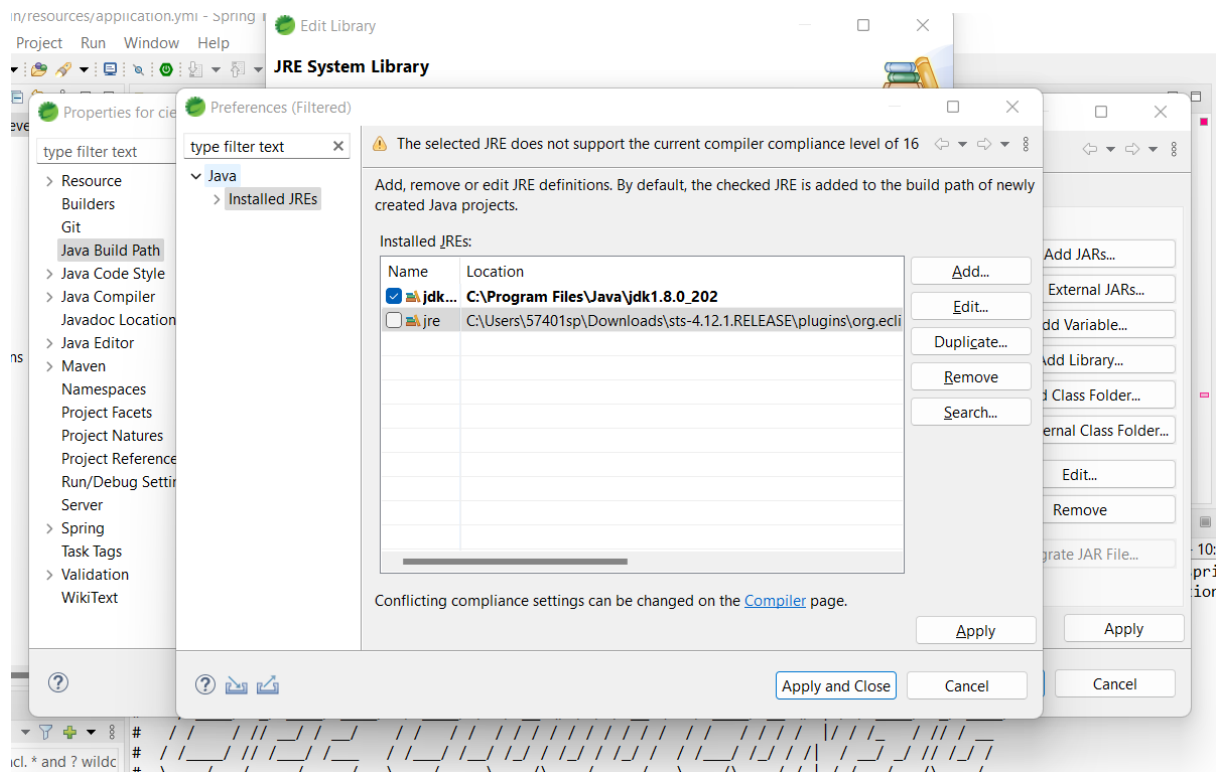

alterar para o jdk selecionado e clicar em finish.

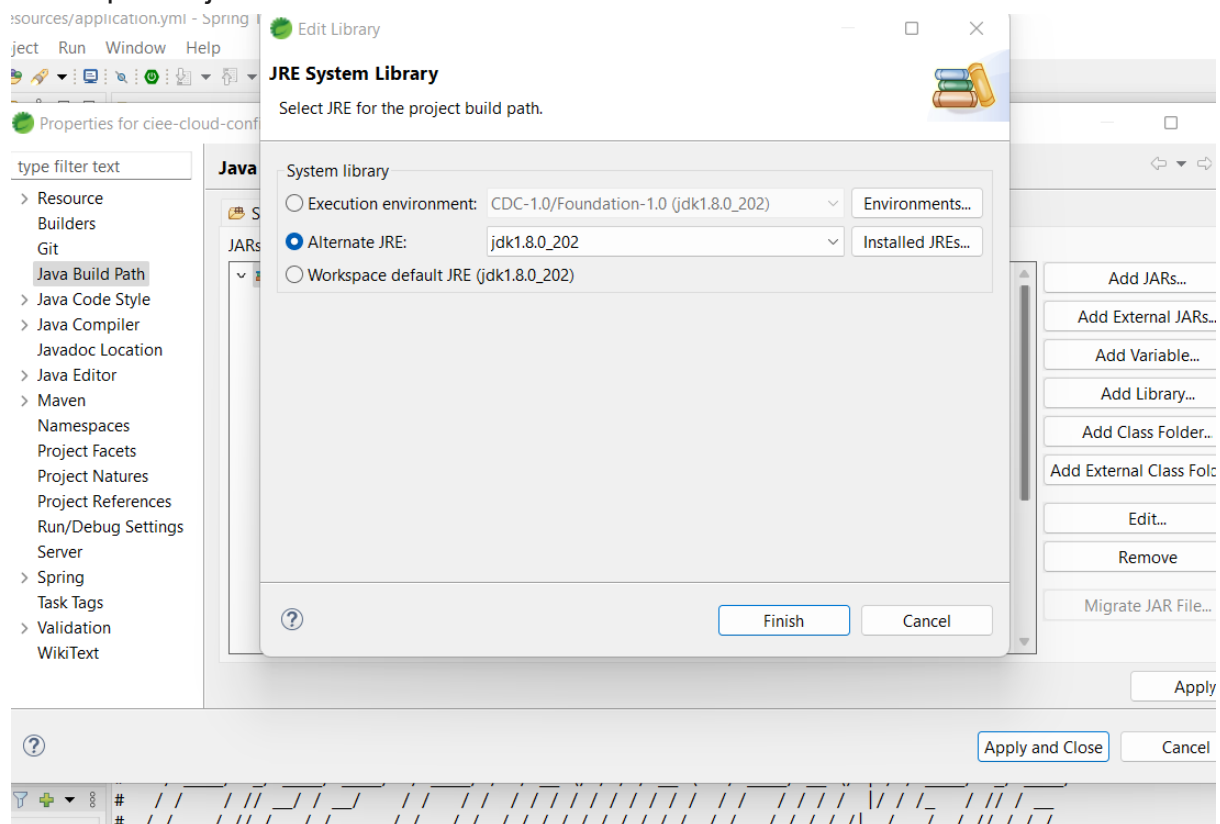

Configuration Files sempre na branch local (ex: config-vitor), se atentar o **flyway false**

Acompanhar os serviços:

<http://localhost:8761/>



subir no powerShell:

```
mvn clean spring-boot:run -D spring-boot.run.profiles=dev1 -D  
run.jvmArguments="-Xmx256m" -e -X -U
```

Configurar FRONTEND

Configurar o front de um exótico:

- Executar esse comando: `git config --system core.longpaths true`
- Dar o git clone
- Criar o python2 na pasta

 python.exe	30/04/2018 16:31	Aplicativo	28 KB
 python2.exe	19/10/2019 20:50	Aplicativo	27 KB

- Ajustar variáveis de ambiente

```
C:\Python27  
C:\Python27\Scripts
```

- Executar o comando: `npm config set msvs_version 2017 --global`
- `npm install node-sass --force`
- Amém amém amém -> `npm install --force`
- Se nada der certo, <https://nodejs.org/dist/v14.8.0/node-v14.8.0-x64.msi> altere a versão para 14

Criar uma branch local para realizar o push:

- Ver as alterações

```

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-company (develop)
$ git diff
diff --git a/src/main/java/br/com/adtsys/ciee/company/preregistration/service/PreRegistrationService.java b/src
index 81837d8a..df47b763 100644
--- a/src/main/java/br/com/adtsys/ciee/company/preregistration/service/PreRegistrationService.java
+++ b/src/main/java/br/com/adtsys/ciee/company/preregistration/service/PreRegistrationService.java
@@ -82,6 +82,7 @@ import com.nimbusds.jose.JOSEException;
import lombok.extern.log4j.Log4j2;
import org.apache.commons.lang3.BooleanUtils;
import org.apache.commons.lang3.StringUtils;
+import org.hamcrest.core.IsNull;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.data.domain.Page;
import org.springframework.data.domain.Pageable;
@@ -673,14 +674,11 @@ public class PreRegistrationService extends BaseServiceImpl<PreRegistration> {
    String zipCodeRequest = addressRequest.getZipCode();
    String zipCodeBD = preCadastro.getAddress().getZipCode();

    if (isNotEqualsZipCode(zipCodeRequest, zipCodeBD)) {
+    if (isNotEqualsZipCode(zipCodeRequest, zipCodeBD) || Objects.isNull(preCadastro.getUnidadeCiee())) {

        UnidadeCiee unidadeCiee = getUnidadeCieeByCep(zipCodeRequest);
        preRegistration.setUnidadeCiee(unidadeCiee);

        Long idCarteira = getCarteiraIdByCep(zipCodeRequest);
        preRegistration.setIdPortfolio(idCarteira);

    }
}
}

```

- Criar branch local e add

```

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-company (develop)
$ git checkout -b bugfix/PK-10790
Switched to a new branch 'bugfix/PK-10790'
M       src/main/java/br/com/adtsys/ciee/company/preregistration/service/PreRegistrationService.java
122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-company (bugfix/PK-10790)
$ git add .

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-company (bugfix/PK-10790)
$ git commit -m "Ajuste para limpar o id da unidade para não manter o id anterior"
[bugfix/PK-10790 929edfc7] Ajuste para limpar o id da unidade para não manter o id anterior
Committer: Vitor Rissatti Oyama <122371SP@adciee.cieesp.org.br>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

1 file changed, 11 insertions(+), 4 deletions(-)

```

- Dar o commit e dar o push

```

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-company (bugfix/PK-10790)
$ git commit -m "Ajuste para limpar o id da unidade para não manter o id anterior"
[bugfix/PK-10790 929edfc] Ajuste para limpar o id da unidade para não manter o id anterior
Committer: Vitor Rissatti Oyama <122371SP@adciee.cieesp.org.br>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

1 file changed, 11 insertions(+), 4 deletions(-)

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-company (bugfix/PK-10790)
$ git push
fatal: The current branch bugfix/PK-10790 has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin bugfix/PK-10790

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-service-company (bugfix/PK-10790)
$ git push --set-upstream origin bugfix/PK-10790
Enumerating objects: 190, done.
Counting objects: 100% (145/145), done.
Delta compression using up to 12 threads
Compressing objects: 100% (39/39), done.
Writing objects: 100% (82/82), 10.31 KiB | 2.06 MiB/s, done.
Total 82 (delta 30), reused 60 (delta 16)
remote:
remote: Create pull request for bugfix/PK-10790:
remote:   https://bitbucket.org/cieedesenv/ciee-service-company/pull-requests/new?source=bugfix/PK-10790
remote:
To https://bitbucket.org/cieedesenv/ciee-service-company.git
 * [new branch]      bugfix/PK-10790 -> bugfix/PK-10790
Branch 'bugfix/PK-10790' set up to track remote branch 'bugfix/PK-10790' from 'origin'.

```

- Depois abrir a PR

The screenshot shows the Bitbucket web interface for a pull request. The left sidebar contains navigation links for Source, Commits, Branches, Pull requests (selected), Pipelines, Deployments, and Downloads. The main content area displays a list of pull requests under the heading 'Pull requests'. The first pull request is titled 'Ajuste para limpar o id da unidade para não manter o id anterior' and is authored by Vitor Rissatti Oyama. It targets the 'develop' branch and has 4 reviewers. The build status is shown as a green checkmark, indicating a successful build. The second pull request is titled 'PK-11909 Melhoria complementar para retorno de informações com CNPJ/CPF' and is authored by João Luis dos Reis Martins Pena. It also targets the 'develop' branch and has 2 reviewers. The build status is shown as a green checkmark. The third pull request is titled 'Branch de teste' and is authored by Felipe Miranda Medeiros. It targets the 'develop' branch and has no reviewers. The build status is shown as a red diamond, indicating a failed build. The fourth pull request is titled 'Altera versão do RunTime do Java' and is authored by Leonardo Ramos Duarte. It targets the 'develop' branch and has no reviewers. The build status is shown as a red diamond, indicating a failed build.

Resolver conflitos

- Ir para a develop e dar o pull

```
122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-servico-vagas (feature/PK-12353)
$ git checkout develop
Switched to branch 'develop'
Your branch is up to date with 'origin/develop'.

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-servico-vagas (develop)
$ git pull
remote: Counting objects: 3074, done.
remote: Compressing objects: 100% (1002/1002), done.
remote: Total 3074 (delta 1029), reused 2483 (delta 700)
Receiving objects: 100% (3074/3074), 245.69 KiB | 577.00 KiB/s, done.
Resolving deltas: 100% (1029/1029), completed with 136 local objects.
From https://bitbucket.org/cieedesenv/ciee-servico-vagas
 f901140fd..f52b7e2b7 develop -> origin/develop
* [new branch]          bugfix/PK-12180-ajuste-documento -> origin/bugfix/PK-12180-ajuste-documento
* [new branch]          bugfix/PK-12186-hmg -> origin/bugfix/PK-12186-hmg
* [new branch]          feature/PK-12280 -> origin/feature/PK-12280
* [new branch]          feature/PK-12284 -> origin/feature/PK-12284
* [new branch]          feature/PK-12292 -> origin/feature/PK-12292
 658537082..f18a788fd feature/dados-turmas-secretaria -> origin/feature/dados-turmas-secretaria
 9f48f8715..12da7ea87 homolog -> origin/homolog
Updating f901140fd..f52b7e2b7
Fast-forward
.../model/EscolaridadeCandidatoAprendizDTO.java      | 7 +-
.../AreaAtuacaoAprendizPesquisarProjection.java     | 21 +++
.../model/CursoCapacidadeProjection.java             | 7 +
.../model/DuracaoCursoCapacidadeProjection.java      | 7 +
.../bancoagencia/BancoAgenciaContractService.java  | 4 +-
.../vagas/api/client/cbo/CboContractService.java    | 4 +
.../cse/estudante/CSEEstudanteContractService.java | 13 ++
.../api/client/cse/estudante/VerificacaoExcel.java | 10 ++
.../client/cse/estudante/model/ExcelHashDTO.java   | 14 ++
.../DashboardAcompanhamentoCSEContractService.java | 32 +++++
.../cse/model/DadosDashboardCSE.java                | 17 +++
.../cse/model/DadosGraficoAcompCSE.java             | 18 +++
.../cse/model/DashboardAcompCSEResponse.java        | 17 +++
.../cse/model/DashboardCSERequest.java              | 18 +++
.../cse/model/DetalhesUnidadeRequest.java           | 15 ++
.../cse/model/DetalhesUnidadeResponse.java          | 20 +++
.../cse/model/GraficoAcompCSEResponse.java          | 19 +++
.../model/ResultadoProcessoResponse.java            | 1 +
```

- Voltar para a branch e dar o merge

```
122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-servico-vagas (develop)
$ git checkout feature/PK-12353
Switched to branch 'feature/PK-12353'
Your branch is up to date with 'origin/feature/PK-12353'.

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-servico-vagas (feature/PK-12353)
$ git merge develop
Removing ciee-servico-vagas-common/src/main/java/br/org/ciee/kairos/vagas/common/model/vaga/aprendiz/SemanaDTO.java
Auto-merging ciee-servico-vagas-business/src/main/java/br/org/ciee/kairos/vagas/business/repository/AgenciaRepository.java
CONFLICT (content): Merge conflict in ciee-servico-vagas-business/src/main/java/br/org/ciee/kairos/vagas/business/repository
Auto-merging ciee-servico-vagas-api/src/main/java/br/org/ciee/kairos/vagas/api/ura/mapper/UraMapper.java
Automatic merge failed; fix conflicts and then commit the result.
```

- Ajustar o conflito na classe: Ex: Agência Repository
- Salvar ajuste
- Dar o git add
- Dar git merge --continue
- :wq ENTER
- Conflito resolvido

Retirar os arquivos

```
122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-frontend (feature/provas-online-modelos)
$ git status
Refresh index: 100% (7121/7121), done.
On branch feature/provas-online-modelos
Your branch is ahead of 'origin/feature/provas-online-modelos' by 463 commits.
  (use "git push" to publish your local commits)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        modified:   package-lock.json
        modified:   src/app/estudante/componentes/student-profile/provas-online/provas-online.component.html
        modified:   src/app/ui/cartao-prova/cartao-prova.component.scss
        modified:   src/app/ui/cartao-prova/cartao-prova.component.ts
        modified:   src/environments/environment.ts

no changes added to commit (use "git add" and/or "git commit -a")

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-frontend (feature/provas-online-modelos)
$ git checkout src/environments/environment.ts

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-frontend (feature/provas-online-modelos)
$ git status
Refresh index: 100% (7121/7121), done.
On branch feature/provas-online-modelos
Your branch is ahead of 'origin/feature/provas-online-modelos' by 463 commits.
  (use "git push" to publish your local commits)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        modified:   package-lock.json
        modified:   src/app/estudante/componentes/student-profile/provas-online/provas-online.component.html
        modified:   src/app/ui/cartao-prova/cartao-prova.component.scss
        modified:   src/app/ui/cartao-prova/cartao-prova.component.ts

no changes added to commit (use "git add" and/or "git commit -a")
```

Se já tiver feito o git add

```
122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-frontend (feature/provas-online-modelos)
$ git status
On branch feature/provas-online-modelos
Your branch is ahead of 'origin/feature/provas-online-modelos' by 1 commit.
  (use "git push" to publish your local commits)

Changes to be committed:
  (use "git reset HEAD <file>..." to unstage)

        modified:   src/app/admin/admin-routing.module.ts
        modified:   src/app/core/ciee-vagas/provas-online-modelos/provas-online-modelos.service.ts
        modified:   src/app/estudante/componentes/student-profile/provas-online/visualizar-provas-online.component.ts
        modified:   src/environments/environment.ts

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-frontend (feature/provas-online-modelos)
$ git reset HEAD src/environments/environment.ts
Unstaged changes after reset:
M   src/environments/environment.ts

It took 2.02 seconds to enumerate unstaged changes after reset. You can
use '--quiet' to avoid this. Set the config setting reset.quiet to true
to make this the default.

122371SP@NOTE-METODOS02 MINGW64 /d/workspace/dev/ciee-frontend (feature/provas-online-modelos)
$ git status
Refresh index: 100% (7001/7001), done.
On branch feature/provas-online-modelos
Your branch is ahead of 'origin/feature/provas-online-modelos' by 1 commit.
  (use "git push" to publish your local commits)

Changes to be committed:
  (use "git reset HEAD <file>..." to unstage)

        modified:   src/app/admin/admin-routing.module.ts
        modified:   src/app/core/ciee-vagas/provas-online-modelos/provas-online-modelos.service.ts
        modified:   src/app/estudante/componentes/student-profile/provas-online/visualizar-provas-online.component.ts

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        modified:   src/environments/environment.ts
```

Renomear branch

git branch -m new-name

Subir o financeiro por linha de comando

```
mvn clean spring-boot:run -Dspring-boot.run.profiles=mig -Drun.jvmArguments="-Xmx256m"
```

Dentro a pasta build

Arquitetura nova

Nível 1 - Deployment é a configuração de cada serviço

Nível 2 - Cada deployment vai ter 1 Réplica Set

Nível 3 - Cada Réplica Set possui os Pods

Nível 4 - Um Pod pode possuir mais de um container, but no Kairós será 1 para 1 (Um Pod para um Container)

No caso cada Pod seria uma taks do serviço na Aws;

Teremos vários Pods para cada Réplica Set;

Se o serviço não subir, o Pod restarta, mas ele não cai, quem fica caindo é o container;

Kibana

Discover é o log do eclipse / validar se o serviço subiu

APM listar erros da aplicação

Alterar usuário

```
git remote set-url origin https://vroyama@bitbucket.org/cieedesenv/ciee-configuration-files.git
```


Deploy Master

Release e Master atualizadas;

Criar a *branch* versionada como o exemplo **feature/entrega-22-06-2021**

Fazer o *cherry-pick* dos commits do pacote de PKs que será entregue;

Alterar a versão de **todos** os arquivos *pom.xml* do serviço:

```
*ciee-servico-vagas/pom.xml
1 <?xml version="1.0" encoding="UTF-8"?>
2 <project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://maven.apache.
3 <parent>
4 <groupId>br.org.ciee.kairos</groupId>
5 <artifactId>parent</artifactId>
6 <version>2.3</version>
7 <relativePath /> <!-- pega do repositório do nexus -->
8 </parent>
9
10 <modelVersion>4.0.0</modelVersion>
11
12 <groupId>br.org.ciee.kairos.servico</groupId>
13 <artifactId>ciee-servico-vagas</artifactId>
14 <packaging>pom</packaging>
15 <version>2.0.1</version>
16
17 <modules>
18 <module>ciee-servico-vagas-common</module>
19 <module>ciee-servico-vagas-api-client</module>
20 <module>ciee-servico-vagas-business</module>
21 <module>ciee-servico-vagas-api</module>
22 <module>ciee-servico-vagas-build</module>
23 </modules>
24 <scm>
25 <developerConnection>scm:git:git@bitbucket.org:cieedesenv/ciee-servico-vagas.git</developerConnection>
26 <tag>v2.0.2</tag>
27 </scm>
```

Exemplo: de 2.0.1 para 2.0.2-SNAPSHOT

```
*ciee-servico-vagas/pom.xml
1 <?xml version="1.0" encoding="UTF-8"?>
2 <project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://maven.apache.
3 <parent>
4 <groupId>br.org.ciee.kairos</groupId>
5 <artifactId>parent</artifactId>
6 <version>2.3</version>
7 <relativePath /> <!-- pega do repositório do nexus -->
8 </parent>
9
10 <modelVersion>4.0.0</modelVersion>
11
12 <groupId>br.org.ciee.kairos.servico</groupId>
13 <artifactId>ciee-servico-vagas</artifactId>
14 <packaging>pom</packaging>
15 <version>2.0.2-SNAPSHOT</version>
16
17 <modules>
18 <module>ciee-servico-vagas-common</module>
19 <module>ciee-servico-vagas-api-client</module>
20 <module>ciee-servico-vagas-business</module>
21 <module>ciee-servico-vagas-api</module>
22 <module>ciee-servico-vagas-build</module>
23 </modules>
24 <scm>
25 <developerConnection>scm:git:git@bitbucket.org:cieedesenv/ciee-servico-vagas.git</developerConnection>
26 <tag>v2.0.2</tag>
27 </scm>
```

Commit no padrão: `git commit -m "Versão 2.0.2-SNAPSHOT"`

Momento de versionar: rodar o comando `mvn clean -DskipTests -Darguments=-DskipTests -Dusername=vroyama release:prepare`

Atenção no momento que perguntar o nome da tag

```
What is the release version for "ciee-servico-vagas"? (br.org.ciee.kairos.servico:ciee-servico-vagas) 2.0.2: :
What is the release version for "ciee-servico-vagas-common"? (br.org.ciee.kairos.servico:ciee-servico-vagas-common) 2.0.2: :
What is the release version for "ciee-servico-vagas-api-client"? (br.org.ciee.kairos.servico:ciee-servico-vagas-api-client) 2.0.2: :
What is the release version for "ciee-servico-vagas-business"? (br.org.ciee.kairos.servico:ciee-servico-vagas-business) 2.0.2: :
What is the release version for "ciee-servico-vagas-api"? (br.org.ciee.kairos.servico:ciee-servico-vagas-api) 2.0.2: :
What is the release version for "ciee-servico-vagas-build"? (br.org.ciee.kairos.servico:ciee-servico-vagas-build) 2.0.2: :
What is SCM release tag or label for "ciee-servico-vagas"? (br.org.ciee.kairos.servico:ciee-servico-vagas) ciee-servico-vagas-2.0.2: : v2.0.2
What is the new development version for "ciee-servico-vagas"? (br.org.ciee.kairos.servico:ciee-servico-vagas) 2.0.3-SNAPSHOT: :
What is the new development version for "ciee-servico-vagas-common"? (br.org.ciee.kairos.servico:ciee-servico-vagas-common) 2.0.3-SNAPSHOT: :
What is the new development version for "ciee-servico-vagas-api-client"? (br.org.ciee.kairos.servico:ciee-servico-vagas-api-client) 2.0.3-SNAPSHOT: :
What is the new development version for "ciee-servico-vagas-business"? (br.org.ciee.kairos.servico:ciee-servico-vagas-business) 2.0.3-SNAPSHOT: :
What is the new development version for "ciee-servico-vagas-api"? (br.org.ciee.kairos.servico:ciee-servico-vagas-api) 2.0.3-SNAPSHOT: :
What is the new development version for "ciee-servico-vagas-build"? (br.org.ciee.kairos.servico:ciee-servico-vagas-build) 2.0.3-SNAPSHOT: :
```

Irá dar erro no momento de **Unable to commit files**

```
[INFO] Reactor Summary for ciee-servico-vagas 2.0.2-SNAPSHOT:
[INFO] ciee-servico-vagas ..... FAILURE [09:08 min]
[INFO] ciee-servico-vagas-common ..... SUCCESS [ 0.055 s]
[INFO] ciee-servico-vagas-api-client ..... SUCCESS [ 0.081 s]
[INFO] ciee-servico-vagas-business ..... SUCCESS [ 0.132 s]
[INFO] ciee-servico-vagas-api ..... SUCCESS [ 0.081 s]
[INFO] ciee-servico-vagas-build ..... SUCCESS [ 0.139 s]
[INFO] -----
[INFO] BUILD FAILURE
[INFO] -----
[INFO] Total time: 09:13 min
[INFO] Finished at: 2021-06-22T13:30:11-03:00
[INFO] -----
[ERROR] Failed to execute goal org.apache.maven.plugins:maven-release-plugin:2.5.3:prepare (default-cli) on project ciee-servico-vagas: Unable to commit files
[ERROR] Provider message:
[ERROR] The git-push command failed.
[ERROR] Command output:
[ERROR] Host key verification failed.
[ERROR] fatal: Could not read from remote repository.
[ERROR]
[ERROR] Please make sure you have the correct access rights
[ERROR] and the repository exists.
[ERROR]
[ERROR] -> [Help 1]
[ERROR]
[ERROR] To see the full stack trace of the errors, re-run Maven with the -e switch.
[ERROR] Re-run Maven using the -X switch to enable full debug logging.
[ERROR]
[ERROR] For more information about the errors and possible solutions, please read the following articles:
[ERROR] [Help 1] http://cwiki.apache.org/confluence/display/MAVEN/MojoFailureException
```

Processar novamente o comando `mvn clean -DskipTests -Darguments=-DskipTests -Dusername=vroyama release:prepare`

Irá dar um erro de **Unable to tag SCM**, mas a partir disso pode-se seguir com o taggamento;

```
[INFO] Executing: cmd.exe /X /C "git tag -F C:\Users\vroya\AppData\Local\Temp\maven-scm-2084411712.commit v2.0.2"
[INFO] Working directory: C:\Users\vroya\OneDrive\Documents\Job\workspace\dev\ciee-servico-vagas
[INFO] Executing: cmd.exe /X /C "git push git@bitbucket.org:cieedesenv/ciee-servico-vagas.git refs/tags/v2.0.2"
[INFO] Working directory: C:\Users\vroya\OneDrive\Documents\Job\workspace\dev\ciee-servico-vagas
[INFO] -----
[INFO] Reactor Summary for ciee-servico-vagas 2.0.2:
[INFO] ciee-servico-vagas ..... FAILURE [ 5.246 s]
[INFO] ciee-servico-vagas-common ..... SUCCESS [ 2.298 s]
[INFO] ciee-servico-vagas-api-client ..... SUCCESS [ 3.942 s]
[INFO] ciee-servico-vagas-business ..... SUCCESS [ 6.032 s]
[INFO] ciee-servico-vagas-api ..... SUCCESS [ 1.566 s]
[INFO] ciee-servico-vagas-build ..... SUCCESS [ 1.921 s]
[INFO] -----
[INFO] BUILD FAILURE
[INFO] -----
[INFO] Total time: 24.108 s
[INFO] Finished at: 2021-06-22T13:30:46-03:00
[INFO] -----
[ERROR] Failed to execute goal org.apache.maven.plugins:maven-release-plugin:2.5.3:prepare (default-cli) on project ciee-servico-vagas: Unable to tag SCM
[ERROR] Provider message:
[ERROR] The git-push command failed.
[ERROR] Command output:
[ERROR] Host key verification failed.
[ERROR] fatal: Could not read from remote repository.
[ERROR]
[ERROR] Please make sure you have the correct access rights
[ERROR] and the repository exists.
[ERROR]
[ERROR] -> [Help 1]
[ERROR]
[ERROR] To see the full stack trace of the errors, re-run Maven with the -e switch.
[ERROR] Re-run Maven using the -X switch to enable full debug logging.
[ERROR]
[ERROR] For more information about the errors and possible solutions, please read the following articles:
[ERROR] [Help 1] http://cwiki.apache.org/confluence/display/MAVEN/MojoFailureException
```

Após isso dar o push da tag: `git push origin v2.0.2`

Dando sucesso, dar o push da branch para abrir a PR: `git push --set-upstream origin feature/entrega-22-06-2021`

Observações:

- Caso o nome da tag fique errado, dar checkout em tudo;
- Dar um `git clean -d -n` e depois `git clean -d -f`
- E recomeça o `mvn clean -DskipTests -Darguments=-DskipTests release:prepare`


Deploy Master Frontend

Master e develop-vagas atualizadas;

Criar a *branch* versionada como o exemplo **feature/entrega-06-10-2022**


Fazer o *cherry-pick* dos commits do pacote de PKs que será entregue;

Atualizar versão da tag no package.json

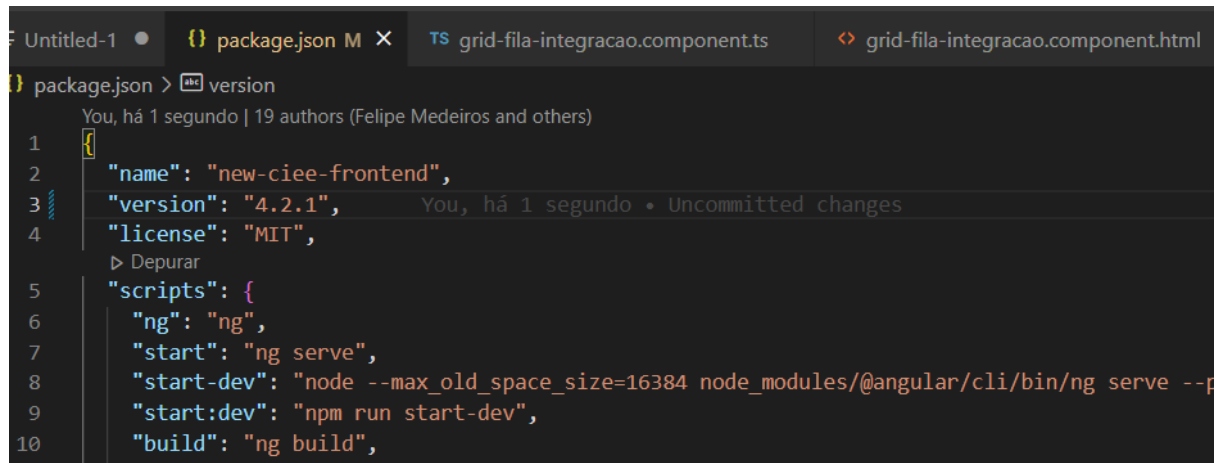


```
package.json > version
You, há 1 segundo | 19 authors (Felipe Medeiros and others)
1 {
2   "name": "new-ciee-frontend",
3   "version": "4.2.1",
4   "license": "MIT",
5   "scripts": {
6     "ng": "ng",
7     "start": "ng serve",
8     "start-dev": "node --max_old_space_size=16384 node_modules/@angular/cli/bin/ng serve --p",
9     "start:dev": "npm run start-dev",
10    "build": "ng build",
11    "build:prod": "ng build --prod",
12    "test": "ng test",
13    "e2e": "ng e2e",
14    "lint": "ng lint",
15    "format": "prettier --write ."
16  }
17 }
```

Atentar que o front não possui o “-SNAPSHOT”

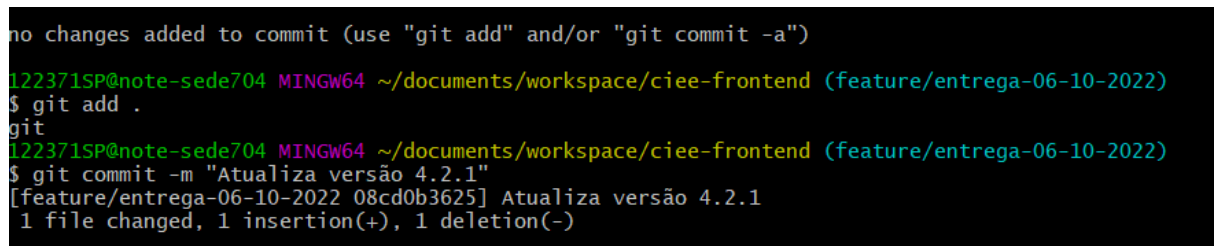


```
no changes added to commit (use "git add" and/or "git commit -a")
122371SP@note-sede704 MINGW64 ~/documents/workspace/ciee-frontend (feature/entrega-06-10-2022)
$ git add .
git
122371SP@note-sede704 MINGW64 ~/documents/workspace/ciee-frontend (feature/entrega-06-10-2022)
$ git commit -m "Atualiza versão 4.2.1"
[feature/entrega-06-10-2022 08cd0b3625] Atualiza versão 4.2.1
1 file changed, 1 insertion(+), 1 deletion(-)
```

Realizar o taggamento:



```
122371SP@note-sede704 MINGW64 ~/documents/workspace/ciee-frontend (feature/entrega-06-10-2022)
$ git tag v4.2.1
```

Depois dar o push da tag e da branch:

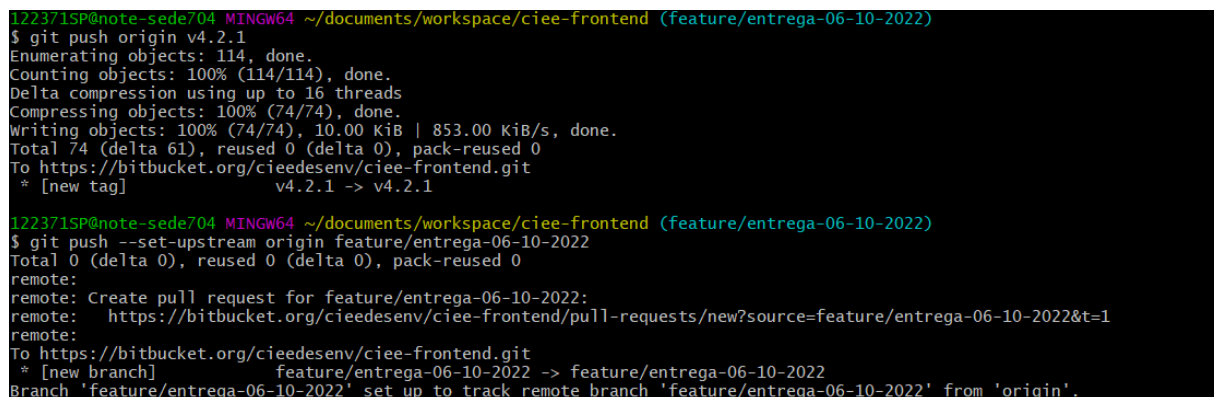

```
122371SP@note-sede704 MINGW64 ~/documents/workspace/ciee-frontend (feature/entrega-06-10-2022)
$ git push origin v4.2.1
Enumerating objects: 114, done.
Counting objects: 100% (114/114), done.
Delta compression using up to 16 threads
Compressing objects: 100% (74/74), done.
Writing objects: 100% (74/74), 10.00 KiB | 853.00 KiB/s, done.
Total 74 (delta 61), reused 0 (delta 0), pack-reused 0
To https://bitbucket.org/cieedesenv/ciee-frontend.git
 * [new tag]          v4.2.1 -> v4.2.1

122371SP@note-sede704 MINGW64 ~/documents/workspace/ciee-frontend (feature/entrega-06-10-2022)
$ git push --set-upstream origin feature/entrega-06-10-2022
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create pull request for feature/entrega-06-10-2022:
remote: https://bitbucket.org/cieedesenv/ciee-frontend/pull-requests/new?source=feature/entrega-06-10-2022&t=1
remote:
To https://bitbucket.org/cieedesenv/ciee-frontend.git
 * [new branch]       feature/entrega-06-10-2022 -> feature/entrega-06-10-2022
Branch 'feature/entrega-06-10-2022' set up to track remote branch 'feature/entrega-06-10-2022' from 'origin'.
```

Primeira coisa, se conectar no respectivo banco do Financeiro;

Oracle SQL Developer - Oracle-Financeiro-HMG

Arquivo Editar Exibir Navegar Executar Origem Equipe Ferramentas Janela Ajuda

Conexões

Oracle-Financeiro-HMG

Oracle Conexões

- DEV1
- HMG
 - Oracle-Audit-HMG
 - Oracle-Auth-HMG
 - Oracle-Company-HMG
 - Oracle-Core-HMG
 - Oracle-Documents-HMG
 - Oracle-Financeiro-HMG
 - Tabelas (Filtrado)
 - Views
 - Índices
 - Pacotes
 - Procedures
 - Funções
 - Operadores
 - Flas

Planilha Query Builder

```
UPDATE parametros_dia_emissao_faturamento SET dia_emissao = 6 WHERE DELETADO = 0;
commit;

BEGIN
  DBMS_MVIEW.REFRESH('SERVICE_FINANCEIRO_DEV.MV_CONTRATO_UNIFICADOR_OUTRAS_COBRANCAS');
  DBMS_MVIEW.REFRESH('SERVICE_FINANCEIRO_DEV.MV_CONTRATO_UNIFICADOR_COBRANCA');
END;

/

BEGIN
  DBMS_MVIEW.REFRESH('SERVICE_FINANCEIRO_DEV.MV_DADOS_FATURAMENTO');
END;
```

```
UPDATE parametros_dia_emissao_faturamento SET dia_emissao = dia_hoje WHERE DELETADO = 0;
commit;
BEGIN
    DBMS_MVIEW.REFRESH('SERVICE_FINANCEIRO_DEV.MV_CONTRATO_UNIFICADOR_OUTRAS_COBRANCAS');
    DBMS_MVIEW.REFRESH('SERVICE_FINANCEIRO_DEV.MV_CONTRATO_UNIFICADOR_COBRANCA');
END;
/

BEGIN
    DBMS_MVIEW.REFRESH('SERVICE_FINANCEIRO_DEV.MV_DADOS_FATURAMENTO');
END;
```

POST {{url}}/auth/integracao/login Send

Params Authorization Headers (10) **Body** Pre-request Script Tests Settings Cookies

☐ none
 ☐ form-data
 ☐ x-www-form-urlencoded
 ☒ raw
 ☐ binary
 ☐ GraphQL
 JSON ▼
 Beautify

```

1 [
2   ... "username": "{{login}}",
3   ... "password": "{{senha}}"
4 ]
  
```

body Cookies Headers (7) Test Results 🌐 200 OK 895 ms 21.12 KB Save Response ▼

Pretty Raw Preview Visualize JSON ▼ ↻

```

1 [
2   "user": "Migracao",
3   "token": "eyJhbGciOiJIUzI1NiJ9.eyJzdWIiOiJtaWdyYWVlbnRvZyYyZWVudC5icm9sZW9pZCI6MSwib3JpZ2VtIjoiaWV0VCIsIiwiaWF0IjoxNjcwMzY2NjQyfQ.rHQDJXZK9m6-vIBJTHQQkvQLcpblF_n6d7BKjl0vV8c",
4   "status": "OK",
5   "message": null,
6   "permissions": [
  
```

Agora é o momento de rodar o Faturamento no seguinte endpoint;
/rotinas/financeiro/faturamento-ci-cia-rastreamento

The screenshot shows a REST client interface with a POST request configured. The URL is `{{url}}/rotinas/financeiro/faturamento-ci-cia-rastreamento`. The interface includes tabs for Params, Authorization, Headers (8), Body, Pre-request Script, Tests, and Settings. A 'Send' button is visible. Below the tabs, there is a 'Query Params' section with a table:

KEY	VALUE	DESCRIPTION	...	Bulk Edit
Key	Value	Description		

Below the table is a 'Response' section.

Quando enviar e receber o seguinte response, é porque deu bom:

The screenshot shows the response of the POST request. The status is '204 No Content' with a response time of '565 ms' and a size of '383 B'. The 'Body' tab is selected, showing a 'Pretty' view of the response. The response body is:

```
1
```

Por último, para pegar o resultado é só trocar o POST por GET

The screenshot shows a REST client interface with a GET request configured. The URL is `{{url}}/rotinas/financeiro/faturamento-ci-cia-rastreamento`. The interface includes tabs for Params, Authorization, Headers (7), Body, Pre-request Script, Tests, and Settings. A 'Send' button is visible. Below the tabs, there is a 'Query Params' section with a table:

KEY	VALUE	DESCRIPTION	...	Bulk Edit
Key	Value	Description		

Below the table is a 'Response' section. The status is '200 OK' with a response time of '964 ms' and a size of '2.65 KB'. The 'Body' tab is selected, showing a 'Pretty' view of the response. The response body is:


```
1 Realizar Faturamento Emissoes e Rastreamento CI e CIA iniciada
2 07/12/2022 08:36:12 Versão Query: V2
3 07/12/2022 08:36:12 Competência: 12/2022
4 07/12/2022 08:36:12 Dia parametrizado para Primeira Emissão: 6
5 07/12/2022 08:36:12 Feriados do mês atual: Não tem
```

Obs: demora entorno de 10 segundos para finalizar;

Fazer deploy no Jenkins (fazer de terça e sexta ou atualização de HMG e PPD depois de aprovado)

Após dar o merge da PR do respectivo serviço, acessar o Jenkins;

<http://jenkins.ciee.org.br:8080>

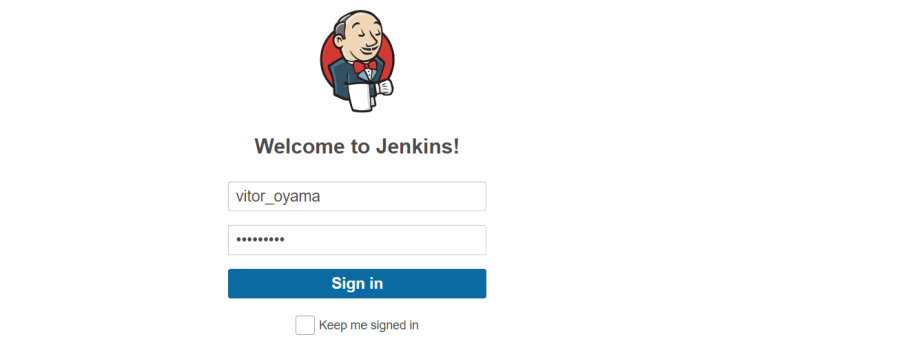

The image shows the Jenkins 'Welcome to Jenkins!' login page. At the top is the Jenkins logo (a cartoon man in a suit). Below it, the text 'Welcome to Jenkins!' is displayed. There are two input fields: the first contains the username 'vitor_oyama' and the second contains masked characters '*****'. A blue 'Sign in' button is positioned below the password field. At the bottom, there is a checkbox labeled 'Keep me signed in' which is currently unchecked.

Frontend fica separado dos outros serviços:

Tudo +	S	W	Nome ↓	Último sucesso	Última falha	Última duração	Fav
	📁	☁️	ciee	N/D	N/D	N/D	☆
	📁	☀️	ciee-frontend	6 meses 1 dia - log	N/D	33 segundos	🕒 ☆
	📁	☀️	ciee-pp-web	1 mês 9 dias - log	N/D	2 segundos	🕒 ☆
	🌐	☀️	ciee_teste_maven	1 ano 9 meses - #5	N/D	8.6 segundos	🕒 ☆
	🌐	☀️	frontend-deploy-dist	N/D	N/D	N/D	☆
	📁	☀️	generators	N/D	N/D	N/D	☆
	🌐	☀️	pauloteste	N/D	N/D	N/D	🕒 ☆
	🌐	☀️	service-deploy	N/D	N/D	N/D	☆
	🌐	☀️	service-deploy-ecs	N/D	N/D	N/D	🕒 ☆
	📁	☁️	services	N/D	N/D	N/D	☆
	📁	☁️	services-pp	N/D	N/D	N/D	☆
	📁	☀️	services_aws	N/D	N/D	N/D	☆

Utilizando o company como exemplo. Após selecionar o serviço, é o momento de escolher a branch que realizará o deploy.

Dashboard	services	ciee-service-company
7 Parado		
8 Parado		

		develop	1 mês 5 dias - #263	1 mês 5 dias - #261	2 minutos 27 segundos		
		feature/entrega-03-03-2022	9 meses 8 dias - #2	9 meses 8 dias - #1	1 minuto 11 segundos		
		feature/entrega-16-12-2021	11 meses - #1	9 meses 8 dias - #2	1 minuto 0 segundos		
		feature/PK-16638	1 ano 4 meses - #1	9 meses 8 dias - #2	2 horas 28 minutos		
		feature/PK-18286	9 meses 14 dias - #7	9 meses 18 dias - #1	1 minuto 3 segundos		
		homolog	19 dias - #185	9 meses 8 dias - #1111	1 minuto 42 segundos		
		hotfix/PK-17804-correcao	1 ano 0 meses - #2	9 meses 8 dias - #3	2 minutos 2 segundos		
		hotfix/PK-18216	9 meses 28 dias - #2	N/D	1 minuto 2 segundos		
		hotfix/PK-18312	9 meses 17 dias - #2	N/D	1 minuto 4 segundos		
		hotfix/revert-21-12-2021	11 meses - #1	9 meses 8 dias - #2	1 minuto 28 segundos		
		master	26 dias - #81	9 meses 8 dias - #50	12 minutos		
		release	20 horas - #143	4 meses 26 dias - #108	8 minutos 13 segundos		

(icone: S M L)

[Legenda](#)
[Atom feed de tudo](#)
[Atom feed das falhas](#)
[Atom feed apenas para os últimos builds](#)

Após escolher uma das branches, é o momento de iniciar o deploy; Para isso na aba lateral clicar em **Construir com parâmetros**

A screenshot of the Jenkins web interface. The top navigation bar is black with the Jenkins logo (a cartoon character) and the word "Jenkins" in white. Below this, a breadcrumb trail shows the path: "Dashboard" > "services" > "ciee-service-company" > "develop". The left sidebar contains several menu items: "Up" with a green arrow icon, "Status" with a magnifying glass icon, "Changes" with a notepad icon, "Construir com parâmetros" with a play button icon (this item is highlighted with a red rectangular box), "Configurar a view" with a gear icon, and "Full Stage View" with a magnifying glass icon. The main content area on the right displays the title "Pipeline develop" in large black font, followed by the text "Nome completo do projeto: services". Below this is a "Recent Changes" section with a notepad icon and the text "Recent Changes". At the bottom of the main area, the title "Stage View" is visible in large black font.

Momento muito importante!!! ESCOLHER A PIPELINE RESPECTIVA DA BRANCH
Se for develop a branch, Pipeline de dev

ciee-service-company

develop

Pipeline develop

Esta builds requer parâmetros:

☒ DEVELOPMENT

dev

☐ HOMOLOG

hmg

☐ PRE_PRODUCTION

ppd

☐ STAGING

pri

☐ PRODUCTION

prod


Construir

Após clicar em "Construir" e aguardar.
Para iniciar o deploy é só dar o Proceed

company develop

Pipeline develop

Nome completo do projeto: services/ciee-service-company/develop

 Recent Changes

Stage View

Checkout	Build	Push Image to Oracle Image Registry	Deploy to development	Deploy to production
8s	50s	9s	9s	0s

Average stage times:
(Average full run time: ~2min 5s)

#264
Dec 07
08:52

You can confirm the deploy to development OKE cluster?

Proceed Abort

(paused for 7s)

Observações: se tiver migration no deploy (arquivo SQL), depois que finalizar, avaliar com algum dev se deu bom;

bitbucket.org/cieedeserv/ciee-servico-vagas/pull-requests/7042

Reservas - Winkler |...

Bitbucket Your work Repositories Projects More Create

Search

java ciee-servico-vagas

Source Commits Branches Pull requests Pipelines Deployments Jira issues Security Downloads Repository settings

ciee-servico-vagas-build / src / main / ... / migration / oracle / shared / V202212120927_KAIROS_PK-19735_cria_colunas_local_contrato.sql

0 +
7 + if coluna_existente_1<=0 then
8 + EXECUTE IMMEDIATE 'ALTER TABLE ACOMPANHAMENTOS_GMC ADD ID_LOCAL_CONTRATO NUMBER(20,0)';
9 + end if;
10 +
11 + SELECT count(*) into coluna_existente_2 from all_tab_columns where table_name = 'ACOMPANHAMENTOS_GMC' and column_name = 'ID_LOCAL_CONTRATO';
12 +
13 + if coluna_existente_2<=0 then
14 + EXECUTE IMMEDIATE 'ALTER TABLE ACOMPANHAMENTOS_GMC ADD NOME_LOCAL_CONTRATO VARCHAR2(255 CHAR)';
15 + end if;
16 + END;
17 +

ciee-servico-vagas-build / src / main / ... / migration / oracle / shared / V202212121858_KAIROS_PK-19952_drop_mv_vitrine_vagas.sql

@@ -0,0 +1 @@
1 + DROP MATERIALIZED VIEW SERVICE_VAGAS_DEV.MV_VITRINE_VAGAS;

ciee-servico-vagas-build / src / main / ... / migration / oracle / shared / V202212121900_KAIROS_PK-19952_cria_mv_vitrine_vagas.sql

@@ -0,0 +1,120 @@
1 + CREATE MATERIALIZED VIEW SERVICE_VAGAS_DEV.MV_VITRINE_VAGAS
2 + BUILD IMMEDIATE
3 + AS
4 + SELECT VT.ID_ESTADO,
5 + VT.DATA_ALTERACAO,

Details Files 31 Activity

2 of 2 checks passed

All tasks resolved

2+ approvals

10 reviewers

Robinson Praxedes

Danilo De Sousa Cunha

Marco Aurélio de Mora

Bruno Bragerolli Marqu

Lucas Merlotti Vianna

Marcelo Henrique Melc

Eduardo Lopes Martins

Pedro Henrique Borim I

Victor Santos Amaral

Vladmir Ferrari Jr

0 builds

Para acompanhamento
<https://eureka-dev.ciee.org.br/>