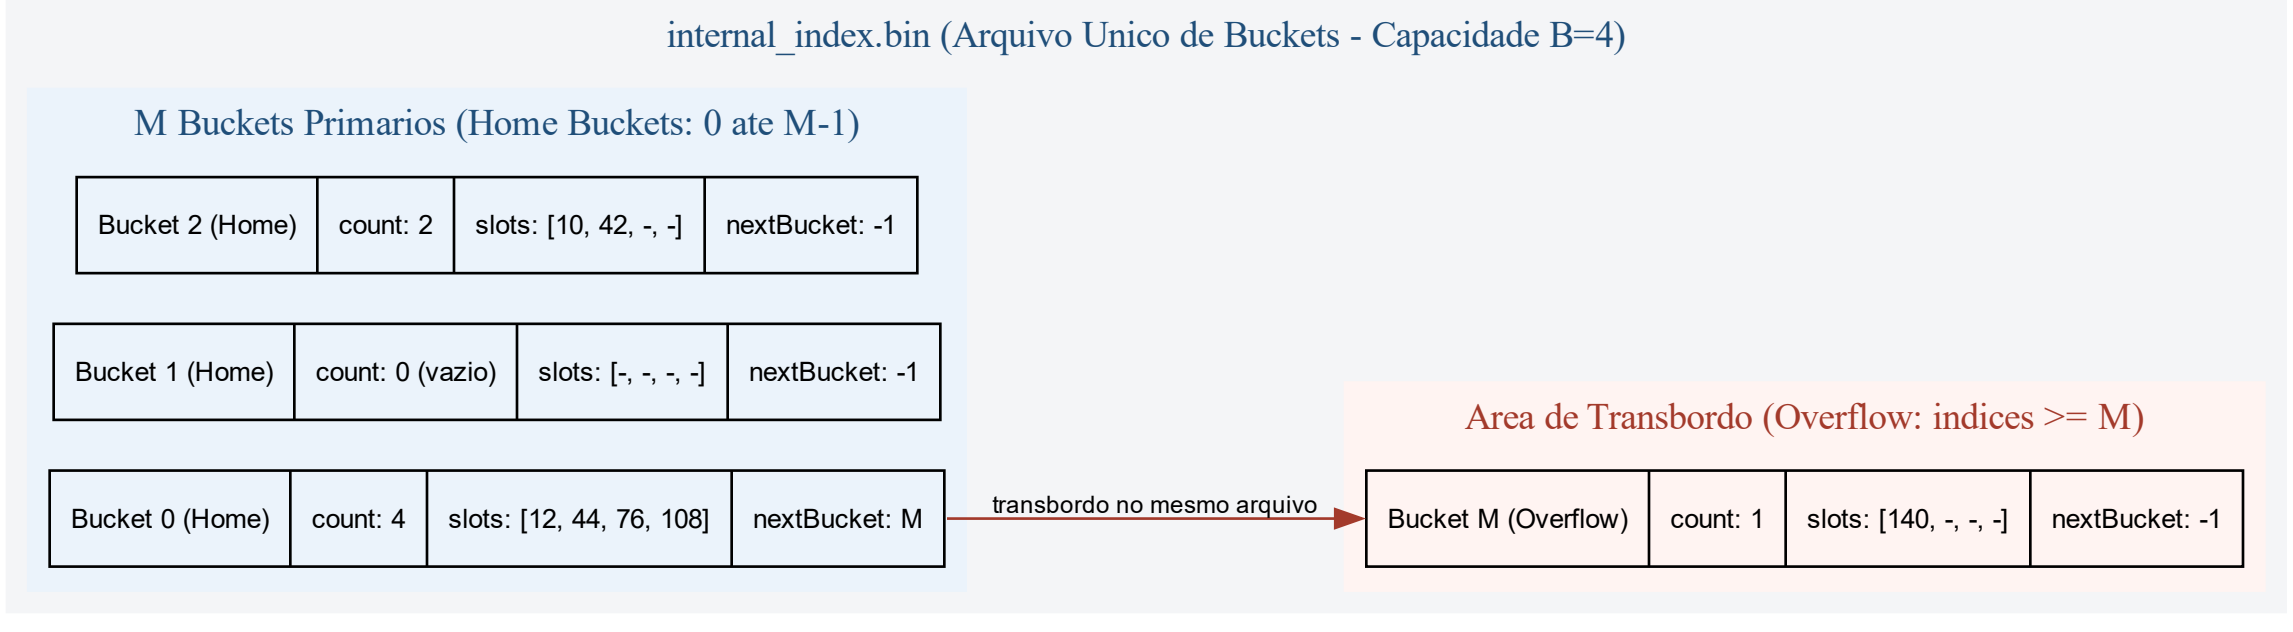
internal_index.bin (Arquivo Unico de Buckets - Capacidade B=4)
M Buckets Primarios (Home Buckets: 0 ate M-1)
Bucket 2 (Home)
count: 2
slots: [10, 42, -, -]
nextBucket: -1
Bucket 1 (Home)
count: 0 (vazio)
slots: [-, -, -, -]
nextBucket: -1
Bucket 0 (Home)
count: 4
slots: [12, 44, 76, 108]
nextBucket: M
transbordo no mesmo arquivo
Area de Transbordo (Overflow: indices >= M)
Bucket M (Overflow)
count: 1
slots: [140, -, -, -]
nextBucket: -1