


Trabalho Prático Individual Final - Git

Trabalho realizado por: Pedro Neves

Disciplina: Desenvolvimento Ágil de Software

Professor: André Carvalhas





Criar o repositório:

Create a new repository A repository contains all project files, including the revision history. Already have a project repository elsewhere? Import a repository.	
Owner * Repository name *	
Pedro084 → / TrabalhoFinalDAS ✓	
Great repository names are short and memorable. Need inspiration? How about reimagined-octo-carnival?	
Description (optional)	
Public Anyone on the internet can see this repository. You choose who can commit. Private You choose who can see and commit to this repository.	
Initialize this repository with: Skip this step if you're importing an existing repository.	
Add a README file This is where you can write a long description for your project. Learn more.	
Add .qitiqnore	
Choose which files not to track from a list of templates. Learn more.	
Choose a license A license tells others what they can and can't do with your code. Learn more.	
License: None ▼	
(i) You are creating a public repository in your personal account.	
Create repository	

Criar as branches master e develop:

git Flow init

Criar o branch "develop": git branch develop

Mudar para o branch "develop": git checkout develop

Criar o branch "master": git branch master


Mudar para o branch "master": git checkout master



2) Ter pelo menos dois níveis de acesso ao GitHub, permitindo a developers a submissão de código, mas nunca a alteração de visibilidade do repositório:


Base permissions alterei de read para Write.

Repository Visibility Change- tirar o visto e dar save.

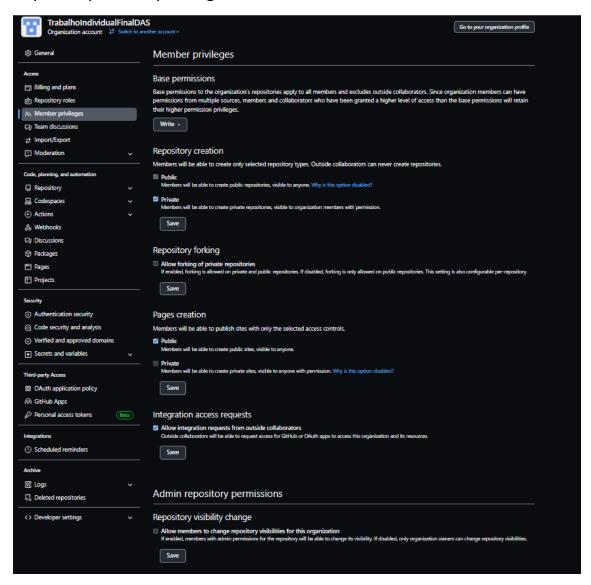



3)Tornar obrigatório a revisão de código antes de um pull request ser aprovado:

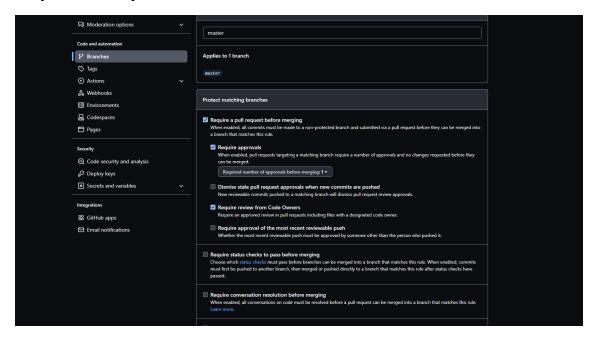

4)Adicionar um ficheiro. gitignore de forma a ignorar ficheiros, .docx e .doca:

```
pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (master)
$ nano .gitignore

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (master)
$ ls -a
./ ../ .git/ .gitignore .gitignore.txt

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (master)
$ rm .gitignore.txt

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (master)
$ ls -a
./ ../ .git/ .gitignore

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (master)
$ cat .gitignore

*.doc
*.docx
```



Fazer o push para o repositório:

```
pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (master)
$ git add .
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the next time Git touches it

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (master)
$ git commit -m "configuração do gitignore"
[master 58eabaf] configuração do gitignore
2 files changed, 2 insertions(+), 21 deletions(-)
create mode 100644 .gitignore
delete mode 100644 .gitignore.txt

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (master)
$ git push origin master
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Writing objects: 100% (3/3), 278 bytes | 278.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote: This repository moved. Please use the new location:
remote: https://github.com/TrabalhoIndividualFinalDAS/TrabalhoFinalDAS.git
To https://github.com/Pedro084/TrabalhoFinalDAS.git
a030342..58eabaf master -> master
```

5) Controlar as versões do relatório a entregar usando o repositório, sendo que é necessário que existam pelo menos:

-Carregamento inicial do ficheiro no branch develop:

```
pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (develop)

$ git add .

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (develop)


$ git commit -m "carregamento inicial"
[develop d9bfab4] carregamento inicial
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 Doc1.pdf

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (develop)


$ git push origin develop
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 134.26 KiB | 14.92 MiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote: This repository moved. Please use the new location:
remote: https://github.com/PrabalhoIndividualFinalDAS/TrabalhoFinalDAS.git
To https://github.com/Pedro084/TrabalhoFinalDAS.git
4bc7f44..d9bfab4 develop -> develop

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (develop)
```


Criar pull request:






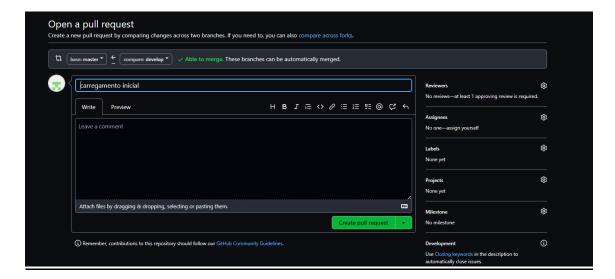

Aprovação do pull request:

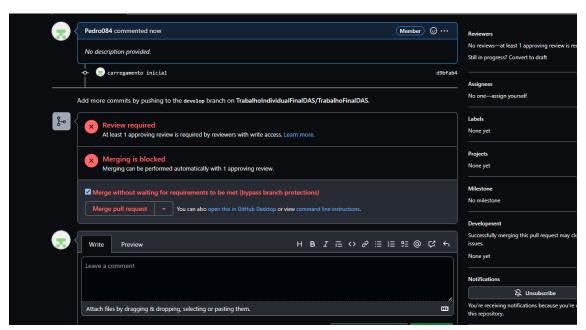

Confirmar a aprovação:

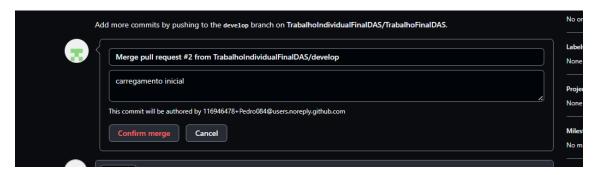



-5 alterações no próprio branch develop com os devidos comentários:

Primeira alteração da feature1-relatorio:

```
pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (develop)
$ git flow feature start feature1-relatorio
Switched to a new branch 'feature/feature1-relatorio'
Summary of actions:
    A new branch 'feature/feature1-relatorio' was created, based on 'develop'
    You are now on branch 'feature/feature1-relatorio'

Now, start committing on your feature. When done, use:
    git flow feature finish feature1-relatorio

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (feature/feature1-relatorio)
$ git add .

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (feature/feature1-relatorio)
$ git commit -m "relatorio versao 1"
[feature/feature1-relatorio ff130f3] relatorio versao 1
1 file changed, 0 insertions(+), 0 deletions(-)
```

```
Switched to branch 'develop'
Your branch is up to date with 'origin/develop'.

Updating d9bfab4..ff130f3
Fast-forward
Docl.pdf | Bin 140948 -> 495475 bytes
1 file changed, 0 insertions(+), 0 deletions(-)

Deleted branch feature/feature1-relatorio (was ff130f3).

Summary of actions:
- The feature branch 'feature/feature1-relatorio' was merged into 'develop'
- Feature branch 'feature/feature1-relatorio' has been locally deleted
- You are now on branch 'develop'
```

```
pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (develop)
$ git push origin develop
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 8 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 447.81 KiB | 24.88 MiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote: This repository moved. Please use the new location:
remote: https://github.com/TrabalhoIndividualFinalDAS/TrabalhoFinalDAS.git
To https://github.com/Pedro084/TrabalhoFinalDAS.git
d9bfab4..ff130f3 develop -> develop
```



Segunda alteração da feature2-relatorio:

```
pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (develop)
$ git flow feature start feature2-relatorio
Switched to a new branch 'feature/feature2-relatorio'
Summary of actions:

- A new branch 'feature/feature2-relatorio' was created, based on 'develop'
- You are now on branch 'feature/feature2-relatorio'

Now, start committing on your feature. When done, use:
    git flow feature finish feature2-relatorio

Pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (feature/feature2-relatorio)
$ git add .

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (feature/feature2-relatorio)
$ git commit - m "relatorio versao 2"
[feature/feature2-relatorio feefef15] relatorio versao 2
1 file changed, 0 insertions(+), 0 deletions(-)

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (feature/feature2-relatorio)
$ git flow feature finish feature2-relatorio
$ git flow feature finish feature2-relatorio

Switched to branch 'develop'

Your branch is up to date with 'origin/develop'.
Updating ff130f3.-6feef15
Fast-forward
Docl.pdf | Bin 495475 -> 560575 bytes
1 file changed, 0 insertions(+), 0 deletions(-)
Deleted branch feature/feature2-relatorio (was 6feef15).

Summary of actions:
- The feature branch 'feature/feature2-relatorio' has been locally deleted
- You are now on branch 'develop'

pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (develop)

$ git push origin develop

Pedro@LAPTOP-11M388R4 MINGW64 ~/TrabalhoFinalDAS (develop)

$ git push origin develop

Delta compression using up to 8 threads
Compressing objects: 100% (3/3), 108.70 kiB | 9.88 MiB/s, done.

Writing objects: 100% (3/3), 108.70 kiB | 9.88 MiB/s, done.

Writing objects: 100% (3/3), 108.70 kiB | 9.88 MiB/s, done.

Total 3 (delta 1), reused 0 (delta 0), pack-reused 0

remote: Resolving deltas: 100% (3/3), 108.70 kiB | 9.88 MiB/s, done.

Total 3 (delta 1), reused 0 (delta 0), pack-reused 0

remote: Resolving deldass: 100% (1/1), completed with 1 local object.

remote: https://github.com/trabalhoFinalDAS.git

ff130f3..6feef15 develop -> develop
```

Terceiro alteração da <u>feature3</u>-relatorio: