# Web Programming

Rodrigo Martins Pagliares


Last update: 2021/08/03

# CSS building blocks

https://mzl.la/3jlfpYD

# **Active learning**:
# **Playing** with **box models**


Can you **change** the **size** of the **second box** (by **adding CSS** to the `.alternate` **class**) to make it **match** the **first box** in **`width`** and **`height`**?

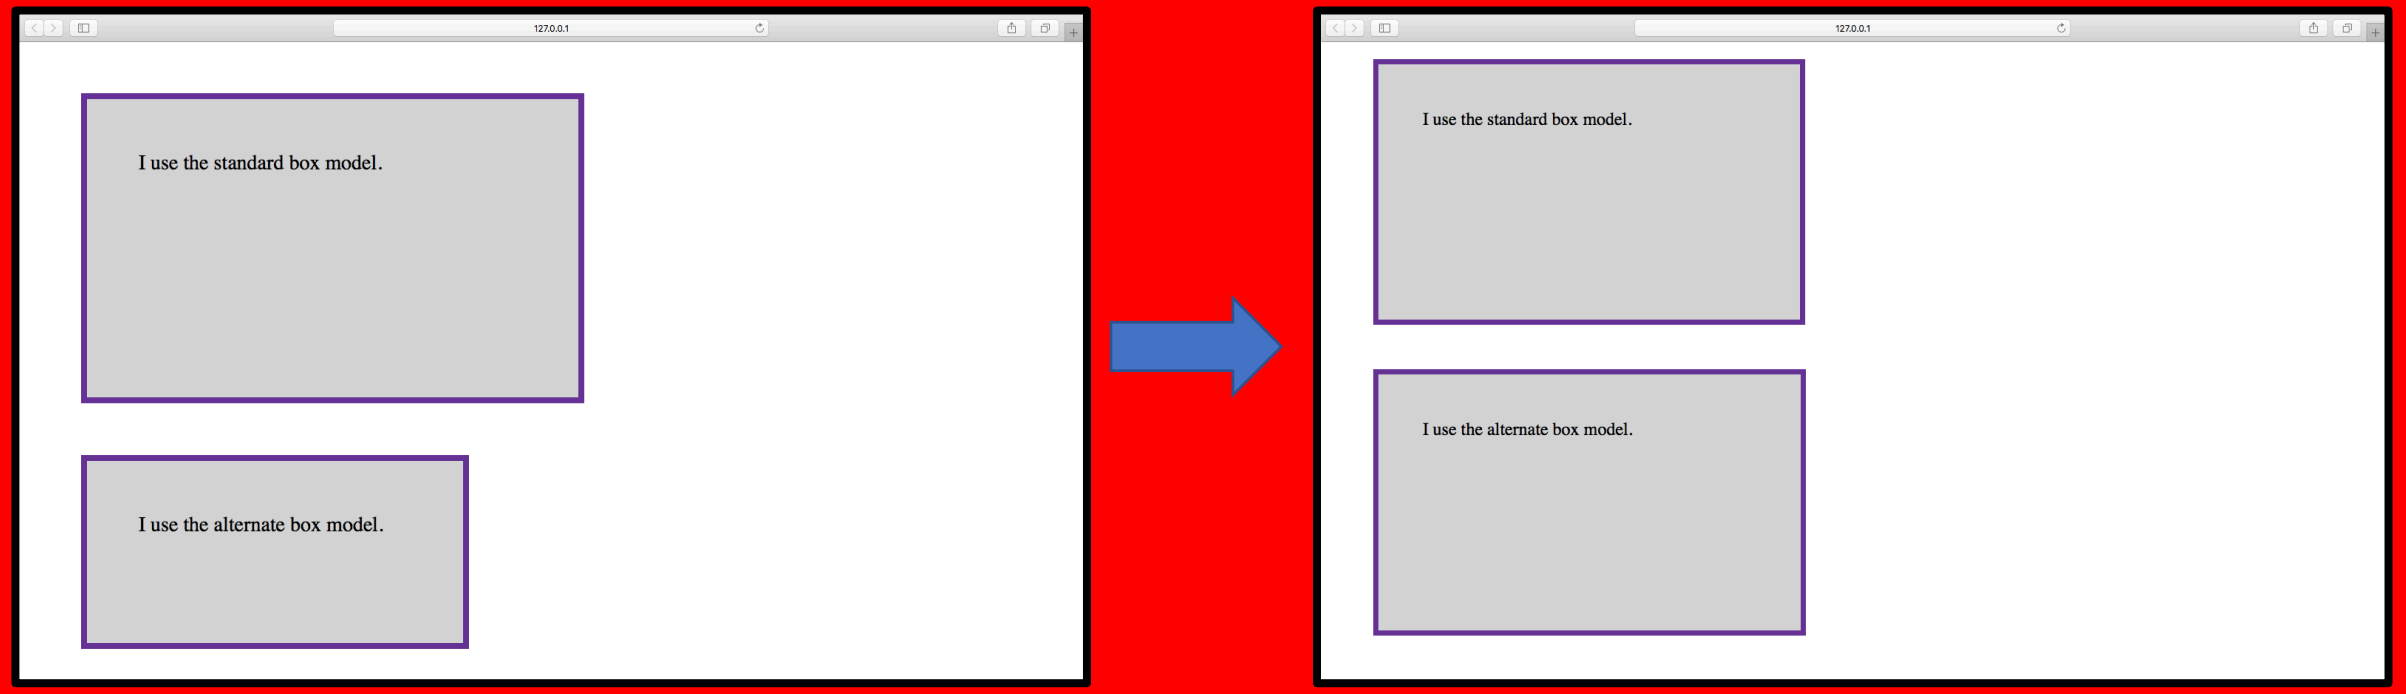


https://mzl.la/2Cqg0J1


# **Active learning**:
# **Playing** with **margins**


**Try changing** the **margin values** to see **how** the **box** is **pushed around due** to the **margin creating** or **removing space** (if it is a **negative margin**) **between** this **element** and the **containing element.**

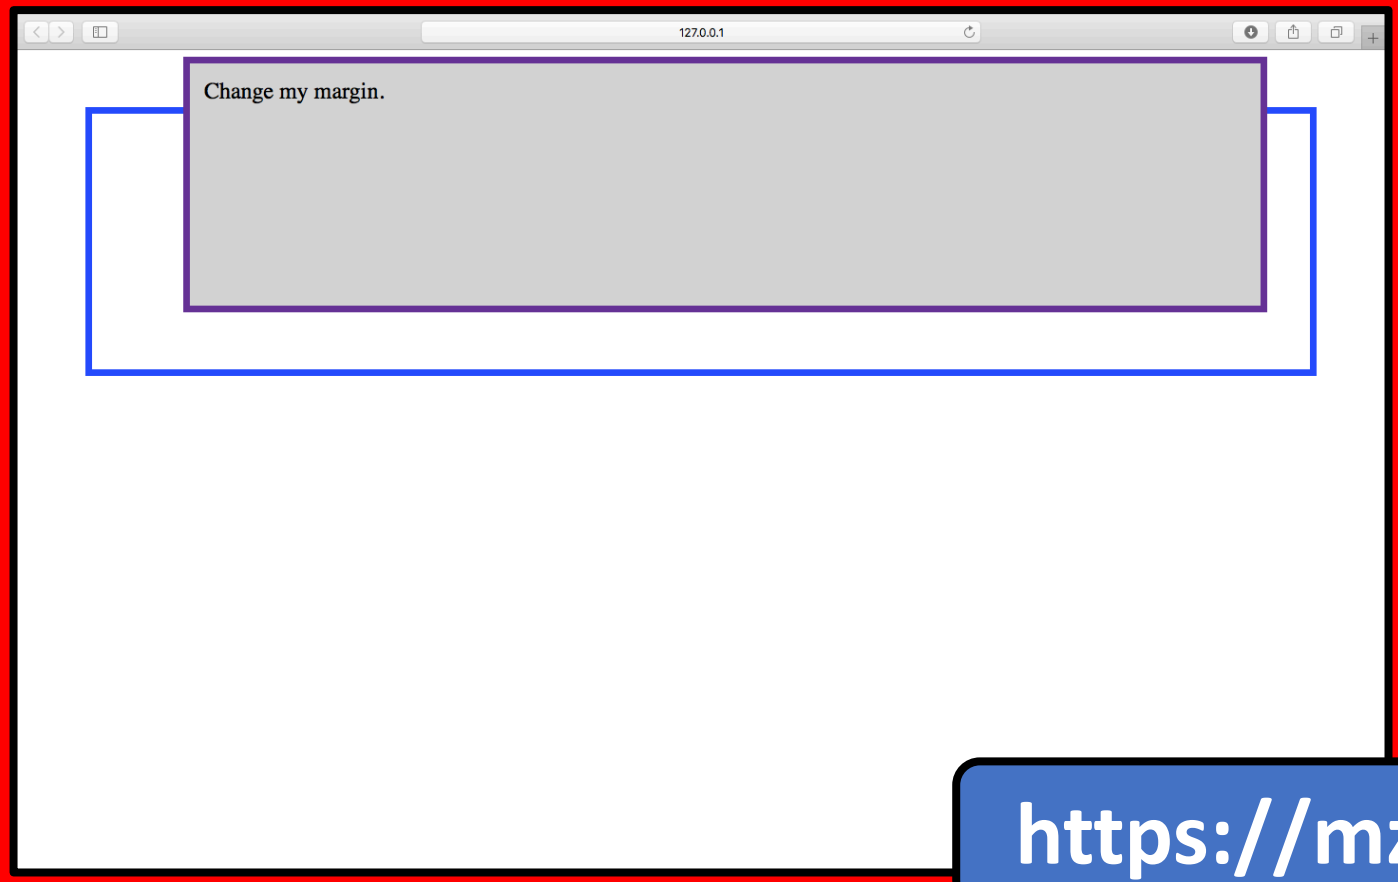



https://mzl.la/31Gn5ij

# Possible solutions

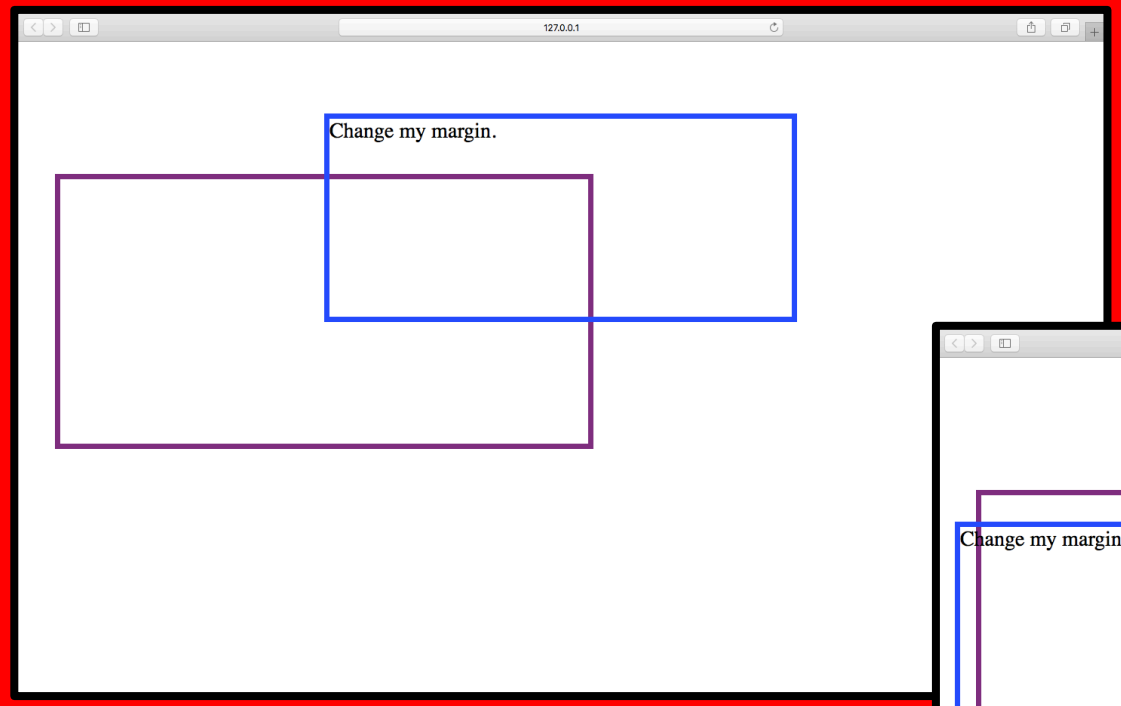

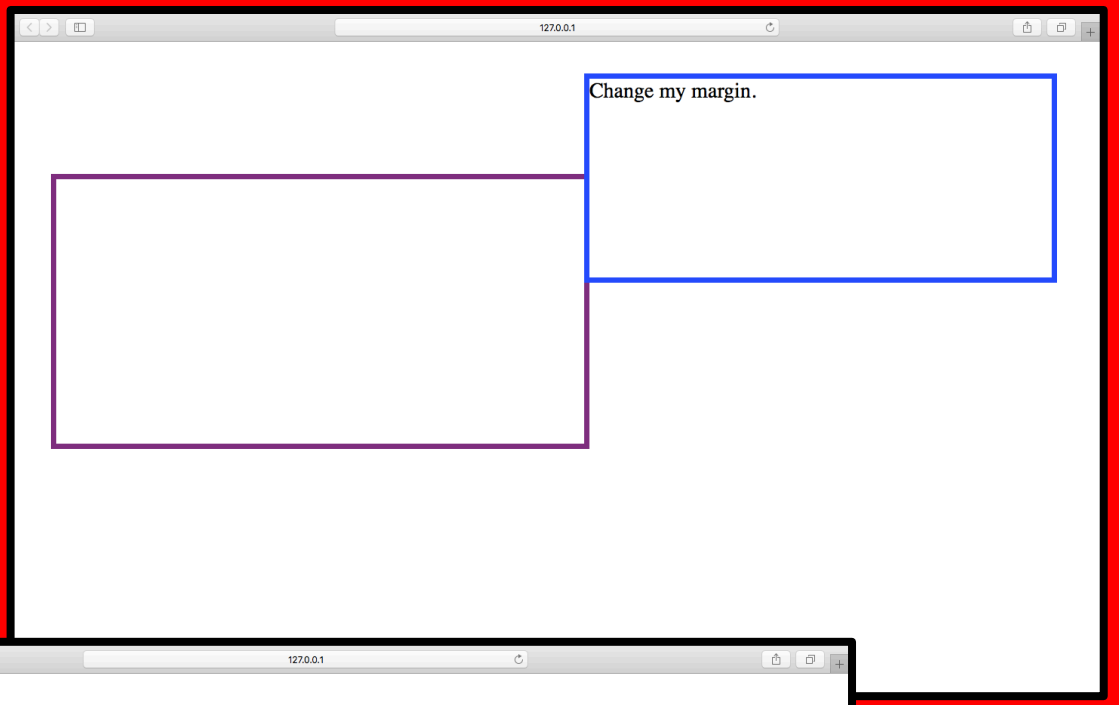


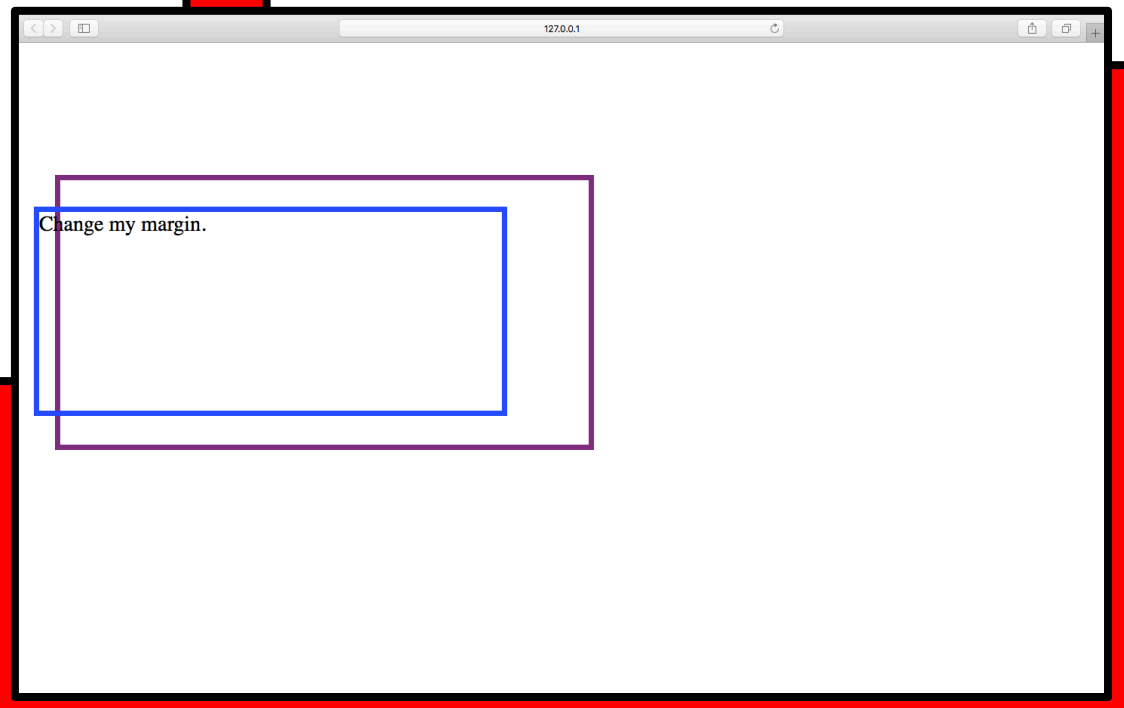
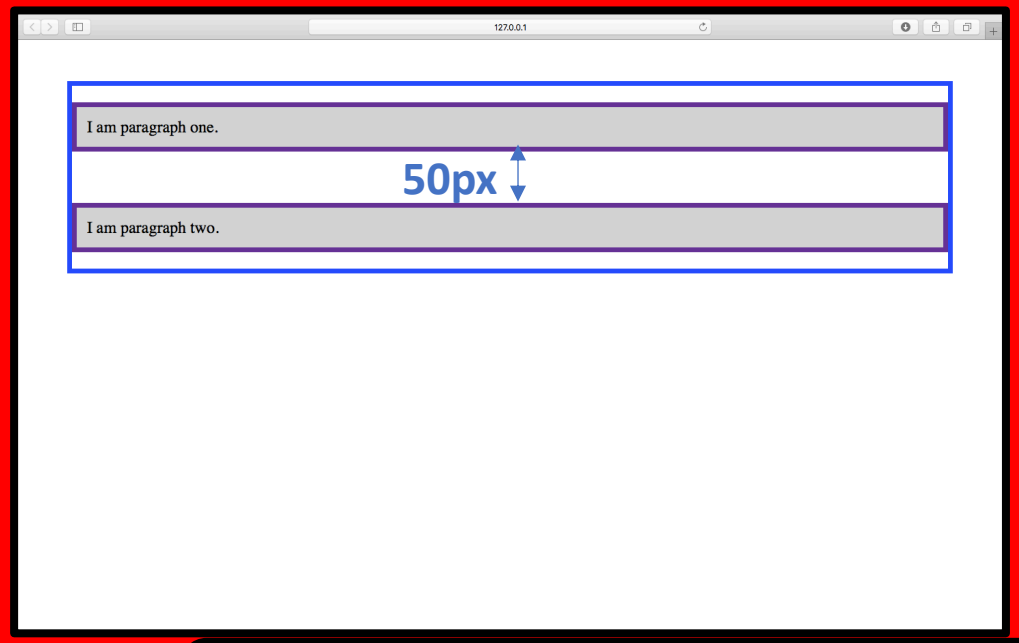



# Active learning:
# Margin collapsing

We can **test margin collapsing algorithm**:

**Set** the **`margin-top`** of **paragraph two** to **0**. The **visible margin between** the **two paragraphs** will not change **— it retains the 50 pixels set in the bottom-margin of paragraph one**

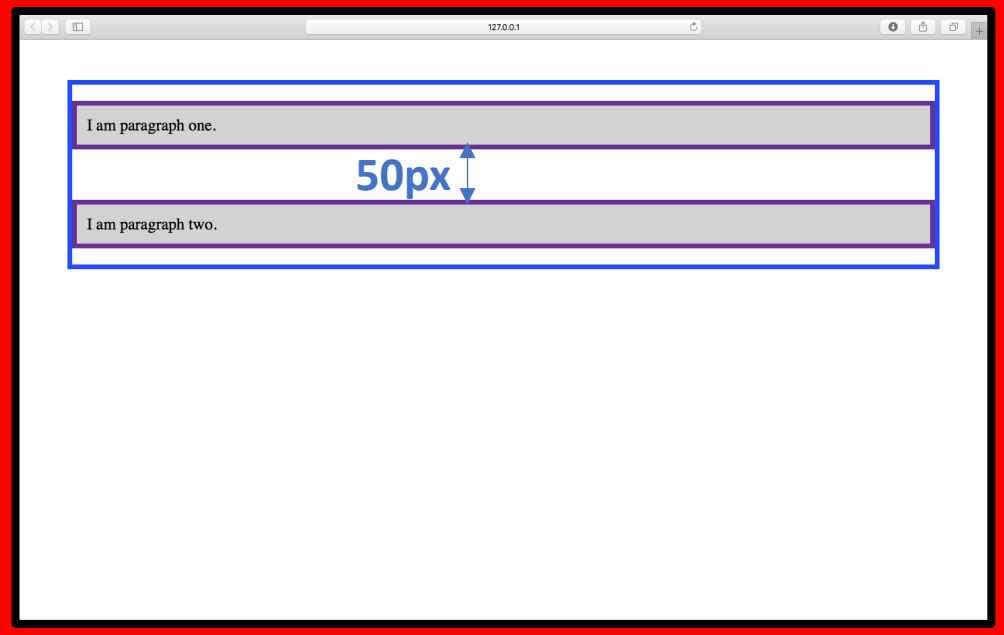







https://mzl.la/2PPpXTt

**We can test margin collapsing algorithm:**

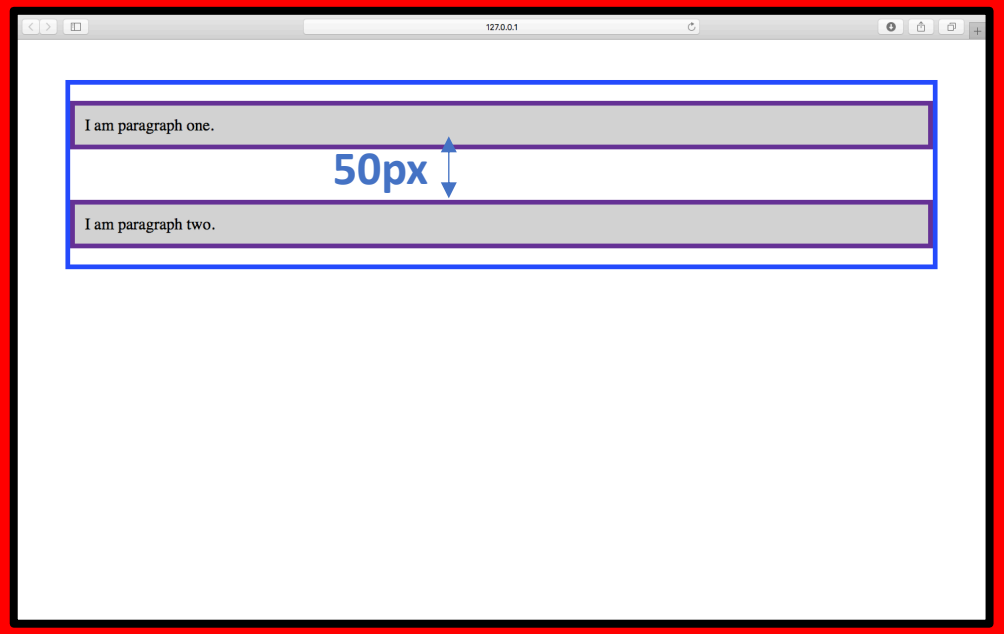
**Set** the **`margin-top`** of **paragraph two** to **-10px,** you'll see that the **overall margin** becomes **40px — it subtracts** from the **50px.**

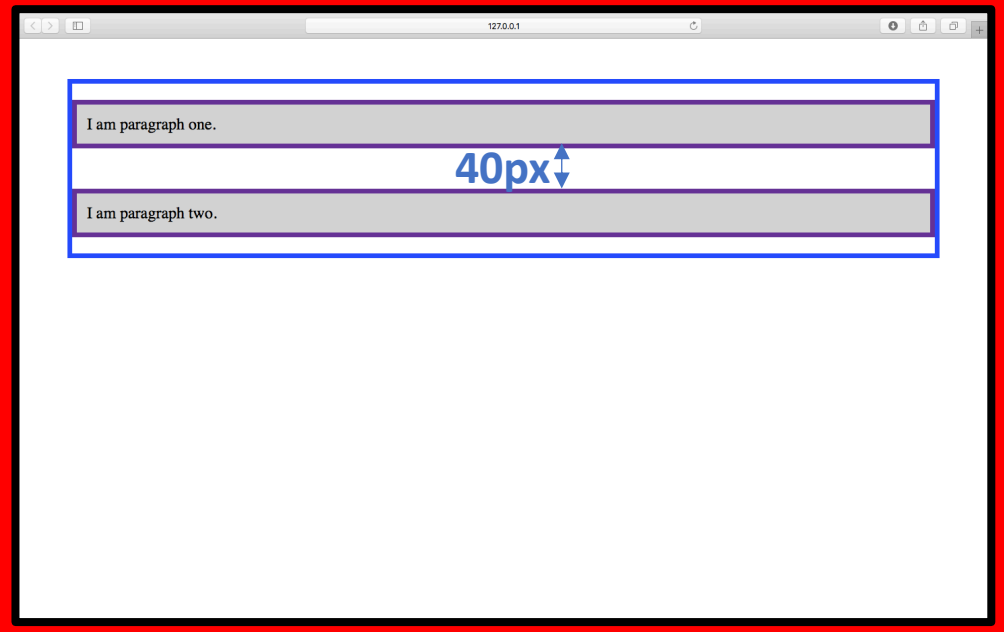





**Active learning**:
**Shorthand** and **longhand** syntax for **borders**

Have a **play around** with the different border **properties** to **check** that you **understand how** they work**. The MDN** pages for the **border properties** give you information about the **different styles** of **border** you can **choose from.**

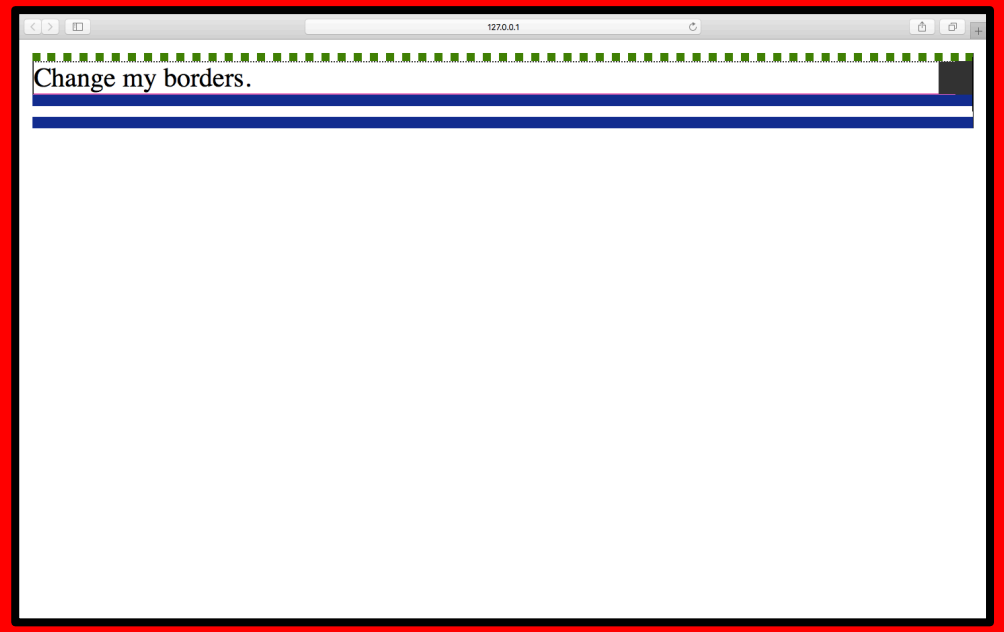



**https://mzl.la/3kLiyT8**

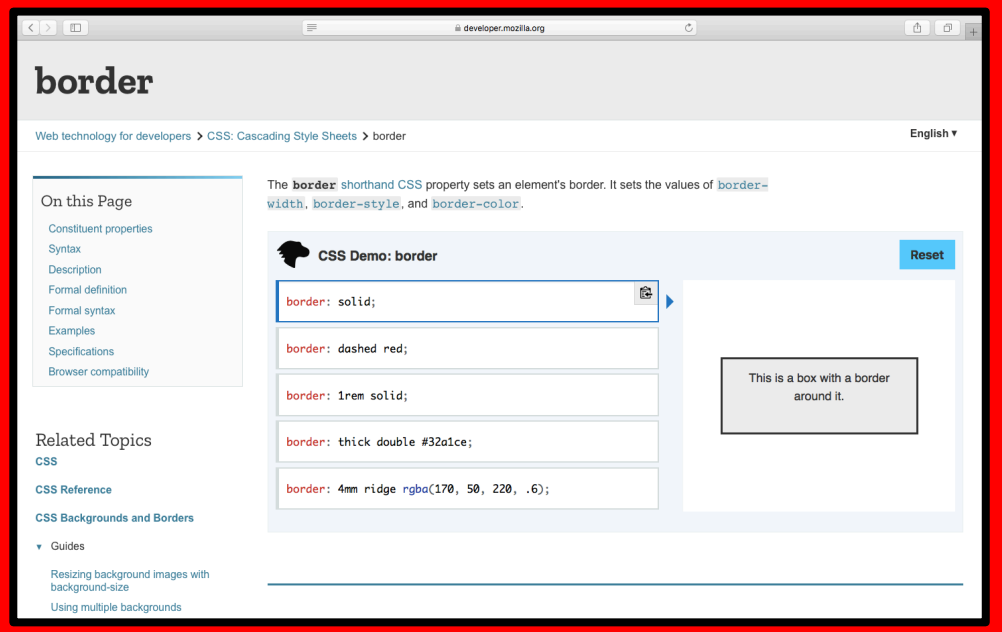


**https://mzl.la/31GIyrf**


# Possible solutions

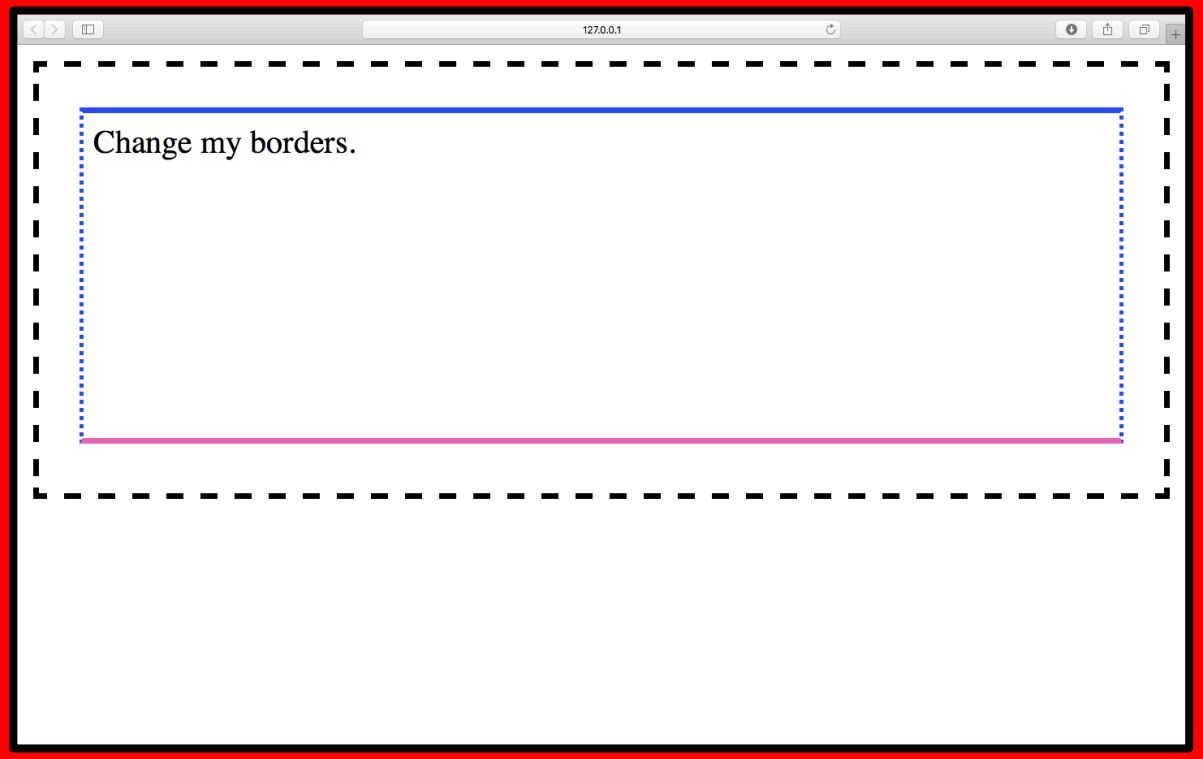





# Active learning: `Padding`

**Change** the **values** for `padding` on the **class** `.box` in the example to **see** that this **changes where** the **text begins** in **relation** to the **box**.

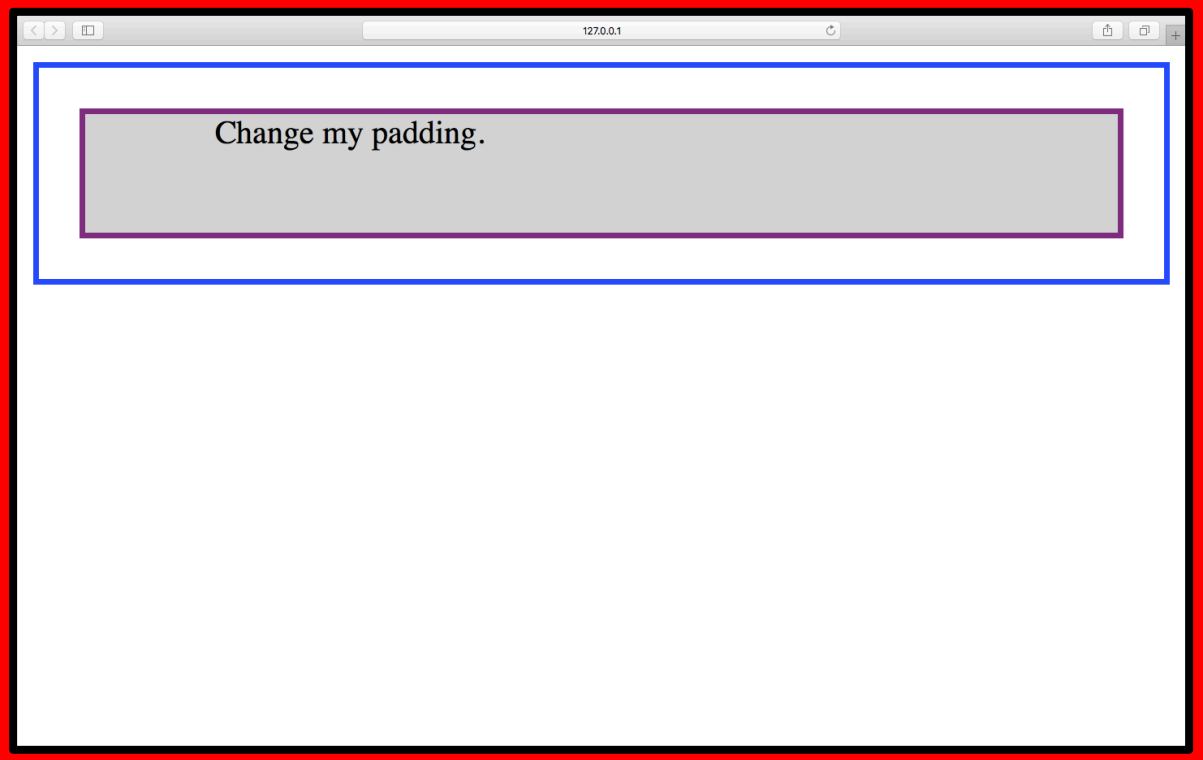


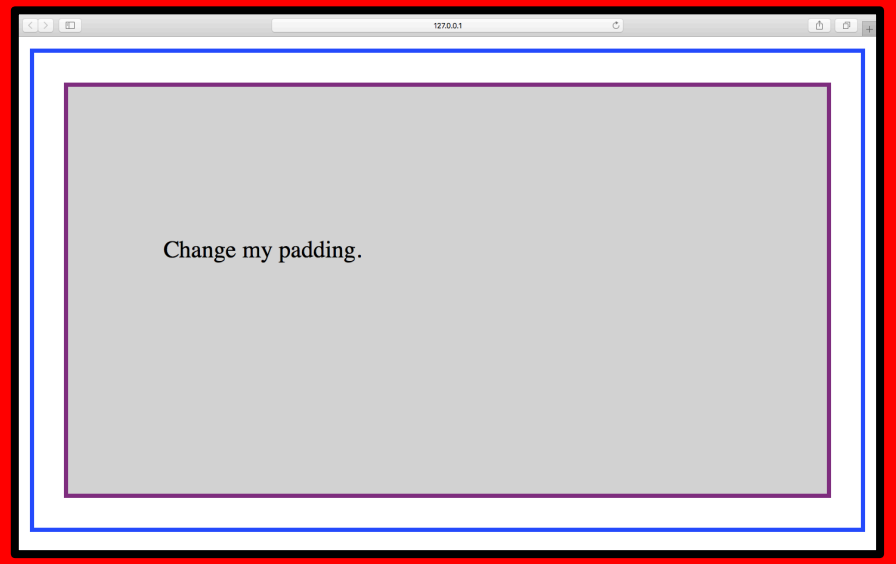




**Possible solution**

https://mzl.la/3aLWqDE

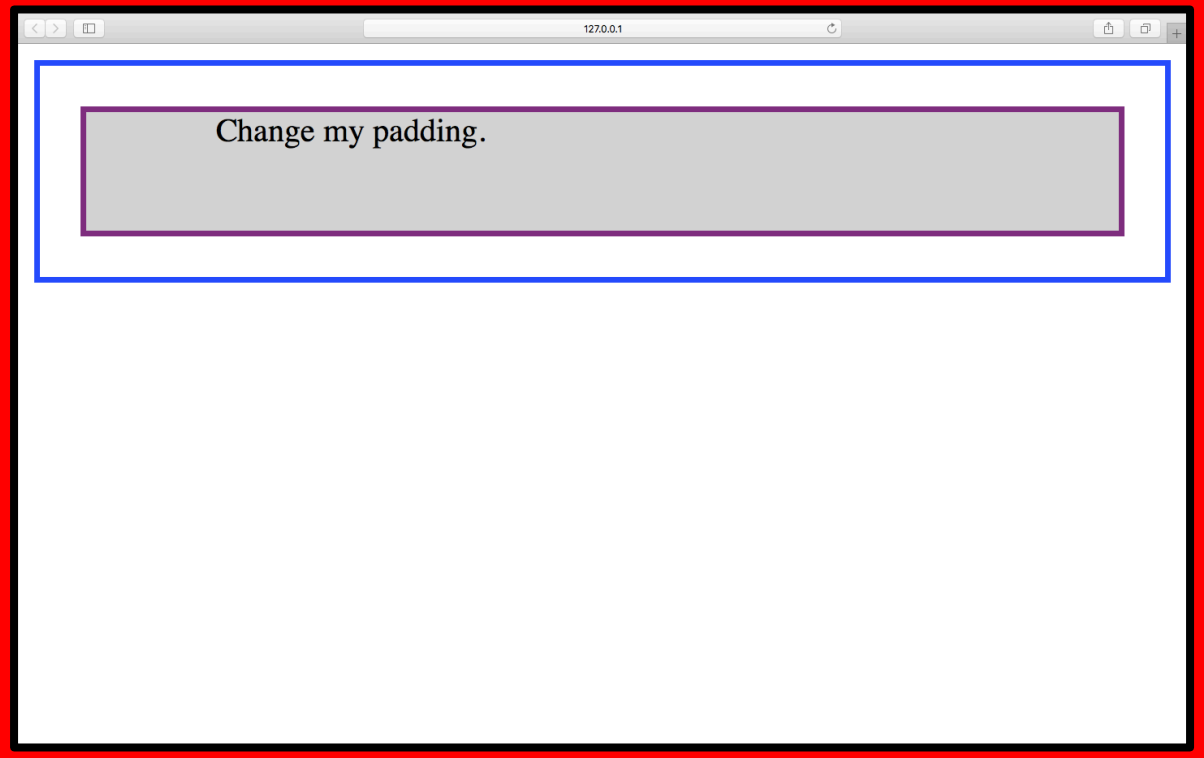**Change** the **padding** on the **class** `.container`, which will **make space between** the **container** and the **box. Padding** can be **changed** on **any element** and will **make space between** its **border** and whatever is **inside** the **element.**

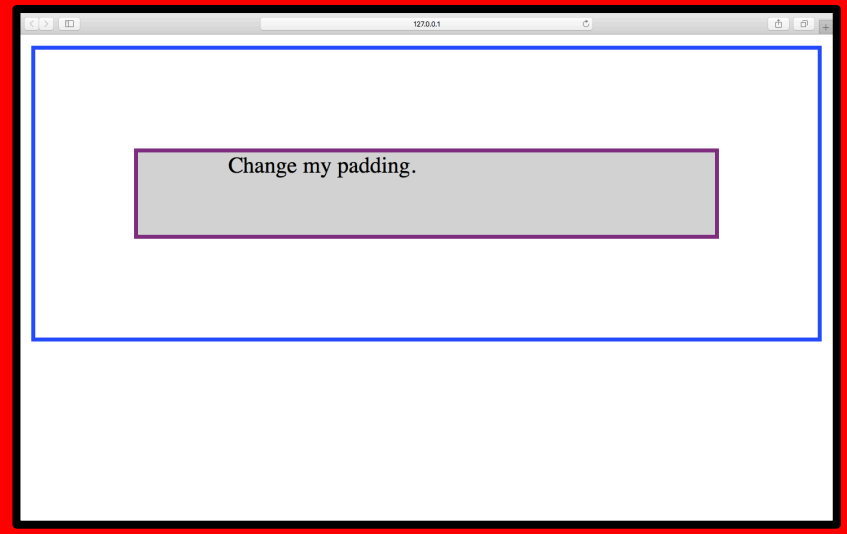







**Possible solution**

# **Active learning**:
# The **box model** and **inline boxes**

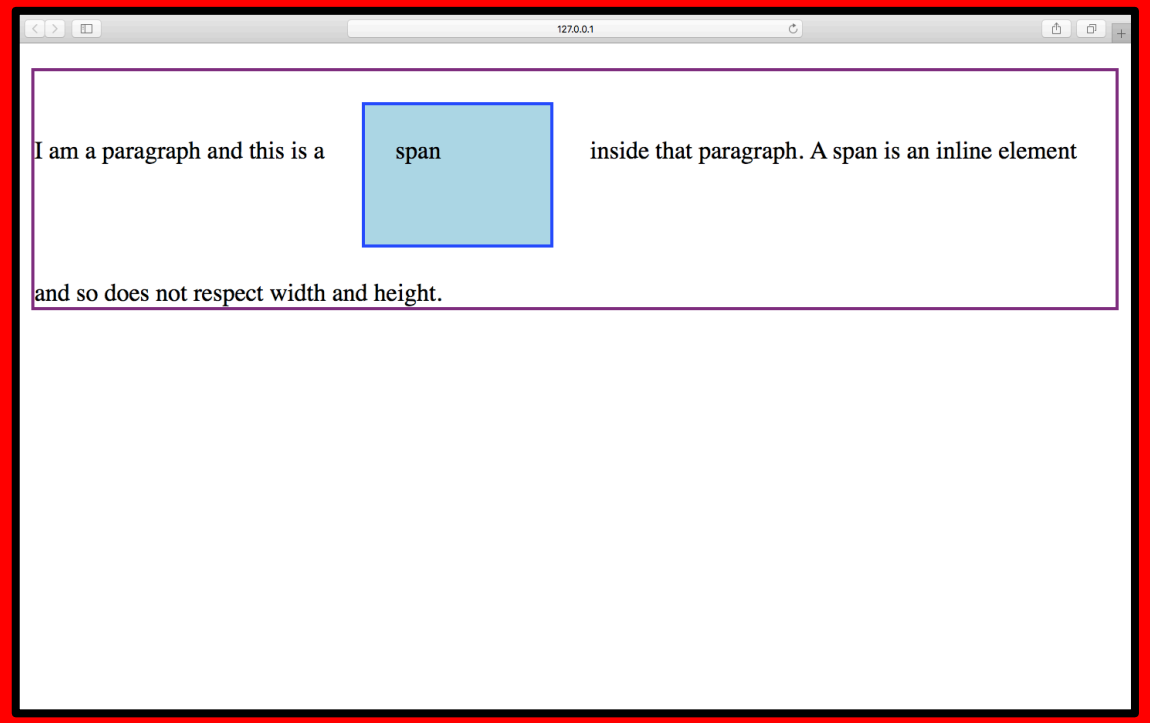We have added **`display: inline-block`** to our **`<span>` element.** Try **changing** this to **`display: block`** or **removing** the **line** completely to **see** the **difference** in **display models**

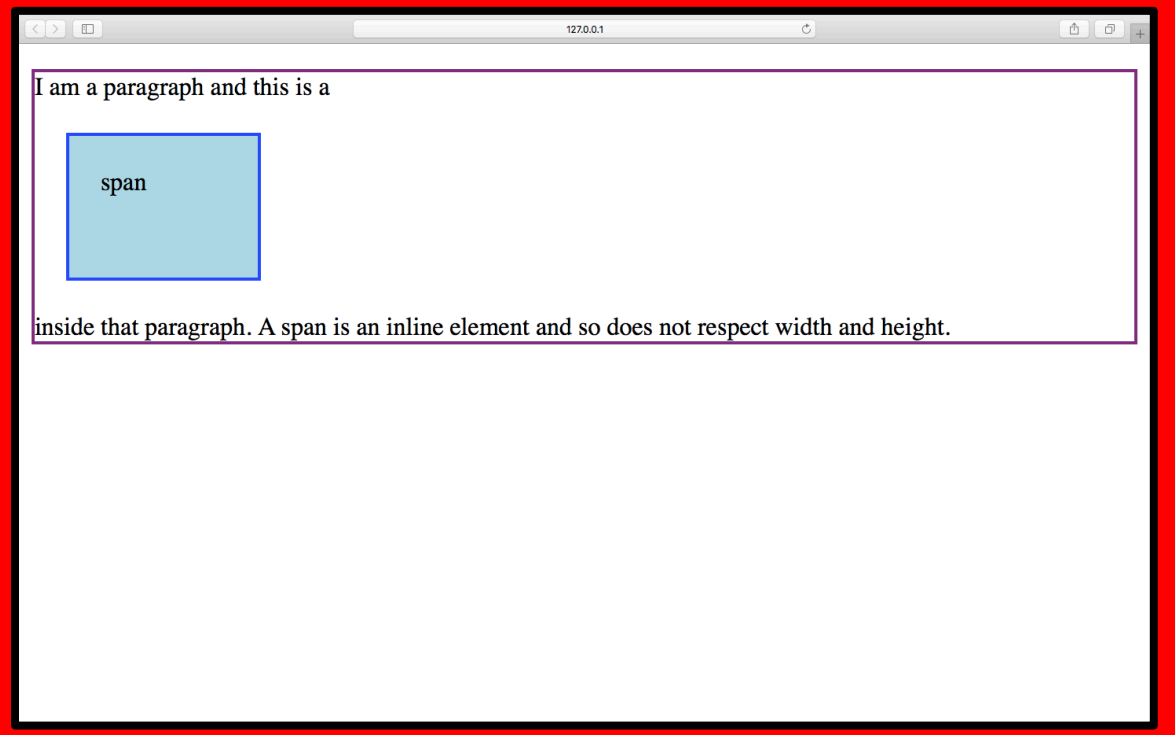







https://mzl.la/3IsfgXY

`display:block`

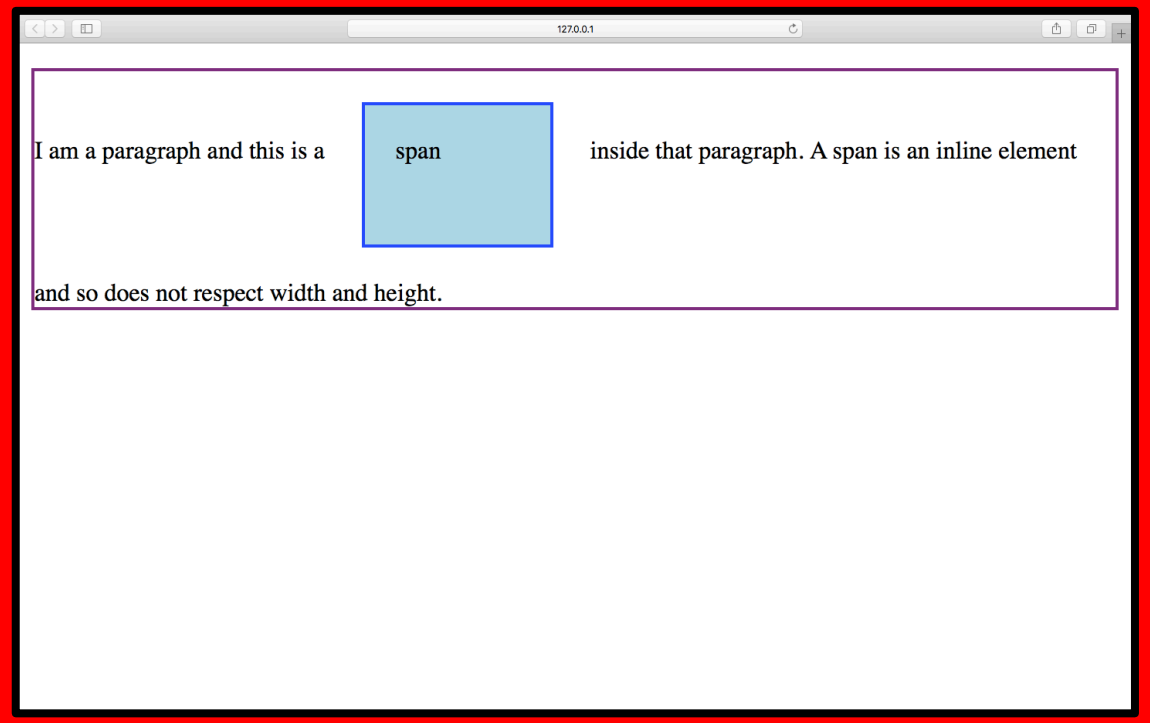We have added **`display: inline-block`** to our **`<span>`** **element.** Try **changing** this to **`display: block`** or **removing** the **line** completely to **see** the **difference** in **display models**

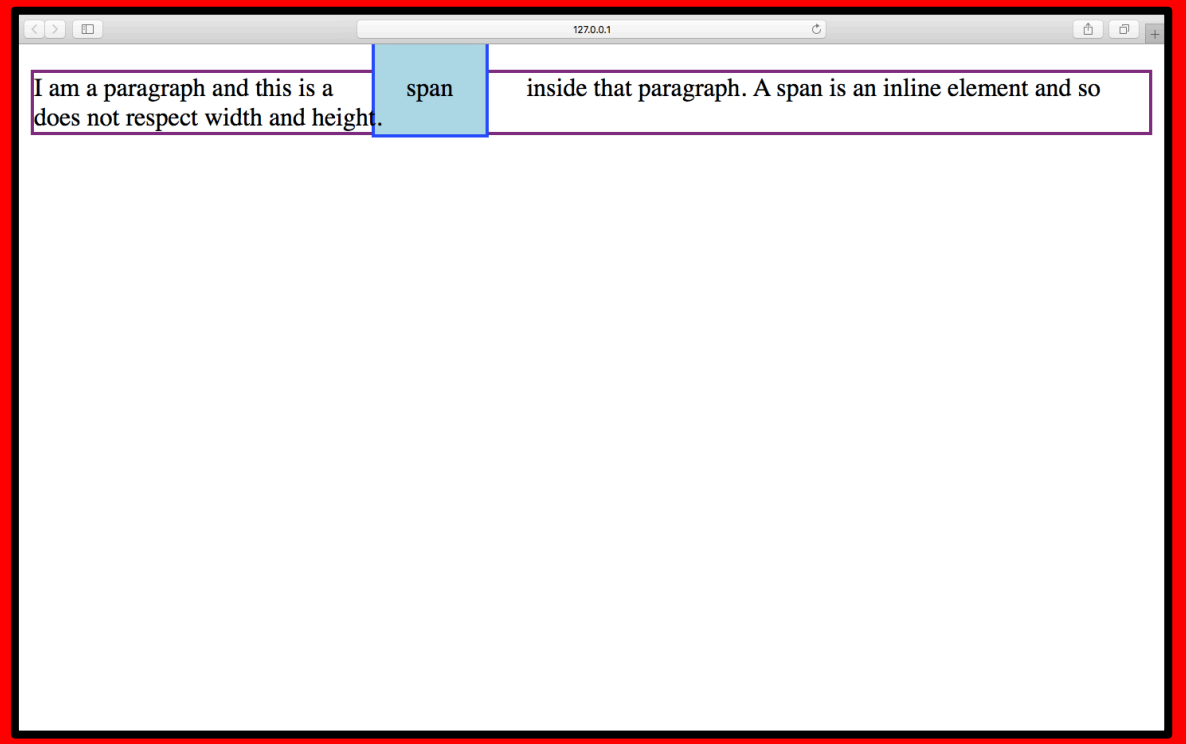






**Property removed**

**Active learning**:

`display:inline-block`

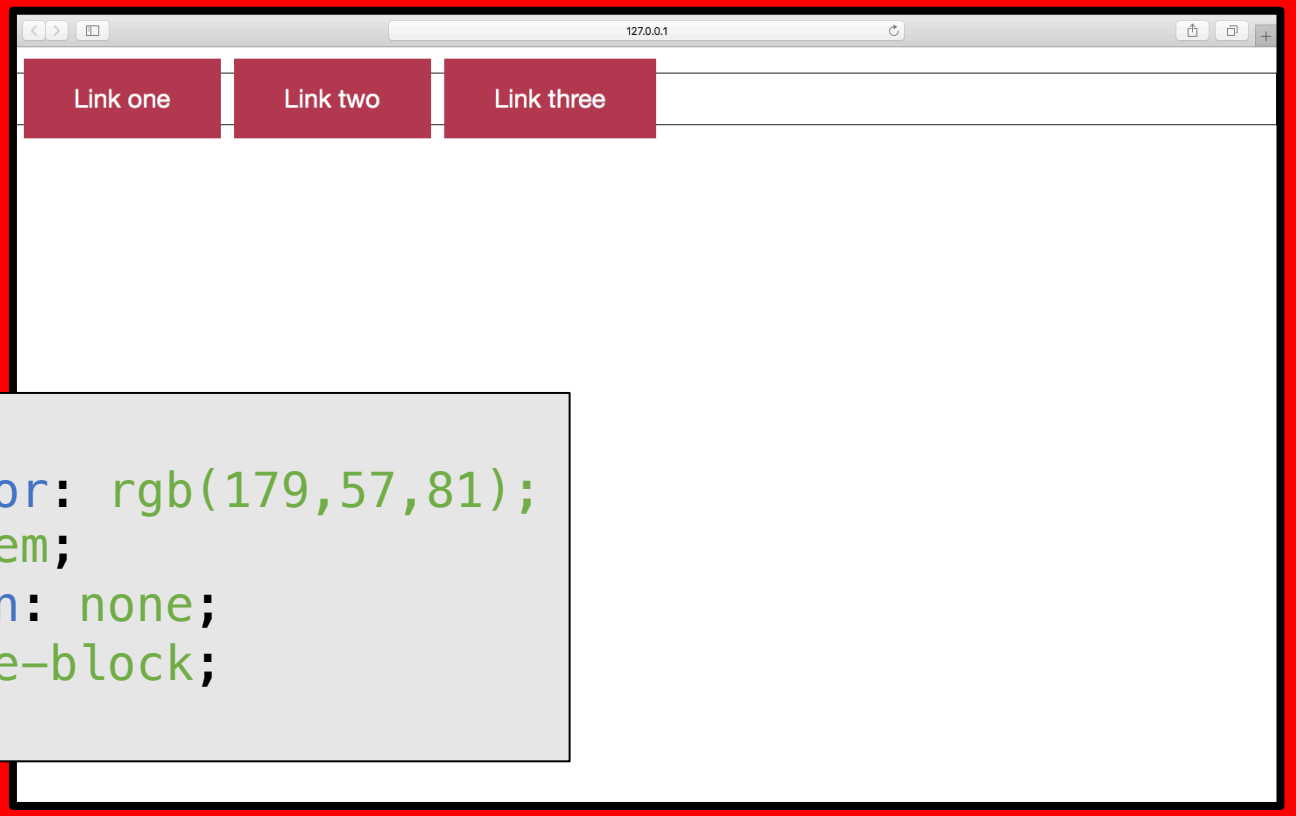Try **adding `width`** and **`height` properties** and **changing** the `display` values to **see difference** in the **output**




```
.links-list a  {
  background-color: rgb(179,57,81);
  padding: 1em 2em;
  text-decoration: none;
  display: inline-block;
}
```

# **Test** your **skills**: the **box model**

**Table of contents**

The Box Model One
The Box Model Two
The Box Model Three
Assessment or further help

Related Topics

**Complete beginners start here!**

▶ Getting started with the Web

**HTML — Structuring the Web**

▶ Introduction to HTML

▶ Multimedia and embedding

▶ HTML tables

**CSS — Styling the Web**

▶ CSS first steps

▼ CSS building blocks

CSS building blocks overview

Cascade and inheritance


# Test your skills: The Box Model

The aim of this task is to help you check your understanding of the CSS Box Model.

> **Note**: You can try out solutions in the interactive editors below, however, it may be helpful to download the code and use an online tool such as CodePen, jsFiddle, or Glitch to work on the tasks.
>
> If you get stuck, then ask us for help — see the Assessment or further help section at the bottom of this page.

## The Box Model One

With the two boxes below, one is using the standard box model, the other the alternate box model. Change the width of the second box by adding rules to the .alternate class, so that it matches the visual width of the first box. Your final result will look like the image below.

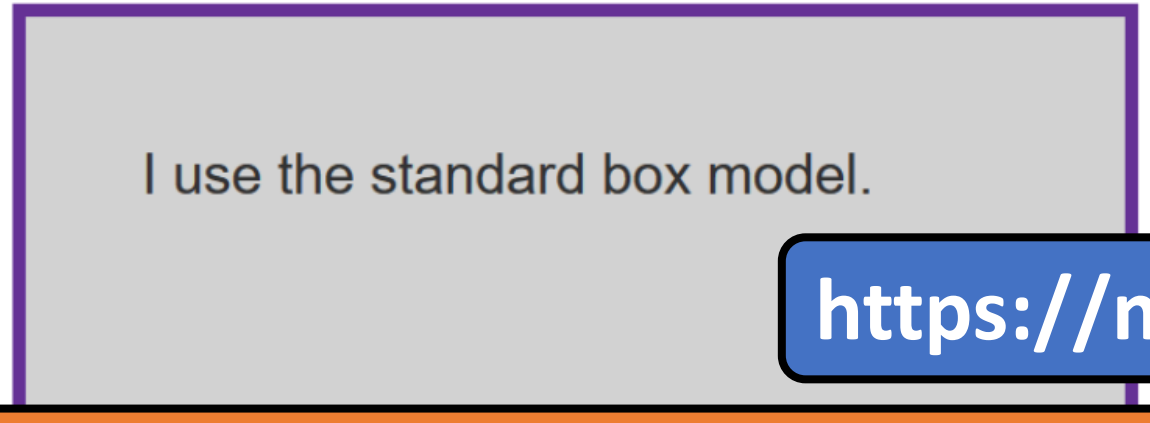


https://mzl.la/3zZZOGm

# Questions?