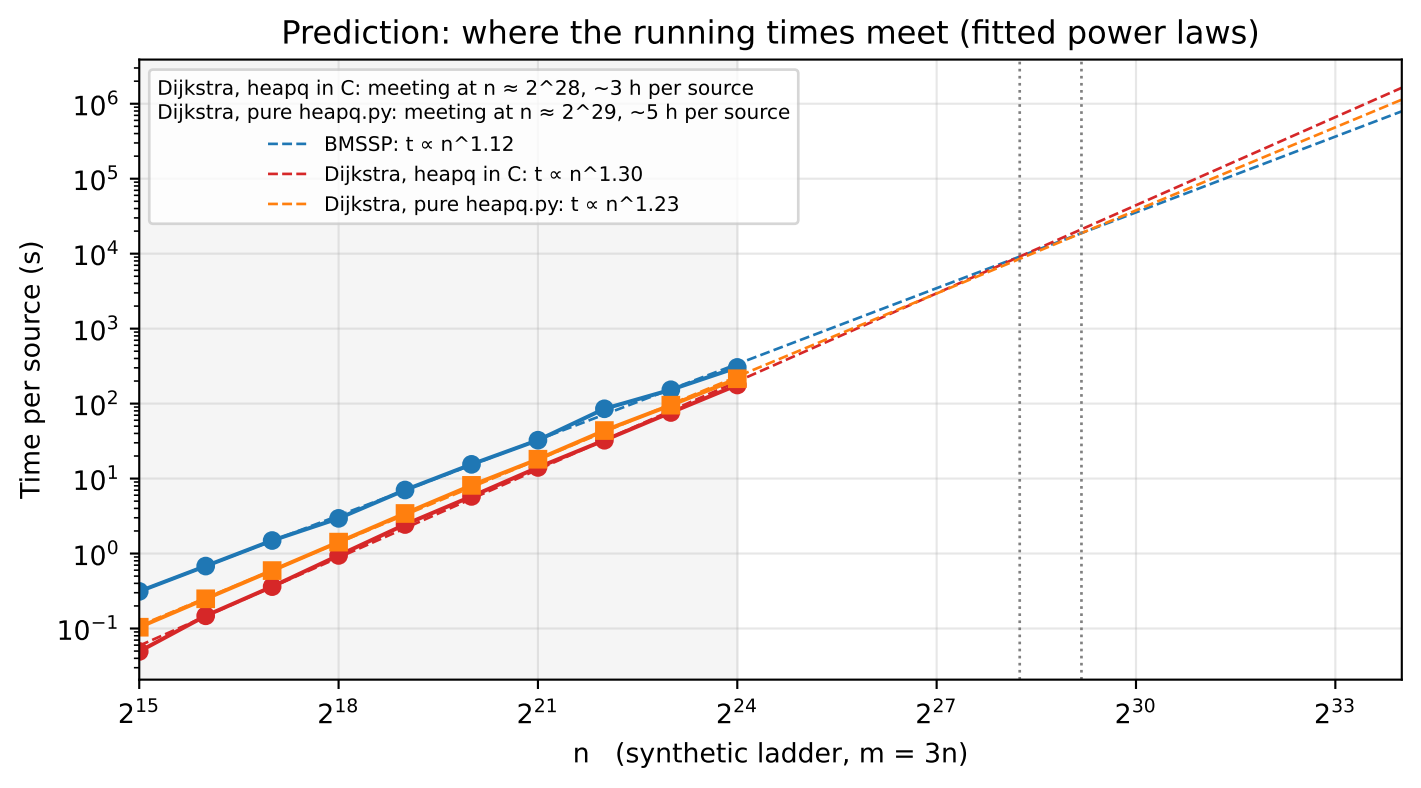
Prediction: where the running times meet (fitted power laws)
Dijkstra, heapq in C: meeting at n ≈ 2^28, ~3 h per source
Dijkstra, pure heapq.py: meeting at n ≈ 2^29, ~5 h per source
BMSSP: t ∝ n^1.12
Dijkstra, heapq in C: t ∝ n^1.30
Dijkstra, pure heapq.py: t ∝ n^1.23
Time per source (s)
n (synthetic ladder, m = 3n)